Connecting LeaderPrism to your HRIS

User guide: setting up the connection, running a review cycle, and getting leadership results into the HRIS KPI module.

Product	LeaderPrism 360° Leadership Assessment Platform
Audience	Organisation admins, HR teams, and the HRIS development team
Version	1.0 · 11 November 2026
Prepared by	TechNeura Consulting

Contents

1. How the connection works
2. Before you start
3. Create an API key
4. Test the connection
5. Sync departments and employees
6. Add a webhook
7. Start a review cycle
8. Open LeaderPrism from the HRIS (single sign-on)
9. Read results into the HRIS KPI module
10. Send performance scores and read talent data
11. Monitor with the audit log
12. A review cycle from start to finish
13. Troubleshooting
14. Security, limits and server settings


The screenshots are from a demo organisation, “Ceylon Weave Holdings”. All names and email addresses in it are made up.

1. How the connection works

The HRIS and LeaderPrism each own one part of the employee's year:

- **The HRIS** owns employees, the org structure, review cycles, KPIs, goals and final performance ratings.
- **LeaderPrism** runs the leadership assessments (competency, 360° feedback, readiness and personality) and turns them into scores.

The two systems talk over a secure web API. The HRIS calls LeaderPrism using an **API key**. LeaderPrism calls the HRIS back with **webhooks** when something happens.

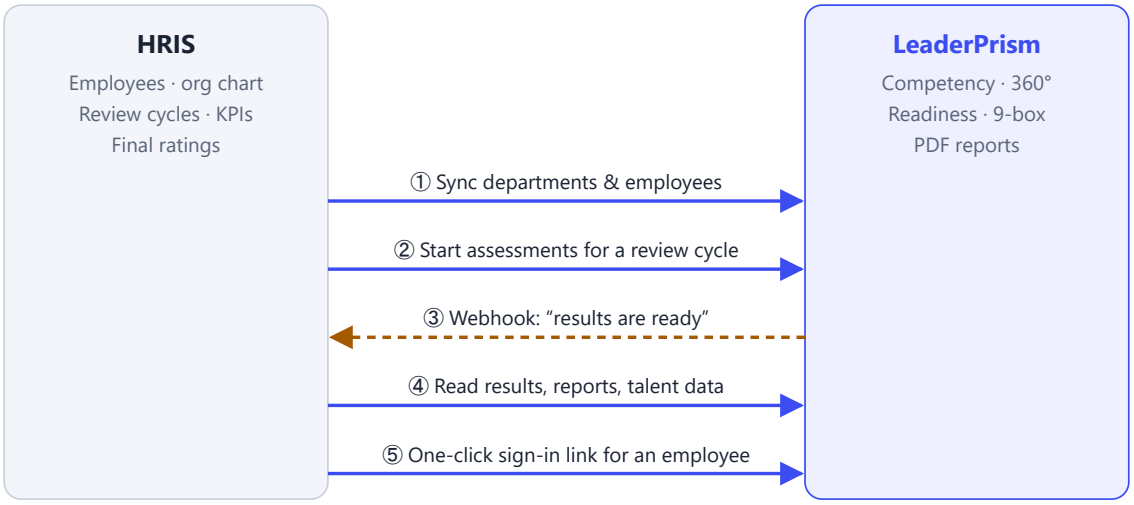

Solid arrows: the HRIS calls LeaderPrism with its API key. Dashed arrow: LeaderPrism notifies the HRIS.

Who does what

ROLE	TASKS IN THIS GUIDE
Org admin	Creates the API key and webhook in LeaderPrism (sections 3 and 6), and watches the audit log (section 11).
HRIS developer	Builds the HRIS calls: sync, starting a cycle, reading results, single sign-on and receiving webhooks (sections 4–10).
Employees	Click "Open LeaderPrism" in the HRIS and complete their assessments (section 8). They need no separate password.

The rules that keep this safe

- Each API key belongs to **one organisation**. It can never read or change another organisation's data.
- The **HRIS is the source of truth** for people data. Names, job titles, departments and managers of synced employees are locked in LeaderPrism.
- **360° anonymity is protected.** The HRIS receives averages only, and only when enough raters answered. It never sees who said what.
- Personality data is for **development only** and never feeds performance scores.

2. Before you start

✓	WHAT YOU NEED	WHY
☐	A LeaderPrism **Org Admin** account	Only org admins can create API keys and webhooks, and view the audit log.
☐	A plan that includes the assessment types you will use	The trial plan does not include competency assessments. A cycle request for a type outside your plan is refused (see section 13).
☐	The **employee ID** each person has in the HRIS	LeaderPrism matches people by this ID (`employeeRef`), not by name.
☐	A web address in the HRIS that can receive webhooks	Needed for section 6. In production it must use `https` .
☐	The two server secrets set by TechNeura	Report links and webhooks need them (see section 14).


The words used in this guide

TERM	MEANING
`employeeRef`	The employee's ID in the HRIS, for example `E-010` .
`departmentRef`	The department's ID in the HRIS, for example `D-FIN` .
`cycleRef`	The HRIS review cycle ID, for example `2027-H1` . All LeaderPrism assessments for that cycle are grouped under it.
`designationRef`	The HRIS job grade or designation. It can be linked to a LeaderPrism role profile, which sets the required competency levels.
Scope	A permission on an API key, such as `results:read` .
Managed by HRIS	A badge on synced people and departments. Their HRIS-owned fields can only be changed in the HRIS.

Where the API lives. All HRIS calls go to `https://<your LeaderPrism API>/api/v1/integrations/hris/…` . Every request sends the key in the `X-Api-Key` header.

3. Create an API key Org admin


1. Sign in to LeaderPrism and go to **Settings → Integrations**.
2. Click **Create API key**. Give the key a name you will recognise, such as “Main HRIS”, and tick only the scopes the HRIS needs. Then click **Create key**.

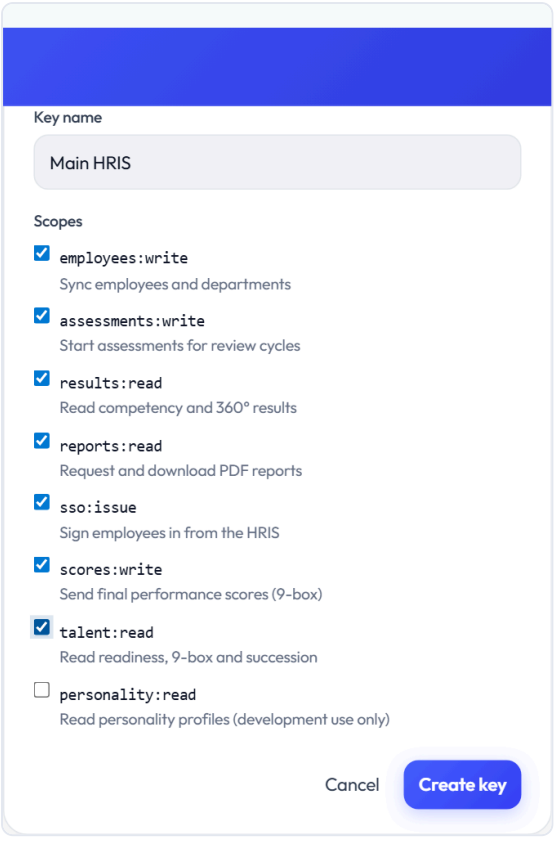

Choosing the key's name and scopes.

SCOPE	LETS THE HRIS…
`employees:write`	Sync departments and employees (section 5)
`assessments:write`	Start assessments for a review cycle (section 7)
`results:read`	Read results and the framework; test the connection (sections 4, 9)
`reports:read`	Request PDF reports (section 9)
`sso:issue`	Create one-click sign-in links (section 8)
`scores:write`	Send final performance scores for the 9-box (section 10)
`talent:read`	Read readiness, 9-box and succession (section 10)
`personality:read`	Read one employee's personality profile, for development only (section 10)

3 The full key is shown **once**. Click **Copy** and give it to the HRIS team through a secure channel. Don't send it in plain email or chat.

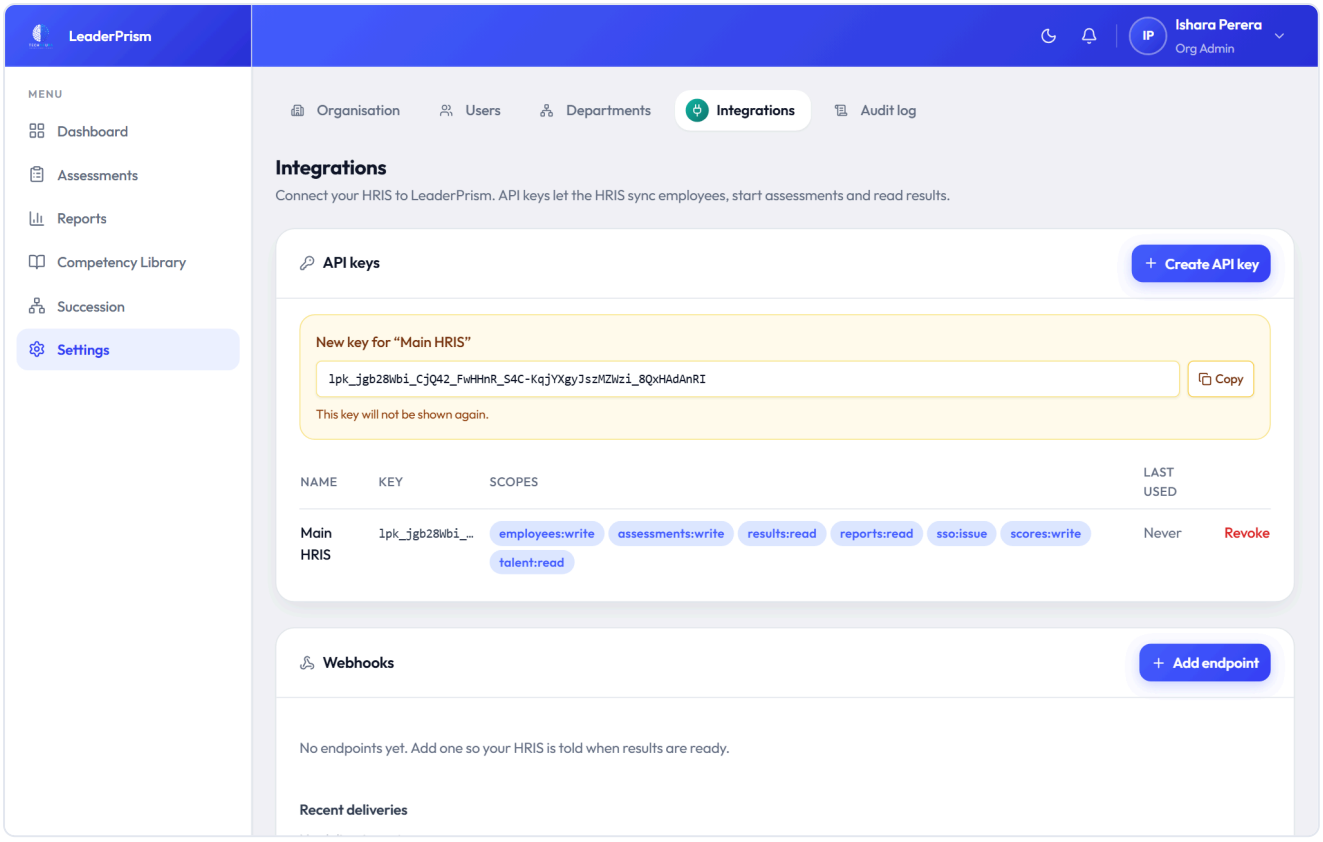

The new key, shown once. Afterwards only its prefix (`lpk_jgb28Wbi_…`) appears in the list.

> **Treat the key like a password.** If it leaks, click **Revoke** next to it and create a new one. A revoked key stops working at once. LeaderPrism stores only a fingerprint of the key, so a lost key cannot be shown again; create a new one instead.

4. Test the connection HRIS developer


Call the ping endpoint with the key. A `200` answer with your organisation's ID means the key works.

```
GET /api/v1/integrations/hris/ping
X-Api-Key: lpk_jgb28Wbi_••••••••••••••••••••••••••••••••••••••

← 200
{ "data": { "orgId": "74aba147-1e49-4f08-b544-3851c0a89409" } }
```

ANSWER	MEANING
`200`	Connected.
`401`	The key is wrong, revoked, or the organisation is inactive.
`403 INSUFFICIENT_SCOPE`	The key exists but lacks the scope this call needs (ping needs `results:read`).

All endpoints, with their full request and response formats, are listed in the API's Swagger page at `/api/docs`, under **HRIS Integration**:

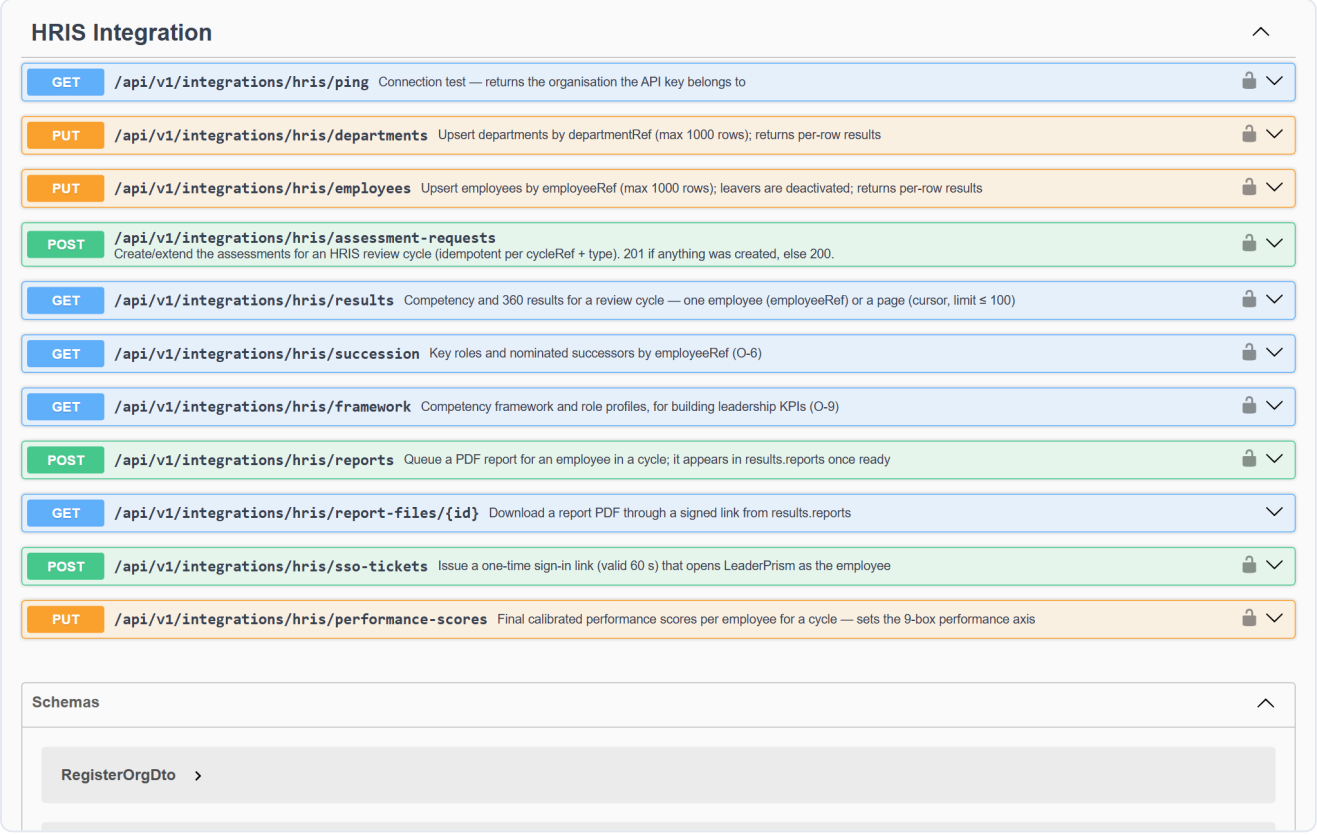

The HRIS Integration endpoints in Swagger. The lock icon means the call needs the API key.

5. Sync departments and employees HRIS developer

Send the org structure first, then the employees. Run the sync whenever the HRIS changes, or nightly. Sending the same data again is safe, because records are matched by their HRIS IDs.

Departments

```
PUT /api/v1/integrations/hris/departments
{ "departments": [
    { "departmentRef": "D-OPS",     "name": "Operations" },
    { "departmentRef": "D-OPS-PRD", "name": "Production", "parentRef": "D-OPS" },
    { "departmentRef": "D-FIN",     "name": "Finance" },
    { "departmentRef": "D-HR",      "name": "Human Resources" } ] }

← 200  { "results": [ { "ref": "D-OPS", "status": "created", "id": "…" }, … ] }
```

Employees


```
PUT /api/v1/integrations/hris/employees
{ "employees": [
    { "employeeRef": "E-010", "email": "kavinda.silva@ceylonweave.example",
      "firstName": "Kavinda", "lastName": "Silva", "jobTitle": "Production Manager",
      "departmentRef": "D-OPS-PRD", "managerRef": "E-001", "designationRef": "MGR-2",
      "employmentStatus": "active" },
    { "employeeRef": "E-011", "email": "dilani.jayasinghe@ceylonweave.example",
      "firstName": "Dilani", "lastName": "Jayasinghe", "jobTitle": "Line Supervisor",
      "departmentRef": "D-OPS-PRD", "managerRef": "E-010", "designationRef": "SUP-1",
      "employmentStatus": "active" } ] }

← 200  { "results": [ { "ref": "E-010", "status": "created", "id": "…" },
               { "ref": "E-011", "status": "created", "id": "…" } ] }
```


- **Up to 1000 rows per call**, in any order. Managers and parent departments are linked after all rows are saved.
- **Roles are set automatically.** New people become *Participant*; anyone with direct reports becomes *Manager*. You may send `role` to override this.
- **Leavers:** send `"employmentStatus": "left"`. The person is deactivated and signed out. Org admins are never deactivated by a sync.
- **Full sync:** `"fullSync": true` deactivates every synced person missing from the list. Only use it when the list holds **everyone**.
- The call returns `200` even if some rows fail. Check each row's `status`: `created`, `updated`, `unchanged` or `error`.

What the org admin sees after a sync


Synced people appear in **Settings** → **Users** with a **Managed by HRIS** badge. Asanka Herath was sent as `left`, so their account is inactive.

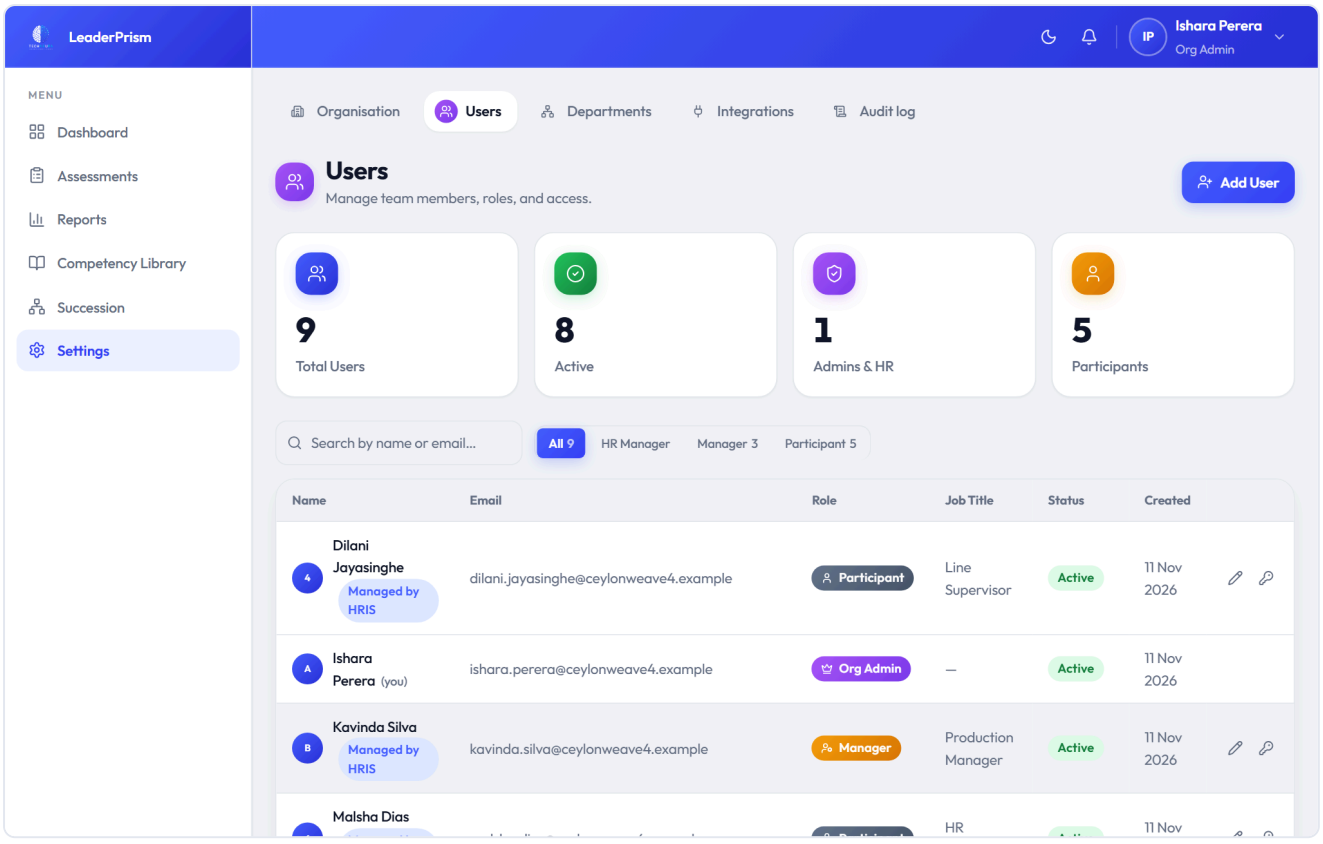

Settings → Users after the sync. The admin's own account has no badge, because it was not synced.

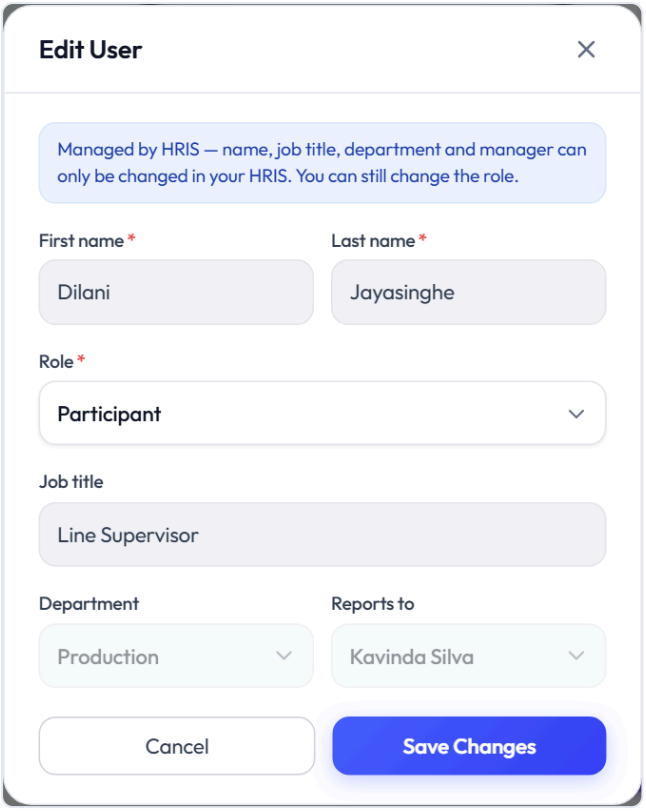

Editing a synced employee: name, job title, department and manager are locked. The role can still be changed.

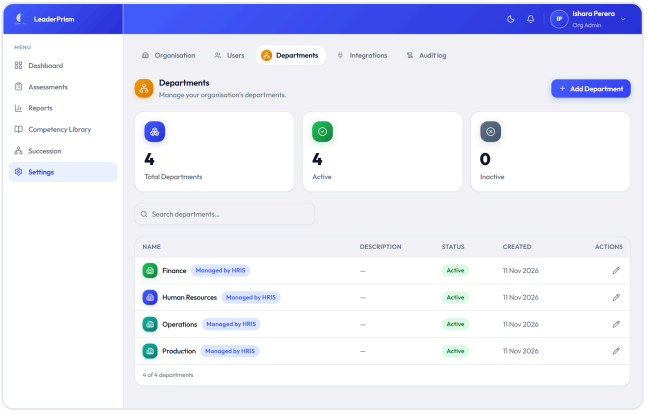

Settings → Departments with the synced structure.

> **To change a locked field**, change it in the HRIS and let the next sync carry it over. Editing it in LeaderPrism through the API is refused with `409 HRIS_MANAGED_FIELD`.


Row warnings and errors

CODE	KIND	WHAT TO DO
`email_conflict`	error	Another employee ID already uses this email. Fix the duplicate in the HRIS.
`manager_cycle` / `parent_cycle`	error	The row would make a loop (A reports to B, B reports to A). Fix the reporting lines.
`manager_not_found`	warning	The manager hasn't been synced yet. Send the row again after the manager.
`department_not_found`	warning	Sync departments before employees.
`protected_role_not_deactivated`	warning	An org admin was sent as `left`. Deactivate admins by hand in LeaderPrism.

6. Add a webhook Org admin


Webhooks let LeaderPrism tell the HRIS when something happens, so the HRIS doesn't have to keep asking.

1. In **Settings** → **Integrations**, click **Add endpoint**. Enter the HRIS web address that receives the messages, tick the events you want, and click **Save endpoint**.

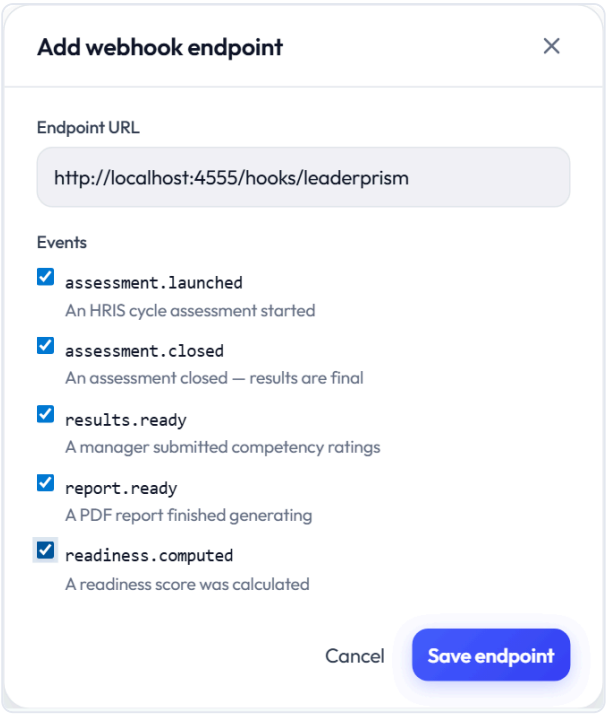

Adding a webhook endpoint. (A local test address is shown here; production addresses must start with `https://`.)

2. Copy the **signing secret** (`whsec_…`). It is shown once. The HRIS uses it to check that each message really came from LeaderPrism.
3. Click **Send test**. A `ping` delivery appears under **Recent deliveries**. *succeeded* with response `200` means the HRIS received it.

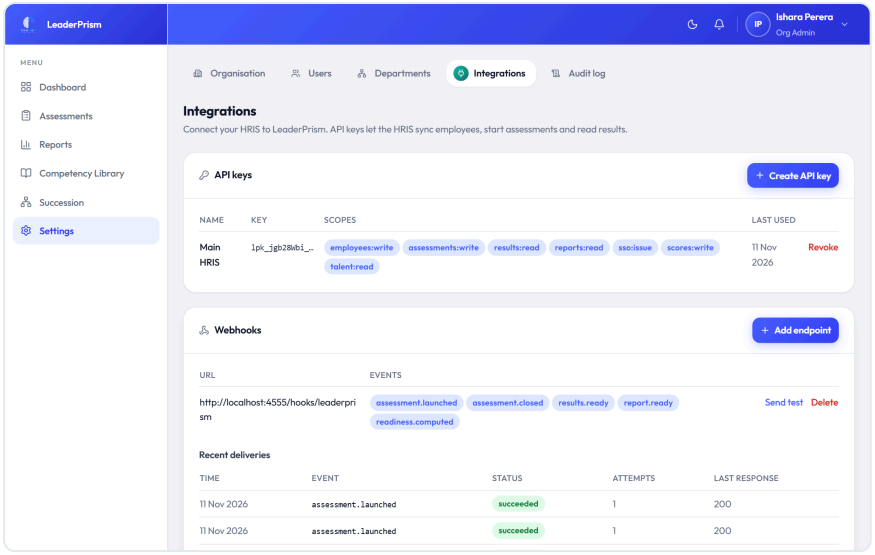

The finished setup: one API key, one webhook endpoint, and successful deliveries (`assessment.launched` after a cycle was started).

Events

EVENT	SENT WHEN
`assessment.launched`	An assessment for a review cycle starts.
`results.ready`	A manager submitted competency ratings for an employee.
`assessment.closed`	HR closed the assessment, or everyone finished and it closed itself.
`report.ready`	A PDF report finished generating.
`readiness.computed`	A leadership-readiness score was calculated.

Receiving a webhook HRIS developer

Each message is a `POST` with a JSON body. This one was received during the demo:

```
X-LeaderPrism-Event:     assessment.launched
X-LeaderPrism-Delivery:  <unique id: use it to ignore duplicates>
X-LeaderPrism-Timestamp: 1794372312
X-LeaderPrism-Signature: sha256=c6d95ac72de65…

{ "event": "assessment.launched", "orgRef": "ceylon-weave", "cycleRef": "2027-H1",
  "assessmentId": "b91d65ba-…", "assessmentType": "competency", "employeeRefs": ["E-010"],
  "occurredAt": "2026-11-11T04:45:12.793Z" }
```

- **Check the signature**: an HMAC-SHA256 of `"<timestamp>.<raw body>"` with the signing secret. Reject messages older than 5 minutes.
- **Answer with any 2xx within 10 seconds.** Anything else is retried up to 6 times, waiting longer each time, starting at 30 seconds.
- **Webhooks only notify.** When `results.ready` or `assessment.closed` arrives, fetch the data with `GET /results` (section 9).


7. Start a review cycle HRIS developer

When a review cycle opens in the HRIS, the HRIS asks LeaderPrism to start the matching assessments. Employees and raters are invited by email straight away.

```
POST /api/v1/integrations/hris/assessment-requests
{ "cycleRef": "2027-H1", "title": "H1 2027 leadership review",
  "types": ["competency", "360_feedback"],
  "startDate": "2026-11-11", "endDate": "2027-06-30",
  "employeeRefs": ["E-010"], "includeSelfAssessment": true,
  "raters": { "E-010": [
    { "email": "dilani.jayasinghe@ceylonweave.example", "name": "Dilani Jayasinghe", "relationship":
"direct_report" },
    { "email": "ruwan.bandara@ceylonweave.example",     "name": "Ruwan Bandara",     "relationship":
"direct_report" },
    { "email": "tharindu.gunawardena@ceylonweave.example", "name": "Tharindu Gunawardena",
"relationship": "peer" } ] } }

← 201
{ "assessments": [
  { "assessmentId": "b91d65ba-…", "type": "competency",   "employeeRefs": ["E-010"], "created": true },
  { "assessmentId": "578c6f97-…", "type": "360_feedback", "employeeRefs": ["E-010"], "created": true } ]
}
```

- **Competency:** one assessment per cycle that holds all listed employees. Each employee rates themselves and their manager rates them.
- **360° feedback:** one assessment **per employee**, with the raters you list. Rater relationships are `supervisor`, `peer`, `direct_report` or `stakeholder`.
- **Adding people later is safe.** Send the same `cycleRef` again with more employees. Existing assessments are reused (`"created": false`) and only the new people are added. In the demo, a second call added E-011, E-012 and E-021 to the same competency assessment.
- The role profile (the required level for each competency) comes from `roleProfileId`, or else from the profile linked to each employee's `designationRef`.

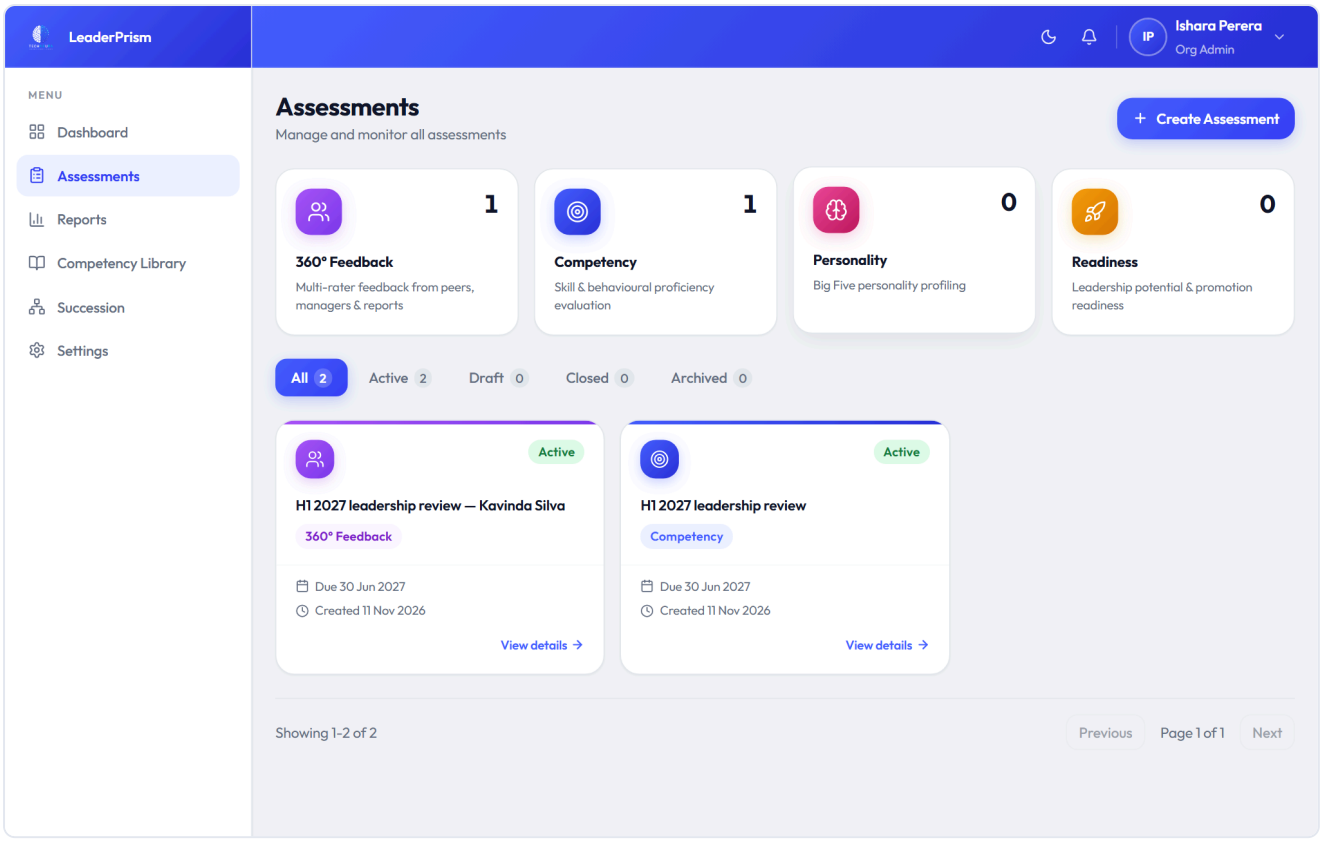

The org admin sees the cycle's assessments in Assessments, already active.


8. Open LeaderPrism from the HRIS (single sign-on)

Employees don't need a LeaderPrism password. The HRIS shows an **Open LeaderPrism** button. When the employee clicks it, the HRIS asks LeaderPrism for a one-time sign-in link and opens it.


```
POST /api/v1/integrations/hris/sso-tickets
{ "employeeRef": "E-011", "redirectPath": "/my-assessments" }

← 201
{ "url": "https://app.leaderprism…/sso/hris?ticket=psm3fhFu…", "expiresAt": "2026-11-11T04:46:32Z" }
```

- The link works **once** and expires after **60 seconds**. Create it at the moment the employee clicks, never in advance.
- `redirectPath` is the LeaderPrism page to open: `/my-assessments` (the default), or `/my-assessments/<assessmentId>` for one assessment.
- Links are refused for org admin accounts, for safety. Admins sign in with their password.

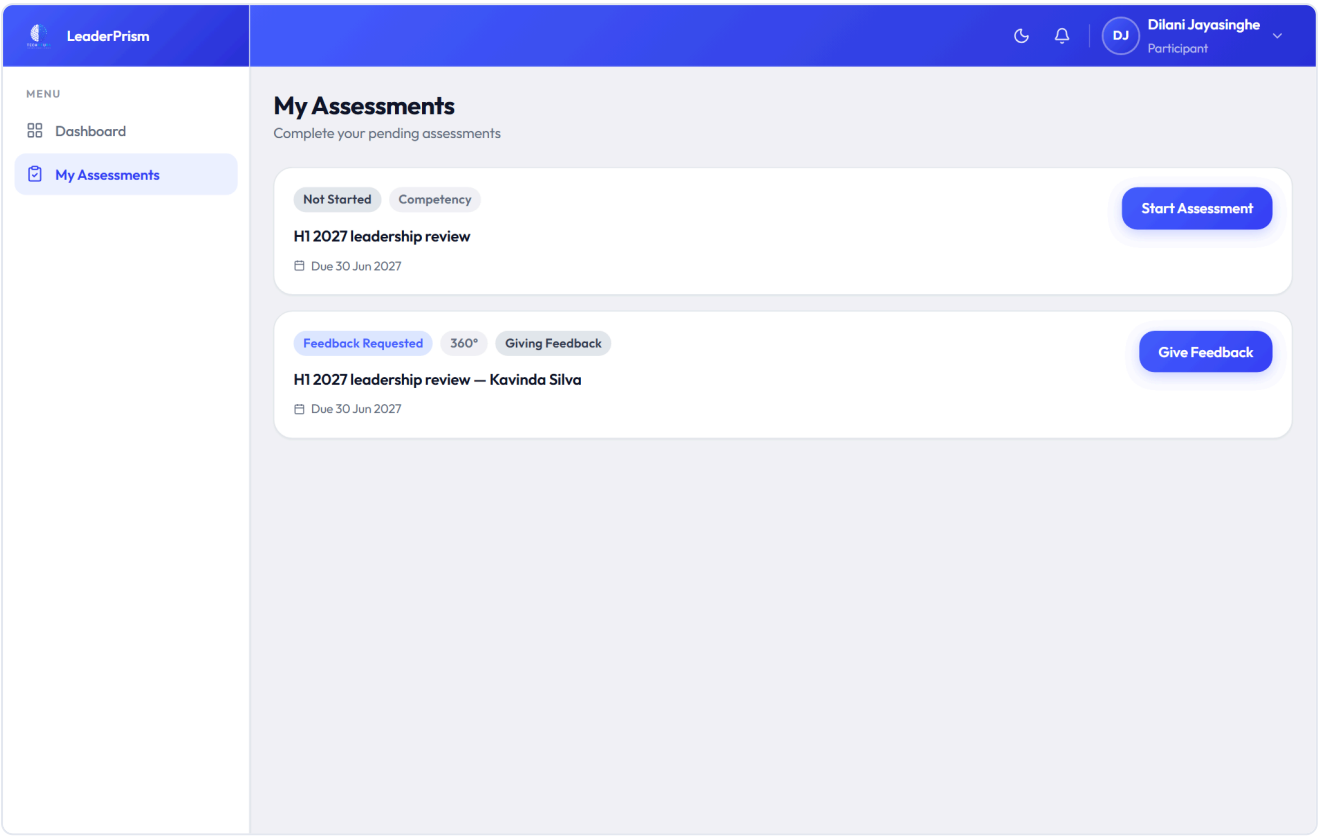

Dilani clicked the link in the HRIS and landed in LeaderPrism, already signed in, with her self-assessment and a 360° feedback request for her manager.

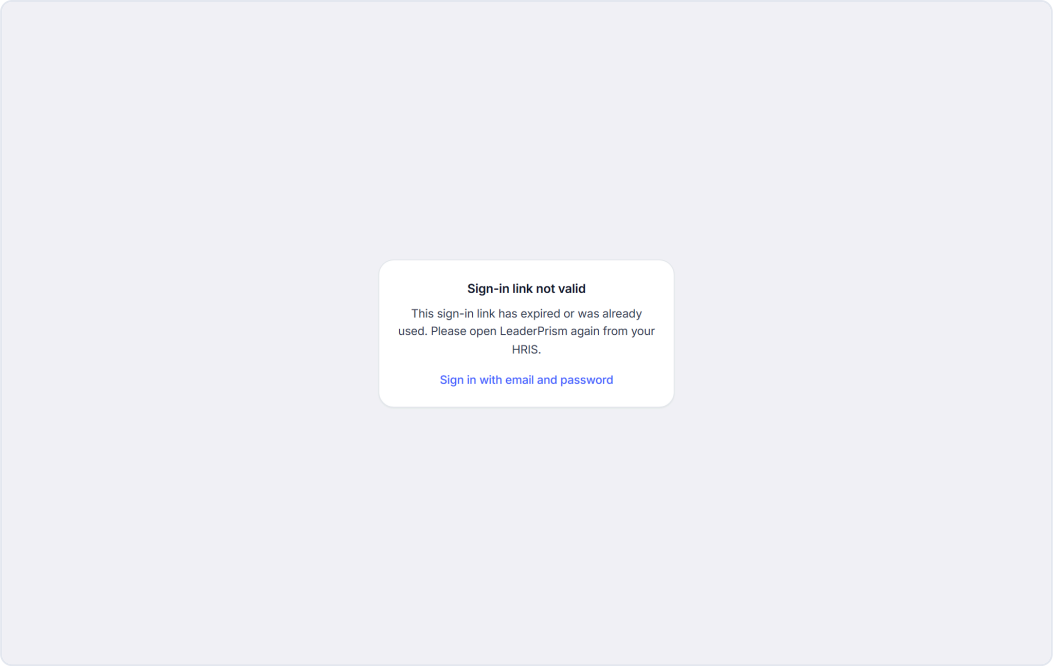

Opening the same link again: it was already used, so the employee is asked to go back to the HRIS.

> **Employees who aren't using the HRIS button** can still reach LeaderPrism from their email invitations, or choose a password with “Forgot password” on the sign-in page.

9. Read results into the HRIS KPI module HRIS developer

When a `results.ready` or `assessment.closed` webhook arrives, read the employee's results and write them into the matching leadership KPIs.

```
GET /api/v1/integrations/hris/results?cycleRef=2027-H1&employeeRef=E-010
(leave out employeeRef to page through everyone: &limit=50&cursor=…)

← 200
{ "employeeRef": "E-010", "cycleRef": "2027-H1", "status": "final",
  "competency": {
    "scaleMax": 4, "roleProfile": { "title": "Production Manager" },
    "items": [ { "name": "Strategic Thinking", "selfLevel": 3, "managerLevel": 2,
                 "requiredLevel": 3, "gapVsRequired": -1, "managerEvidence": "…" } ],
    "summary": { "managerAvgPct": 50.0, "achievementVsRequiredPct": 66.7 } },
  "feedback360": { "status": "ok", "scaleMax": 5, "minRaterThreshold": 3,
    "items": [ { "othersMean": 3.6, "self": 4, "gapVsSelf": -0.4,
                 "byGroup": { "direct_report": { "mean": 3.7, "n": 3 } } } ],
    "overallOthersPct": 65.0 },
  "reports": [ { "type": "competency", "url": "https://…", "expiresAt": "…" } ] }
```

Turning results into KPI values

KPI IN THE HRIS	FIELD TO USE
Leadership competency achievement (%)	`competency.summary.achievementVsRequiredPct`. It can go above 100%; cap it in the HRIS if your KPI should not.
Per-competency target vs actual	`requiredLevel` (target) and `managerLevel` (actual), on a 1–4 scale.
360° feedback score (%)	`feedback360.overallOthersPct`, which is (mean − 1) ÷ (scale − 1) × 100.
Development gaps	Items with a negative `gapVsRequired`; use `developmentComment` in the development plan.

`status` is `in_progress` until every assessment the employee is in has closed, and `final` after that. Only write final values into a KPI that closes the cycle.

> **How 360° anonymity is protected.**
>
> - `othersMean` never includes the employee's self-rating.
> - A rater group (for example peers) only appears if at least `minRaterThreshold` people in it answered (normally 3).
> - If too few people answered in total, the HRIS receives `{ "status": "insufficient_raters" }` and no numbers at all.
> - Rater names and individual answers are never sent to the HRIS.

Building KPIs from the competency framework

`GET /framework` returns every competency with its four level descriptions, and every role profile with its required levels. Use it once to set up the leadership KPIs in the HRIS, with `requiredLevel` as the target.

PDF reports

```
POST /api/v1/integrations/hris/reports
{ "cycleRef": "2027-H1", "employeeRef": "E-010", "type": "competency" }   // or "individual_360"
```

The report is created in the background. When the `report.ready` webhook arrives, read the results again: the report appears in `reports` with a download link. The link needs no API key, so it can be opened in the browser, but it **expires after 15 minutes**. Read the results again to get a fresh link; don't save links.

10. Send performance scores and read talent data

Send final performance scores `scores:write`

After calibration, the HRIS sends each employee's final performance score (0–100). It sets the **performance** axis of LeaderPrism's 9-box grid.

```
PUT /api/v1/integrations/hris/performance-scores
{ "cycleRef": "2026-H2",
  "scores": [ { "employeeRef": "E-010", "finalScore": 82.5, "ratingBand": "Exceeds",
                "finalisedAt": "2026-11-11T10:00:00Z" } ] }
```

SCORE	9-BOX PERFORMANCE
70 or more	High
40 to 69.9	Medium
Below 40	Low

- `finalisedAt` is **required** on every row. The latest score by this date is used.
- Sending the same cycle again replaces the score, for example after an appeal.
- A manual override by HR inside LeaderPrism always wins over the HRIS score.
- Row errors: `employee_not_found`, and `invalid_score` when the score is outside 0–100.

Read readiness, 9-box and succession `talent:read`

With this scope, every result also carries:


```
"readiness": { "rating": "1_2_years", "compositeScore": 62, "roleProfile": { "title": "Production
Manager" } },
"nineBox":   { "performance": "high", "potential": "high", "performanceSource": "hris" }
```

`performanceSource` shows where the performance value came from: `manual` (HR override), `hris` (your score) or `feedback360`. `GET /succession` lists key roles and their successors by `employeeRef`.

> **Use talent data for development and succession only, never as a performance score.** Personality profiles (`personality:read`) are stricter still. They are returned only for one employee at a time, must be visible only to the employee and HR, and must never affect ratings, rankings, pay or other employment decisions.

11. Monitor with the audit log Org admin

Settings → Audit log records everything the HRIS does: every sync, deactivation, cycle request, results read, report download and score upload. It also records SSO sign-ins and changes made by admins (new keys, webhooks, 9-box overrides). Entries cannot be changed.

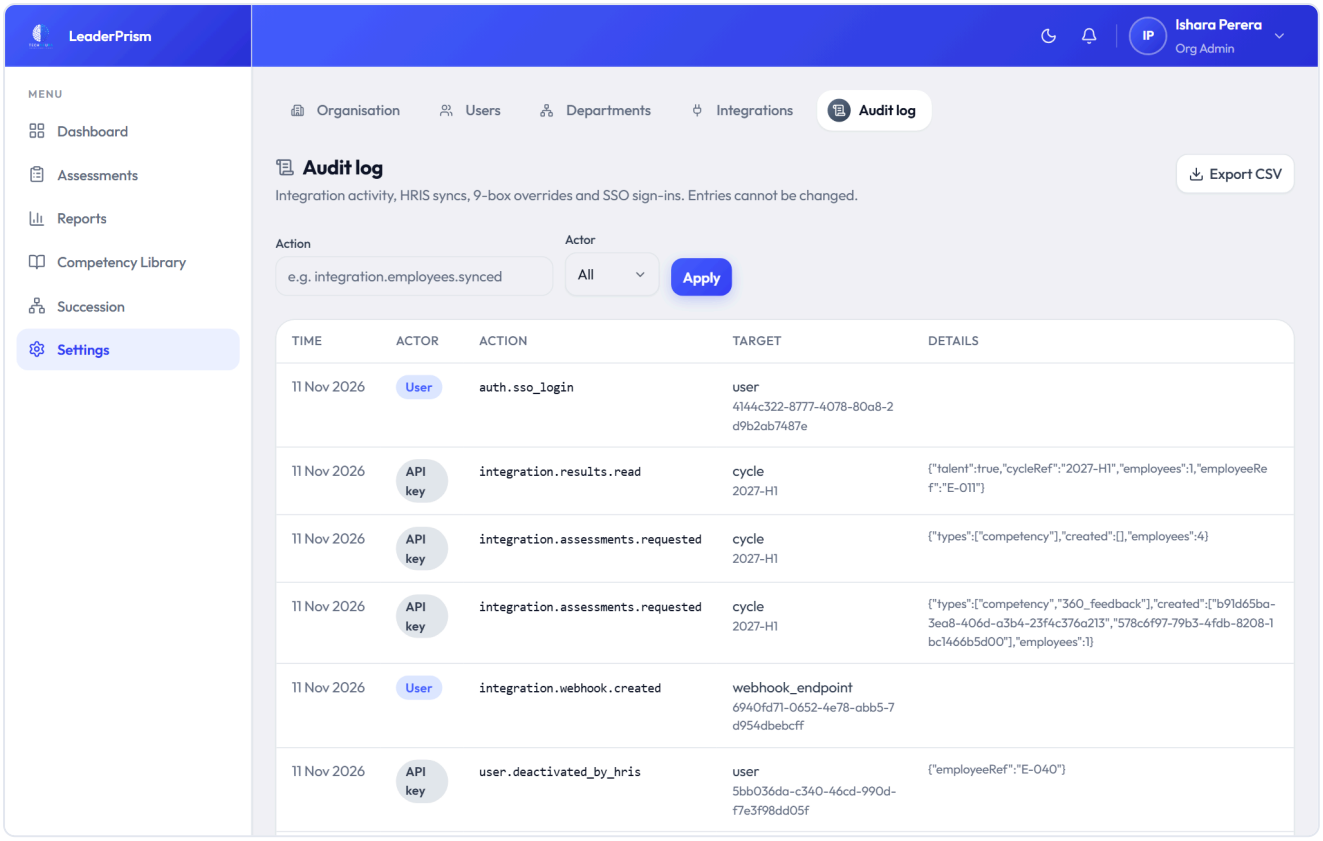

The audit log after the demo. The **Actor** column shows whether the API key or a person did it.

- Filter by **Action** (for example `integration.employees.synced`) or by **Actor**, then click **Apply**.
- **Export CSV** downloads the filtered log for your records or an auditor.
- On the Integrations page, the API key's **Last used** date and the webhook's **Recent deliveries** show whether the connection is alive.

12. A review cycle from start to finish

#	WHEN	HRIS DOES	LEADERPRISM DOES
1	Once, at setup	Org admin creates the API key and webhook; developer reads `/framework` and builds leadership KPIs.	—
2	Nightly, or on change	`PUT /departments`, then `PUT /employees`.	Creates or updates people; deactivates leavers.
3	Cycle opens	`POST /assessment-requests` with the cycle's employees and raters.	Creates and launches assessments; emails invitations; sends `assessment.launched`.
4	During the cycle	Shows an “Open LeaderPrism” button that calls `POST /sso-tickets`.	Employees self-assess, managers rate, raters give 360° feedback. Automatic reminders go out if they are set up for the assessment.
5	As ratings come in	On `results.ready`, calls `GET /results` and shows progress.	Sends `results.ready` when a manager submits ratings.
6	Cycle closes	On `assessment.closed`, reads final results and writes the leadership KPIs.	Closes the assessments; sends `assessment.closed`.
7	After calibration	`PUT /performance-scores`; requests PDF reports for the review meeting.	Updates the 9-box; generates reports; sends `report.ready`.
8	Talent review	Reads readiness, 9-box and `/succession` for succession planning.	—

13. Troubleshooting

YOU SEE	CAUSE AND FIX
`401` on every call	The key is wrong or revoked, or the organisation is inactive. Check **Settings** → **Integrations**; create a new key if needed.
`403 INSUFFICIENT_SCOPE`	The key lacks the scope. Create a new key with the right scopes (scopes can't be added to an existing key) and revoke the old one.
`403` "Assessment type … is not available on plan …"	Your LeaderPrism plan doesn't include that assessment type, or you've reached the plan's limit of active assessments. Contact TechNeura to upgrade.
`422 UNKNOWN_EMPLOYEES`	An employee in the request isn't synced or is inactive. `details.employeeRefs` lists them. Sync them first. Nothing was created.
`422 RATERS_NOT_ALLOWED`	A 360° rater is a LeaderPrism Manager or HR Manager, who can't give 360° feedback. `details.emails` lists them. Remove them from the raters.
`403 SSO_NOT_ALLOWED`	The employee is an org admin. Admins sign in with their password.
`404` from `sso-tickets`	The employee is unknown, inactive or has left.
"Sign-in link not valid"	The link was already used or is older than 60 seconds. Click the button in the HRIS again.
`409 HRIS_MANAGED_FIELD`	Someone tried to edit an HRIS-owned field in LeaderPrism. Change it in the HRIS instead.
Webhook delivery *failed*	The HRIS didn't answer 2xx within 10 seconds after 6 attempts. The **Last response** column shows why. Fix the receiver and use **Send test**.
`feedback360.status = "insufficient_raters"`	Too few raters answered to protect anonymity. Remind raters, or add more raters by sending the cycle request again.
`403` on a report link	The link is older than 15 minutes. Read the results again for a fresh link.

14. Security, limits and server settings

Security checklist

- Give each key only the scopes it needs. Use separate keys for separate systems, so one can be revoked without stopping the others.
- Keep keys and webhook secrets in the HRIS server's secret store, never in a browser or mobile app.
- Always check the webhook signature and timestamp before trusting a message.
- Create sign-in links on the server at the moment of the click, and never log them.
- Rotate keys at least once a year: create the new key, switch the HRIS over, then revoke the old one.

Limits

ITEM	LIMIT
Rows per sync call	1000
Results page size	100 (default 50)
Sign-in link	60 seconds, single use
Report download link	15 minutes
Webhook answer time / attempts	10 seconds / 6 attempts
Request rate	100 requests per minute per IP address

Server settings (for TechNeura)

VARIABLE	PURPOSE
`INTEGRATION_URL_SIGNING_SECRET`	Signs report download links. Generate with `openssl rand -hex 32`.
`INTEGRATION_ENCRYPTION_KEY`	Encrypts webhook secrets (32 bytes, base64). Generate with `openssl rand -base64 32`.
`API_PUBLIC_URL`	Public address of the API, used in report links.
`APP_URL`	Public address of the web app, used in sign-in links.

> **More detail for developers:** the full API reference is in `docs/integrations/hris-api.md` in the LeaderPrism repository, and live in Swagger at `/api/docs` under **HRIS Integration**.