
CATHODE®
POWER | SPREADING GOODNESS WITH TRUST

SMART • RELIABLE • EFFICIENT

No.1 Choice of Solar EPCs Across India

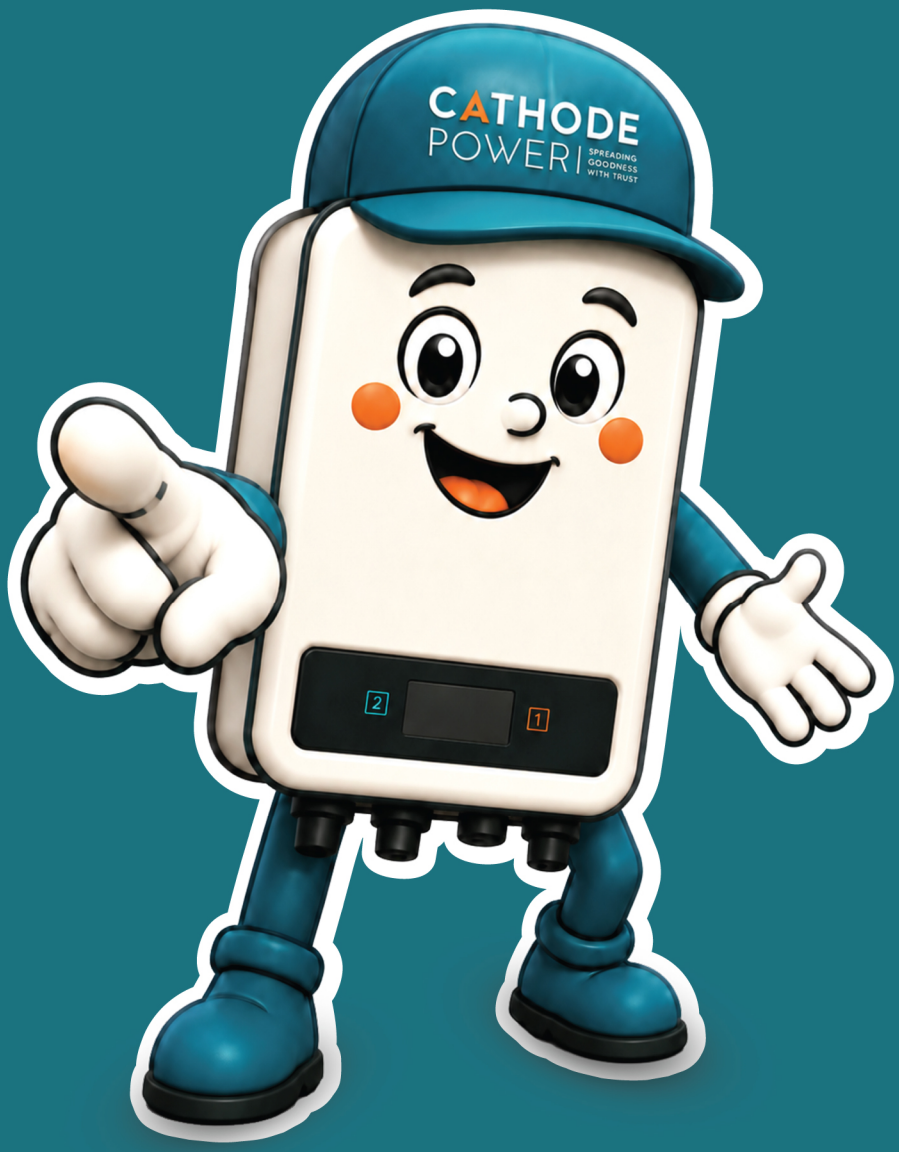


CATHODE POWER | SPREADING GOODNESS WITH TRUST

Empowering Epcs To Build A Sustainable Future With Smart, Efficient & Reliable Inverter Solutions.

On-Grid | Hybrid | Micro | BESS


WHO'S GOT YOUR BACK ON EVERY INSTALLATION?

YOUR POWER PARTNER FROM INSTALLATION TO AFTER - SALES

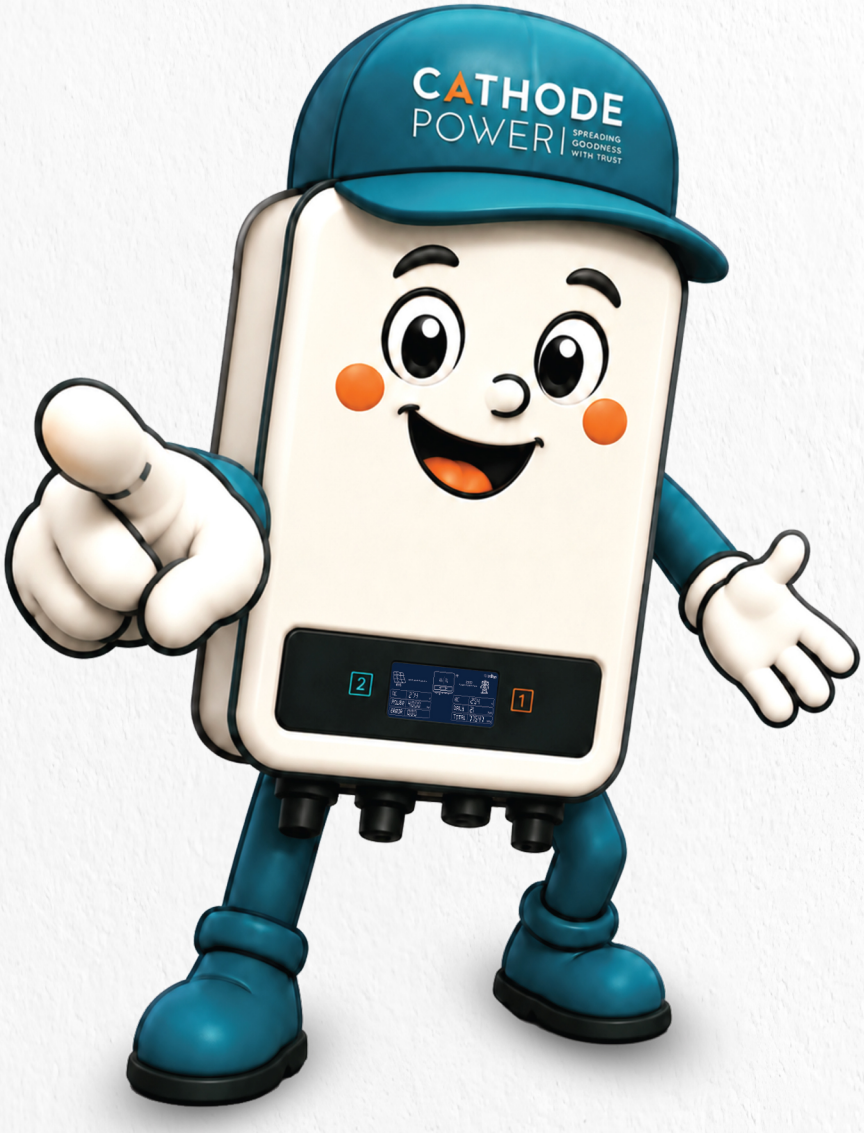

LITHIUM BATTERIES (WALL MOUNTED)

51.2V100Ah | 51.2V200Ah

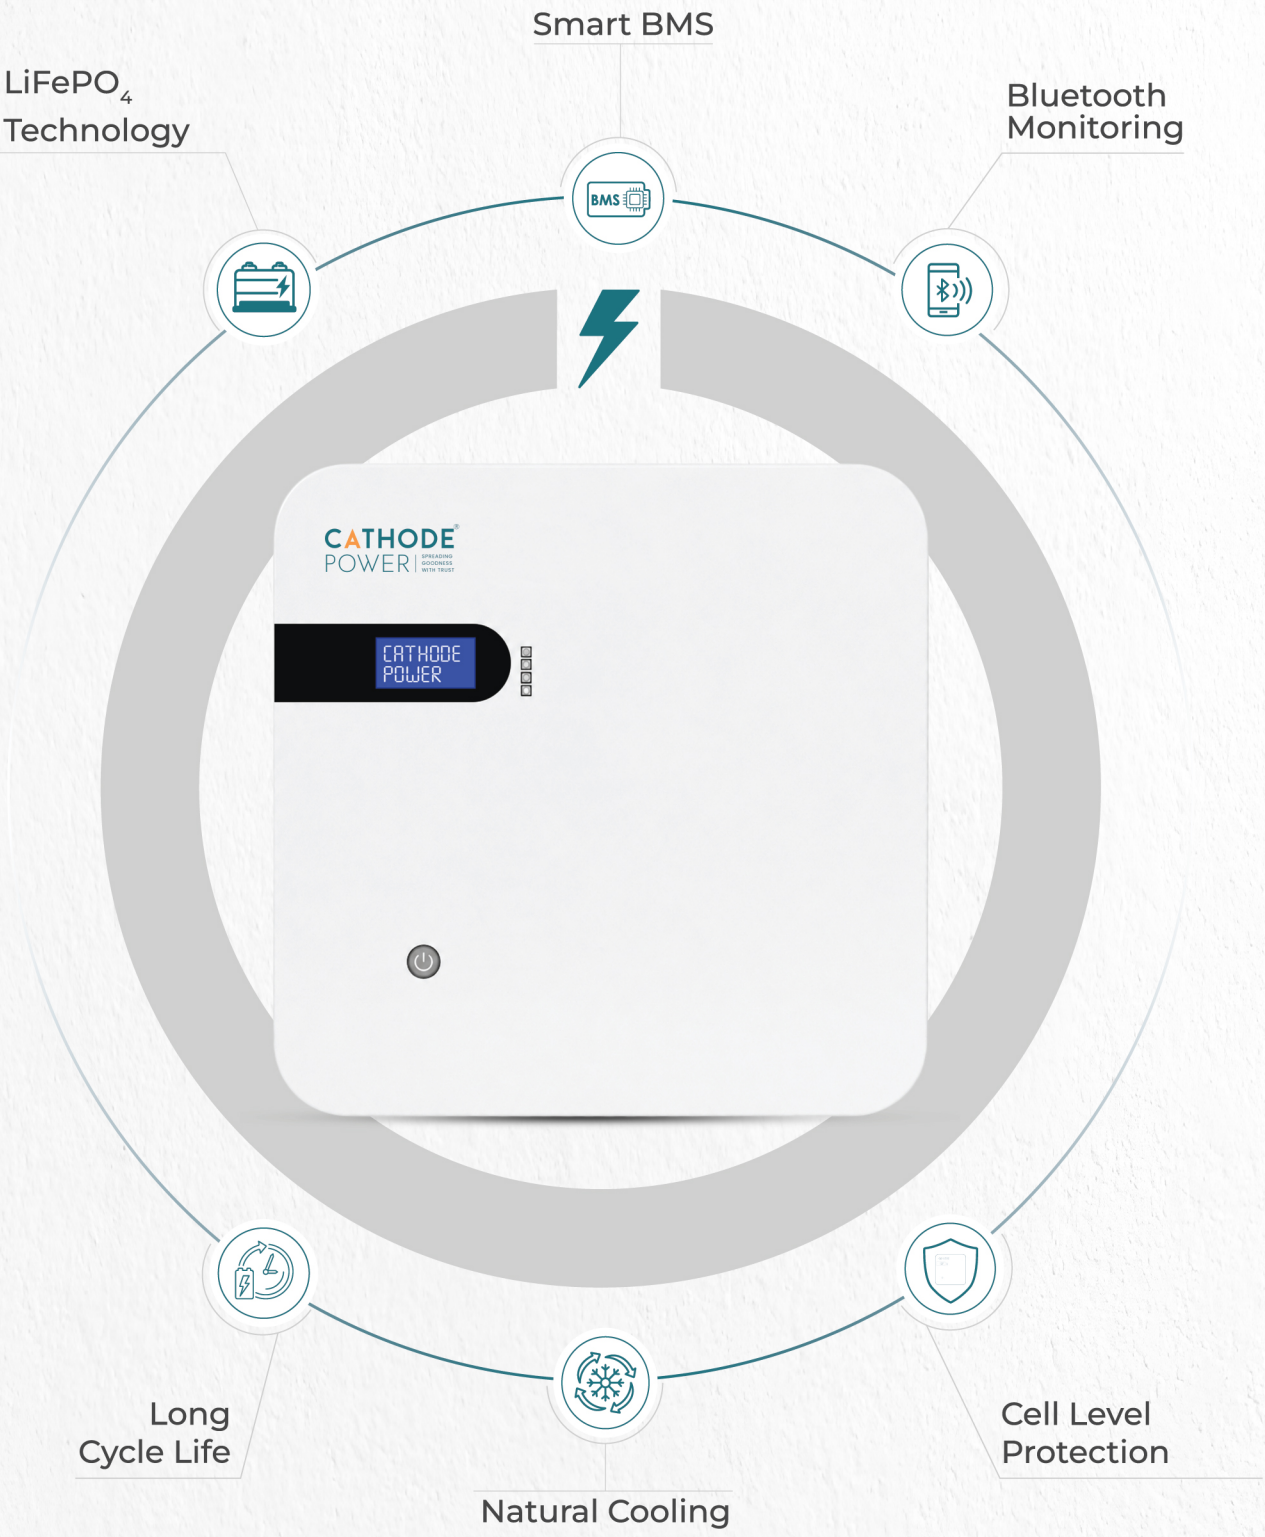


CATHODE POWER | SPREADING GOODNESS WITH TRUST

TECHNICAL DATA
(CP-51.2V100Ah & CP-51.2V200Ah)

PARAMETER	CP-51.2V100Ah	CP-51.2V200Ah
Nominal Voltage	51.2V	
Nominal Capacity	100Ah	200Ah
Nominal Energy	5.12kWh	10.24kWh
Cell Type	LiFePO4	
Combination Mode	16S1P	16S2P
BMS Configuration	16S100A	16S200A
Operating Voltage Range	41.6V-57.6V	
Standard Charge Current	20A 0.2C	40A 0.2C
Maximum Continue Charge Current	50A 0.5C	100A 0.5C
Standard Discharge Current	50A 0.5C	100A 0.5C
Maximum Continue Discharge Current	100A 1C	200A 1C
Cut-off Charge Voltage	57.6V	
Cut-off Discharge Voltage	41.6V	
Weight	48Kg	85Kg
Dimension (L/W/H) (mm)	508.5x469x155mm	515x505x240mm
Power Cable Outlet Mode	Front	
Cycle Life	≥3000/6000 Cycle, 80% DOD, 25°C	
Case Material	Metal	
Cooling Type	Natural Cooling	
Operating Temperature	Charging: 0°C ~ 50°C	/ Discharge: -20°C ~ 60°C
Relative Humidity	10% - 95% RH	
Storage Temperature	< 3 Month - 10°C ~ 25°C	
Instalation Mode	Wall Mounting	
Remote Mode	Bluetooth	
Communication Mode	CAN, RS485, RS232	

CATHODE POWER | SPREADING GOODNESS WITH TRUST

PAN INDIA PRESENCE

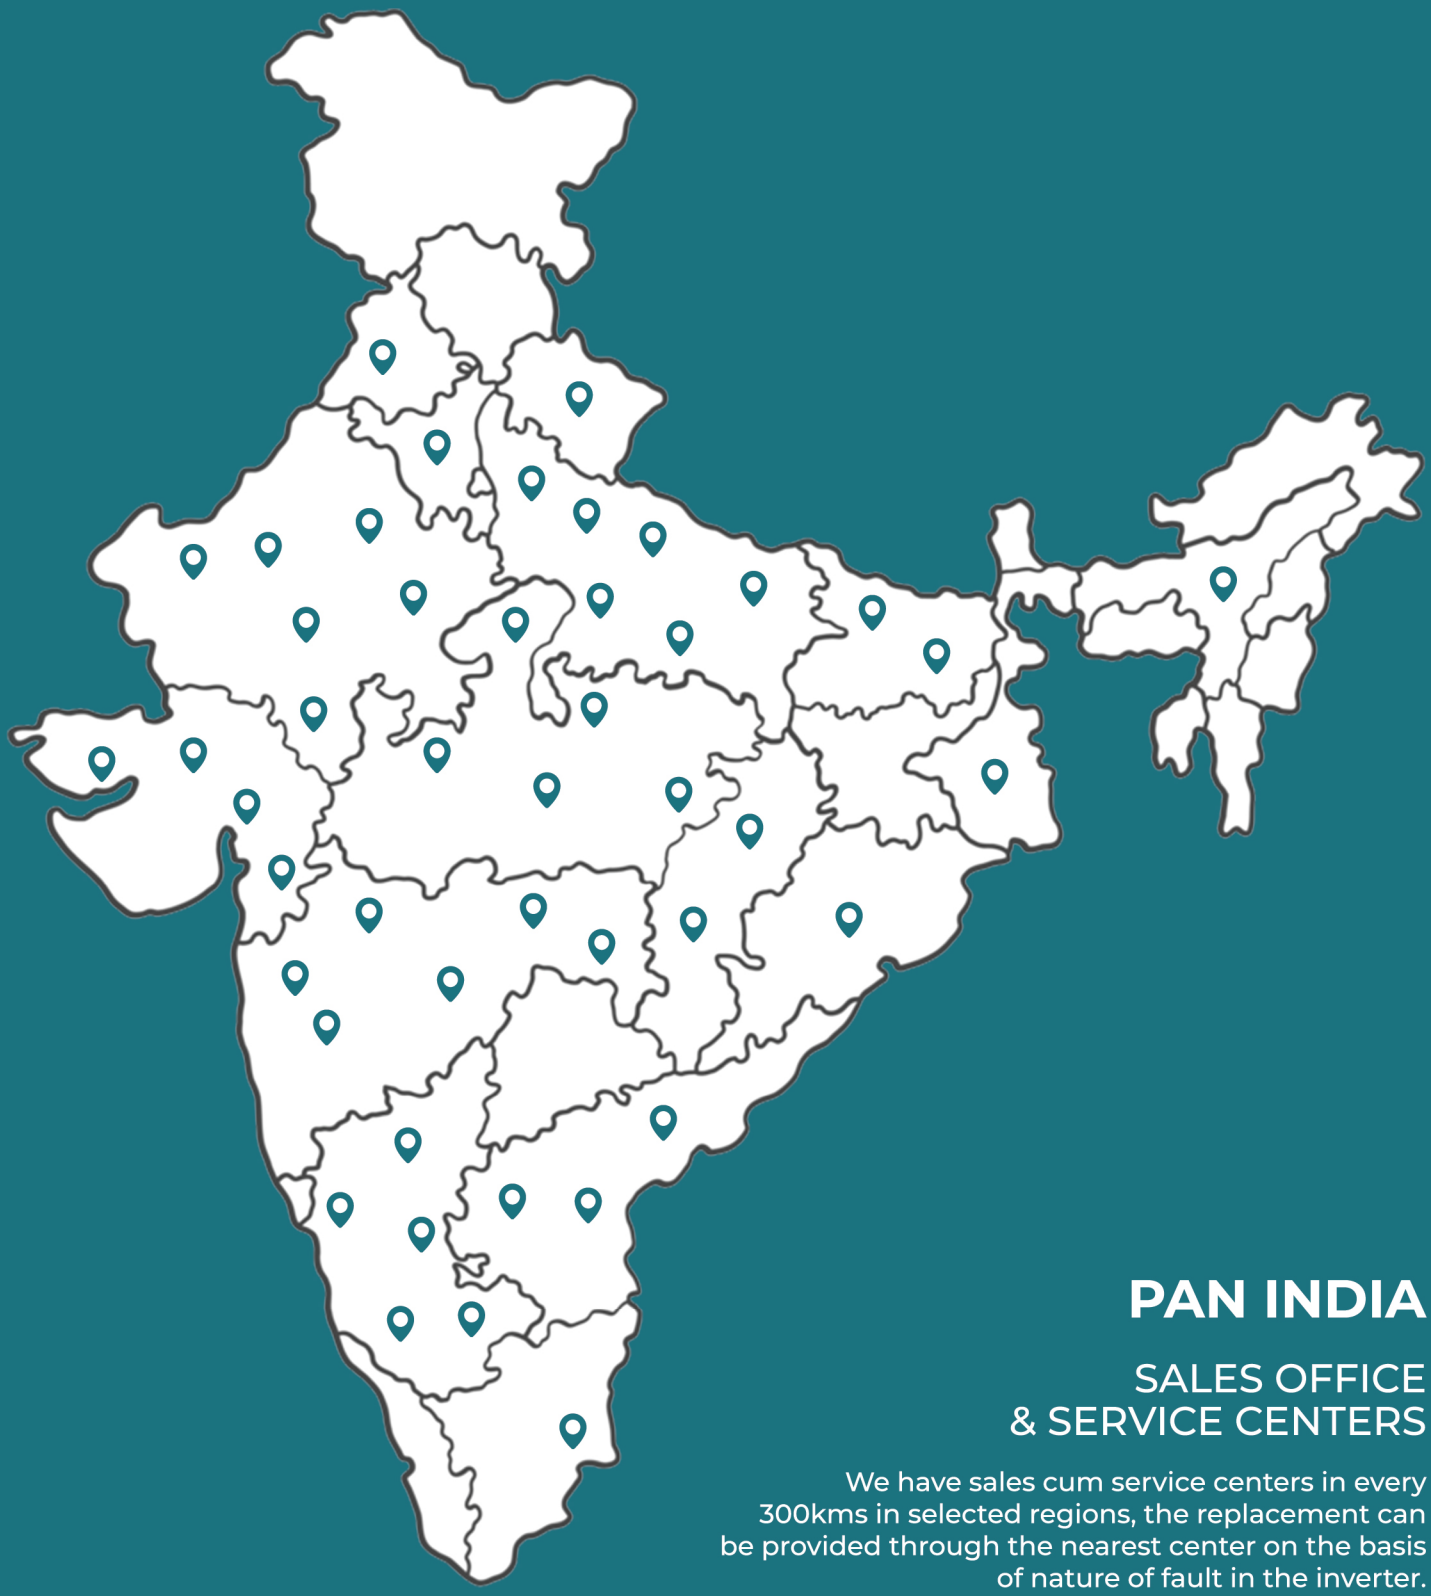

PAN INDIA

SALES OFFICE & SERVICE CENTERS

We have sales cum service centers in every 300kms in selected regions, the replacement can be provided through the nearest center on the basis of nature of fault in the inverter.

#YEHSWADESHIHAI

CATHODE® POWER

SPREADING GOODNESS WITH TRUST

Cathode Power Private Limited.

Corporate Office: SF 201-203, Fortune Platinum, Nr. Tulsidham Circle, Manjalpur, Vadodara, Gujarat - 390011

Factory Address: R.S. No.229, Sugar Factory, Ta. Karjan, Opp. Gandhara, Gandhara, Gujarat-391210

Contact: +91 98002 68002

Email: hello@cathodepower.com

Website: www.cathodepower.com