


Amazon S3 Bucket Creation

Hari Vignesh Rao

23BD1A052Q

Step-1: click on create bucket

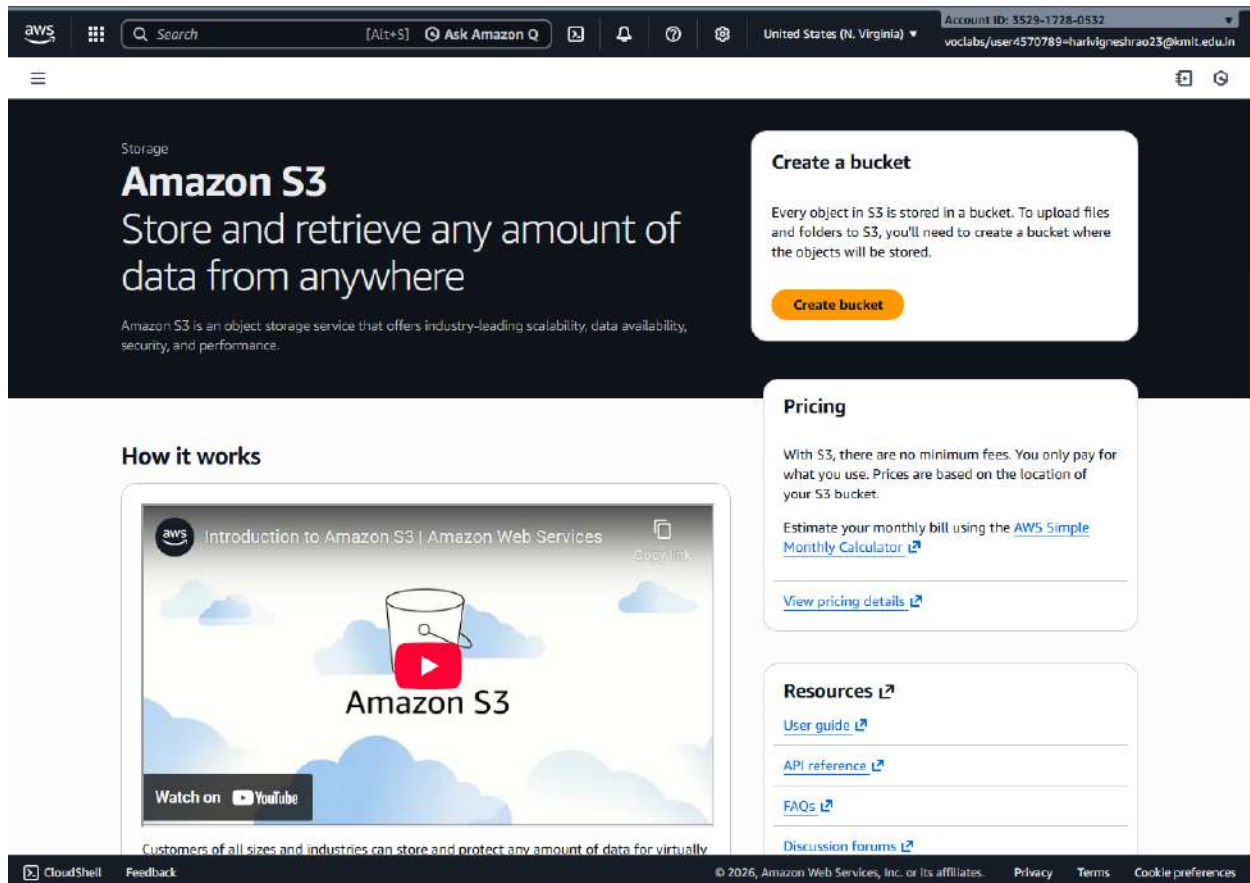

The screenshot shows the Amazon S3 console interface. At the top, there's a navigation bar with the AWS logo, a search bar, and account information including 'United States (N. Virginia)' and 'Account ID: 3529-1778-0532'. The main content area has a dark header with the text 'Storage Amazon S3 Store and retrieve any amount of data from anywhere'. Below this, there's a 'Create a bucket' section with a yellow 'Create bucket' button. To the right, there's a 'Pricing' section with a 'View pricing details' link. At the bottom, there's a 'Resources' section with links to 'User guide', 'API reference', 'FAQs', and 'Discussion forums'. A video player titled 'Introduction to Amazon S3 | Amazon Web Services' is also visible, showing a bucket icon and the text 'Amazon S3'.

Storage

Amazon S3

Store and retrieve any amount of data from anywhere

Amazon S3 is an object storage service that offers industry-leading scalability, data availability, security, and performance.

Create a bucket

Every object in S3 is stored in a bucket. To upload files and folders to S3, you'll need to create a bucket where the objects will be stored.

[Create bucket](#)

Pricing

With S3, there are no minimum fees. You only pay for what you use. Prices are based on the location of your S3 bucket.

Estimate your monthly bill using the [AWS Simple Monthly Calculator](#)

[View pricing details](#)

Resources

- [User guide](#)
- [API reference](#)
- [FAQs](#)
- [Discussion forums](#)

How it works

Introduction to Amazon S3 | Amazon Web Services

Copy link

Amazon S3

Watch on [YouTube](#)

Customers of all sizes and industries can store and protect any amount of data for virtually

CloudShell Feedback © 2026, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

2.give the bucket name

Create bucket [Info](#)

Buckets are containers for data stored in S3.

General configuration

AWS Region
US East (N. Virginia) us-east-1

Bucket type [Info](#)

☒ **General purpose**
Recommended for most use cases and access patterns. General purpose buckets are the original S3 bucket type. They allow a mix of storage classes that redundantly store objects across multiple Availability Zones.

☐ **Directory**
Recommended for low-latency use cases. These buckets use only the S3 Express One Zone storage class, which provides faster processing of data within a single Availability Zone.

Bucket name [Info](#)

salaar-public-bucket

Bucket names must be 3 to 63 characters and unique within the global namespace. Bucket names must also begin and end with a letter or number. Valid characters are a-z, 0-9, periods (.), and hyphens (-). [Learn more](#)

Copy settings from existing bucket - optional
Only the bucket settings in the following configuration are copied.

[Choose bucket](#)

Format: s3://bucket/prefix

Object Ownership [Info](#)

Control ownership of objects written to this bucket from other AWS accounts and the use of access control lists (ACLs). Object ownership determines who can specify access to objects.

Object Ownership

☒ **ACLs disabled (recommended)**
All objects in this bucket are owned by this account. Access to this bucket and its objects is specified using only policies.

☐ **ACLs enabled**
Objects in this bucket can be owned by other AWS accounts. Access to this bucket and its objects can be specified using ACLs.

CloudShell Feedback

© 2026, Amazon Web Services, Inc. or its affiliates. [Privacy](#) [Terms](#) [Cookie preferences](#)

3. click on ACL enabled

aws Search [Alt+S] Ask Amazon Q United States (N. Virginia) Account ID: 3529-1728-0532 vodlabs/user4570789=harivigneshrao23@kmit.edu.in

Amazon S3 Buckets Create bucket

Format: s3://bucket/prefix

Object Ownership [Info](#)

Control ownership of objects written to this bucket from other AWS accounts and the use of access control lists (ACLs). Object ownership determines who can specify access to objects.

Object Ownership

☐ **ACLs disabled (recommended)**
All objects in this bucket are owned by this account. Access to this bucket and its objects is specified using only policies.

☒ **ACLs enabled**
Objects in this bucket can be owned by other AWS accounts. Access to this bucket and its objects can be specified using ACLs.

⚠ We recommend disabling ACLs, unless you need to control access for each object individually or to have the object writer own the data they upload. Using a bucket policy instead of ACLs to share data with users outside of your account simplifies permissions management and auditing.

Object Ownership

☒ **Bucket owner preferred**
If new objects written to this bucket specify the bucket-owner-full-control canned ACL, they are owned by the bucket owner. Otherwise, they are owned by the object writer.

☐ **Object writer**
The object writer remains the object owner.

ℹ If you want to enforce object ownership for new objects only, your bucket policy must specify that the bucket-owner-full-control canned ACL is required for object uploads. [Learn more](#)

Block Public Access settings for this bucket

Public access is granted to buckets and objects through access control lists (ACLs), bucket policies, access point policies, or all. In order to ensure that public access to this bucket and its objects is blocked, turn on Block all public access. These settings apply only to this bucket and its access points. AWS recommends that you turn on Block all public access, but before applying any of these settings, ensure that your applications will work correctly without public access. If you require some level of public access to this bucket or objects within, you can customize the individual settings below to suit your specific storage use cases. [Learn more](#)

☐ **Block all public access**
Turning this section on is the same as turning on all four settings below. Each of the following settings are independent of one another.

CloudShell Feedback © 2026, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

4. uncheck block all ip's

Search

[Alt+S] Ask Amazon Q

United States (N. Virginia)

Account ID: 3529-1728-0532
voclabs/user4570789+harivigneshrao23@kmit.edu.in

Amazon S3

Buckets

Create bucket

If you want to enforce object ownership for new objects only, your bucket policy must specify that the bucket-owner-full-control canned ACL is required for object uploads.
[Learn more](#)

Block Public Access settings for this bucket

Public access is granted to buckets and objects through access control lists (ACLs), bucket policies, access point policies, or all. In order to ensure that public access to this bucket and its objects is blocked, turn on Block all public access. These settings apply only to this bucket and its access points. AWS recommends that you turn on Block all public access, but before applying any of these settings, ensure that your applications will work correctly without public access. If you require some level of public access to this bucket or objects within, you can customize the individual settings below to suit your specific storage use cases. [Learn more](#)

☐ Block all public access

Turning this setting on is the same as turning on all four settings below. Each of the following settings are independent of one another.

☐ Block public access to buckets and objects granted through new access control lists (ACLs)

S3 will block public access permissions applied to newly added buckets or objects, and prevent the creation of new public access ACLs for existing buckets and objects. This setting doesn't change any existing permissions that allow public access to S3 resources using ACLs.

☐ Block public access to buckets and objects granted through any access control lists (ACLs)

S3 will ignore all ACLs that grant public access to buckets and objects.

☐ Block public access to buckets and objects granted through new public bucket or access point policies

S3 will block new bucket and access point policies that grant public access to buckets and objects. This setting doesn't change any existing policies that allow public access to S3 resources.

☐ Block public and cross-account access to buckets and objects through any public bucket or access point policies

S3 will ignore public and cross-account access for buckets or access points with policies that grant public access to buckets and objects.

Turning off block all public access might result in this bucket and the objects within becoming public

AWS recommends that you turn on block all public access, unless public access is required for specific and verified use cases such as static website hosting.

☒ I acknowledge that the current settings might result in this bucket and the objects within becoming public.

Bucket Versioning

Versioning is a means of keeping multiple variants of an object in the same bucket. You can use versioning to preserve, retrieve, and restore every version of every object stored in your Amazon S3 bucket. With versioning, you can easily recover from both unintended user actions and application failures. [Learn more](#)


Bucket Versioning

CloudShell

Feedback

© 2026, Amazon Web Services, Inc. or its affiliates. [Privacy](#) [Terms](#) [Cookie preferences](#)

5.Bucket versioning enable



6. click on create bucket

aws

Search

[Alt+S]

Ask Amazon Q

United States (N. Virginia)

Account ID: 3529-1728-0532
voclabs/user4570789-harivigneshrao23@kmit.edu.in

Amazon S3

Buckets

Create bucket

allocation and resource organization. To ensure a seamless transition, please provide permissions to s3:ListTagsForResource, s3:TagResource, and s3:UntagResource actions.
[Learn more](#)

No tags associated with this bucket.

Add new tag

You can add up to 50 tags.

Default encryption

Info

Server-side encryption is automatically applied to new objects stored in this bucket.

Encryption type

Info

Secure your objects with two separate layers of encryption. For details on pricing, see [DSSE-KMS pricing](#) on the [Storage](#) tab of the [Amazon S3 pricing page](#).

☒ Server-side encryption with Amazon S3 managed keys (SSE-S3)
☐ Server-side encryption with AWS Key Management Service keys (SSE-KMS)
☐ Dual-layer server-side encryption with AWS Key Management Service keys (DSSE-KMS)

Bucket Key

Using an S3 Bucket Key for SSE-KMS reduces encryption costs by lowering calls to AWS KMS. S3 Bucket Keys aren't supported for DSSE-KMS. [Learn more](#)

☐ Disable
☒ Enable

Advanced settings

After creating the bucket, you can upload files and folders to the bucket, and configure additional bucket settings.

Cancel

Create bucket

CloudShell

Feedback

© 2026, Amazon Web Services, Inc. or its affiliates. [Privacy](#) [Terms](#) [Cookie preferences](#)

8.bucket is created

aws

Search

[Alt+S]

Ask Amazon

United States (N. Virginia)

Account ID: 3529-1728-0532

voclabs/user4570789-harivigneshrao23@kmit.edu.in

Amazon S3

Buckets

Successfully created bucket "salaar-public-bucket"
To upload files and folders, or to configure additional bucket settings, choose [View details](#).

General purpose buckets

All AWS Regions

Directory buckets

General purpose buckets (1)

Info

Copy ARN

Empty

Delete

Create bucket

Buckets are containers for data stored in S3.

Find buckets by name:

< 1 >

Name	AWS Region	Creation date
salaar-public-bucket	US East (N. Virginia) us-east-1	February 2, 2026, 10:29:01 (UTC+05:30)

Account snapshot

Info

Updated daily

[View dashboard](#)

Storage Lens provides visibility into storage usage and activity trends.

External access summary

Info

Updated daily

External access findings help you identify bucket permissions that allow public access or access from other AWS accounts.

CloudShell

Feedback

© 2026, Amazon Web Services, Inc. or its affiliates.

Privacy

Terms

Cookie preferences

9.bucket permissions tab

Amazon S3 > Buckets > salaar-public-bucket

Info

ObjectsMetadataPropertiesPermissionsMetricsManagementAccess Points

Permissions overview

Access finding

Access findings are provided by IAM external access analyzers. Learn more about [How IAM analyzer findings work](#).
[View analyzer for us-east-1](#)

Block public access (bucket settings)

Edit

Public access is granted to buckets and objects through access control lists (ACLs), bucket policies, access point policies, or all. In order to ensure that public access to all your S3 buckets and objects is blocked, turn on Block all public access. These settings apply only to this bucket and its access points. AWS recommends that you turn on Block all public access, but before applying any of these settings, ensure that your applications will work correctly without public access. If you require some level of public access to your buckets or objects within, you can customize the individual settings below to suit your specific storage use cases. [Learn more](#)

Block all public access

Off

Individual Block Public Access settings for this bucket

Bucket policy

EditDelete

The bucket policy, written in JSON, provides access to the objects stored in the bucket. Bucket policies don't apply to objects owned by other accounts. [Learn more](#)

No policy to display.

Copy

CloudShellFeedback

© 2026, Amazon Web Services, Inc. or its affiliates. PrivacyTermsCookie preferences

10. acl everyone public access read permission to be given

aws [Search] [Alt+S] Ask Amazon Q United States (N. Virginia) Account ID: 3529-1728-0532 voclabs/user:4570789-harivigneshrao23@kmit.edu.in

Amazon S3 > Buckets > salaar-public-bucket > Edit access control list (ACL)

Access control list (ACL)

Grant basic read/write permissions to other AWS accounts. [Learn more](#)

Grantee	Objects	Bucket ACL
Bucket owner (your AWS account) Canonical ID: d94e1de01a161999edc4e1775a a8429eddde69ae223187b896ae93092037b13f	☒ List ☒ Write	☒ Read ☒ Write
Everyone (public access) Group: http://acs.amazonaws.com/groups/global/AllUsers	☐ List ☐ Write	☒ Read ☐ Write
Authenticated users group (anyone with an AWS account) Group: http://acs.amazonaws.com/groups/global/AuthenticatedUsers	☐ List ☐ Write	☐ Read ☐ Write
S3 log delivery group Group: http://acs.amazonaws.com/groups/s3/LogDelivery	☐ List ☐ Write	☐ Read ☐ Write

When you grant access to the Everyone or Authenticated users group grantees, anyone in the world can access the objects in this bucket.

[Learn more](#)

☒ I understand the effects of these changes on my objects and buckets.

Access for other AWS accounts
No other AWS accounts associated with the resource.

[Add grantee](#)

[Cancel](#) [Save changes](#)

CloudShell Feedback © 2026, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

10.click on bucket name

aws

Search

[Alt+S] Ask Amazon Q

United States (N. Virginia)

Account ID: 3529-1728-0532
voclebs/user4570789-harivigneshrao23@kmit.edu.in

Amazon S3Buckets>salaar-public-bucket

salaar-public-bucketInfo

ObjectsMetadataPropertiesPermissionsMetricsManagementAccess Points

Objects (0)

Copy S3 URI

Copy URL

Download

Open i2

Delete

Actions

Create folder

Upload

Objects are the fundamental entities stored in Amazon S3. You can use [Amazon S3 inventory](#) to get a list of all objects in your bucket. For others to access your objects, you'll need to explicitly grant them permissions. [Learn more](#)

Find objects by prefix

Show versions

< 1 >

Name

Type

Last modified

Size

Storage class

No objects

You don't have any objects in this bucket.

Upload

CloudShellFeedback

© 2025, Amazon Web Services, Inc. or its affiliates. PrivacyTermsCookie preferences

11. click on upload

The screenshot displays the AWS Management Console interface for Amazon S3. At the top, a green notification banner states "Upload succeeded" with a link to view the "Files and folders" table. Below this, the "Upload: status" section shows a summary of the upload process. The "Summary" section indicates the destination is "s3://salaar-public-bucket", with 1 file (658.1 KB) succeeded and 0 files failed. The "Files and folders" tab is active, showing a table with one file: "Unit 1 Part 1.pdf" (application/pdf, 658.1 KB, Succeeded). The footer includes the AWS logo, "CloudShell", "Feedback", and copyright information for Amazon Web Services, Inc. (© 2025).

aws [Search] [Alt+S] Ask Amazon Q United States (N. Virginia) Account ID: 3529-1728-0532 voclabs/user:4570789-harivigneshrao23@kmit.edu.in

Amazon S3

Upload succeeded
For more information, see the [Files and folders](#) table.

Upload: status Close

After you navigate away from this page, the following information is no longer available.

Summary

Destination s3://salaar-public-bucket	Succeeded ✔ 1 file, 658.1 KB (100.00%)	Failed ✘ 0 files, 0 B (0%)
--	--	--------------------------------------

Files and folders | Configuration

Files and folders (1 total, 658.1 KB)

Find by name

Name	Folder	Type	Size	Status	Error
Unit 1 Part 1.pdf	-	application/pdf	658.1 KB	✔ Succeeded	-

CloudShell Feedback © 2025, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

12. click on permissions and give acl read

Search

[Alt+S]

United States (N. Virginia)

Account ID: 3529-1728-0532
voclabs/user4570789-charvi@gnedhrao23@kmit.edu.in

Amazon S3 > Buckets > salaar-public-bucket > Unit 1 Part 1.pdf > Edit access control list

Access control list (ACL)

Grant basic read/write permissions to AWS accounts. [Learn more](#)

Grantee	Objects	Object ACL
Object owner (your AWS account) Canonical ID: d94e14c01a161999edc4e1f75aa8429 odd0d69a223187b896ae93092037b13f	☒ Read	☒ Read ☒ Write
Everyone (public access) Group: http://acs.amazonaws.com/groups/global/AllUsers	☒ Read	☐ Read ☐ Write
Authenticated users group (anyone with an AWS account) Group: http://acs.amazonaws.com/groups/global/AuthenticatedUsers	☐ Read	☐ Read ☐ Write

⚠ When you grant access to the Everyone or Authenticated users group grantees, anyone in the world can access this object.

[Learn more](#)

☐ I understand the effects of these changes on this object.

☒ You must select the check box to continue.

Access for other AWS accounts
No other AWS accounts associated with the resource.

[Add grantee](#)

Specified objects

Name	Type	Version ID	Last modified	Size
Unit 1 Part 1.pdf	pdf	-	February 2, 2026, 10:32:53 (UTC+05:30)	658.1 KB

[Cancel](#) [Save changes](#)

CloudShell Feedback © 2026, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

13.file uploaded

aws Search [Alt+S] United States (N. Virginia) account-id: 952911281952 voclabs/user4570789=harivigned/rao23@kmit.edu.in

Amazon S3 > Buckets > salaar-public-bucket > Unit 1 Part 1.pdf

Successfully edited access control list for object "Unit 1 Part 1.pdf".

Unit 1 Part 1.pdf Info

[Copy S3 URI](#) [Download](#) [Open L²](#) [Object actions](#)

[Properties](#) [Permissions](#) [Versions](#)

Object overview

Owner d94e14e01a161999edc4e1f75aa8429edcde69ae223187b896ae95092037b13f	S3 URI s3://salaar-public-bucket/Unit 1 Part 1.pdf
AWS Region US East (N. Virginia) us-east-1	Amazon Resource Name (ARN) arn:aws:s3::salaar-public-bucket/Unit 1 Part 1.pdf
Last modified February 2, 2026, 10:32:53 (UTC+05:30)	Entity tag (Etag) f3468ae0175d2bda2b7832a8c71576fe
Size 658.1 KB	Object URL https://salaar-public-bucket.s3.us-east-1.amazonaws.com/Unit+1+Part+1.pdf
Type pdf	
Key Unit 1 Part 1.pdf	


Object management overview

The following bucket properties and object management configurations impact the behavior of this object.

Bucket properties Bucket Versioning When enabled, multiple variants of an object can be stored in the bucket to easily recover from unintended user actions and application failures. Enabled	Management configurations Replication status When a replication rule is applied to an object the replication status indicates the progress of the operation. - View replication rules
--	---

CloudShell Feedback © 2026, Amazon Web Services, Inc. or its affiliates. [Privacy](#) [Terms](#) [Cookie preferences](#)

14.file accessed

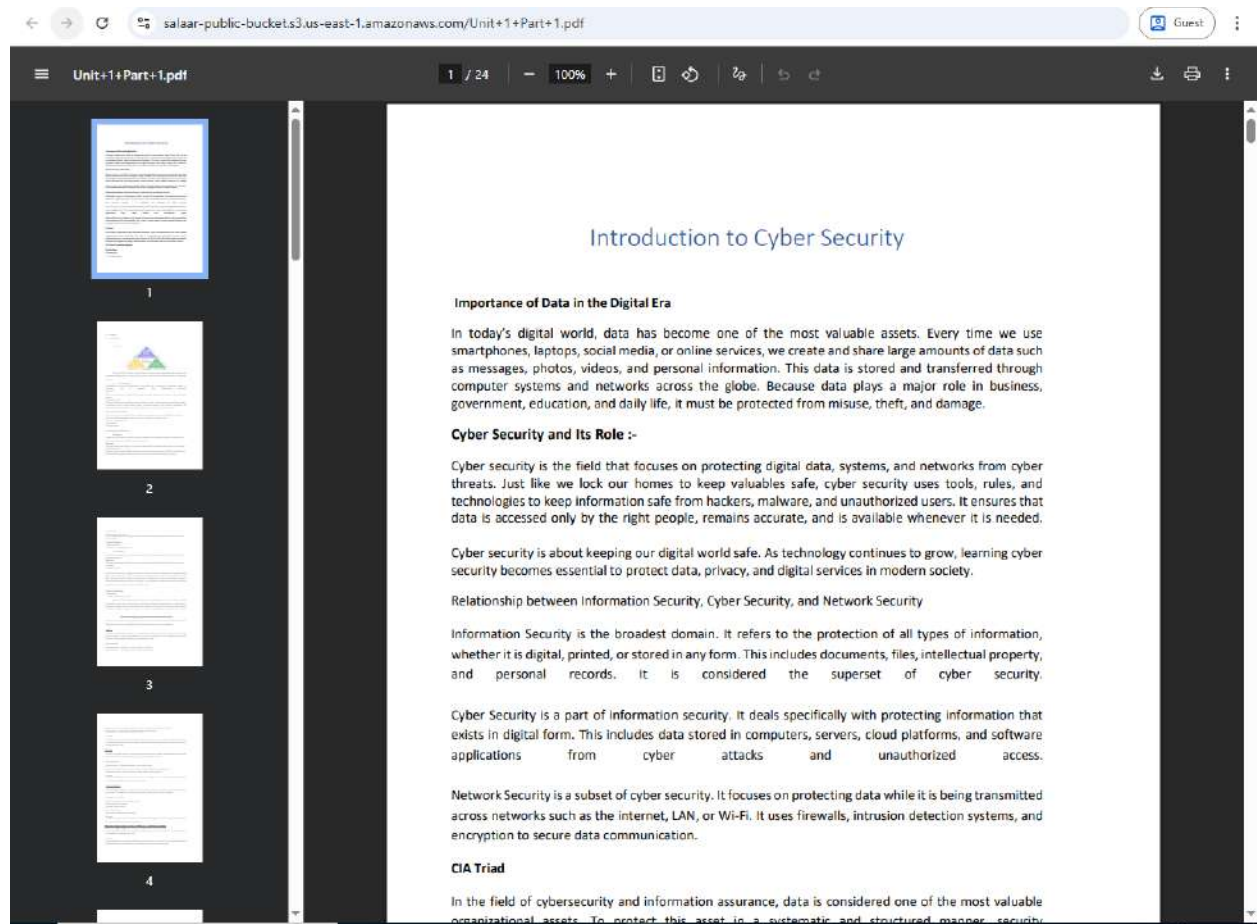

15. different versions are given if uploaded the same file

aws

Search

[Alt+5] Ask Amazon Q

United States (N. Virginia)

Account ID: 3529-1728-0532
voclabu/user4570789-hurivgneshrao23@kmit.edu.in

Amazon S3

Buckets

salaar-public-bucket

Unit 1 Part 1.pdf

Amazon S3

Buckets

General purpose buckets

Directory buckets

Table buckets

Vector buckets

Access management and security

Access Points

Access Points for FSx

Access Grants

IAM Access Analyzer

Storage management and insights

Storage Lens

Batch Operations

Account and organization settings

AWS Marketplace for S3

Unit 1 Part 1.pdf

Info

Copy S3 URI

Download

Open

Object actions

Properties

Permissions

Versions

Versions (2)

Download

Open

Delete

Actions

Version ID

Type

Last modified

Size

Storage class

aE6C7rhRymon01lj...
(Current version)

pdf

February 2, 2026, 10:52:...

658.1 KB

Standard

4wqgdCzriWGbN...

pdf

February 2, 2026, 10:32:...

658.1 KB

Standard

CloudShell

Feedback

© 2026, Amazon Web Services, Inc. or its affiliates.

Privacy

Terms

Cookie preferences

2.Replication AWS

Step-1: Change the region and create a bucket

The screenshot shows the AWS Management Console interface for creating a new S3 bucket. The top navigation bar includes the AWS logo, a search bar, and the current region set to 'United States (Oregon)'. The breadcrumb trail indicates the path: Amazon S3 > Buckets > Create bucket. The main heading is 'Create bucket' with an 'Info' link. Below this, a sub-header 'General configuration' is followed by the text 'Buckets are containers for data stored in S3.' The 'AWS Region' is set to 'US West (Oregon) us-west-2'. Under 'Bucket type', two options are shown: 'General purpose' (selected) and 'Directory'. The 'General purpose' option is described as recommended for most use cases and access patterns, allowing a mix of storage classes across multiple Availability Zones. The 'Directory' option is recommended for low-latency use cases using S3 Express One Zone storage class. The 'Bucket name' field contains 'salaar-cc2'. A note states that bucket names must be 3 to 63 characters, unique, and follow specific character rules. A 'Copy settings from existing bucket - optional' section includes a 'Choose bucket' button and a format example 's3://bucket/prefix'. The 'Object Ownership' section has two options: 'ACLs disabled (recommended)' and 'ACLs enabled' (selected). The 'ACLs enabled' option notes that objects can be owned by other AWS accounts and accessed using ACLs. The footer contains 'CloudShell', 'Feedback', and copyright information for Amazon Web Services, Inc. or its affiliates, along with links for 'Privacy', 'Terms', and 'Cookie preferences'.

aws Search [Alt+S] United States (Oregon) Account ID: 3529-1728-0532 voclabs/user:4570789-harivigneshrao23@kmit.edu.in

Amazon S3 > Buckets > Create bucket

Create bucket [Info](#)

Buckets are containers for data stored in S3.

General configuration

AWS Region
US West (Oregon) us-west-2

Bucket type [Info](#)

- ☒ **General purpose**
Recommended for most use cases and access patterns. General purpose buckets are the original S3 bucket type. They allow a mix of storage classes that redundantly store objects across multiple Availability Zones.
- ☐ **Directory**
Recommended for low-latency use cases. These buckets use only the S3 Express One Zone storage class, which provides faster processing of data within a single Availability Zone.

Bucket name [Info](#)

salaar-cc2

Bucket names must be 3 to 63 characters and unique within the global namespace. Bucket names must also begin and end with a letter or number. Valid characters are a-z, 0-9, periods (.), and hyphens (-). [Learn more](#)

Copy settings from existing bucket - optional
Only the bucket settings in the following configuration are copied.

[Choose bucket](#)

Format: s3://bucket/prefix

Object Ownership [Info](#)

Control ownership of objects written to this bucket from other AWS accounts and the use of access control lists (ACLs). Object ownership determines who can specify access to objects.

Object Ownership

- ☐ **ACLs disabled (recommended)**
All objects in this bucket are owned by this account. Access to this bucket and its objects is specified using only policies.
- ☒ **ACLs enabled**
Objects in this bucket can be owned by other AWS accounts. Access to this bucket and its objects can be specified using ACLs.

CloudShell Feedback © 2020, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

Step-2: Acl enabled and uncheck block

Object Ownership [info](#)

Control ownership of objects written to this bucket from other AWS accounts and the use of access control lists (ACLs). Object ownership determines who can specify access to objects.

Object Ownership

☐ **ACLs disabled (recommended)**
All objects in this bucket are owned by this account. Access to this bucket and its objects is specified using only policies.

☒ **ACLs enabled**
Objects in this bucket can be owned by other AWS accounts. Access to this bucket and its objects can be specified using ACLs.

 We recommend disabling ACLs, unless you need to control access for each object individually or to have the object writer own the data they upload. Using a bucket policy instead of ACLs to share data with users outside of your account simplifies permissions management and auditing.

Object Ownership
☒ **Bucket owner preferred**
If new objects written to this bucket specify the bucket-owner-full-control canned ACL, they are owned by the bucket owner. Otherwise, they are owned by the object writer.
☐ **Object writer**
The object writer remains the object owner.

 If you want to enforce object ownership for new objects only, your bucket policy must specify that the bucket-owner-full-control canned ACL is required for object uploads. [Learn more](#)

Block Public Access settings for this bucket

Public access is granted to buckets and objects through access control lists (ACLs), bucket policies, access point policies, or all. In order to ensure that public access to this bucket and its objects is blocked, turn on Block all public access. These settings apply only to this bucket and its access points. AWS recommends that you turn on Block all public access, but before applying any of these settings, ensure that your applications will work correctly without public access. If you require some level of public access to this bucket or objects within, you can customize the individual settings below to suit your specific storage use cases. [Learn more](#)

☐ **Block all public access**
Turning this setting on is the same as turning on all four settings below. Each of the following settings are independent of one another.

☐ **Block public access to buckets and objects granted through new access control lists (ACLs)**
S3 will block public access permissions applied to newly added buckets or objects, and prevent the creation of new public access ACLs for existing buckets and objects. This setting doesn't change any existing permissions that allow public access to S3 resources using ACLs.

☐ **Block public access to buckets and objects granted through any access control lists (ACLs)**
S3 will ignore all ACLs that grant public access to buckets and objects.

☐ **Block public access to buckets and objects granted through new public bucket or access point policies**
S3 will block new bucket and access point policies that grant public access to buckets and objects. This setting doesn't change any existing policies that allow public access to S3 resources.

☐ **Block public and cross-account access to buckets and objects through any public bucket or access point policies**
S3 will ignore public and cross-account access for buckets or access points with policies that grant public access to buckets and objects.


 **Turning off block all public access might result in this bucket and the objects within becoming public**
AWS recommends that you turn on block all public access, unless public access is required for specific and verified use cases such as static website hosting.

☒ I acknowledge that the current settings might result in this bucket and the objects within becoming public.

Step-3: Block Versioning enable

Step-4: Bucket is created

Step-4: Bucket is created

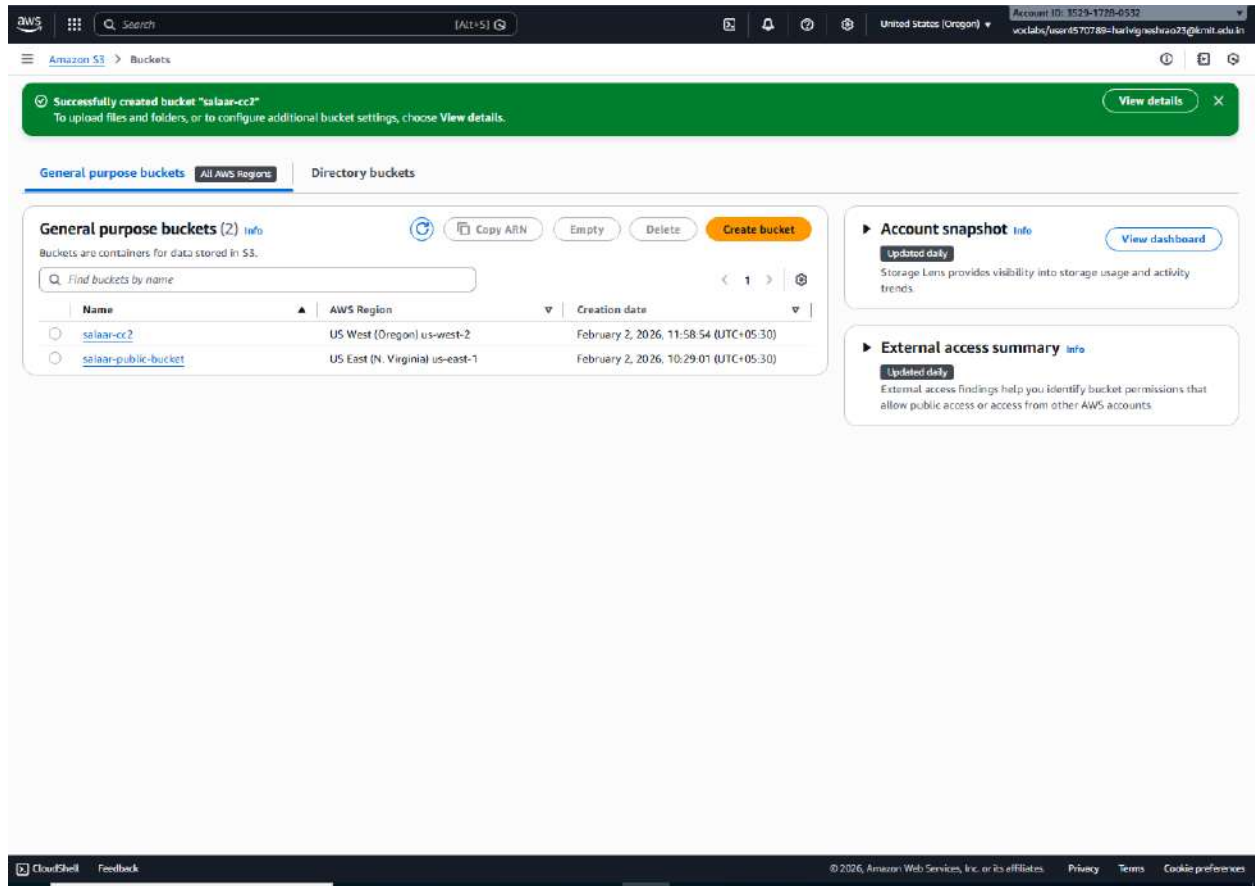

Step-5: management selection and find replication rules

aws Search [Alt+S] Ask Amazon Q United States (N. Virginia) Account ID: 5529-1228-0532 voclabs/user4570789-harivigneshrao23@kmit.edu.in

Amazon S3 Buckets salaar-public-bucket

Amazon S3

- Buckets
 - General purpose buckets
 - Directory buckets
 - Table buckets
 - Vector buckets
- Access management and security
 - Access Points
 - Access Points for FSx
 - Access Grants
 - IAM Access Analyzer
- Storage management and insights
 - Storage Lens
 - Batch Operations

Account and organization settings

AWS Marketplace for S3

salaar-public-bucket

Objects Metadata Properties Permissions Metrics **Management** Access Points

Lifecycle configuration

To manage your objects so that they are stored cost effectively throughout their lifecycle, configure their lifecycle. A lifecycle configuration is a set of rules that define actions that Amazon S3 applies to a group of objects. Lifecycle rules run once per day.

Lifecycle rules

Use lifecycle rules to define actions you want Amazon S3 to take during an object's lifetime such as transitioning objects to another storage class, archiving them, or deleting them after a specified period of time. [Learn more](#)

View details Edit Delete Actions Create lifecycle rule

Lifecycle rule ...	Status	Scope	Current versio...	Noncurrent ve...	Expired object...	Incomplete m...
No lifecycle rules						
There are no lifecycle rules for this bucket.						
Create lifecycle rule						

Replication rules (0)

Use replication rules to define options you want Amazon S3 to apply during replication such as server-side encryption, replica ownership, transitioning replicas to another storage class, and more. [Learn more](#)

View details Edit rule Delete Actions Create replication rule

Replication rule name	Status	Destination bucket	Destination Region	Priority	Scope	Storage class	Replica owner	Replicati Time Cor
No replication rules								
You don't have any rules in the replication configuration.								
Create replication rule								

CloudShell Feedback © 2026, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

Step-6: Replication Rules and write the name for it

aws Search [Alt+S] Ask Amazon Q United States (N. Virginia) Account ID: 3529-1728-0532 voclabs/user4570789+harivigneshrso23@kmit.edu.in

Amazon S3 Buckets saaar-public-bucket Replication rules Create replication rule

Create replication rule [Info](#)

Replication rule configuration

Replication rule name

rule

Up to 255 characters. In order to be able to use CloudWatch metrics to monitor the progress of your replication rule, the replication rule name must only contain English characters.

Status
Choose whether the rule will be enabled or disabled when created.

☒ Enabled
☐ Disabled

Priority
The priority value resolves conflicts that occur when an object is eligible for replication under multiple rules to the same destination. The rule is added to the configuration at the highest priority and the priority can be changed on the replication rules table.

0

Source bucket

Source bucket name
saar-public-bucket

Source Region
US East (N. Virginia) us-east-1

Choose a rule scope

☒ Limit the scope of this rule using one or more filters
☐ Apply to all objects in the bucket

Filter type
You can filter objects by prefix, object tags, or a combination of both.



Prefix
Add a filter to limit the scope of this rule to a single prefix.

Enter prefix

Don't include the bucket name in the prefix. Using certain characters in key names can cause problems with some applications and protocols.

CloudShell Feedback © 2026, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

Step-7: Destination name select the bucket name there

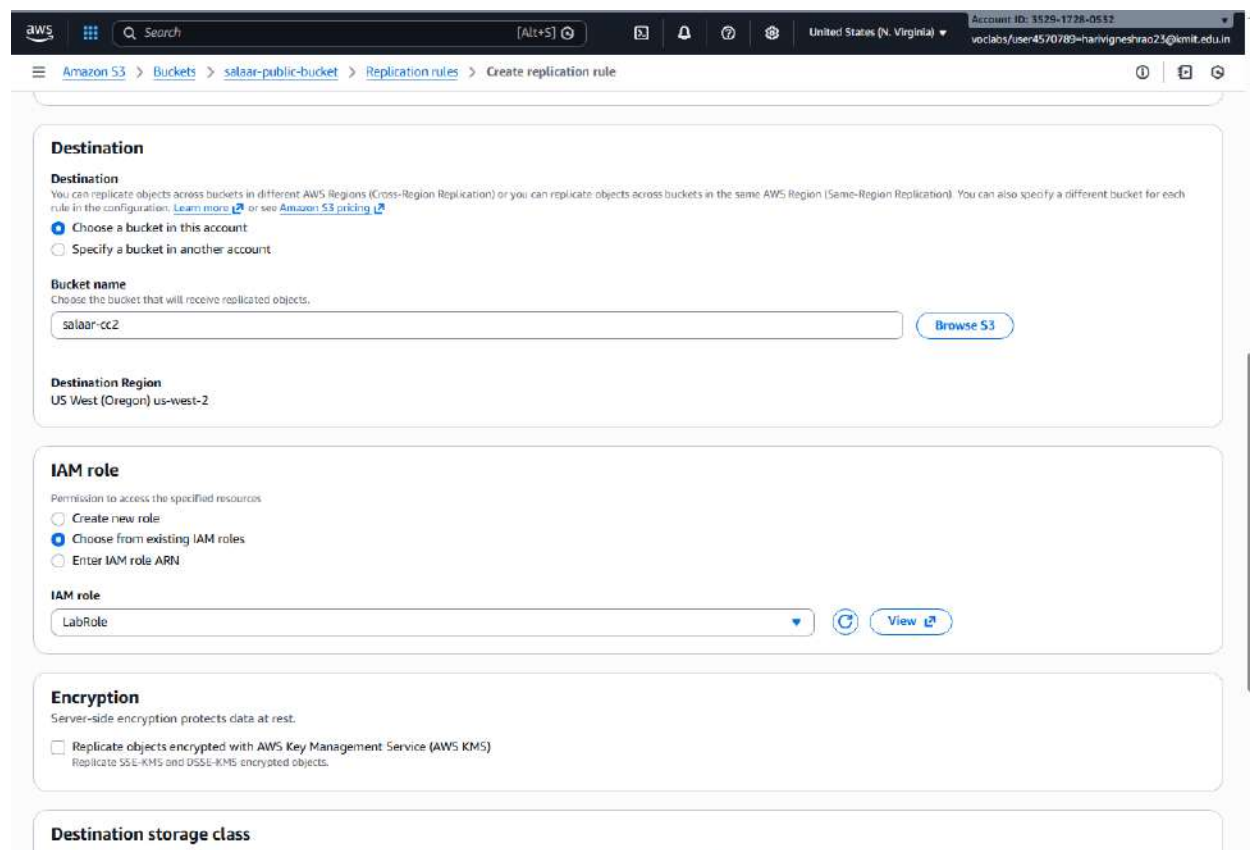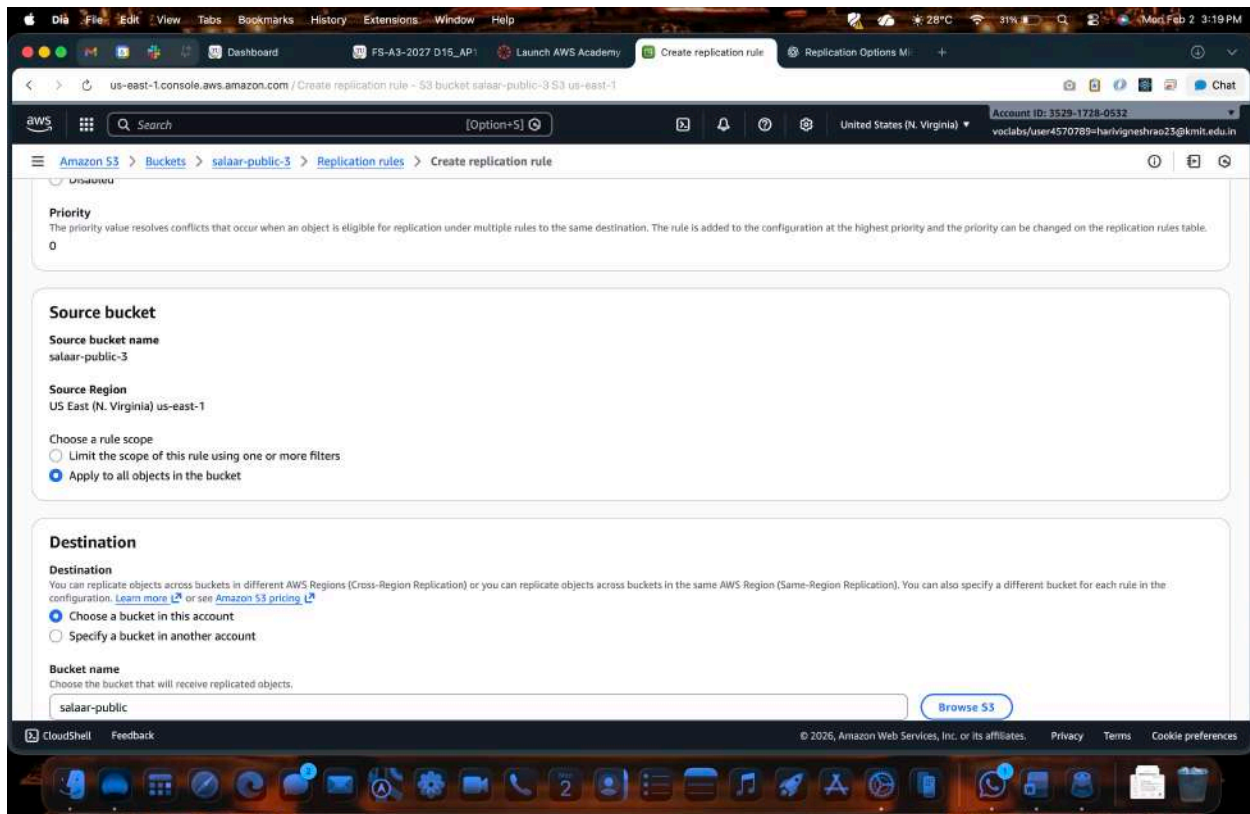

Step-8: IAM Rule Lab Role

The screenshot shows the AWS IAM console interface for creating a replication rule. The breadcrumb navigation at the top indicates the path: **Amazon S3** > **Buckets** > **salaar-public-bucket** > **Replication rules** > **Create replication rule**. The account information at the top right shows the account ID as 3529-1728-0532 and the user as voclabs/user4570783-harvigneshrao25@kmit.edu.in.

The main configuration area includes the following sections:

- Destination bucket:** A text input field containing "salaar-cc2" and a "Browse S3" button.
- Destination Region:** A text input field containing "US West (Oregon) us-west-2".
- IAM role:** A section with the description "Permission to access the specified resources". It has three radio button options: "Create new role", "Choose from existing IAM roles" (which is selected), and "Enter IAM role ARN". Below these is a dropdown menu for the IAM role, currently showing "LabRole", and a "View" button.
- Encryption:** A section with the description "Server-side encryption protects data at rest." It contains a checkbox labeled "Replicate objects encrypted with AWS Key Management Service (AWS KMS)" with a sub-note "Replicate SSE-KMS and DSSS-KMS encrypted objects.".
- Destination storage class:** A section with the description "Amazon S3 offers a range of storage classes designed for different use cases. [Learn more](#) or see [Amazon S3 pricing](#)". It contains a checkbox labeled "Change the storage class for the replicated objects".
- Additional replication options:** A section with two checkboxes: "Replication Time Control (RTC)" (with a sub-note "Replication Time Control replicates 99.99% of new objects within 15 minutes and includes replication metrics. Additional fees will apply. [Learn more](#)") and "Replication metrics".

The footer of the console shows "CloudShell" and "Feedback" on the left, and "© 2026, Amazon Web Services, Inc. or its affiliates. [Privacy](#) [Terms](#) [Cookie preferences](#)" on the right.

Step-9: Click Save

aws [Search] [Alt+S] United States (N. Virginia) Account ID: 3529-1728-0632 vocabulary/user4570789-harivigneshrao25@kmit.edu.in

Amazon S3 > Buckets > salaar-public-bucket > Replication rules > Create replication rule

☒ Choose from existing IAM roles
☐ Enter IAM role ARN

IAM role
LabRole [View](#)

Encryption
Server-side encryption protects data at rest.
☐ Replicate objects encrypted with AWS Key Management Service (AWS KMS)
Replicate SSE-KMS and DSSE-KMS encrypted objects.

Destination storage class
Amazon S3 offers a range of storage classes designed for different use cases. [Learn more](#) or see [Amazon S3 pricing](#)
☐ Change the storage class for the replicated objects

Additional replication options

☐ **Replication Time Control (RTC)**
Replication Time Control replicates 99.99% of new objects within 15 minutes and includes replication metrics. Additional fees will apply. [Learn more](#)

☐ **Replication metrics**
With replication metrics, you can monitor the total number and size of objects that are pending replication, and the maximum replication time to the destination Region. You can also view and diagnose replication failures. CloudWatch metrics fees apply. [Learn more](#) or see [Amazon CloudWatch pricing](#)

☐ **Delete marker replication**
Delete markers created by S3 delete operations will be replicated. Delete markers created by lifecycle rules are not replicated. [Learn more](#)

☐ **Replica modification sync**
Replicate metadata changes made to replicas from the destination bucket to the source bucket. [Learn more](#)

[Cancel](#) [Save](#)

CloudShell Feedback © 2026, Amazon Web Services, Inc. or its affiliates. [Privacy](#) [Terms](#) [Cookie preferences](#)

Step-10: no do not replicating

Replication configuration successfully updated
If changes to the configuration aren't displayed, choose the refresh button. Changes apply only to new objects. To replicate existing objects with this configuration, choose [Create replication job](#).

Replication rules Info

Replication enables automatic and asynchronous copying of objects across buckets in the same or different AWS Regions. A replication configuration is a set of rules that define what options should be applied to a group of objects during replication.

Replication configuration settings

Configuration settings affect all replication rules in the bucket.

Source bucket
salaar-public-bucket

Source Region
US East (N. Virginia) us-east-1

Replication rules (1)

Use replication rules to define options you want Amazon S3 to apply to objects that you upload to the bucket. You can also use replication rules to replicate objects from another storage class, and more. [Learn more](#)

Replicate existing objects?

You can enable a one-time Batch Operations job from this replication configuration to replicate objects that already exist in the bucket and to synchronize the source and destination buckets. [Learn more](#) or [see pricing](#).

Existing objects

☒ No, do not replicate existing objects.

☐ Yes, replicate existing objects.

[Cancel](#) [Submit](#)

Replication rule name	Status	Destination bucket	Destination Region	Priority	Scope	Storage class	Replica owner	Replication Time Control	KMS-encrypted objects (SSE-KMS or DSSE-KMS)	Replica modification sync
cc2	Enabled	s3://salaar-cc2	US West (Oregon) us-west-2	0	Prefix: puli	Same as source	Same as source	Disabled	Do not replicate	Disabled

Step-11: created successfully

aws

Search

[Alt+S]

United States (N. Virginia)

Account ID: 3529-1723-0532
voclabs/user4570769-harivagneshrao23@kmit.edu.in

Amazon S3 > Buckets > salaar-public-bucket > Replication rules

Replication configuration successfully updated
If changes to the configuration aren't displayed, choose the refresh button. Changes apply only to new objects. To replicate existing objects with this configuration, choose [Create replication job](#).

Create replication job

Replication rules

Replication enables automatic and asynchronous copying of objects across buckets in the same or different AWS Regions. A replication configuration is a set of rules that define what options should be applied to a group of objects during replication.

Replication configuration settings

Configuration settings affect all replication rules in the bucket.

Source bucket
salaar-public-bucket

Source Region
US East (N. Virginia) us-east-1

IAM role
[LabRole](#)

Create replication job

Edit

Replication rules (1)

Use replication rules to define options you want Amazon S3 to apply during replication such as server-side encryption, replica ownership, transitioning replicas to another storage class, and more. [Learn more](#)

View details

Edit rule

Delete

Actions


Create replication rule

Replication rule name	Status	Destination bucket	Destination Region	Priority	Scope	Storage class	Replica owner	Replication Time Control	KMS-encrypted objects (SSE-KMS or DSSE-KMS)	Replica modification sync
cc2	Enabled	s3://salaar-cc2	US West (Oregon) us-west-2	0	Prefix: pull	Same as source	Same as source	Disabled	Do not replicate	Disabled


CloudShell Feedback

© 2026, Amazon Web Services, Inc. or its affiliates. [Privacy](#) [Terms](#) [Cookie preferences](#)


Step-12: click on upload on source side bucket

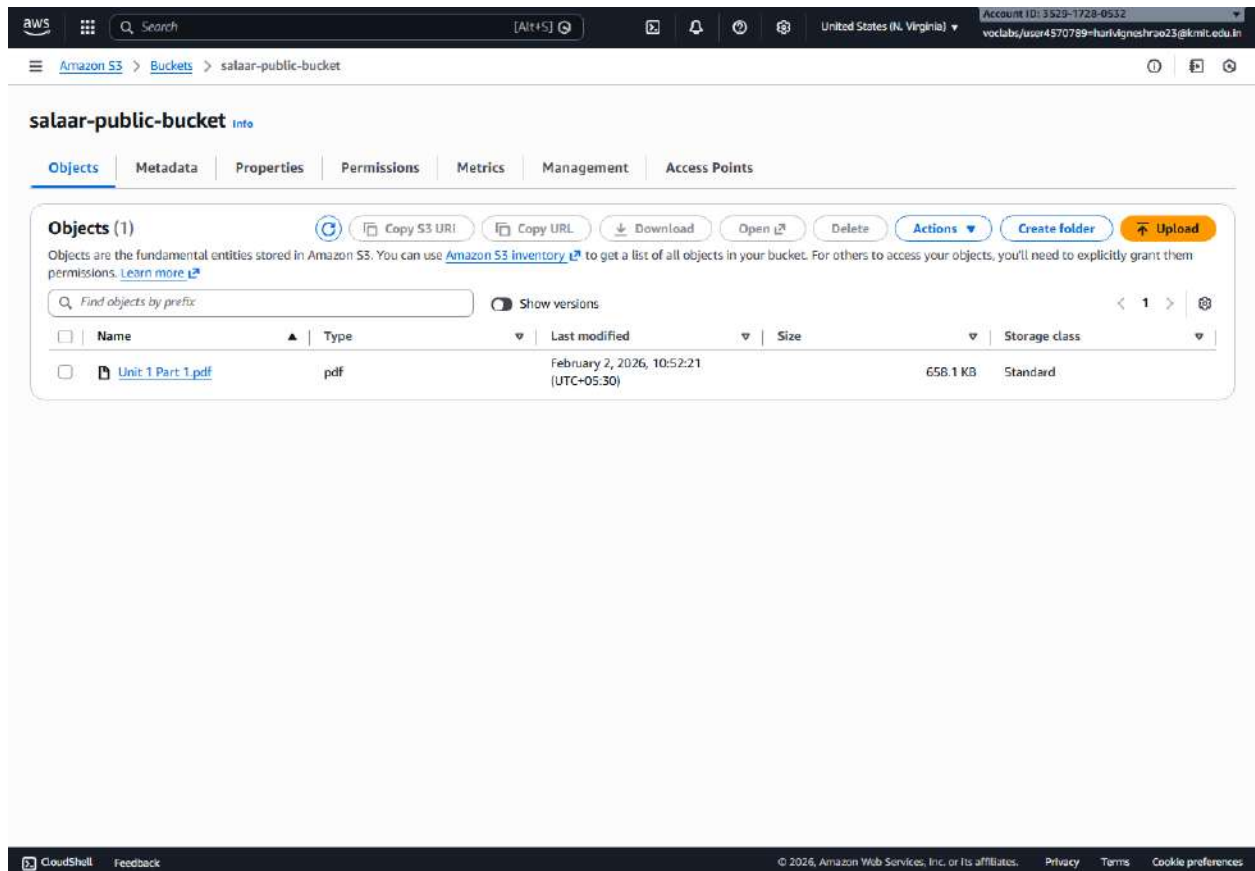

Step-13 :file pdf is chosen in source bucket

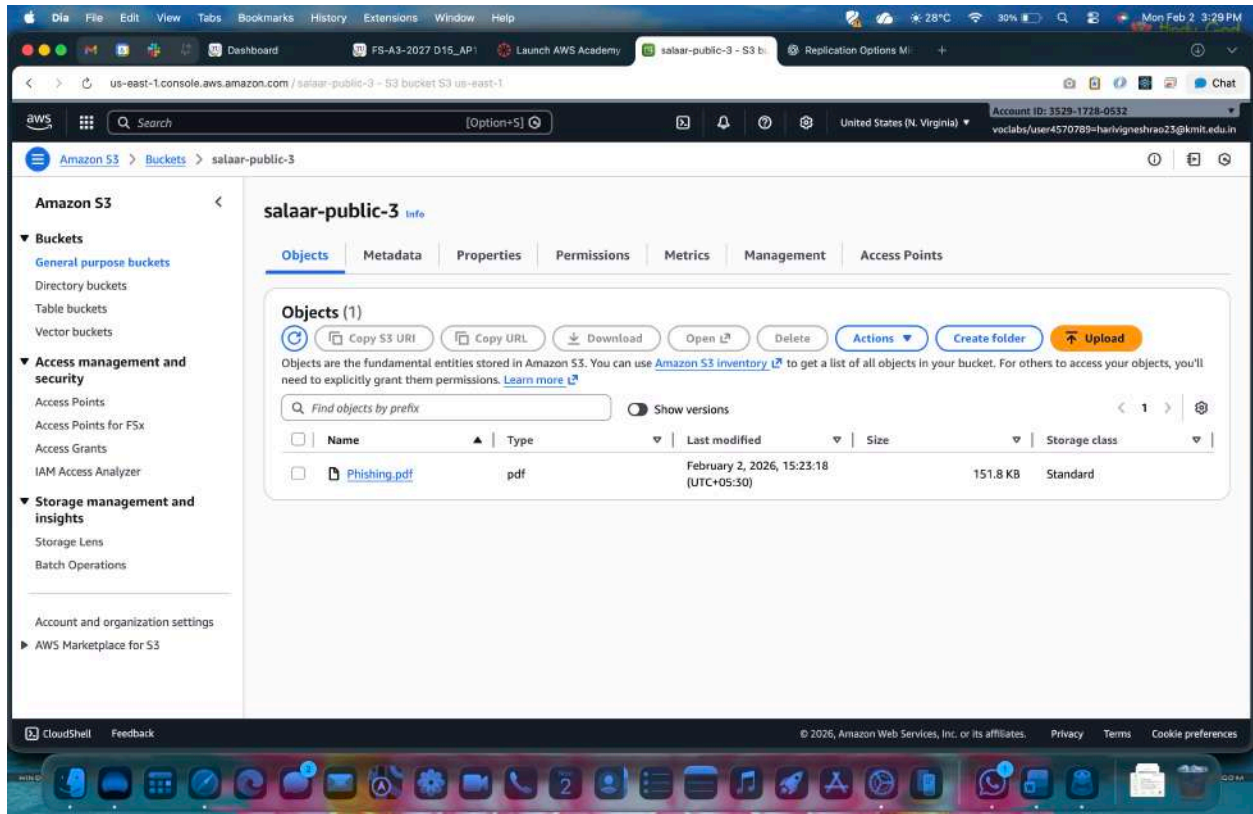

Step-14: file pdf is visible in destination bucket

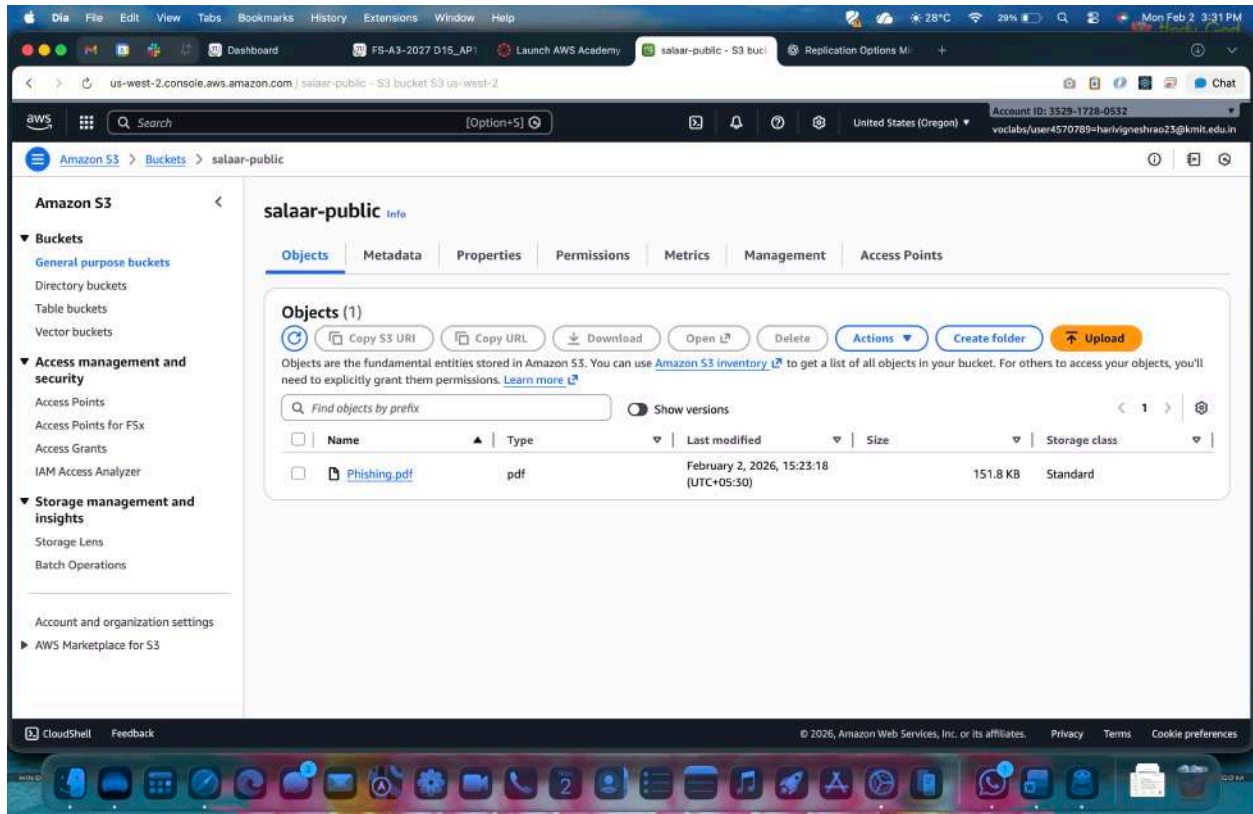

3. Static Website Hosting in S3

1 Create an S3 Bucket

1. Login to AWS Management Console
2. Go to Services → S3
3. Click Create bucket
4. Enter:
 - Bucket name: my-static-site-bucket-123
 - Region: Nearest region
5. Under Block Public Access:
 - ☒ Uncheck Block all public access
 - ☒ Acknowledge the warning
6. Click Create bucket

✓ Bucket created successfully

aws [Search] [Alt+S] United States (Oregon) Account ID: 3529-1728-0532 voclabs/user4570789-harivigneshrao23@kmit.edu.in

Amazon S3 > Buckets > Create bucket

Create bucket [Info](#)

Buckets are containers for data stored in S3.

General configuration

AWS Region
US West (Oregon) us-west-2

Bucket type [Info](#)

☒ **General purpose**
Recommended for most use cases and access patterns. General purpose buckets are the original S3 bucket type. They allow a mix of storage classes that redundantly store objects across multiple Availability Zones.

☐ **Directory**
Recommended for low-latency use cases. These buckets use only the S3 Express One Zone storage class, which provides faster processing of data within a single Availability Zone.

Bucket name [Info](#)

salaar-cc2

Bucket names must be 3 to 63 characters and unique within the global namespace. Bucket names must also begin and end with a letter or number. Valid characters are a-z, 0-9, periods (.), and hyphens (-). [Learn more](#)

Copy settings from existing bucket - optional
Only the bucket settings in the following configuration are copied.

[Choose bucket](#)

Format: s3://bucket/prefix

Object Ownership [Info](#)

Control ownership of objects written to this bucket from other AWS accounts and the use of access control lists (ACLs). Object ownership determines who can specify access to objects.

Object Ownership

☐ **ACLs disabled (recommended)**
All objects in this bucket are owned by this account. Access to this bucket and its objects is specified using only policies.

☒ **ACLs enabled**
Objects in this bucket can be owned by other AWS accounts. Access to this bucket and its objects can be specified using ACLs.

CloudShell Feedback © 2025, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

info

Control ownership of objects written to this bucket from other AWS accounts and the use of access control lists (ACLs). Object ownership determines who can specify access to objects.

Object Ownership

- **ACLs enabled**
Objects in this bucket can be owned by other AWS accounts. Access to this bucket and its objects can be specified using ACLs.

 We recommend disabling ACLs, unless you need to control access for each object individually or to have the object writer own the data they upload. Using a bucket policy instead of ACLs to share data with users outside of your account simplifies permissions management and auditing.

Object Ownership

- ☒ **Bucket owner preferred**
If new objects written to this bucket specify the bucket-owner-full-control canned ACL, they are owned by the bucket owner. Otherwise, they are owned by the object writer.
- ☐ **Object writer**
The object writer remains the object owner.

① If you want to enforce object ownership for new objects only, your bucket policy must specify that the bucket-owner-full-control canned ACL is required for object uploads. [Learn more](#)

Block Public Access settings for this bucket

Public access is granted to buckets and objects through access control lists (ACLs), bucket policies, access point policies, or all. In order to ensure that public access to this bucket and its objects is blocked, turn on Block all public access. These settings apply only to this bucket and its access points. AWS recommends that you turn on Block all public access, but before applying any of these settings, ensure that your applications will work correctly without public access. If you require some level of public access to this bucket or objects within, you can customize the individual settings below to suit your specific storage use case. [Learn more](#)

- Block all public access**
Turning this setting on is the same as turning on all four settings below. Each of the following settings are independent of one another.

 - ☐ **Block public access to buckets and objects granted through new access control lists (ACLs)**
S3 will block public access permissions applied to newly added buckets or objects, and prevent the creation of new public access ACLs for existing buckets and objects. This setting doesn't change any existing permissions that allow public access to S3 resources using ACLs.
 - ☐ **Block public access to buckets and objects granted through any access control lists (ACLs)**
S3 will ignore all ACLs that grant public access to buckets and objects.
 - ☐ **Block public access to buckets and objects granted through new public bucket or access point policies**
S3 will block new bucket and access point policies that grant public access to buckets and objects. This setting doesn't change any existing policies that allow public access to S3 resources.
 - ☐ **Block public and cross-account access to buckets and objects through any public bucket or access point policies**
S3 will ignore public and cross-account access for buckets or access points with policies that grant public access to buckets and objects.

 Turning off block all public access might result in this bucket and the objects within becoming public
AWS recommends that you turn on block all public access, unless public access is required for specific and verified use cases such as static website hosting.

☒ I acknowledge that the current settings might result in this bucket and the objects within becoming public.

Bucket Versioning

recover from both unintended user actions and application failures. [Learn more](#)

☐ Disable
☒ Enable

Tags - optional

You can use bucket tags to analyze, manage and specify permissions for a bucket. [Learn more](#)

No tags associated with this bucket.

Default encryption [Info](#)

Server-side encryption is automatically applied to new objects stored in this bucket.

Encryption type [Info](#)

Secure your objects with two separate layers of encryption. For details on pricing, see DSE-KMS pricing on the Storage tab of the [Amazon S3 pricing page](#).


- ☒ Server-side encryption with Amazon S3 managed keys (SSE-S3)
- ☐ Server-side encryption with AWS Key Management Service keys (SSE-KMS)
- ☐ Dual-layer server-side encryption with AWS Key Management Service keys (DSSE-KMS)

Bucket Key

Using an S3 Bucket Key for SSE-KMS reduces encryption costs by lowering calls to AWS KMS. S3 Bucket Keys aren't supported for DSSE-KMS. [Learn more](#)

☐ Disable
☒ Enable



Advanced settings

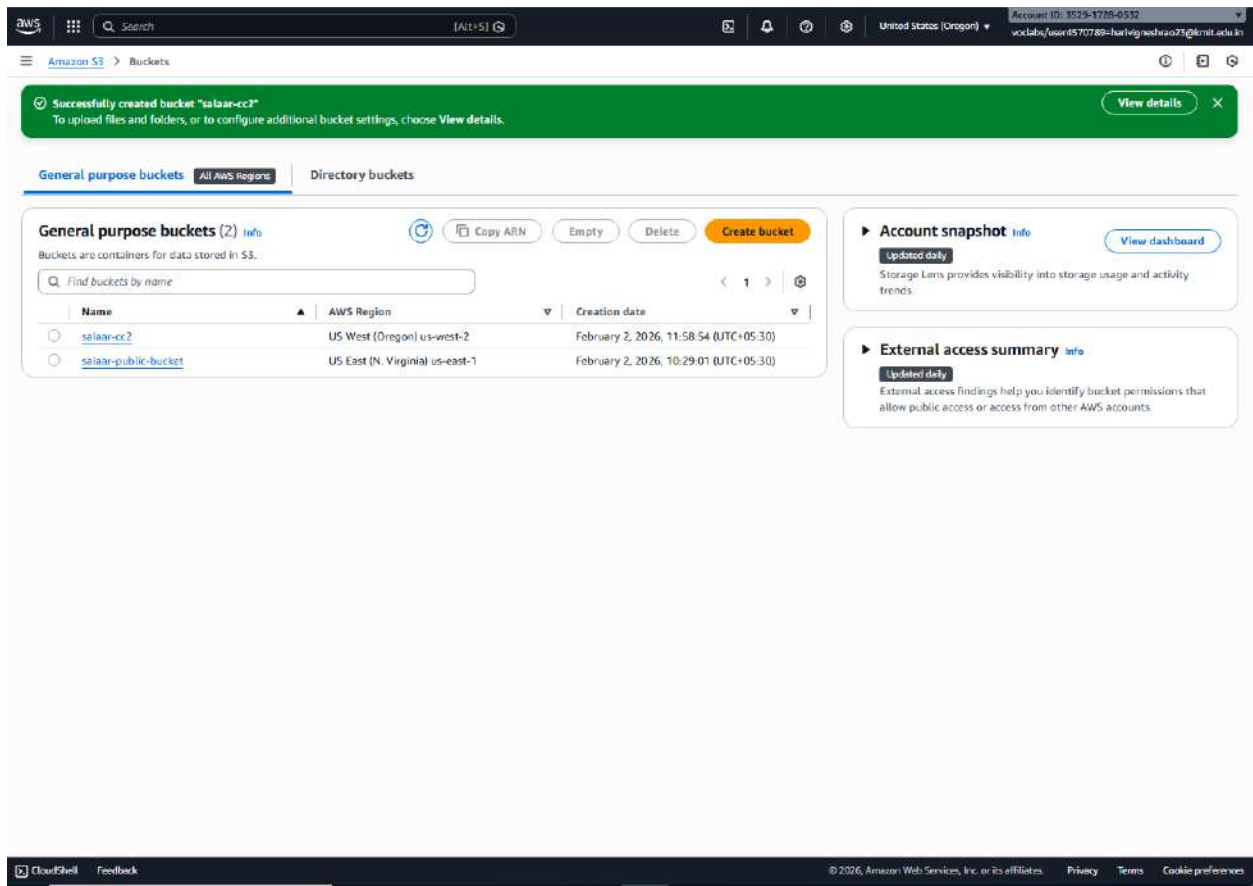

2 Upload Website Files

1. Open the bucket
2. Go to Objects tab
3. Click Upload
4. Click Add files
5. Select:
 - index.html
 - error.html
6. Click Upload


✓ Files uploaded

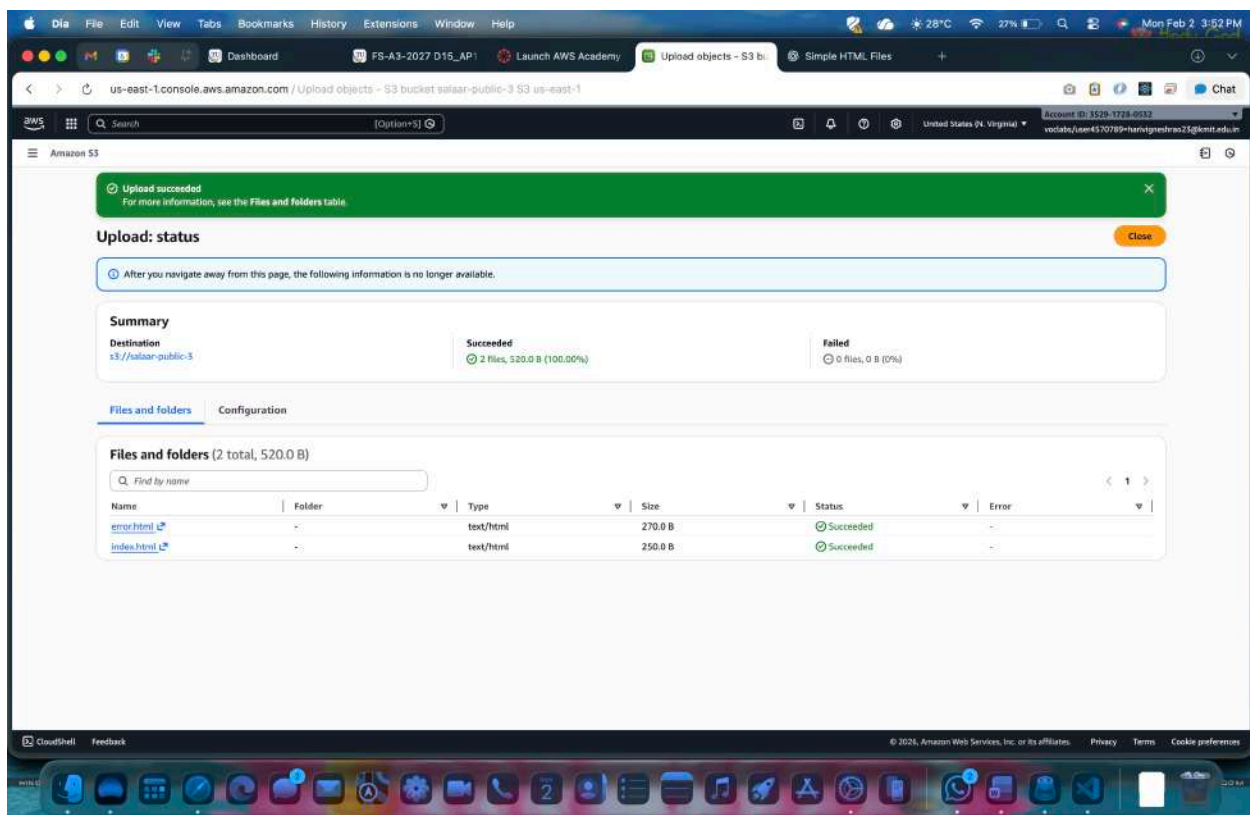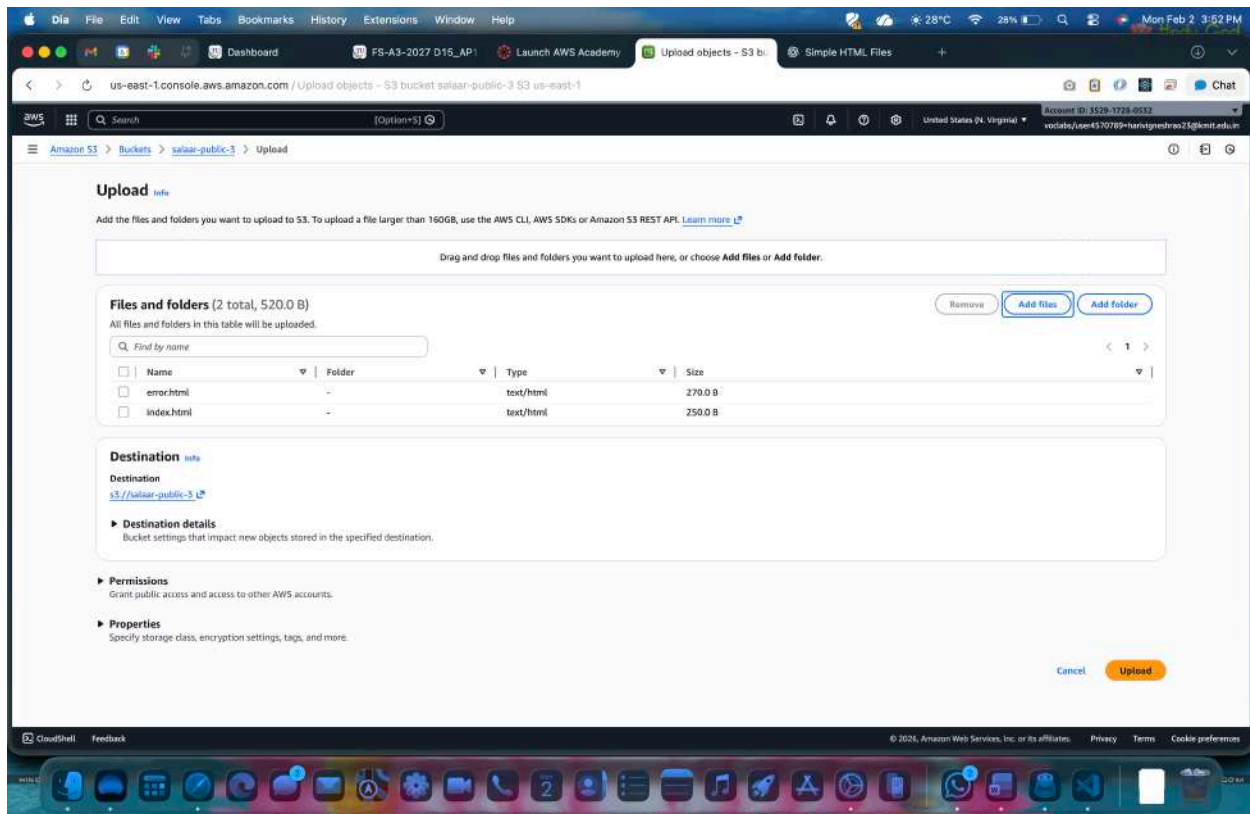


Enable Static Website Hosting

1. Go to Properties tab
2. Scroll to Static website hosting
3. Click Edit
4. Select Enable
5. Choose Host a static website
6. Enter:
 - Index document: index.html
 - Error document: error.html
7. Click Save changes

✓ Static website hosting enabled

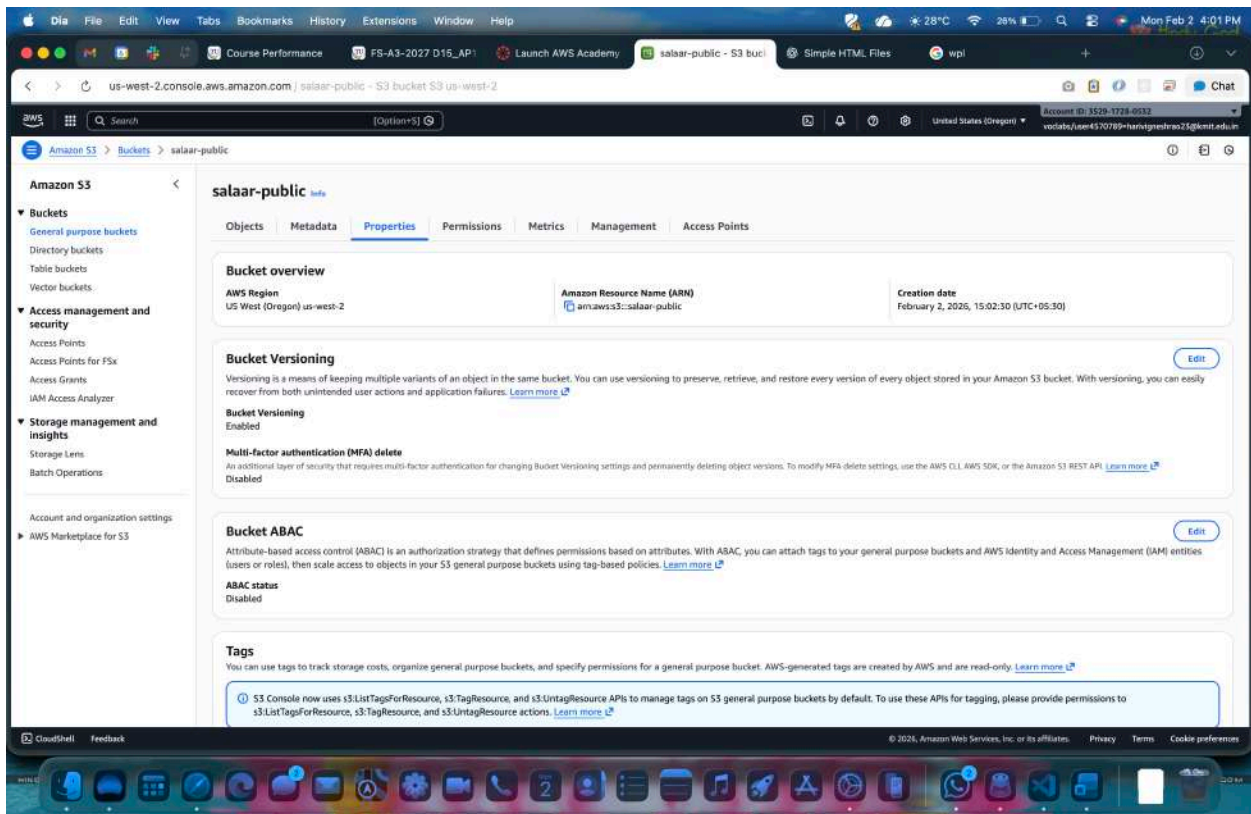

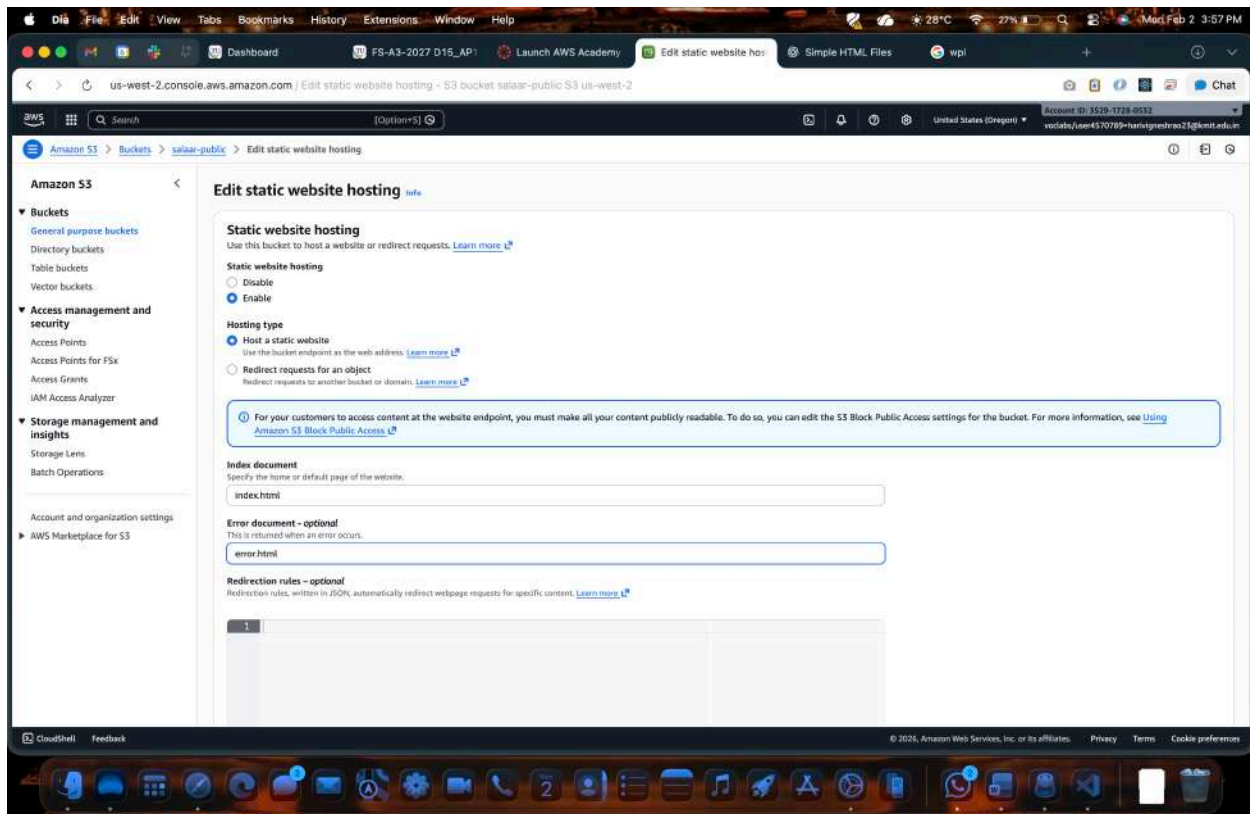


Enable Bucket-Level Public Access (ACL)

◆ Purpose

Allows public users to access objects inside the bucket.

1. Go to Permissions tab
 2. Scroll to Access Control List (ACL)
 3. Click Edit
 4. Under Public access:
 - Everyone (public access) → ✓ Read
 5. Click Save changes
- ✓ Bucket-level public read access enabled

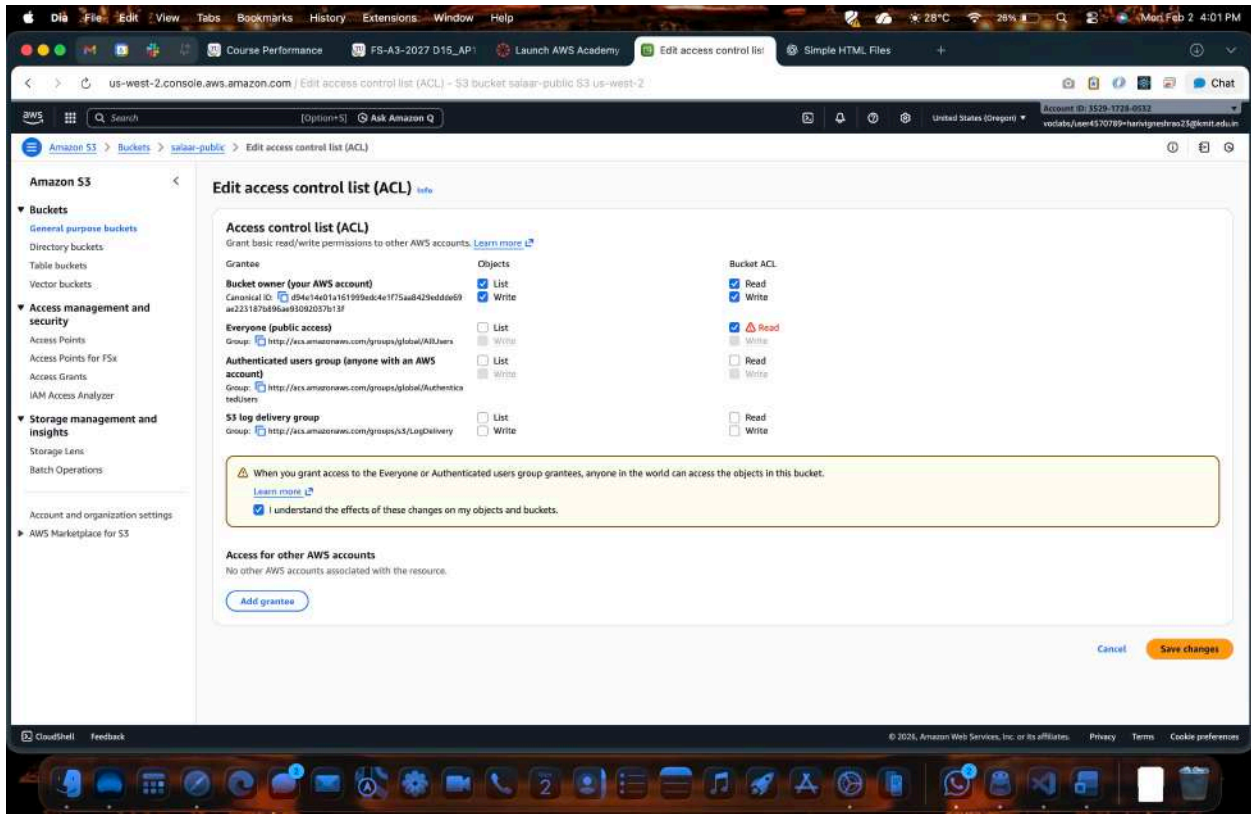

Enable Object-Level Public Access (ACL)

Steps (For Each File)

1. Go to Objects tab
2. Click on index.html
3. Go to Permissions
4. Scroll to Access Control List (ACL)
5. Click Edit
6. Under Public access:
 - Everyone (public access) → ✓ Read
7. Save changes

 Repeat the same steps for error.html

✓ Object-level public access enabled

The screenshot shows the Amazon S3 console interface. The left sidebar contains navigation links for Buckets, Access management and security, and Storage management and insights. The main content area displays the 'index.html' object overview for the 's3://salaar-public' bucket. The overview includes the following details:

- Owner:** d94e14e01a161999edc4e1f75aa8429edde69ec221187b896ae33092037b13f
- AWS Region:** US West (Oregon) us-west-2
- Last modified:** February 2, 2026, 15:52:30 (UTC+05:30)
- Size:** 250.0 B
- Type:** html
- Key:** index.html
- S3 URI:** s3://salaar-public/index.html
- Amazon Resource Name (ARN):** arn:aws:s3::salaar-public/index.html
- Entity tag (ETag):** ce327c30760742f4ef5c4fb929228ec8
- Object URL:** https://salaar-public.s3.us-west-2.amazonaws.com/index.html

Below the overview, there is an 'Object management overview' section with 'Bucket properties' and 'Management configurations'. The 'Bucket properties' section indicates that 'Bucket Versioning' is 'Enabled'. The 'Management configurations' section includes 'Replication status' (set to 'REPLICA') and 'Expiration rule'.

The screenshot shows the 'Edit access control list' page in the Amazon S3 console. The page title is 'Edit access control list' and the subtitle is 'Access control list (ACL)'. The main content area is divided into two columns: 'Grantee' and 'Object ACL'.

Grantee:

- Object owner (your AWS account):** Canonical ID: d94e14e01a161999edc4e1f75aa8429edde69ec221187b896ae33092037b13f
- Everyone (public access):** Group: http://acs.amazonaws.com/groups/global/AllUsers
- Authenticated users group (anyone with an AWS account):** Group: http://acs.amazonaws.com/groups/global/AuthenticatedUsers

Object ACL:

- Read:** ☒
- Write:** ☒
- Read:** ☒
- Write:** ☐
- Read:** ☐
- Write:** ☐

A warning message states: 'When you grant access to the Everyone or Authenticated users group grantees, anyone in the world can access this object.' Below this, there is a checkbox for 'I understand the effects of these changes on this object.' and a button to 'Add grantee'.

Access for other AWS accounts: No other AWS accounts associated with the resource.

Specified objects:


Name	Type	Version ID	Last modified	Size
index.html	html	-	February 2, 2026, 15:52:30 (UTC+05:30)	250.0 B

At the bottom right, there are 'Cancel' and 'Save changes' buttons.

6 Access the Static Website

1. Go to Properties
2. Scroll to Static website hosting
3. Copy the Bucket website endpoint
4. `http://my-static-site-bucket-123.s3-website-region.amazonaws.com`
5. Paste into browser

✓ index.html page loads successfully

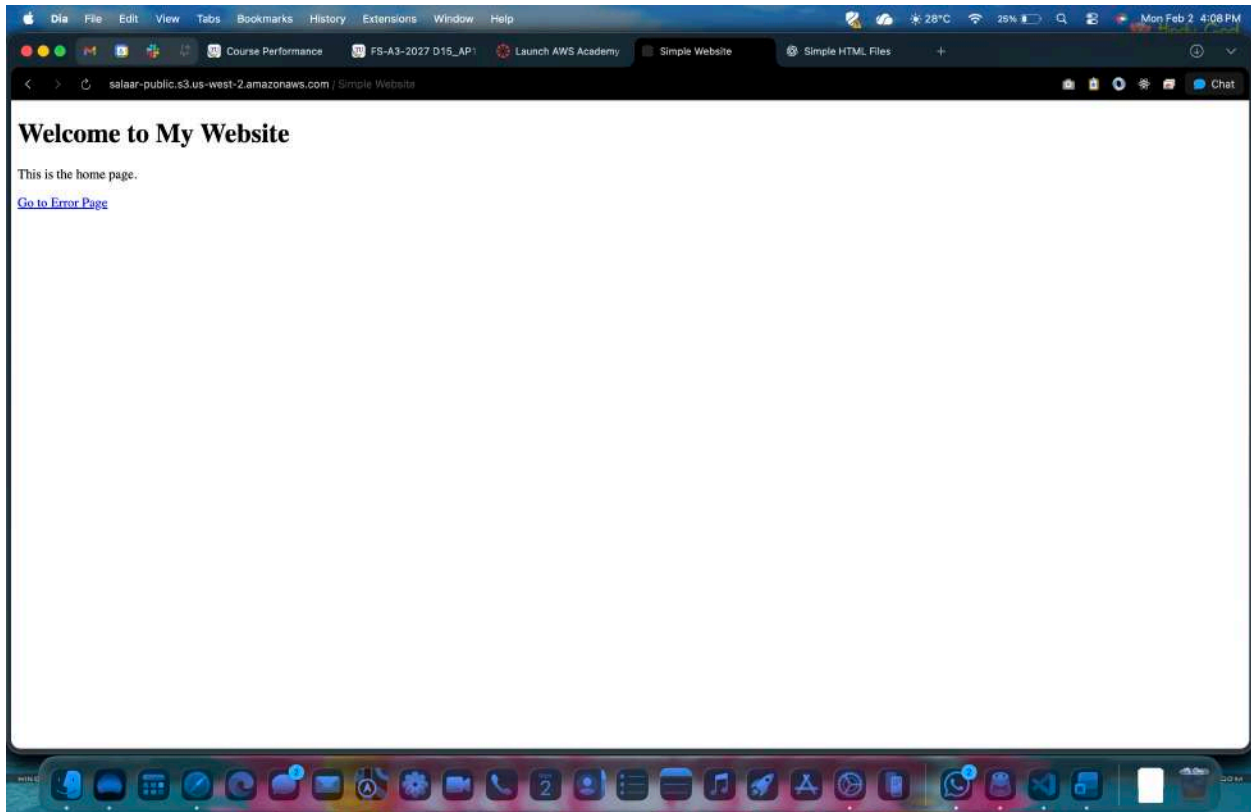

Error Page Output Scenario

◆ Test Error Page

- Open an invalid URL:
- `http://bucket-name.s3-website-region.amazonaws.com/invalid.html`

✦ Output:

- error.html page is displayed

✓ Error page working correctly

