

HARI VIGNESH RAO 23BD1A052Q


WEEK-12 : IAM

1. Administrative Setup (Root User)


Step 1: Log in to the AWS Management Console as the Root User.

Step 2: Search for IAM under the "Security, Identity, & Compliance" category.


Step 3: Navigate to Users and click Create user.

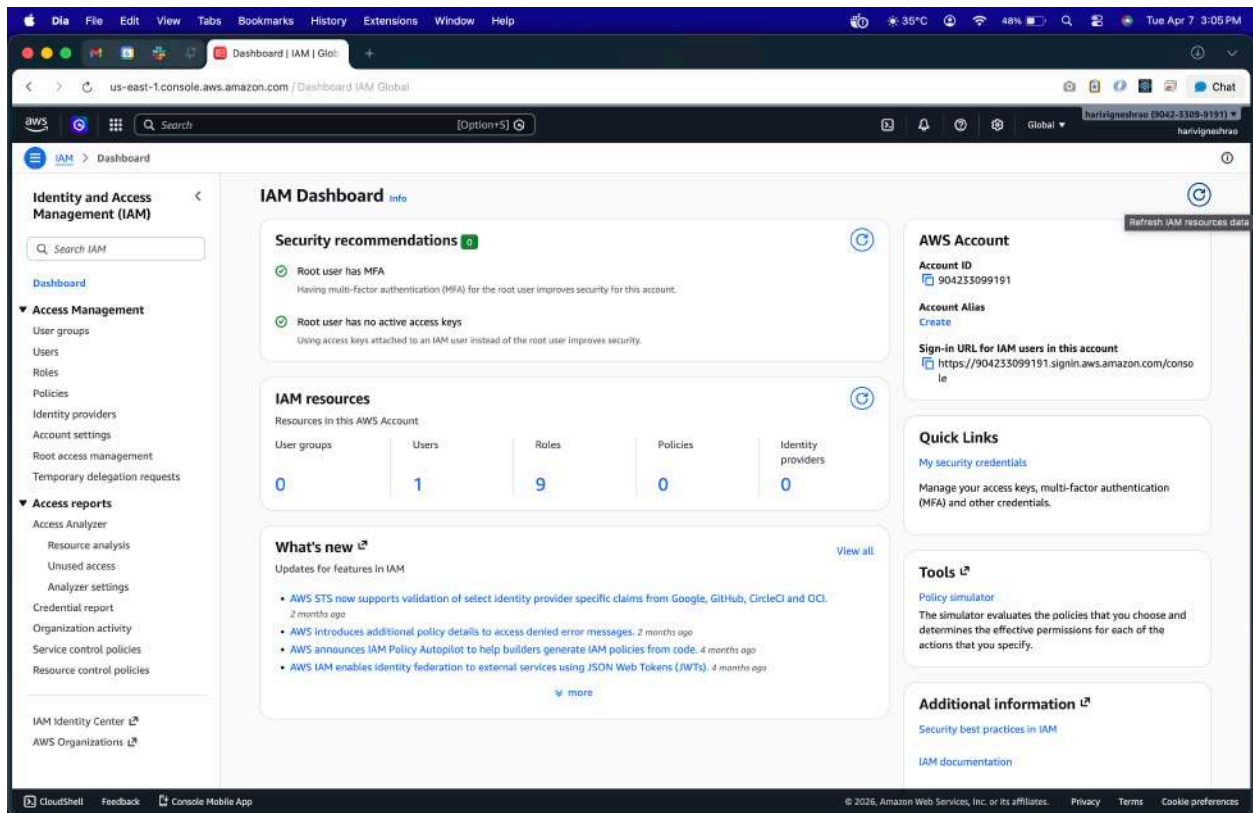


Step 4: User Details: Enter a name (e.g., S3_Specialist). Check the box for "Provide user access to the AWS Management Console." – custom password.

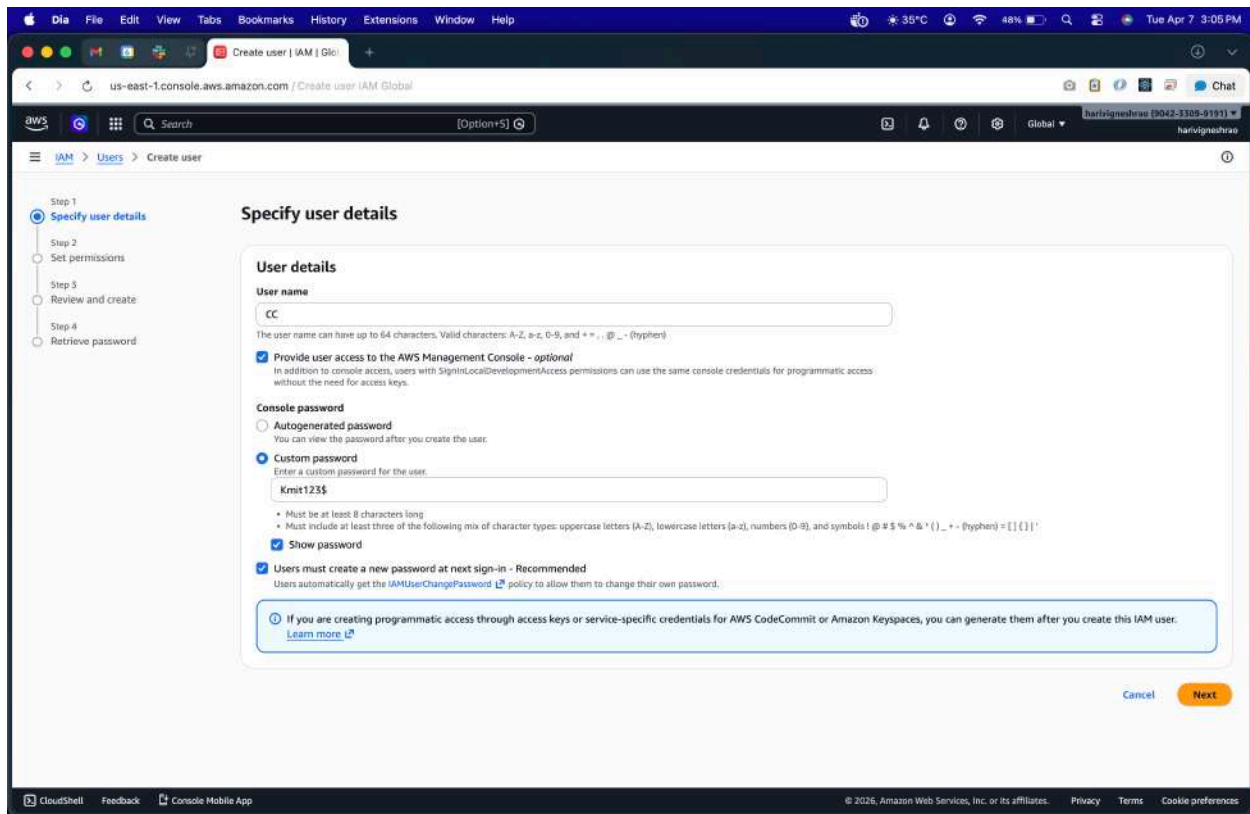


Step 5: Set Permissions: Select "Attach policies directly." Search for and select AmazonS3FullAccess.

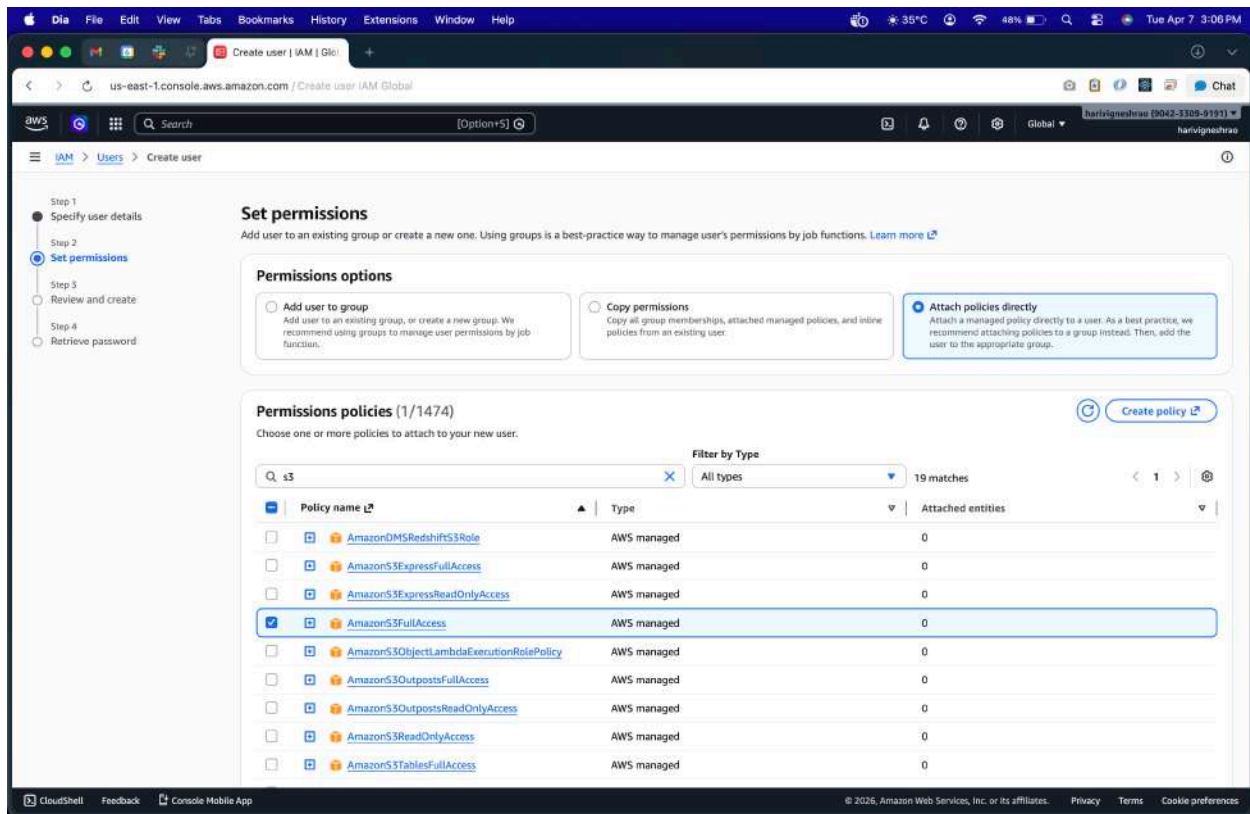


Step 6: Review & Create: Complete the wizard. On the final page, click Download .csv file.

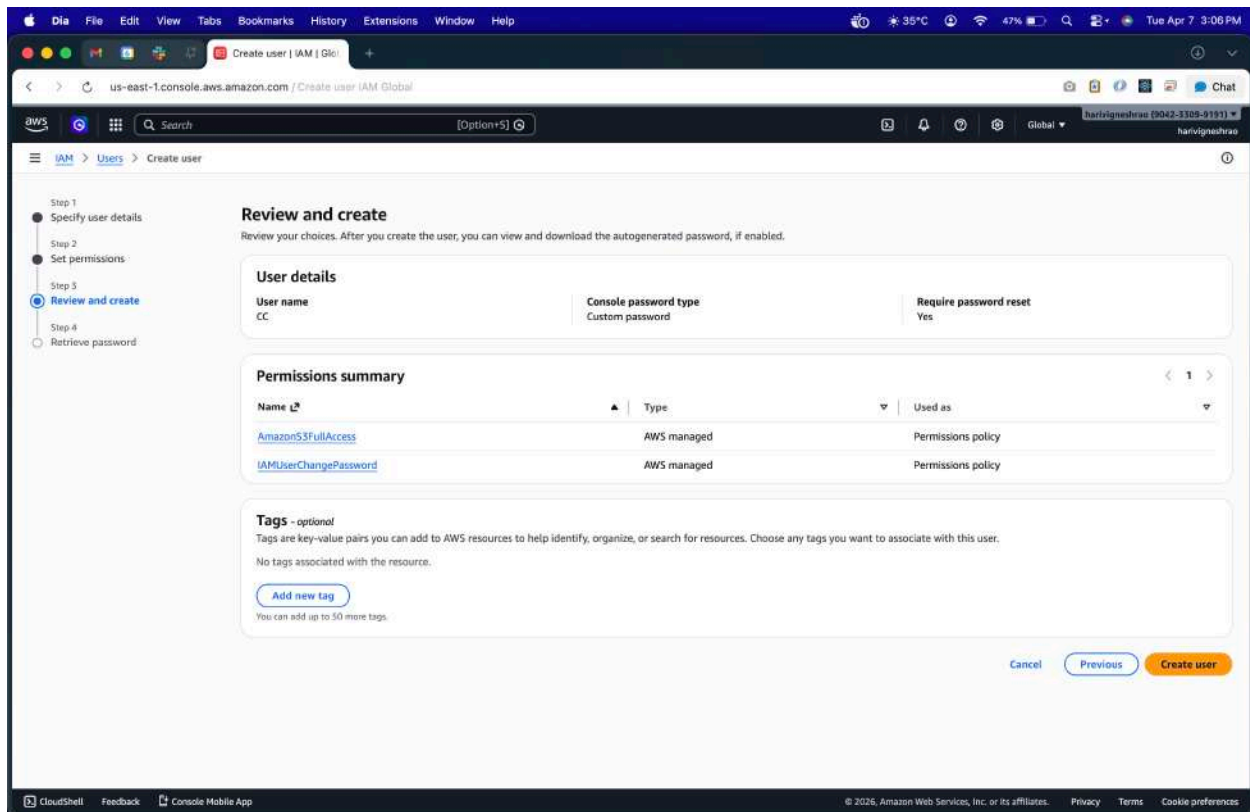

Now you see CC-LAB user created.

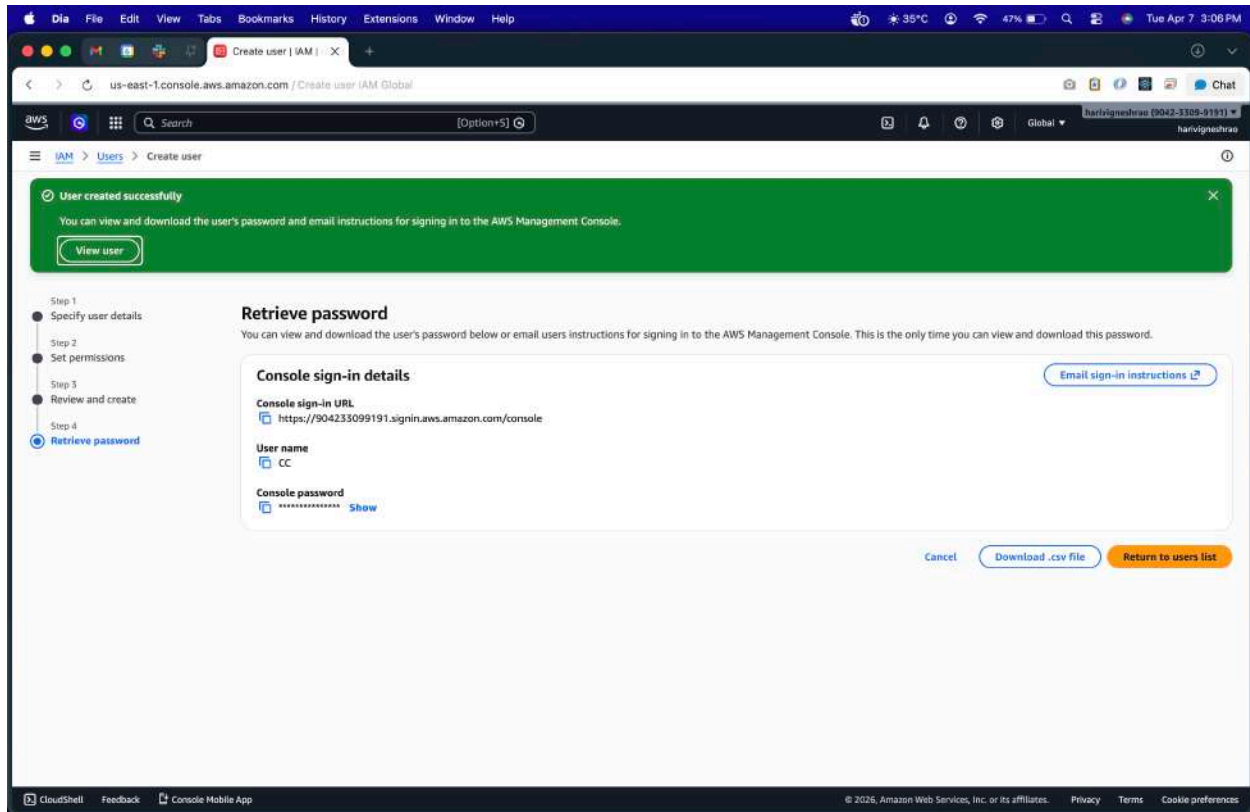


Step 7: Copy your 12-digit Account ID (found in the top-right dropdown or the .csv) and Sign Out.

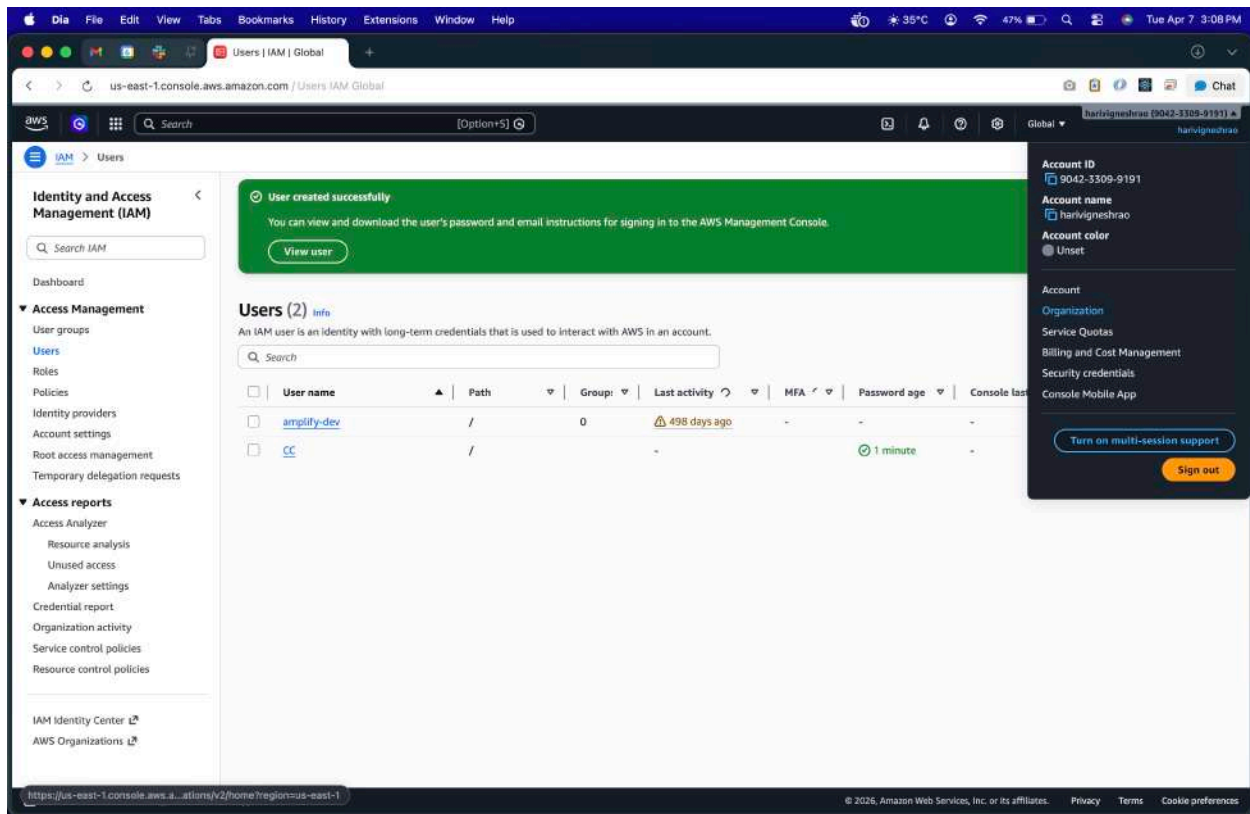


Step 8: Use the Sign-in URL from the .csv (or go to the AWS sign-in page and select IAM User).



Step 9: Enter the Account ID, then the IAM Username and Password from the .csv.

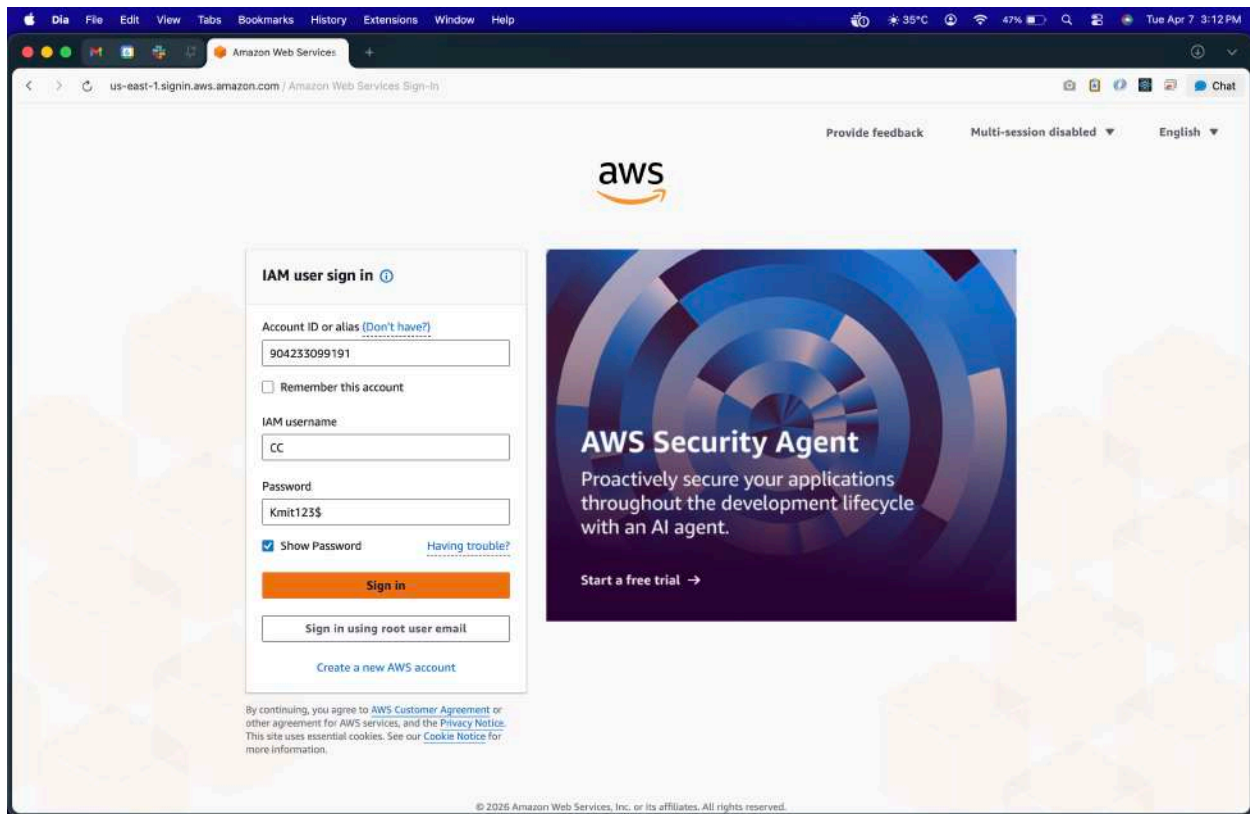

Test 1 (Failure): Navigate to EC2. Try to view instances. You will see "API Error" or "Access Denied." This proves the user is restricted.

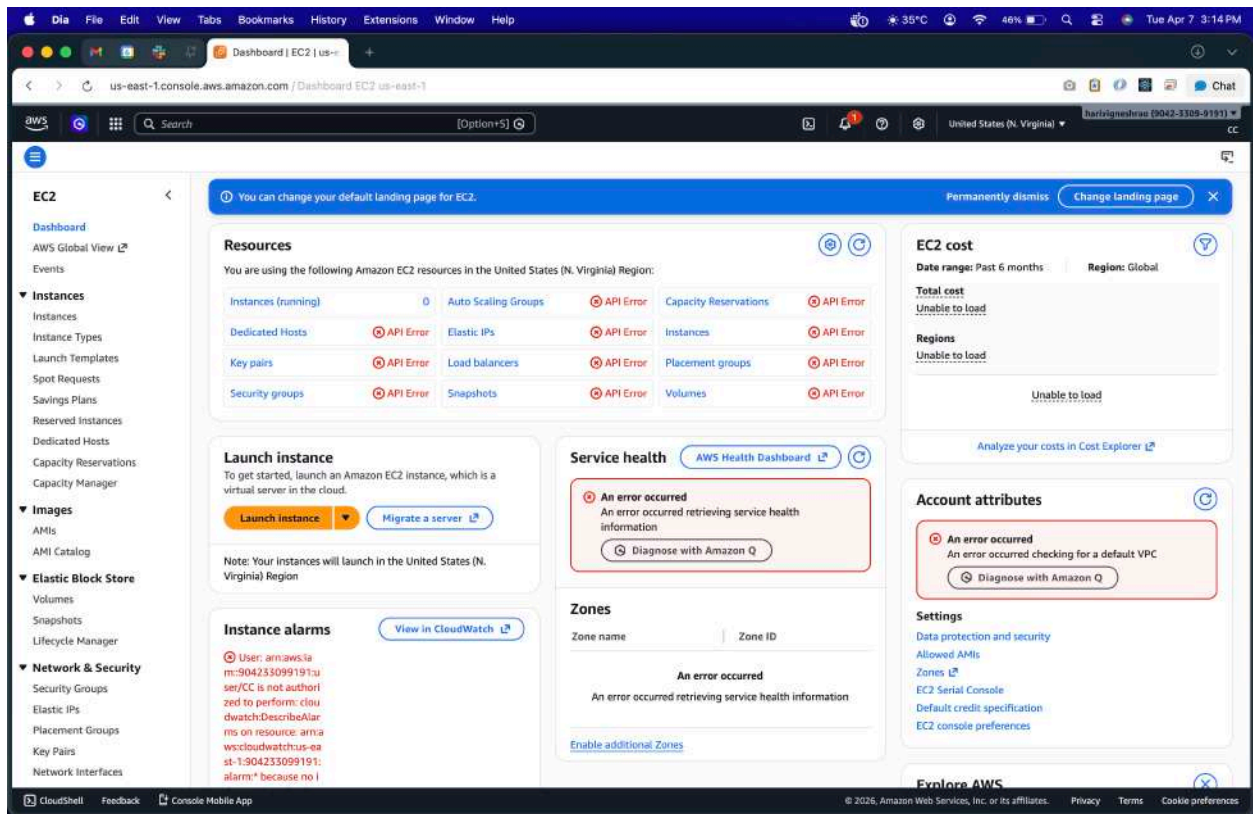

Test 2 (Success): Navigate to S3. Create a new bucket. It will work perfectly because of the attached policy.

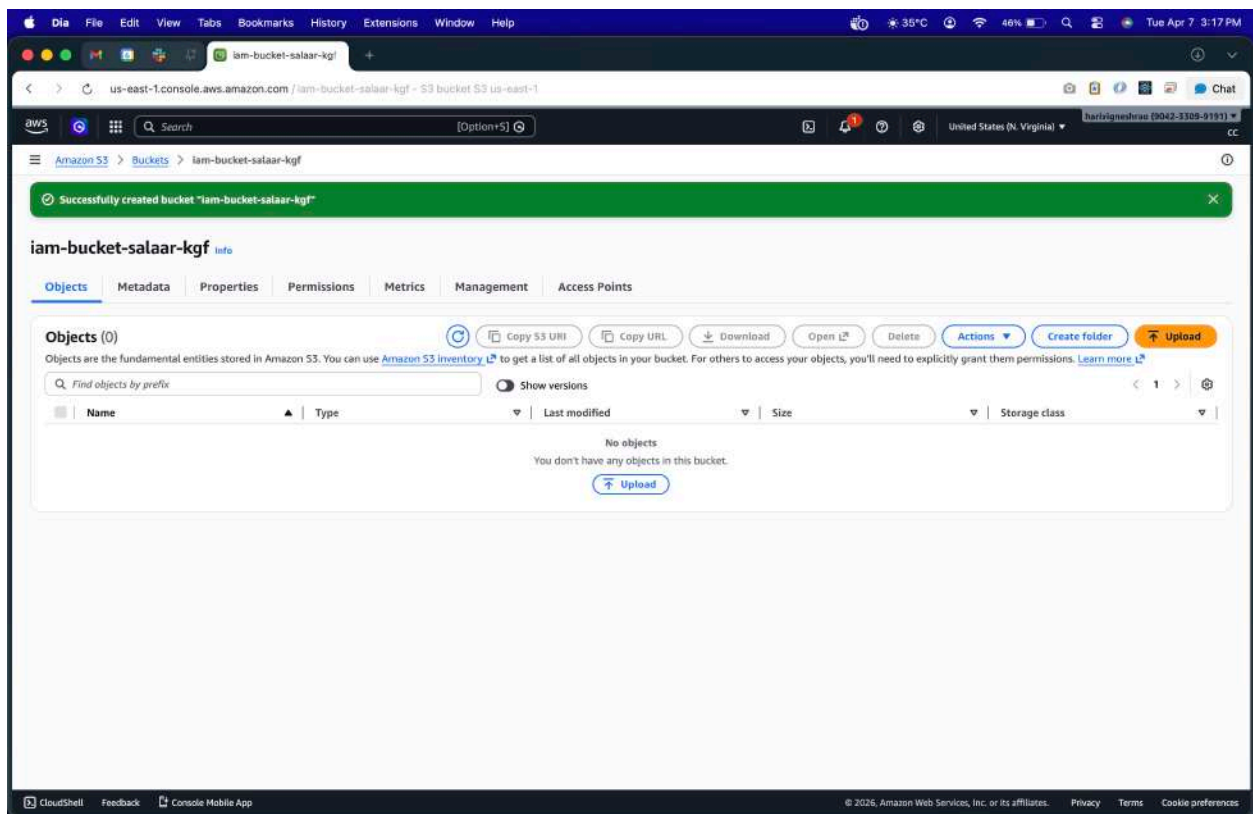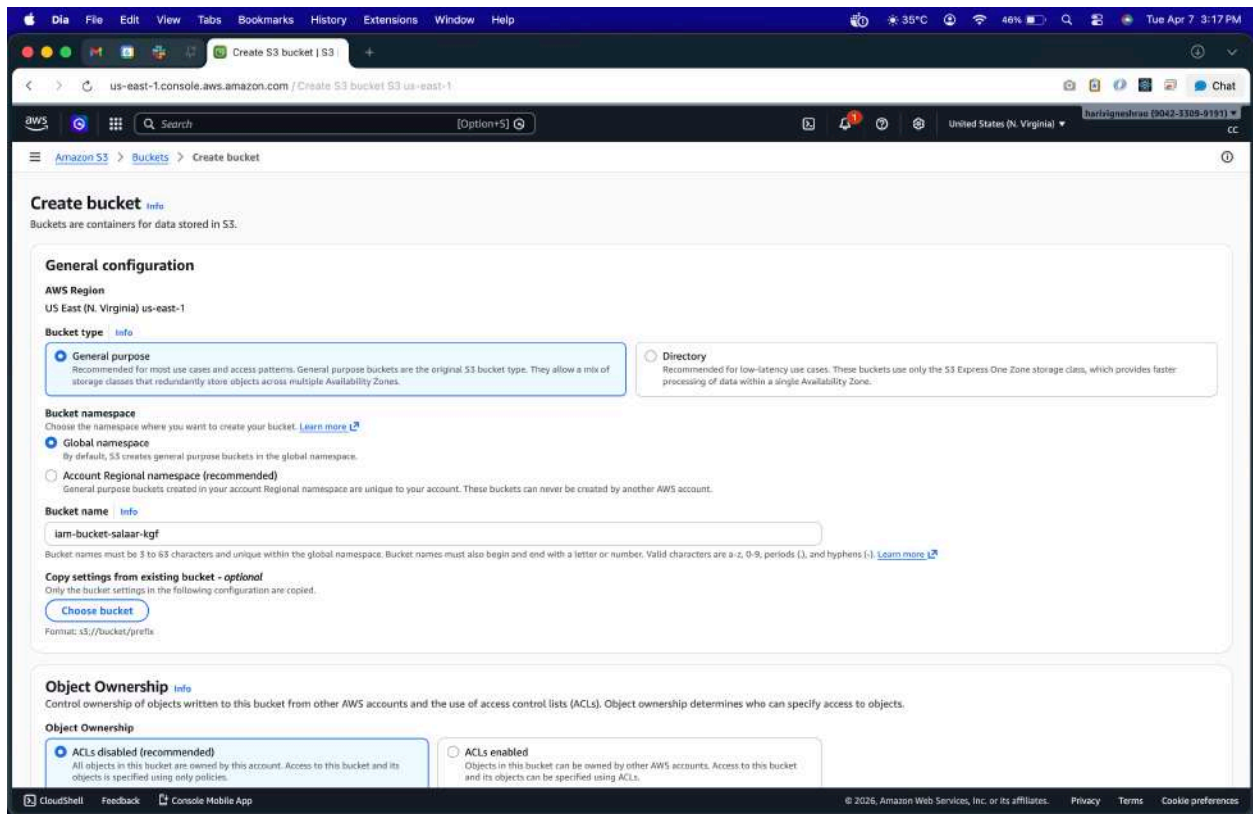


Part B: CLI Access (Programmatic Access)

Objective: Access AWS resources from a standalone system (CMD/Terminal) using security keys.


1. Credential Generation

Step 1: While logged in as an Admin/Root, go to IAM > Users and click on your user.



Step 2: Go to the Security credentials tab. Scroll to Access keys and click Create access key.

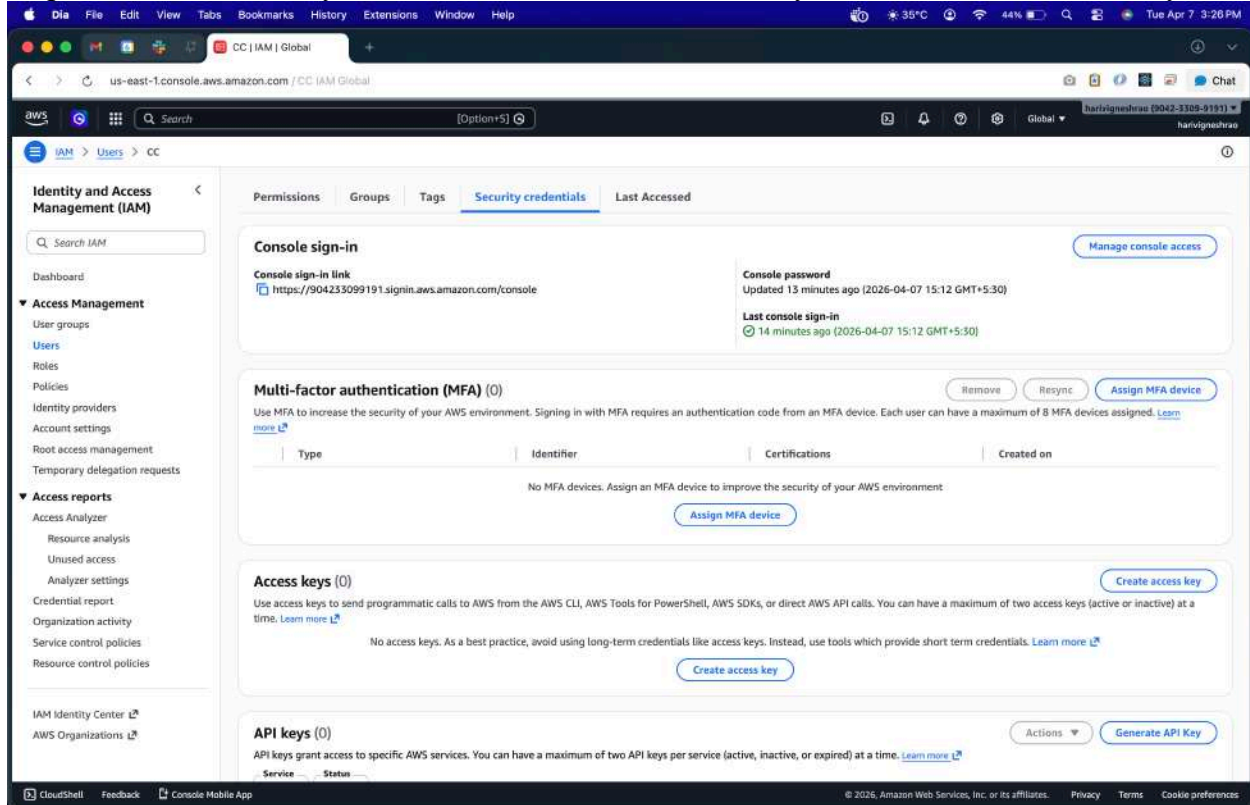

Step 3: Select Command Line Interface (CLI). Acknowledge the warning and click Next.

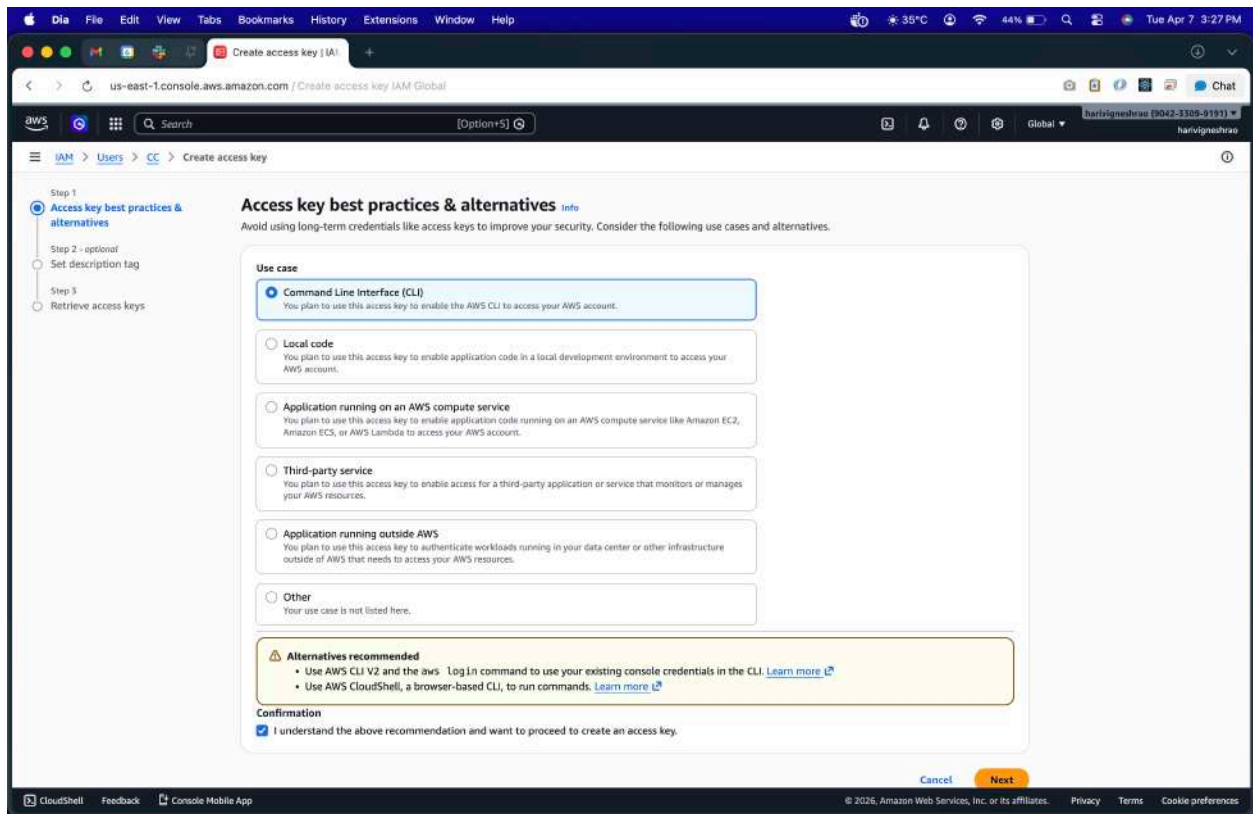



Step 4: Download the .csv file. Critical: This contains the Access Key ID and Secret Access Key. If lost, you must delete and recreate them.

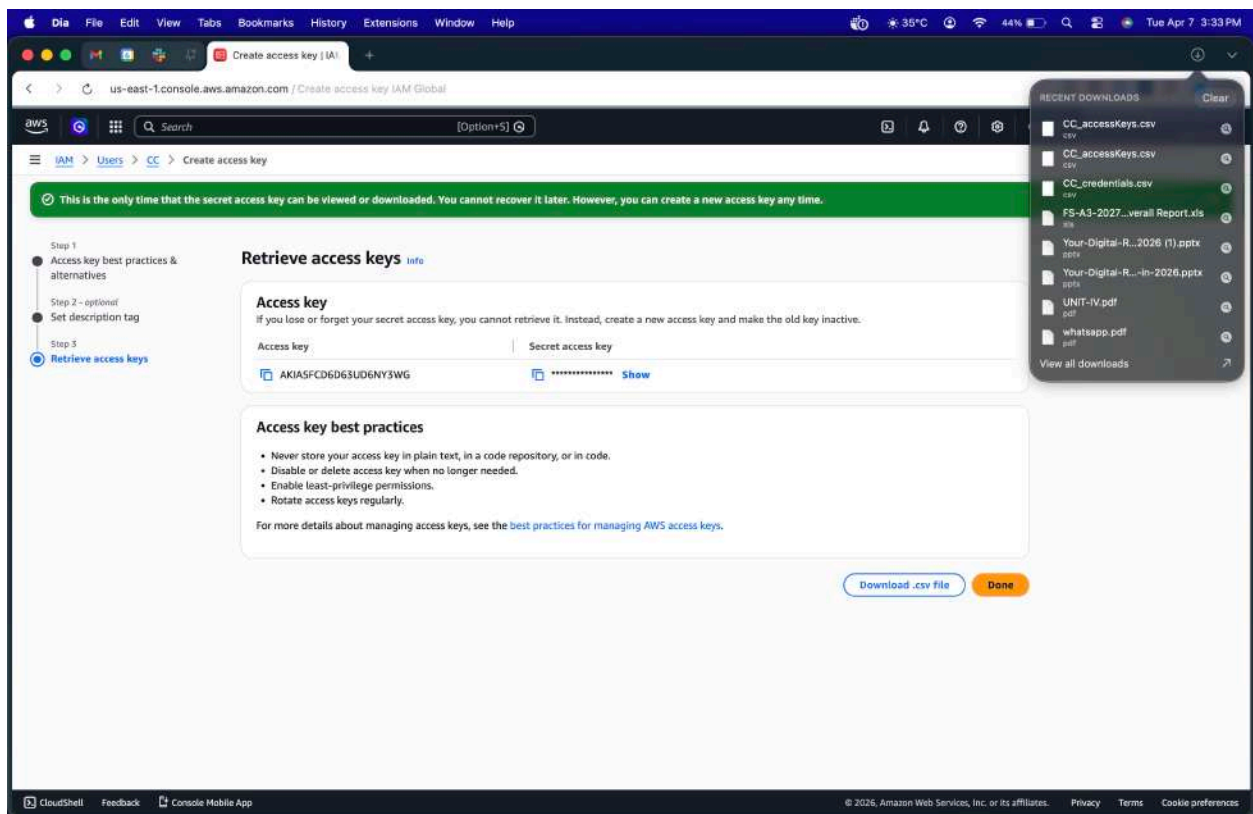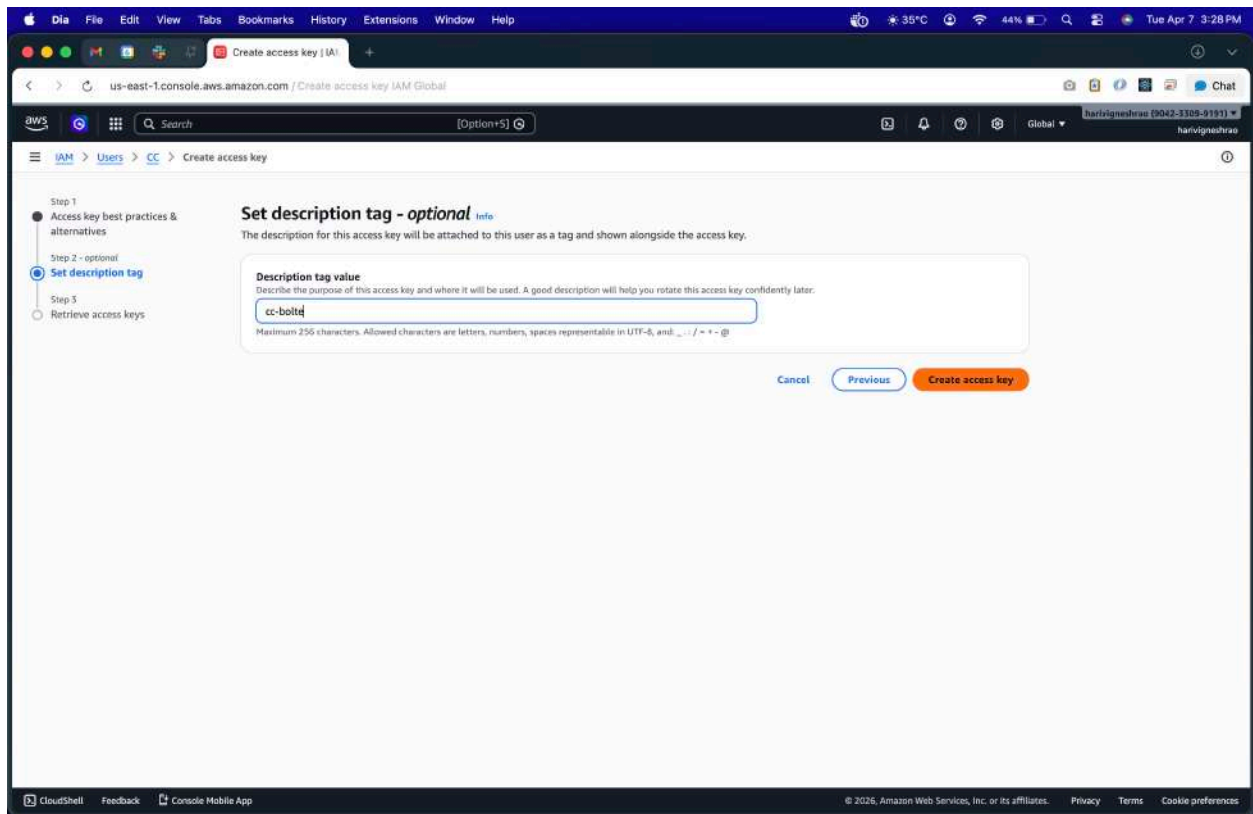

2. Standalone System Configuration



Step 5: Install the AWS CLI Tool on your computer.

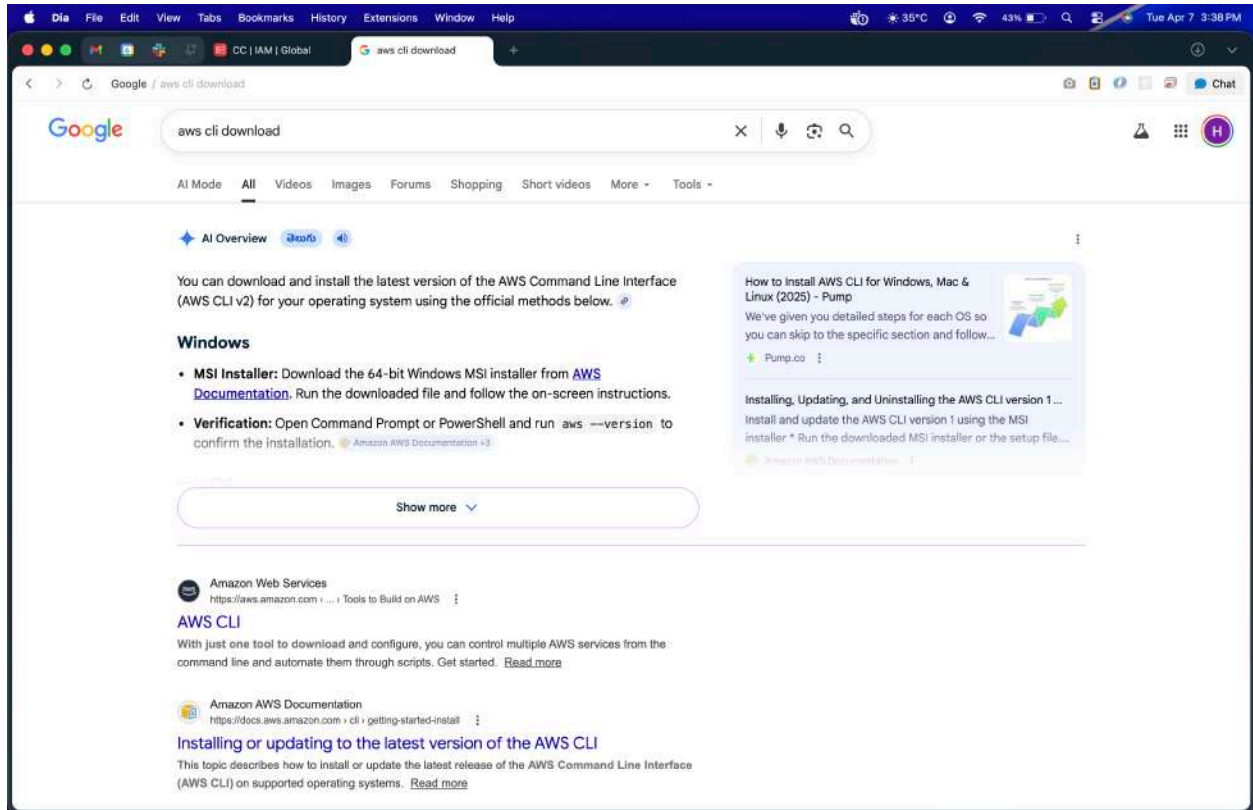

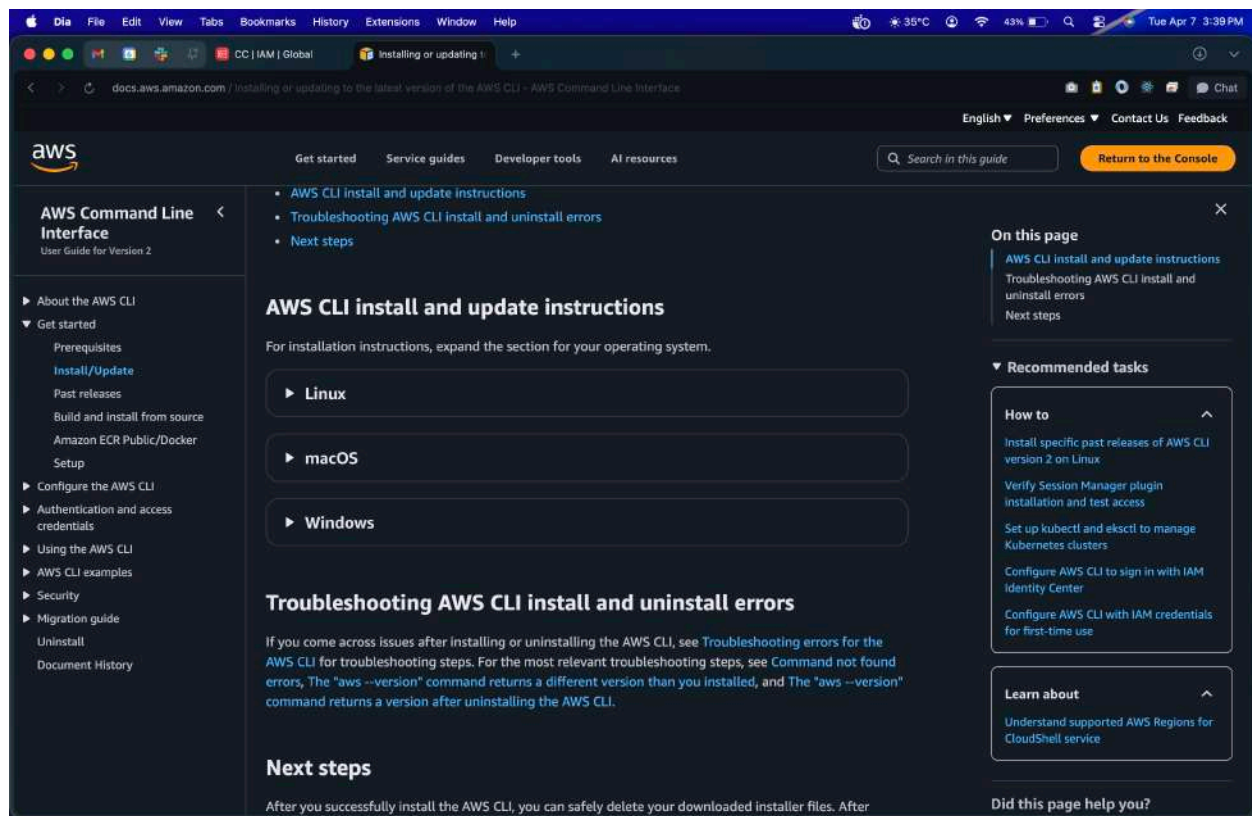


```
curl "https://awscli.amazonaws.com/AWSCLIV2.pkg" -o "AWSCLIV2.pkg"
```

```
sudo installer -pkg AWSCLIV2.pkg -target /
```

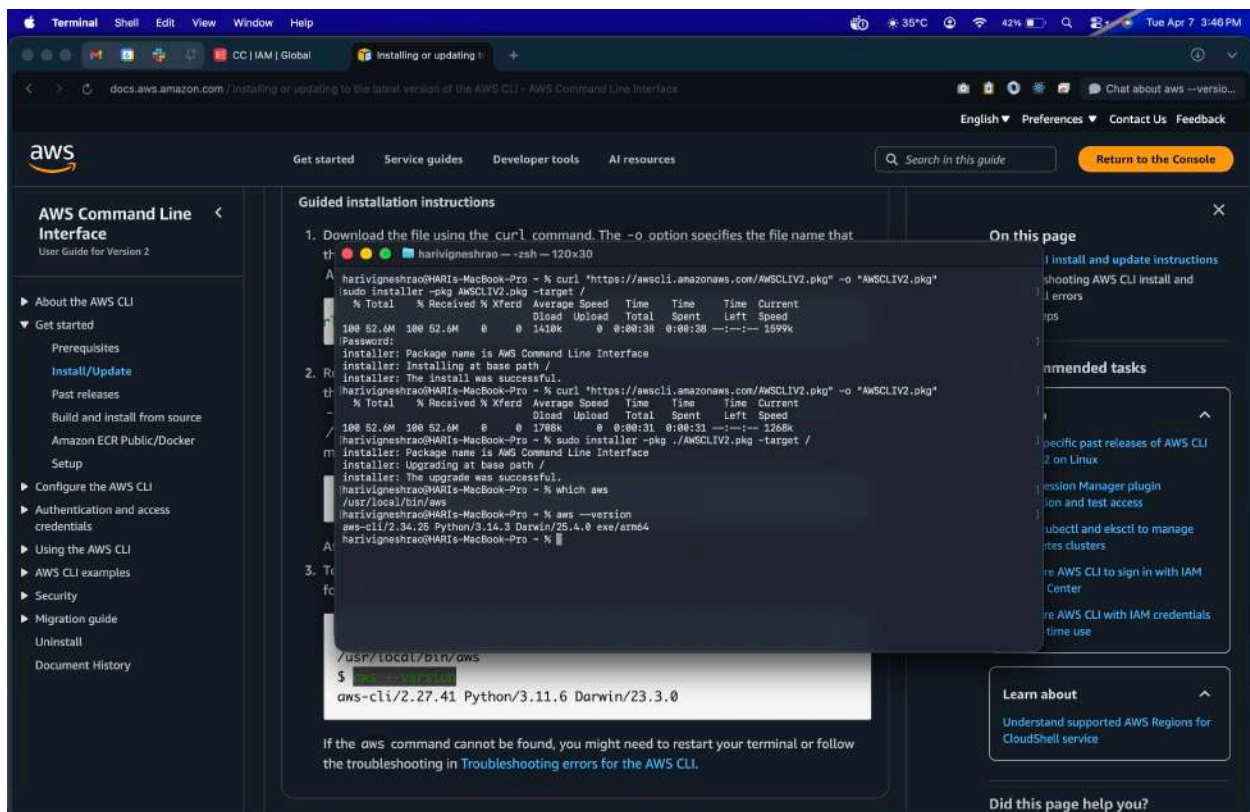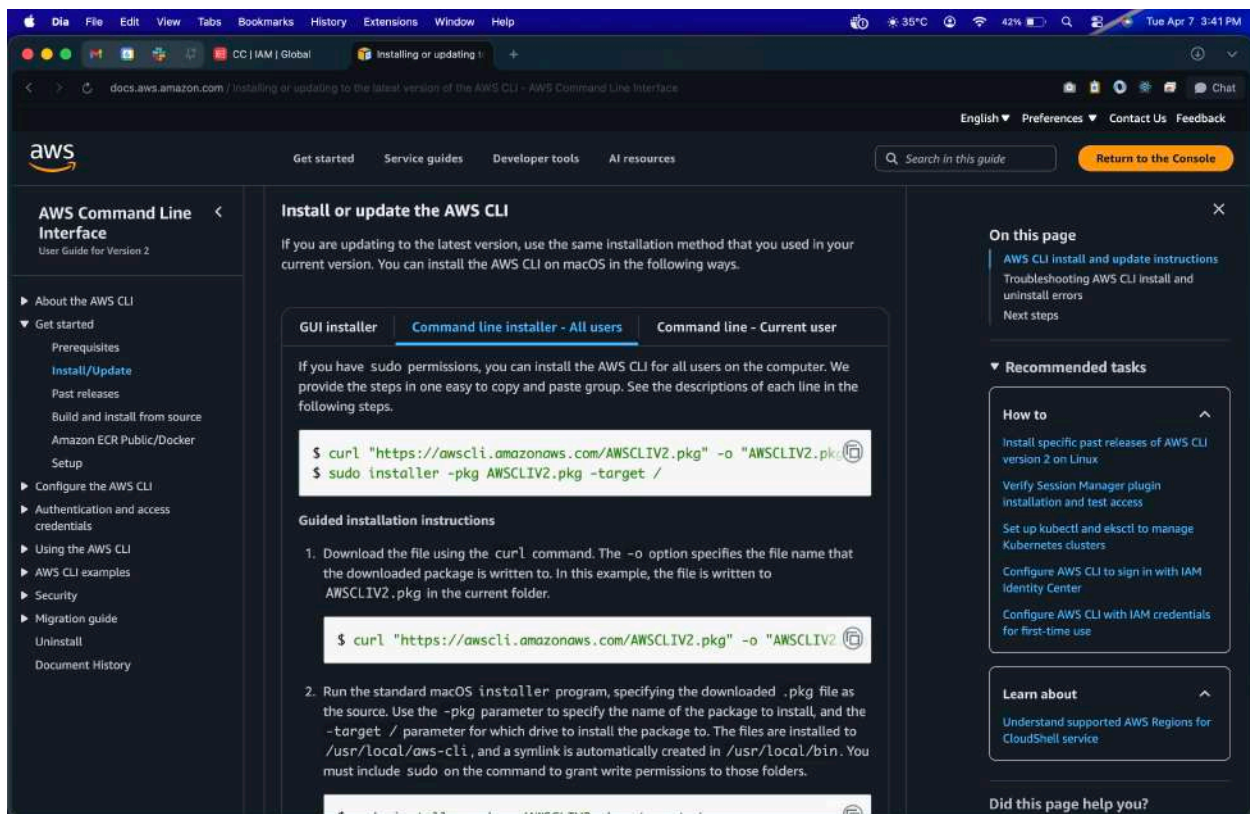
Step 6: Open your Command Prompt (CMD) or Terminal.

Step 7: Type `aws configure` and press Enter.

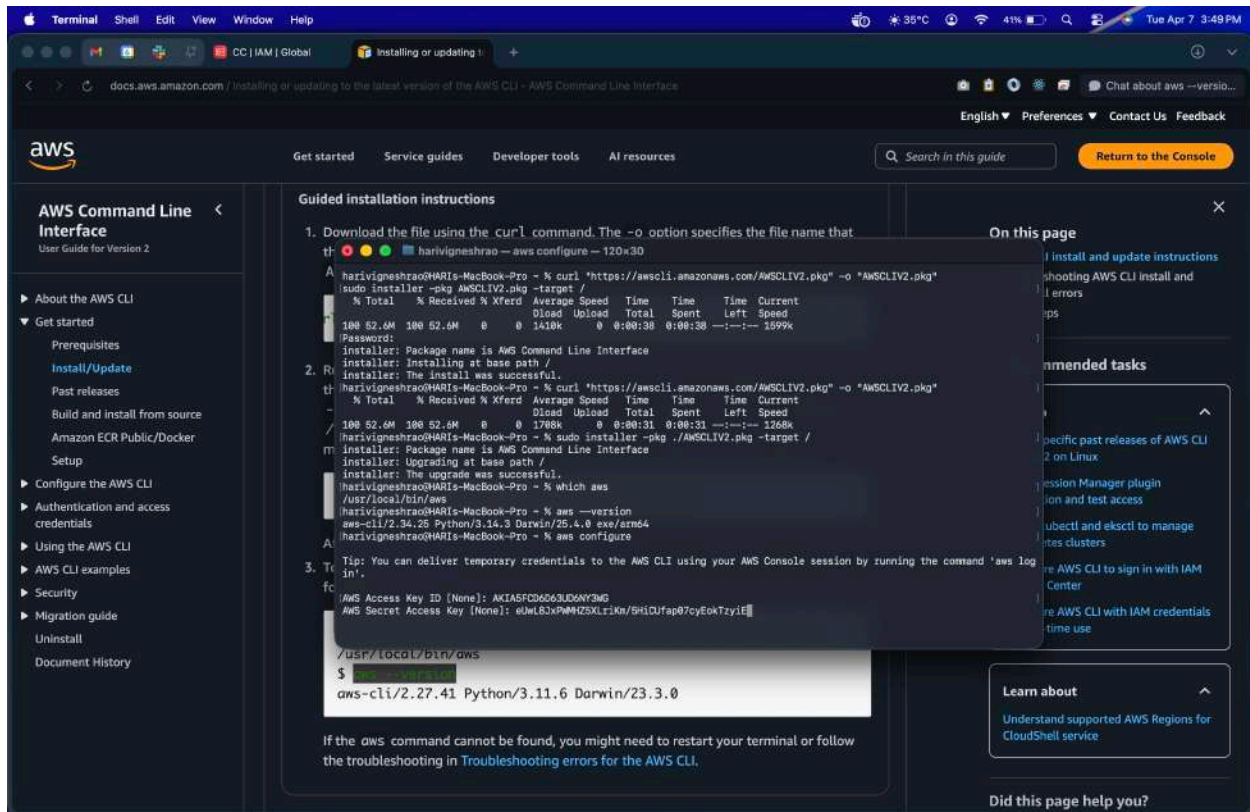


Step 8: Provide the following from your .csv:

- Access Key ID
- Secret Access Key
- Default region (e.g., ap-south-1)
- Default output: json

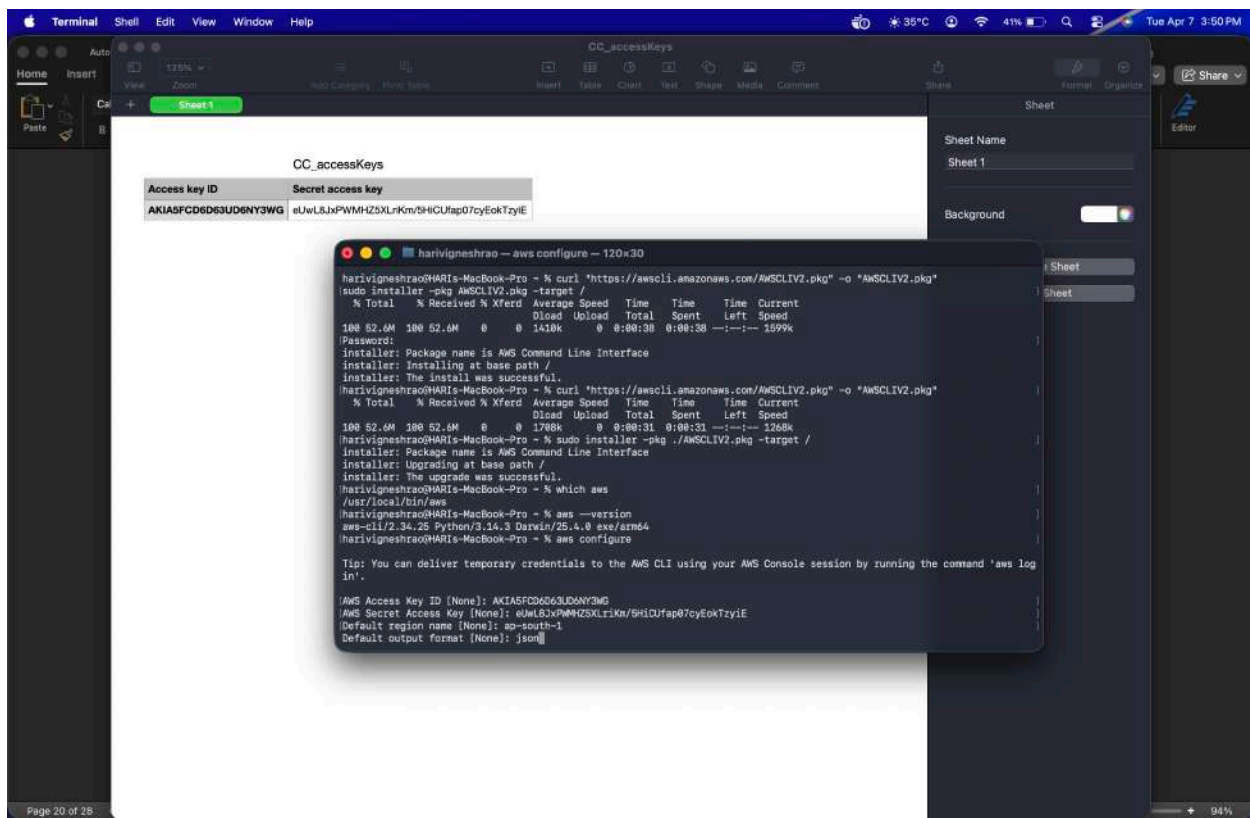


Run: `aws ec2 describe-instances`
Result: You will get an (AccessDenied) error.

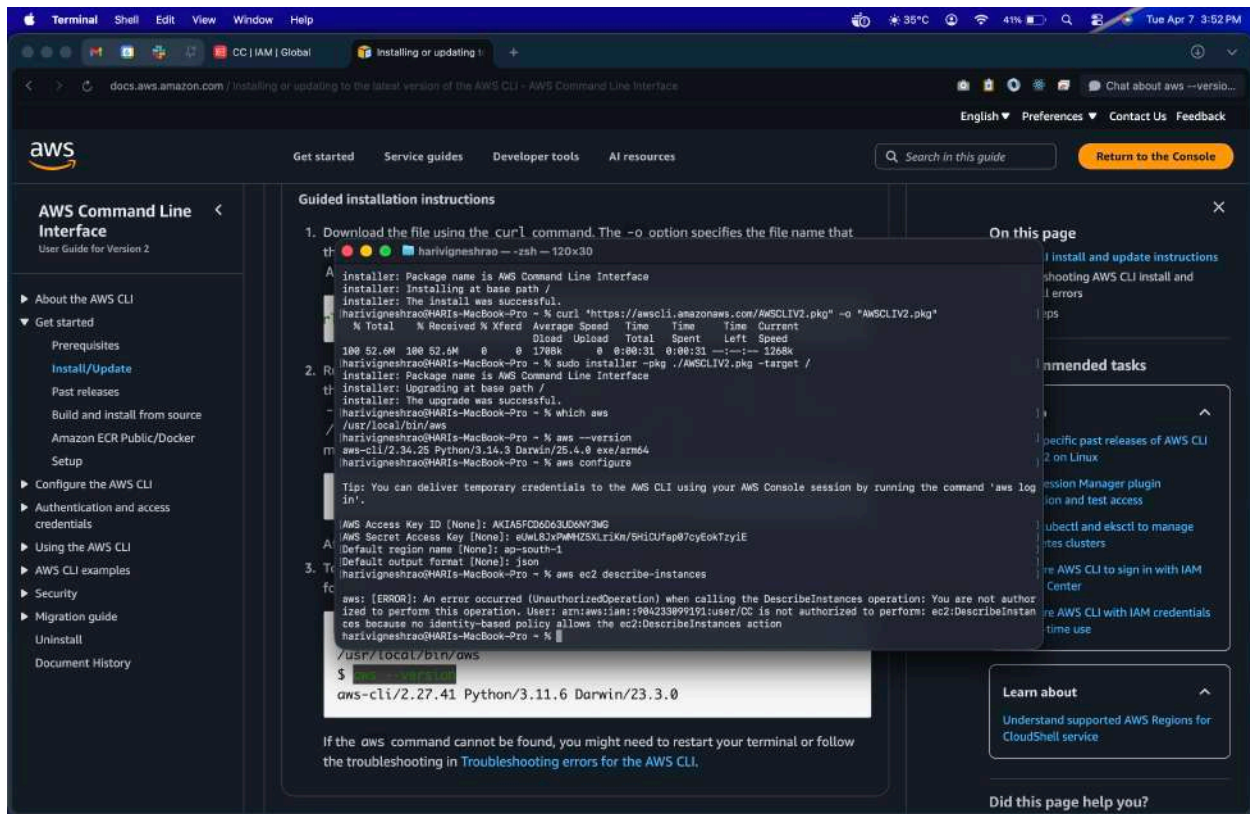


This confirms that the CLI is respecting the same IAM policy as the GUI.

3. Verification via Commands

Step 9: Run `aws s3 ls` (This should list your buckets).

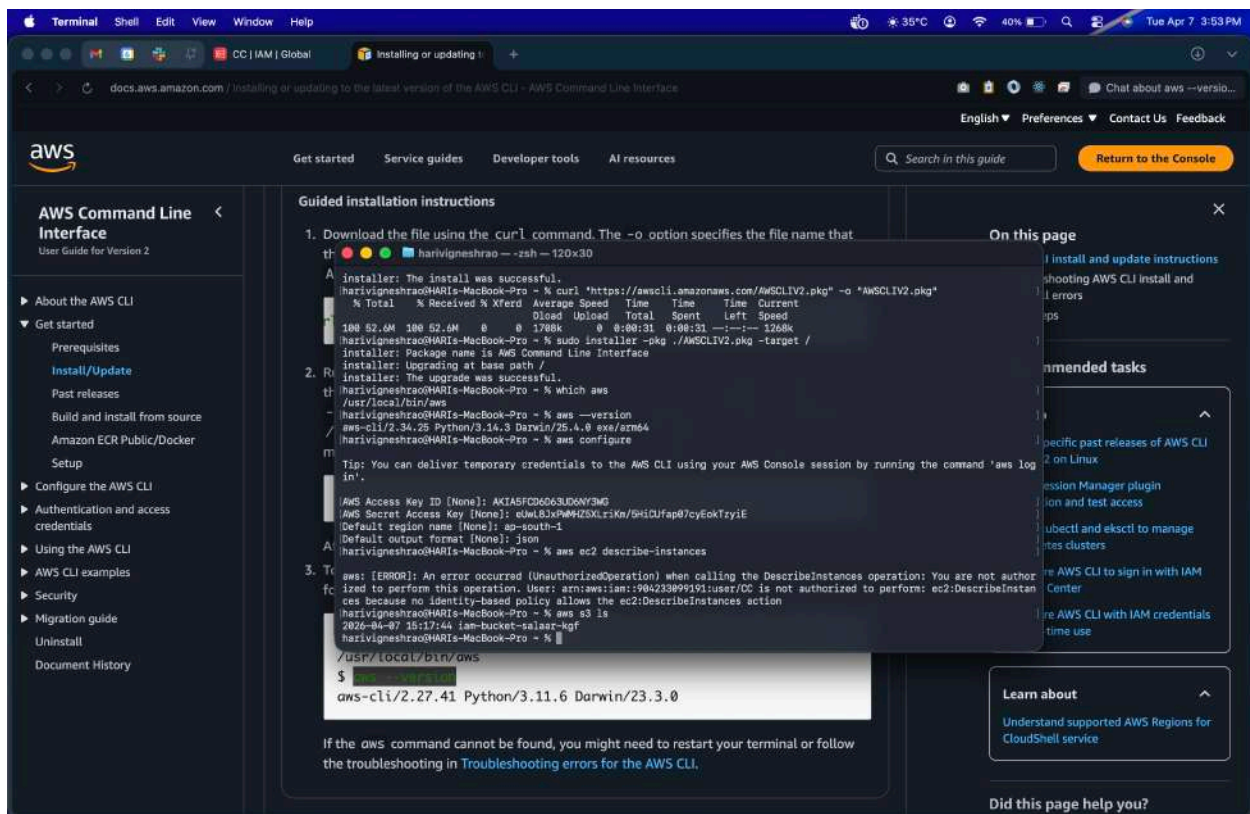

Step 10: Run `aws s3 mb s3://your-unique-bucket-name` (Success).

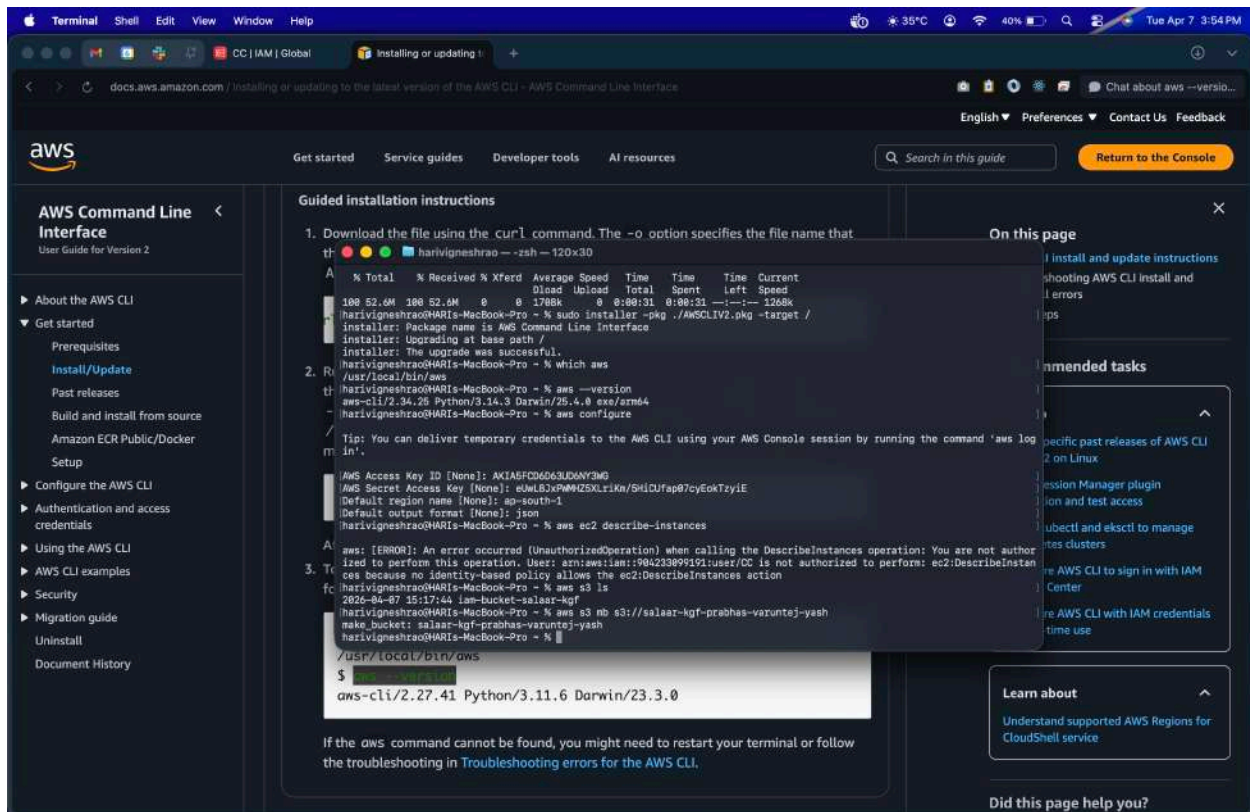

Check in console to see the bucket created from CLI.

