

SIGAC — Modelo de dados

Documento completo gerado diretamente do schema SQLite. Todas as tabelas, campos, chaves primárias e relacionamentos vêm da mesma fonte.

Inventário: 27 tabelas

Legenda: PK = chave primária; * = campo obrigatório; linhas verdes = relacionamentos FK visíveis na mesma página.

Diagrama ER visual · tabelas 1–3 de 27

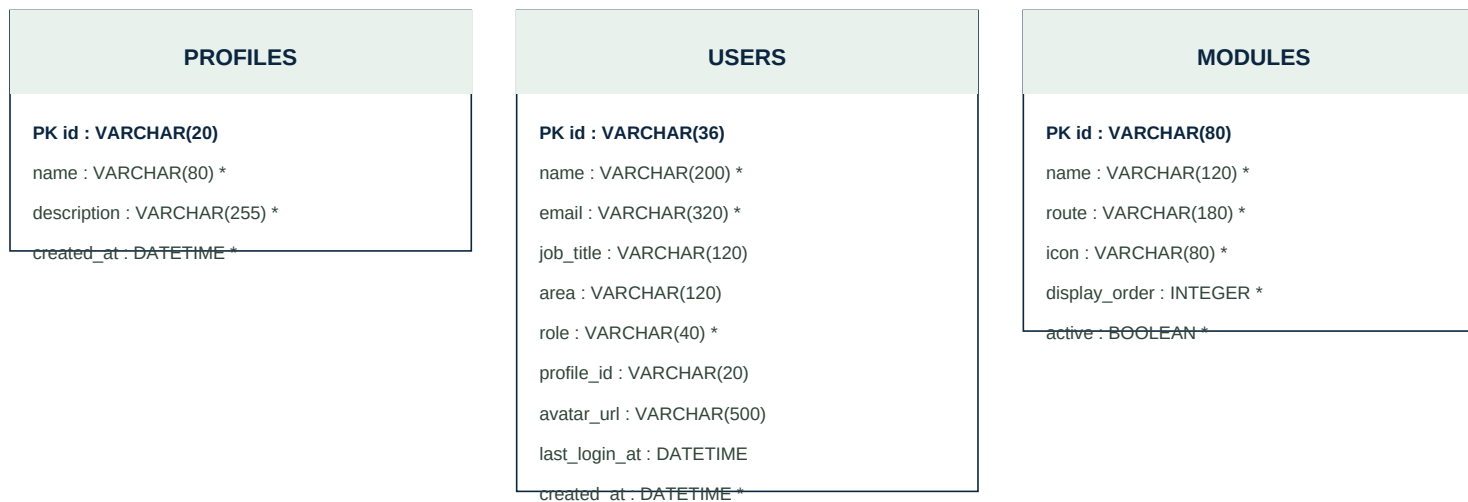


Diagrama ER visual · tabelas 4–6 de 27

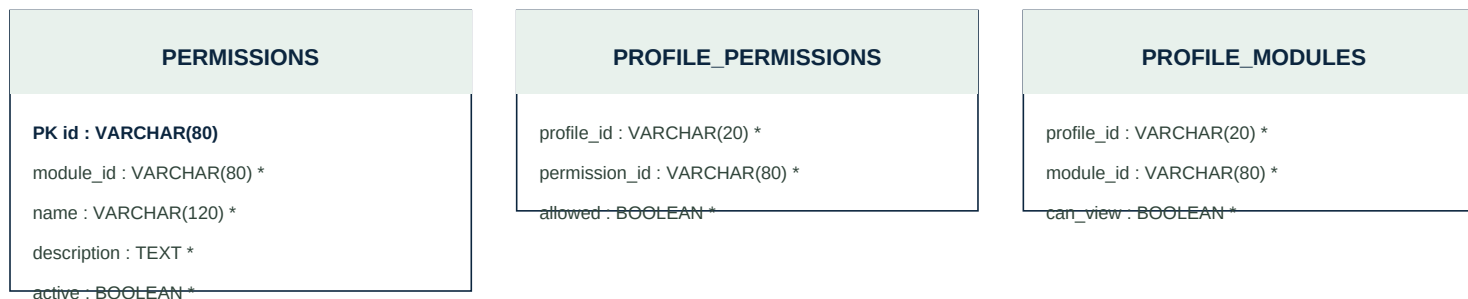


Diagrama ER visual · tabelas 7–9 de 27

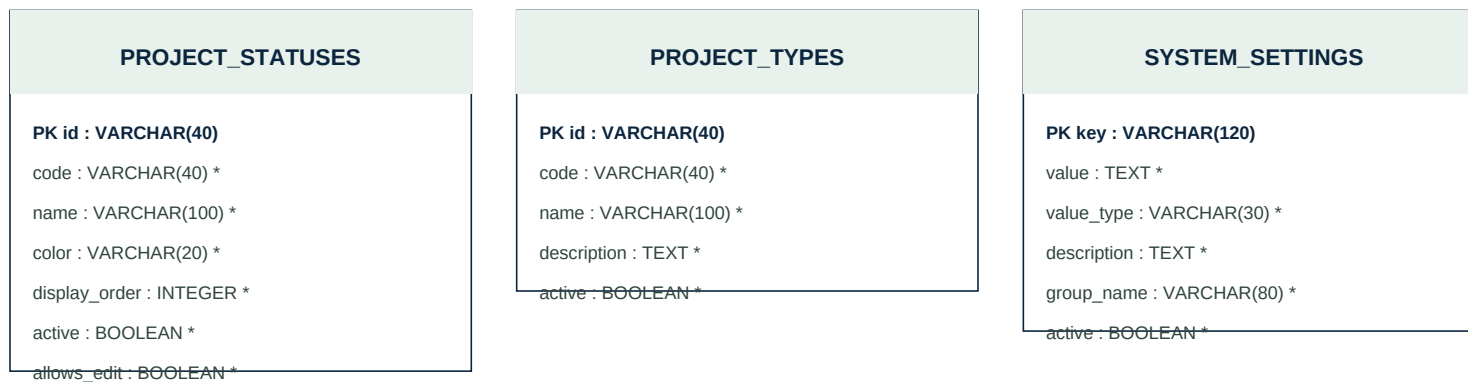


Diagrama ER visual · tabelas 10–12 de 27

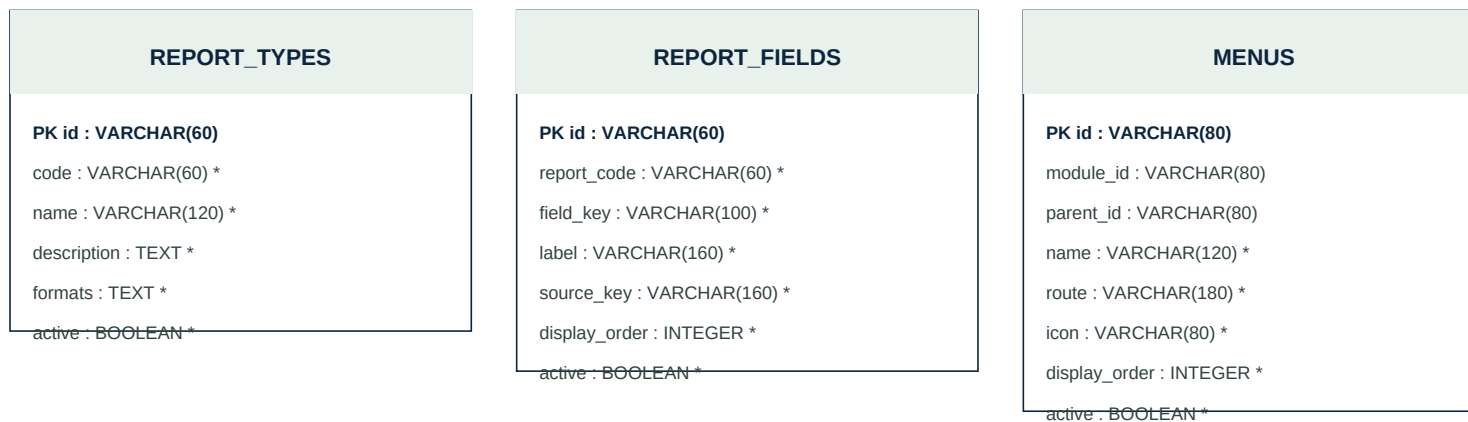


Diagrama ER visual · tabelas 13–15 de 27

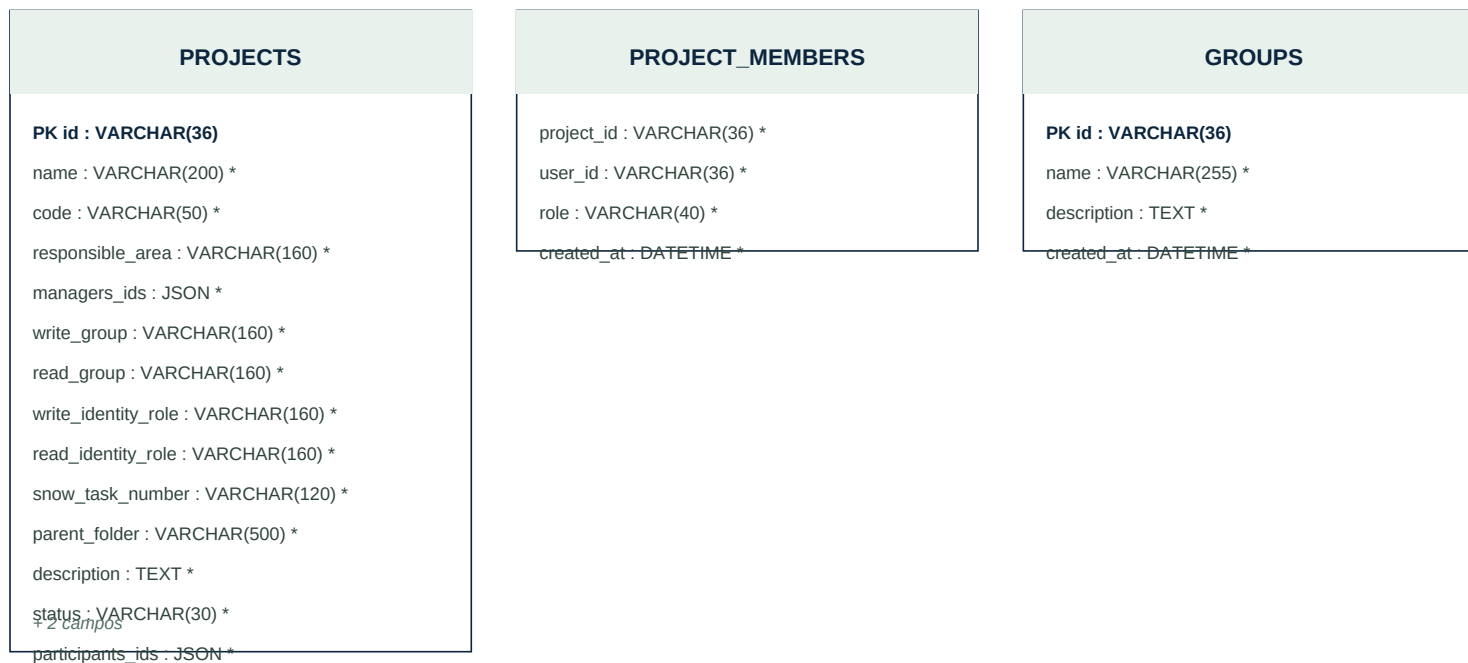


Diagrama ER visual · tabelas 16–18 de 27

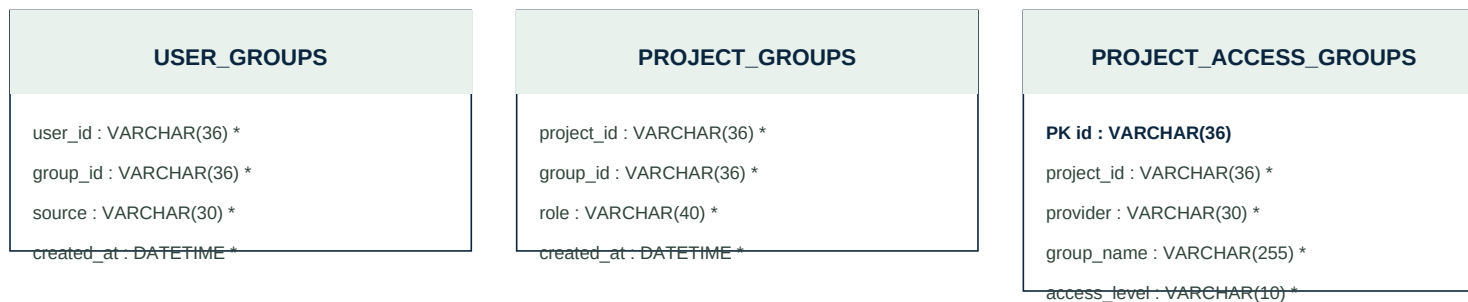


Diagrama ER visual · tabelas 19–21 de 27

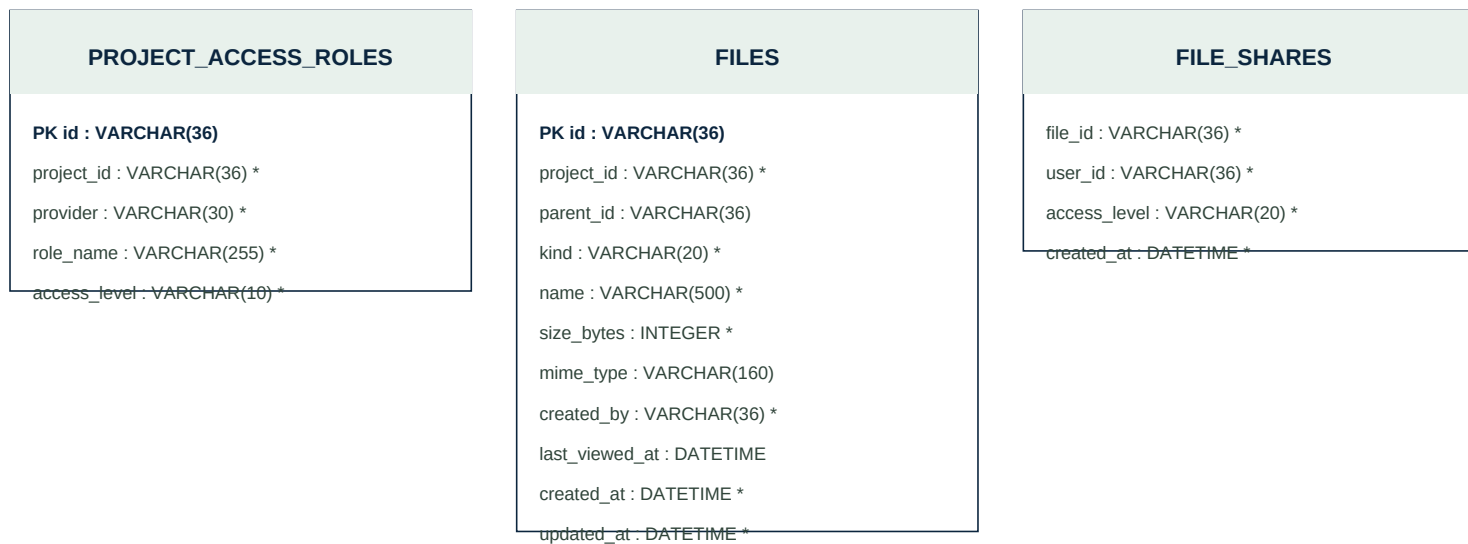


Diagrama ER visual · tabelas 22–24 de 27

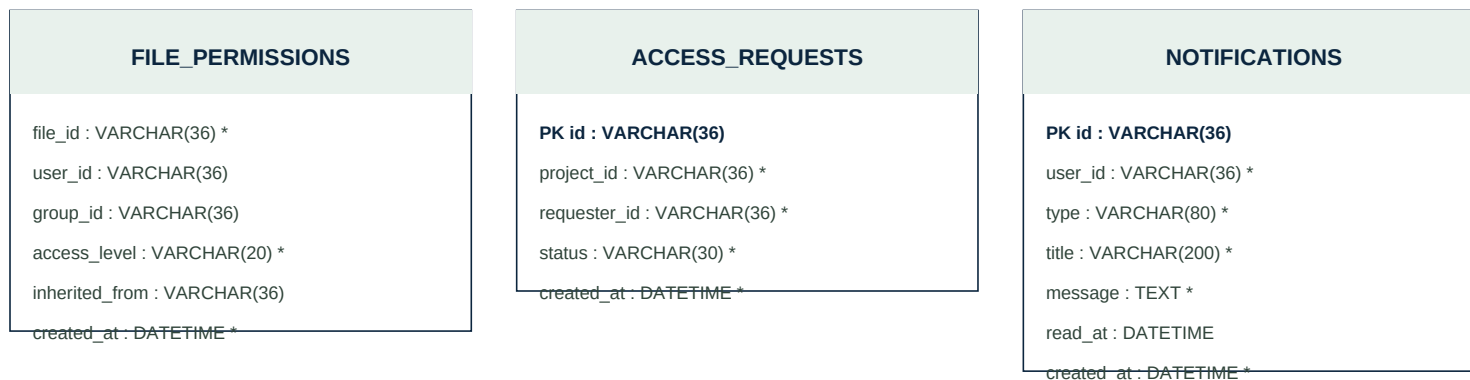


Diagrama ER visual · tabelas 25–27 de 27



Inventário completo de tabelas

profiles · 4 campos · PK: id

id, name, description, created_at

users · 10 campos · PK: id

id, name, email, job_title, area, role, profile_id, avatar_url, last_login_at, created_at

modules · 6 campos · PK: id

id, name, route, icon, display_order, active

permissions · 5 campos · PK: id

id, module_id, name, description, active

profile_permissions · 3 campos · PK: —

profile_id, permission_id, allowed

profile_modules · 3 campos · PK: —

profile_id, module_id, can_view

project_statuses · 7 campos · PK: id

id, code, name, color, display_order, active, allows_edit

project_types · 5 campos · PK: id

id, code, name, description, active

system_settings · 6 campos · PK: key

key, value, value_type, description, group_name, active

report_types · 6 campos · PK: id

id, code, name, description, formats, active

report_fields · 7 campos · PK: id

id, report_code, field_key, label, source_key, display_order, active

menus · 8 campos · PK: id

id, module_id, parent_id, name, route, icon, display_order, active

projects · 16 campos · PK: id

id, name, code, responsible_area, managers_ids, write_group, read_group, write_identity_role, read_identity_role, snow_task_number, parent_folder, description, status, participants_ids, created_at, updated_at

project_members · 4 campos · PK: —

project_id, user_id, role, created_at

groups · 4 campos · PK: id

id, name, description, created_at

user_groups · 4 campos · PK: —

user_id, group_id, source, created_at

project_groups · 4 campos · PK: —

project_id, group_id, role, created_at

project_access_groups · 5 campos · PK: id

id, project_id, provider, group_name, access_level

project_access_roles · 5 campos · PK: id

id, project_id, provider, role_name, access_level

files · 11 campos · PK: id

id, project_id, parent_id, kind, name, size_bytes, mime_type, created_by, last_viewed_at, created_at, updated_at

file_shares · 4 campos · PK: —

file_id, user_id, access_level, created_at

file_permissions · 6 campos · PK: —

file_id, user_id, group_id, access_level, inherited_from, created_at

access_requests · 5 campos · PK: id

id, project_id, requester_id, status, created_at

notifications · 7 campos · PK: id

id, user_id, type, title, message, read_at, created_at

activity_logs · 7 campos · PK: id

id, user_id, action, entity, entity_id, details, created_at

sessions · 3 campos · PK: id

id, user_id, expires_at

permission_matrix · 2 campos · PK: id

id, matrix