

SIGAC — Tabelas e campos

Inventário das tabelas utilizadas pelo SIGAC, com campos físicos, chaves primárias, chaves estrangeiras, finalidade, páginas do frontend, arquivos e endpoints do backend.

Tabelas: 19

Legenda: PK = chave primária; * = campo obrigatório; linhas verdes = relacionamentos FK.

Diagrama ER visual · tabelas 1–3 de 19

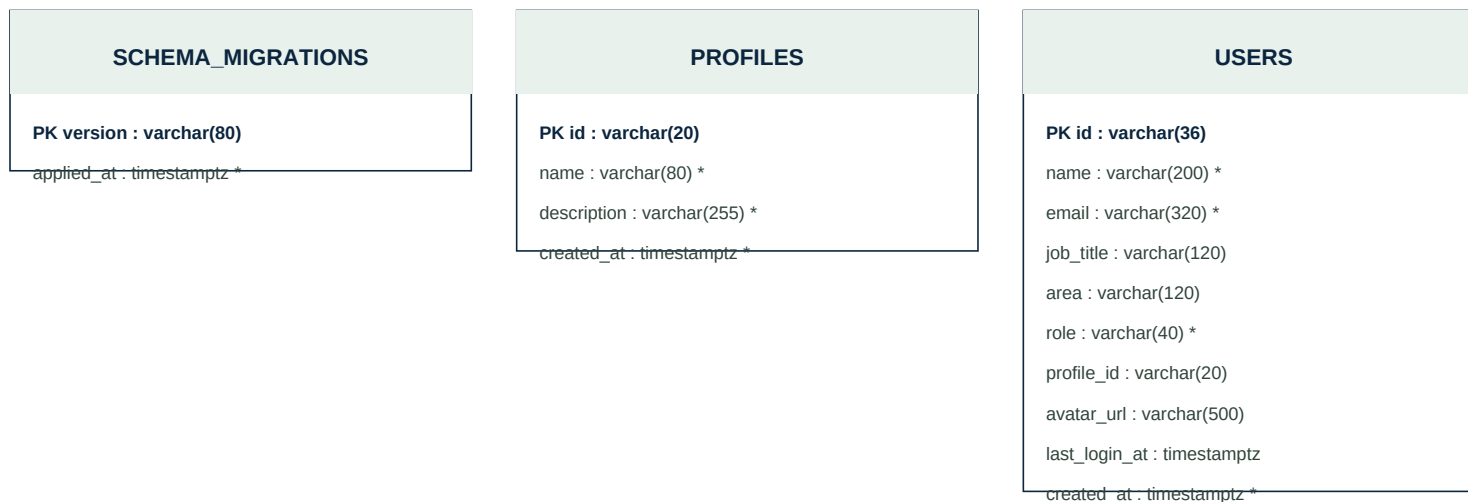


Diagrama ER visual · tabelas 4–6 de 19

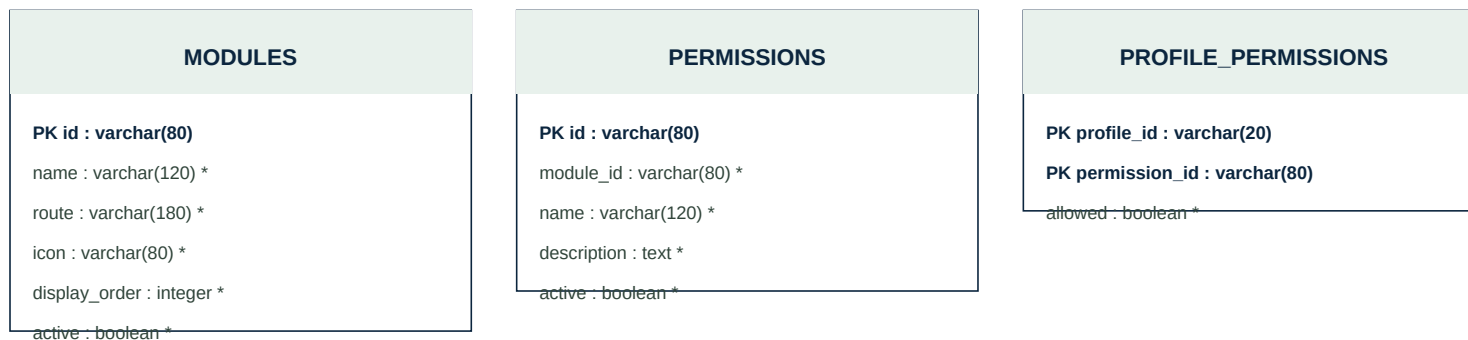


Diagrama ER visual · tabelas 7–9 de 19

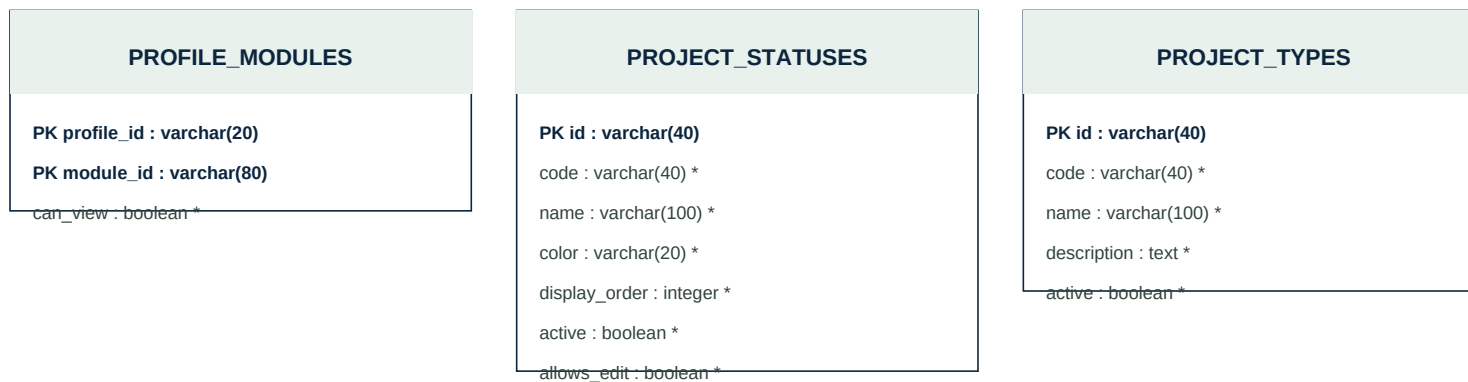


Diagrama ER visual · tabelas 10–12 de 19

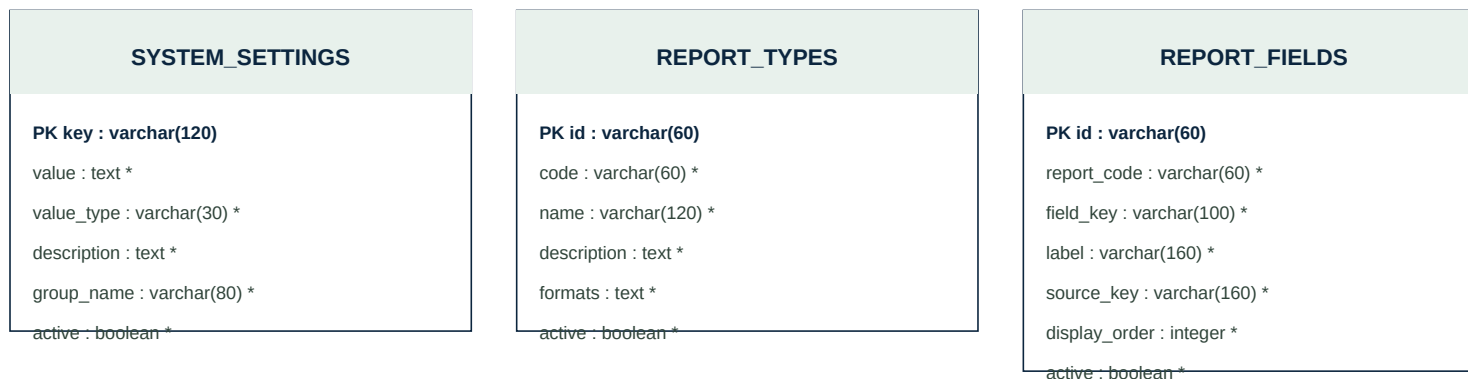



Diagrama ER visual · tabelas 13–15 de 19



Diagrama ER visual · tabelas 16–18 de 19



Diagrama ER visual · tabelas 19–19 de 19

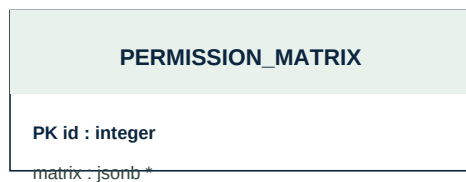

Inventário de tabelas e campos

Campos físicos, PKs e FKs das tabelas utilizadas pelo SiGAC.

schema_migrations

version · varchar(80) (PK)

applied_at · timestamptz (NOT NULL)

Finalidade: Uso não identificado no código atual

Frontend: —

Endpoints: —

profiles

id · varchar(20) (PK)

name · varchar(80) (NOT NULL)

description · varchar(255) (NOT NULL)

created_at · timestamptz (NOT NULL)

Finalidade: Perfis dos usuários e autorização

Frontend: app/login/page.tsx; app/(app)/layout.tsx; hooks/use-permissions.ts

Endpoints: GET /api/auth/session; GET/PUT /api/permissions

users

id · varchar(36) (PK)

name · varchar(200) (NOT NULL)

email · varchar(320) (NOT NULL)

job_title · varchar(120)

area · varchar(120)

role · varchar(40) (NOT NULL)

profile_id · varchar(20)

avatar_url · varchar(500)
last_login_at · timestampz
created_at · timestampz (NOT NULL)

Finalidade: Login, diretório, vínculos e auditoria

Frontend: app/login/page.tsx; app/(app)/projetos/; app/(app)/logs/page.tsx

Endpoints: POST /api/auth/login; GET /api/auth/session; GET /api/users; GET /api/projects/{id}/members; GET /api/activity-logs

modules

id · varchar(80) (PK)
name · varchar(120) (NOT NULL)
route · varchar(180) (NOT NULL)
icon · varchar(80) (NOT NULL)
display_order · integer (NOT NULL)
active · boolean (NOT NULL)

Finalidade: Módulos e navegação

Frontend: app/(app)/layout.tsx; components/layout/app-sidebar.tsx; lib/nav-config.ts

Endpoints: GET /api/auth/session; GET /api/permissions

permissions

id · varchar(80) (PK)
module_id · varchar(80) (NOT NULL)
name · varchar(120) (NOT NULL)
description · text (NOT NULL)
active · boolean (NOT NULL)

Finalidade: Capacidades por módulo

Frontend: hooks/use-permissions.ts; componentes de administração

Endpoints: GET/PUT /api/permissions

profile_permissions

profile_id · varchar(20) (PK; NOT NULL)

permission_id · varchar(80) (PK; NOT NULL)

allowed · boolean (NOT NULL)

Finalidade: Relação entre perfis e permissões

Frontend: hooks/use-permissions.ts

Endpoints: GET/PUT /api/permissions

profile_modules

profile_id · varchar(20) (PK; NOT NULL)

module_id · varchar(80) (PK; NOT NULL)

can_view · boolean (NOT NULL)

Finalidade: Módulos visíveis por perfil

Frontend: app/(app)/layout.tsx; components/layout/app-sidebar.tsx

Endpoints: GET /api/auth/session; GET /api/permissions

project_statuses

id · varchar(40) (PK)

code · varchar(40) (NOT NULL)

name · varchar(100) (NOT NULL)

color · varchar(20) (NOT NULL)

display_order · integer (NOT NULL)

active · boolean (NOT NULL)

allows_edit · boolean (NOT NULL)

Finalidade: Catálogo de status

Frontend: components/projects/new-project-form.tsx; app/(app)/relatorios/page.tsx

Endpoints: GET /api/catalogos; GET /api/reports

project_types

id · varchar(40) (PK)
code · varchar(40) (NOT NULL)
name · varchar(100) (NOT NULL)
description · text (NOT NULL)
active · boolean (NOT NULL)

Finalidade: Catálogo de tipos de projeto

Frontend: components/project-form.tsx; hooks/use-catalogs.ts

Endpoints: GET /api/catalogos

system_settings

key · varchar(120) (PK)
value · text (NOT NULL)
value_type · varchar(30) (NOT NULL)
description · text (NOT NULL)
group_name · varchar(80) (NOT NULL)
active · boolean (NOT NULL)

Finalidade: Configurações da plataforma

Frontend: hooks/use-settings.ts

Endpoints: GET /api/settings; PATCH /api/settings

report_types

id · varchar(60) (PK)
code · varchar(60) (NOT NULL)
name · varchar(120) (NOT NULL)

description · text (NOT NULL)

formats · text (NOT NULL)

active · boolean (NOT NULL)

Finalidade: Tipos de relatório

Frontend: app/(app)/relatorios/page.tsx

Endpoints: GET /api/reports; GET /api/report-fields

report_fields

id · varchar(60) (PK)

report_code · varchar(60) (NOT NULL)

field_key · varchar(100) (NOT NULL)

label · varchar(160) (NOT NULL)

source_key · varchar(160) (NOT NULL)

display_order · integer (NOT NULL)

active · boolean (NOT NULL)

Finalidade: Campos configuráveis de relatórios

Frontend: app/(app)/relatorios/page.tsx; components/export-fields-dialog.tsx

Endpoints: GET /api/report-fields

menus

id · varchar(80) (PK)

module_id · varchar(80)

parent_id · varchar(80)

name · varchar(120) (NOT NULL)

route · varchar(180) (NOT NULL)

icon · varchar(80) (NOT NULL)

display_order · integer (NOT NULL)

active · boolean (NOT NULL)

Finalidade: Itens de menu e rotas

Frontend: components/layout/app-sidebar.tsx; lib/nav-config.ts

Endpoints: GET /api/auth/session; GET /api/permissions

projects

id · varchar(36) (PK)

name · varchar(200) (NOT NULL)

code · varchar(50) (NOT NULL)

responsible_area · varchar(160) (NOT NULL)

managers_ids · jsonb (NOT NULL)

write_group · varchar(160) (NOT NULL)

read_group · varchar(160) (NOT NULL)

write_identity_role · varchar(160) (NOT NULL)

read_identity_role · varchar(160) (NOT NULL)

snow_task_number · varchar(120) (NOT NULL)

parent_folder · varchar(500) (NOT NULL)

description · text (NOT NULL)

status · varchar(30) (NOT NULL)

participants_ids · jsonb (NOT NULL)

created_at · timestamptz (NOT NULL)

updated_at · timestamptz (NOT NULL)

Finalidade: Cadastro, gestão e relatórios

Frontend: app/(app)/projetos/page.tsx; app/(app)/projetos/novo/page.tsx; app/(app)/projetos/[id]/page.tsx

Endpoints: GET/POST /api/projects; GET/PATCH/DELETE /api/projects/{id}; GET /api/reports; GET /api/dashboard/summary

project_members

project_id · varchar(36) (PK; NOT NULL)

user_id · varchar(36) (PK; NOT NULL)

role · varchar(40) (NOT NULL)

created_at · timestampz (NOT NULL)

Finalidade: Usuários vinculados aos projetos

Frontend: components/projects/project-members-tab.tsx; app/(app)/projetos/[id]/page.tsx

Endpoints: GET /api/projects/{id}/members; GET /api/projects/{id}/access-map

folders

id · varchar(36) (PK)

project_id · varchar(36) (NOT NULL)

parent_id · varchar(36)

kind · varchar(20) (NOT NULL)

name · varchar(500) (NOT NULL)

size_bytes · bigint (NOT NULL)

mime_type · varchar(160)

created_by · varchar(36) (NOT NULL)

last_viewed_at · timestampz

created_at · timestampz (NOT NULL)

updated_at · timestampz (NOT NULL)

Finalidade: Pastas do projeto, somente leitura

Frontend: components/projects/project-file-explorer.tsx; app/(app)/projetos/[id]/page.tsx

Endpoints: GET /api/folders?projectId={id}

access_requests

id · varchar(36) (PK)

project_id · varchar(36) (NOT NULL)

requester_id · varchar(36) (NOT NULL)

status · varchar(30) (NOT NULL)

created_at · timestampz (NOT NULL)

Finalidade: Solicitações de acesso

Frontend: components/administracao/access-requests-queue.tsx; app/(app)/projetos/[id]/page.tsx

Endpoints: GET/POST /api/access-requests; PATCH /api/access-requests/{id}

activity_logs

id · varchar(36) (PK)

user_id · varchar(36)

action · varchar(100) (NOT NULL)

entity · varchar(100) (NOT NULL)

entity_id · varchar(36)

details · text (NOT NULL)

created_at · timestampz (NOT NULL)

Finalidade: Auditoria das operações

Frontend: app/(app)/logs/page.tsx; hooks/use-activity-logs.ts

Endpoints: GET /api/activity-logs

permission_matrix

id · integer (PK)

matrix · jsonb (NOT NULL)

Finalidade: Matriz consolidada de permissões

Frontend: hooks/use-permissions.ts; componentes de administração

Endpoints: GET/PUT /api/permissions