

NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 FR-DES-006-00

SR.NO	DESCRIPTION	LENGTH	WIDTH	THICKNESS	MATERIAL	QUANTITY	SURFACE AREA/QUANTITY
3	SHEET-1	75.00 mm	60.00 mm	2.00 mm	M.S.	2	14.76 in^2
2	Nut Hex_M5_PARIstd				M.S.	7	0.36 in^2
1	C BRACKET 2	1219.00 mm	195.36 mm	2.00 mm	M.S	1	739.09 in^2

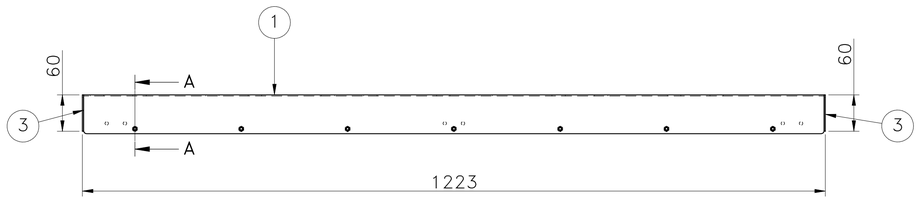

TOP VIEW
SCALE/ECHELLE 1:5



SECTION A-A
SCALE/ECHELLE 1:5

GENERAL WELDING DETAILS FOR UNSPECIFIED WELD JOINTS

1) REFER TABLE FOR UNSPECIFIED BEAD SIZE.


UNSPECIFIED WELD BEAD SIZES IN mm		
MIN. PLATE / SECTION THICKNESS	BEAD SIZE FOR WELD CLASS C & D	BEAD SIZE FOR WELD CLASS B
UPTO 4	2	2
4 UPTO 8	3	4
8 UPTO 12	5	6
ABOVE 12	5	8

2) REFER TABLE BELOW FOR UNSPECIFIED WELD DETAILS.


WELD LENGTH (MM)	WELD CLASS C & D (WELD-PITCH)	WELD CLASS B (WELD-PITCH)
UPTO 250	FULL LENGTH WELD	FULL LENGTH WELD
250 TO 500	50-100	50-100
500 TO 1000	50-150	50-150
ABOVE 1000	100-200	100-200

3) FOR STITCH WELDING, APPLY 25 MM WELD ON END OF WELD SEAM UNLESS SPECIFIED.

PROOF MACHINING NOTE:-(English)
ALL PROFILE EDGES MUST BE PROOF MACHINED.




FRONT VIEW
SCALE/ECHELLE 1:5




R.H. SIDE VIEW
SCALE/ECHELLE 1:5

WELDING NOTES -
1) ALL JOINTS SHOULD BE AS PER TABLES "GENERAL WELDING DETAILS"
2) SUITABLE EDGE PREPARATION TO BE DONE BEFORE WELDING
3) FABRICATED STRUCTURE TOLERANCES SHOULD BE AS PER IS 2102 COARSE GRADE UNLESS SPECIFIED.
4) WELDING SHOULD BE NEAT & CLEAN
5) WELD CLASS - "D"

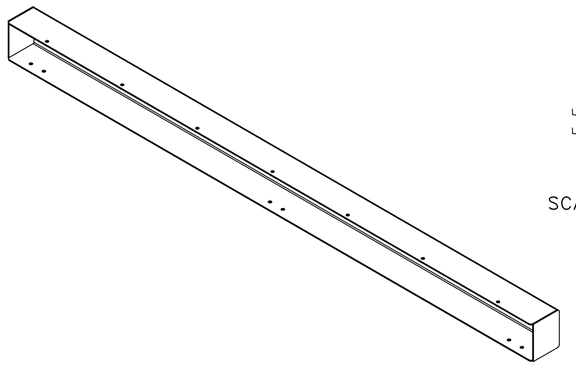

ISOMETRIC VIEW
SCALE/ECHELLE 1:5

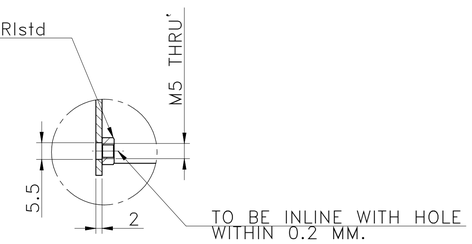

DETAIL B
SCALE/ECHELLE 1:1

NOTE :-(English)
DEBURR ALL UNSPECIFIED HOLES AND SHARP EDGES.

NOTE :-(French)
EBAVUREZ TOUS LES TROUS NON SPÉCIFIÉS ET LES BORDS TRANCHANTS.

#NOTE:- SILVER PAITING TO BE DONE AS MOUNTING IS ON EXTRUSION

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : N.A.

NOTE : (English)
MATERIAL: REFER LIST
FINISH: PAINTING
MACHINING:
WEIGHT(Kg): 3.82 kg

NOTE :-(French)
MATÉRIEL : REFER LIST
FINITION : PAINTING
MACHINES :
POIDS (Kg): 3.82 kg

50 (12.5)

RESERVED SPACE FOR CONTROLLED COPY STAMP

CONTROLLED COPY

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED

UNSP.RADII 0.5 R	UNSP.CHF. 0.5 X 45°
UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm.	
UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'
UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4
UNSPECIFIED TOL.(MFC) FOR ANGULAR IN mm.	
UP TO 10	±1°
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'
UNSPECIFIED TOL.(MFC) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2
LIMITS	
Gen Tol.: IS 2102	

REVISION	DESCRIPTION	DATE	DRN.BY

WIPRO PARI GROUP

www.wiropari.com

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER

DESCRIPTION: LIGHT MTG STRUCTURE
DRAWING TYPE: FAB/MACHINING


SURFACE AREA	SURFACE TREATMENT	MACHINING	DESIGN UNIT	DESIGN UNIT CD.	TEAM NO.	SHEET SIZE
771.14 in^2	#	#	WPES	0300	PL-02	A1
REFERENCE DWG.	---	PART CLASS. B	HEAT TREATMENT	---		

LOCATION : PUNE	DRN.BY	CHKD.BY	APPD.BY	MATERIAL	DRG./PART CODE	REV.	SCALE
	03006330	03004785	03002882	#	P23Y5B076198	00	1 : 5
	13/11/2024	13/11/2024	13/11/2024	NET WEIGHT-Kg 3.82 kg			SHEET 1 OF 2


© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

\\srv01043\c:dm_Uploading\2022--23\P23Y5\P23Y5B076198.dft


NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 FR-DES-006-00

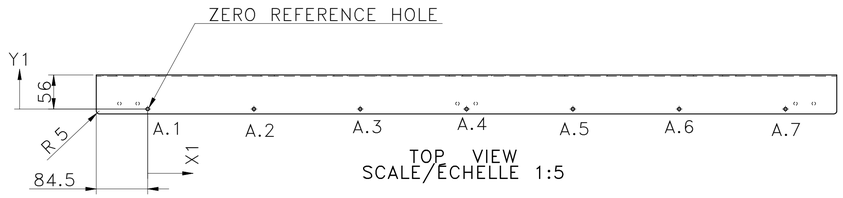


TOP VIEW
SCALE/ECHELLE 1:5

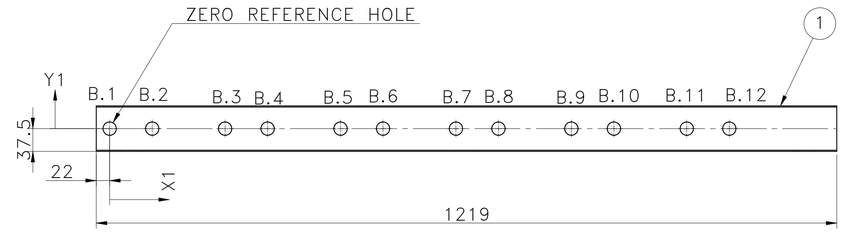

FRONT VIEW
SCALE/ECHELLE 1:5




R.H. SIDE VIEW
SCALE/ECHELLE 1:5

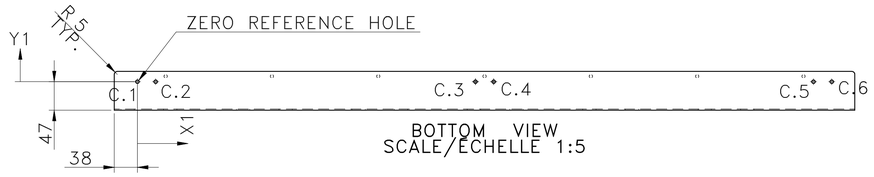

BOTTOM VIEW
SCALE/ECHELLE 1:5

HOLE TABLE FOR TOP VIEW				
Hole	X	Y	Size	REMARK
A.1	0.00	0.00	Ø 5.50 mm THRU'	
A.2	175.00	0.00	Ø 5.50 mm THRU'	
A.3	350.00	0.00	Ø 5.50 mm THRU'	
A.4	525.00	0.00	Ø 5.50 mm THRU'	
A.5	700.00	0.00	Ø 5.50 mm THRU'	
A.6	875.00	0.00	Ø 5.50 mm THRU'	
A.7	1050.00	0.00	Ø 5.50 mm THRU'	

HOLE TABLE FOR FRONT VIEW				
Hole	X	Y	Size	REMARK
B.1	0.00	0.00	Ø 22.00 mm THRU'	
B.2	70.00	0.00	Ø 22.00 mm THRU'	
B.3	190.00	0.00	Ø 22.00 mm THRU'	
B.4	260.00	0.00	Ø 22.00 mm THRU'	
B.5	380.00	0.00	Ø 22.00 mm THRU'	
B.6	450.00	0.00	Ø 22.00 mm THRU'	
B.7	570.00	0.00	Ø 22.00 mm THRU'	
B.8	640.00	0.00	Ø 22.00 mm THRU'	
B.9	760.00	0.00	Ø 22.00 mm THRU'	
B.10	830.00	0.00	Ø 22.00 mm THRU'	
B.11	950.00	0.00	Ø 22.00 mm THRU'	
B.12	1020.00	0.00	Ø 22.00 mm THRU'	

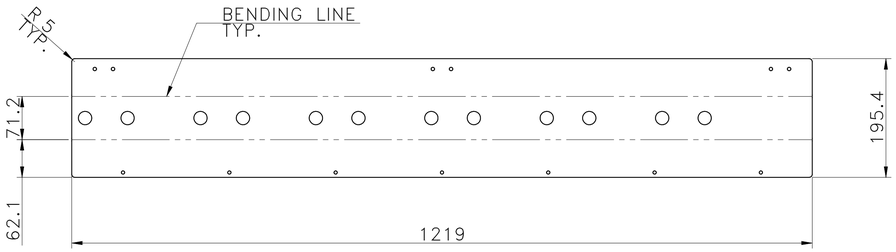


DEVELOPMENT VIEW
SCALE/ECHELLE 1:5



R.H. SIDE VIEW
SCALE/ECHELLE 1:5

HOLE TABLE FOR BOTTOM VIEW				
Hole	X	Y	Size	REMARK
C.1	0.00	0.00	Ø 5.80 mm THRU'	
C.2	30.00	0.00	Ø 5.80 mm THRU'	
C.3	556.50	0.00	Ø 5.80 mm THRU'	
C.4	586.50	0.00	Ø 5.80 mm THRU'	
C.5	1113.00	0.00	Ø 5.80 mm THRU'	
C.6	1143.00	0.00	Ø 5.80 mm THRU'	

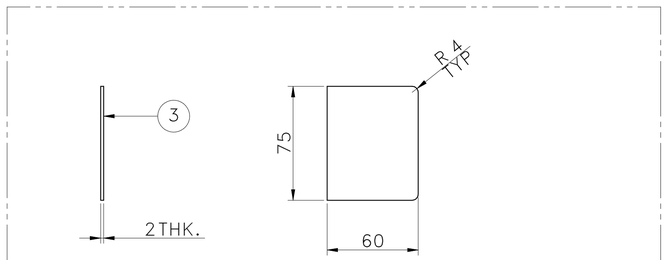

L.H.SIDE VIEW
SCALE/ECHELLE 1:2

DETAIL VIEW
SCALE/ECHELLE 1:2

#NOTE:- SILVER PAITING TO BE DONE AS MOUNTING IS ON EXTRUSION

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : N.A.

TOLERANCE NOTE :- (English)
1) ALL H7 HOLES C.D SHOULD BE CONTROLLED WITHIN +/- 0.02. / IT7
2) ALL HOLES,TAP & COUNTER BORE C.D,
SHOULD BE CONTROLLED WITHIN +/- 0.1

NOTE DE TOLERANCE :- (French)
1) TOUT TROU H7 C.D DOIT ÊTRE CONTRÔLÉ SOUS +/- 0.02 / IT7
2) TOUT TROU ET CONTRE-ALÉSAGE C.D,
DOIT ÊTRE CONTROLÉ SOUS +/- 0.1

NOTE : (English)
MATERIAL: REFER LIST
FINISH: PAINTING
MACHINING: 50 (12.5)
WEIGHT(Kg): 3.82 kg

NOTE :-(French)
MATÉRIEL : REFER LIST
FINITION : PAINTING
MACHINES : 50 (12.5)
POIDS (Kg): 3.82 kg

RESERVED SPACE FOR STAMP

CONTROLLED COPY

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED

UNSP.RADII	UNSP.CHF.
0.5 R	0.5 X 45°

UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm	
UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'

UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4

UNSPECIFIED TOL.(MC) FOR ANGULAR IN mm	
UP TO 10	±1°
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'

UNSPECIFIED TOL.(MC) FOR LINEAR IN mm	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2

LIMITS
Gen Tol.: IS 2102

REVISION	DESCRIPTION	DATE	DRN.BY

www.wipropari.com
1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER

WIPRO PARI GROUP

DESCRIPTION: LIGHT MTG STRUCTURE
DRAWING TYPE: FAB/MACHINING

SURFACE AREA	SURFACE TREATMENT	MACHINING	DESIGN UNIT	DESIGN UNIT CD.	TEAM NO.	SHEET SIZE
771.14 in^2	#	#	WPES	0300	PL-02	A1

REFERENCE DWG. --- PART CLASS. B HEAT TREATMENT ---

LOCATION : PUNE

DRN.BY	CHKD.BY	APPD.BY	MATERIAL
03006330	03004785	03002882	#
13/11/2024	13/11/2024	13/11/2024	NET WEIGHT-Kg 3.82 kg

DRG./PART CODE: P23Y5B076198
REV.: 00
SCALE: 1 : 5
SHEET: 2 OF 2

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

\\srv01043\E,dOM Uploading\2022-23\P23Y5\P23Y5B076198.dlf