

NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 FR-DES-006-00

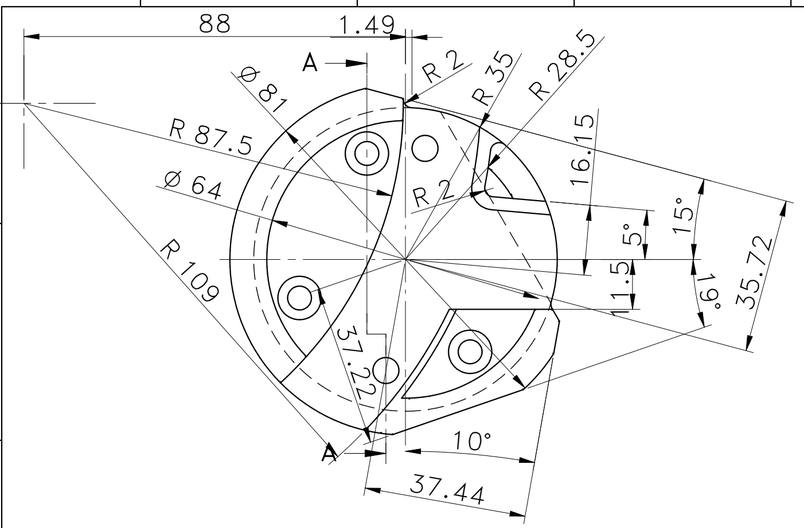

SCALE/ÉCHELLE 1:1

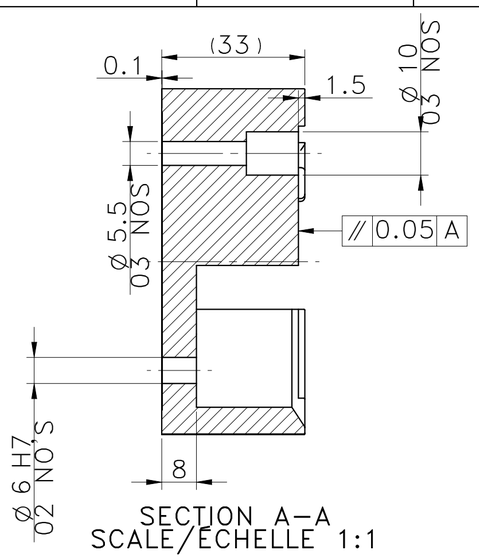


SECTION A–A
SCALE/ÉCHELLE 1:1


HOLE TABLE				
Hole	X	Y	Size	REMARK
A.1	−4.51	25.61	Ø 6.00 mm THRU'	H7
A.2	4.51	−25.61	Ø 6.00 mm THRU'	H7
B.1	−24.43	8.89	Ø 5.50 mm THRU' C'BORE Ø 10.00 mm – 12.00 mm DEEP	REF SEC A–A
B.2	−8.89	−24.43	Ø 5.50 mm THRU' C'BORE Ø 10.00 mm – 12.00 mm DEEP	REF SEC A–A
B.3	14.91	21.30	Ø 5.50 mm THRU' C'BORE Ø 10.00 mm – 12.00 mm DEEP	REF SEC A–A

TOLERANCE NOTE:–

ALL H7 HOLES C.D. SHOULD BE CONTROLLED WITHIN ±0.02 / IT7
ALL HOLES,TAP & COUNTER BORE C.D.
SHOULD BE CONTROLLED WITHIN ± 0.2

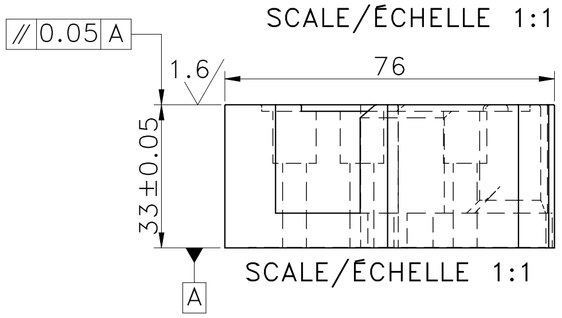


SCALE/ÉCHELLE 1:1



SCALE/ÉCHELLE 1:2

NOTE :–(English)
DEBURR ALL UNSPECIFIED HOLES AND SHARP EDGES.

NOTE :–(French)
ÉBAVUREZ TOUS LES TROUS NON SPÉCIFIÉS
ET LES BORDS TRANCHANTS.

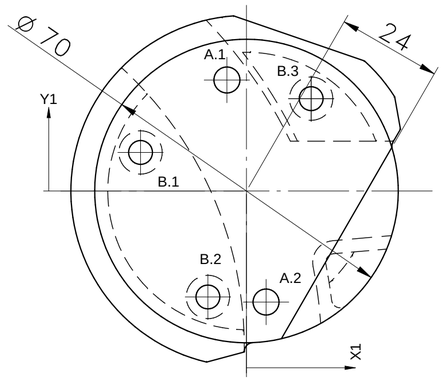

SCALE/ÉCHELLE 1:1

HEAT TREATMENT NOTE :–
1) TO BE CASE HARDENED UPTO 56~60 HRC.
2) CASE DEPTH 0.8~1.2mm.
3) THREADS TO BE KEEP SOFT.
4) RETAPPING TO BE DONE AFTER SURFACE TREATMENT AT SUPPLIER END.(IF APPLICABLE

NOTE : (English)
MATERIAL: Steel – Alloyed:1.7147 , 20MnCr5
FINISH: I.Z.B.P. (TRIVALENT)
MACHINING: 3.2 (1.6)
WEIGHT(Kg): 0.73 kg

NOTE :–(French)
MATÉRIEL : Steel – Alloyed:1.7147 , 20MnCr5
FINITION : I.Z.B.P. (TRIVALENT)
MACHINES : 3.2 (1.6)
POIDS (Kg): 0.73 kg

RESERVED SPACE FOR

CONTROLLED COPY

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : NA

REVISION	DESCRIPTION	DATE	DRN.BY
.	.	.	.
.	.	.	.

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED	
UNSP.RADII 0.5 R	UNSP.CHF. 0.5 X 45°

UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm.	
UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'

UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4

UNSPECIFIED TOL.(M/C) FOR ANGULAR IN mm.	
UP TO 10	±1°
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'

UNSPECIFIED TOL.(M/C) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2
LIMITS	
Gen Tol.: IS 2102	

wipro PARI
www.wipropari.com

WIPRO PARI GROUP

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER
LOCATION : PUNE

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

DESCRIPTION						DRAWING TYPE
FIXTURE						MACHINING
SURFACE AREA	SURFACE TREATMENT	MACHINING	DESIGN UNIT	DESIGN UNIT CD.	TEAM NO.	SHEET SIZE
33.58 in^2	#	#	WPES	0300	PL-02	A2
REFERENCE DWG.		PART CLASS. B	HEAT TREATMENT			

DRN.BY	CHKD.BY	APPD.BY	MATERIAL	DRG./PART CODE	REV.	SCALE
03006128	03004785	03002882	#	P23Y5B071035	00	1 : 1
08/05/2024	08/05/2024	08/05/2024	NET WEIGHT-Kg 0.73 kg			SHEET 1 OF 1

\\srv01102\ExDM Uploading\2022-23\P23Y5\P23Y5B071035.dft