NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 FR-DES-006-00

H.T.PROCESS	: CASE HARDENING
HARDNESS & DEPTH	: 56~60 HRC & 0.8 TO 2 mm.
FINISH & DEPTH	: IZBP
TEST COUPON SIZE	:(∅8 x 20mm LENGTH - 01NOS)
WELD CLASS	: B IF APPLICABLE

MTC REPORT REQURIED
NON DESTRUCTIVE TESTING

RAW MATERIAL	HEAT TREATMENT	FINISH COMPOMENT
UT	DP+UT	MPI



DETAIL A
SCALE 2:1

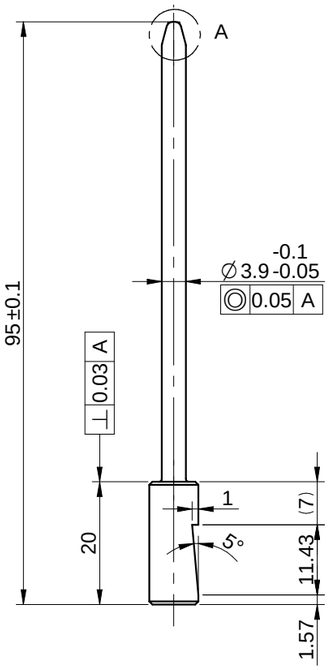

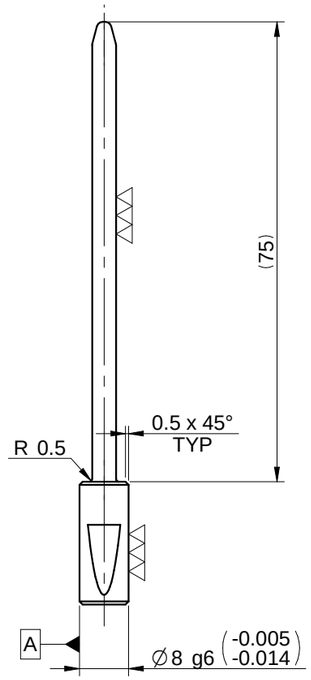



NOTE :
MATERIAL : 20MnCr5
FINISH : I.Z.B.P. (TRIVALENT)
MACHINING : ▽▽(▽▽▽)

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : W

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED	
UNSP.RADII 0.5 R	UNSP.CHF. 0.5 X 45°
UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm.	
UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'
UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4
UNSPECIFIED TOL.(M/C) FOR ANGULAR IN mm.	
UP TO 10	±1°
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'
UNSPECIFIED TOL.(M/C) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2
LIMITS	
Gen Tol.: IS 2102	

REVISION	DESCRIPTION	DATE	DRN.BY
	.	.	.
	.	.	.

CONTROLLED COPY

CONTROLLED COPY STAMP

www.wipropari.com

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER
LOCATION : PUNE

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

WIPRO PARI GROUP

DESCRIPTION: **PIN**

DRAWING TYPE: MACHINING

SURFACE AREA	SURFACE TREATMENT	MACHINING	DESIGN UNIT	DESIGN UNIT CD.	TEAM NO.	SHEET SIZE
2.30 in^2	#	#	WPR	0300	PL-02	A3

REFERENCE DWG. PAT49A043217 | PART CLASS. T+S | HEAT TREATMENT REFER NOTE

DRN.BY	CHKD.BY	APPD.BY	MATERIAL	DRG./PART CODE	REV.	SCALE
80151926	80151522	03002882	#	PRP87C105089	00	1 : 2
26/11/2025	26/11/2025	26/11/2025	NET WEIGHT-Kg 0.01 kg			SHEET 1 OF 1

\\parienggnew\BT10ENGG\20-21\PRP87_GMET4 Crank\EXDM Uploading\PRP87C105089.dft