NOTE : STANDARD FASTENER TORQUE AS PER PST-DES-01 PFR-DES-07-REV-05

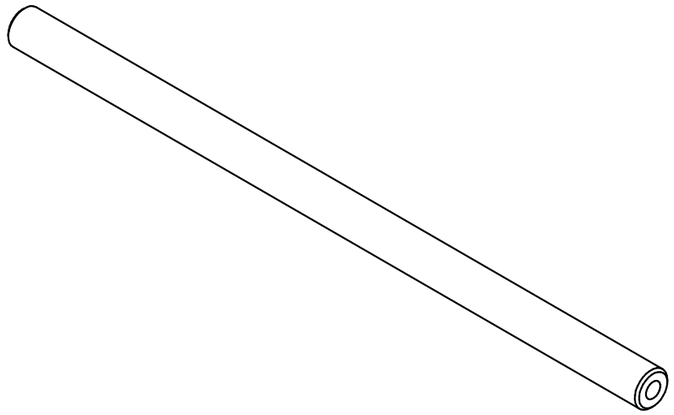

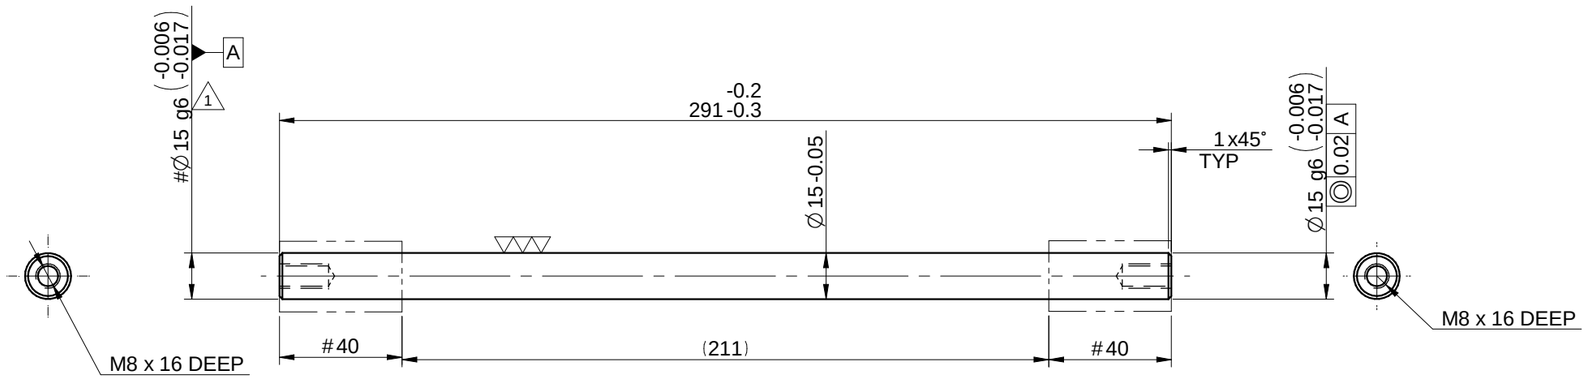

NOTE :
MATERIAL : EN9 2
FINISH : IZBP
MACHINING : ▽▽(▽▽▽)

HEAT TREATMENT :-
1) TO BE TOUGHENED UPTO 24-32 HRC.
2) RETAPPING TO BE DONE AFTER SURFACE TREATMENT AT SUPPLIER END.(IF APPLICABLE)

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : NA

NOTE-
MAINTAIN ∅15g6 UP TO 40MM BOTH SIDE END

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED	
UNSP.RADII 0.5 R	UNSP.CHF. 0.5 X 45°

UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm.	
UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'

UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4

UNSPECIFIED TOL.(M/C) FOR ANGULAR IN mm.	
UP TO 10	±1°
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'

UNSPECIFIED TOL.(M/C) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2
LIMITS	
Gen Tol.: IS 2102	

REVISION	DESCRIPTION	DATE	DRN.BY
2	MATERIAL CHANGE	23/11/2023	6144
1	TOLERANCE CHANGE g6 (WAS K6)	30/08/2023	ASHVIN

www.wipropari.com

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER
LOCATION : PUNE

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

RESERVED SPACE FOR
CONTROLLED COPY

WIPRO PARI PRIVATE LIMITED

[Formerly Known as Precision Automation and Robotics India Limited]

DESCRIPTION: **SHAFT**

DRAWING TYPE: MACHINING

SURFACE AREA	FINISH	MACHINING	MATERIAL	NET WEIGHT-Kg	TEAM NO.	SHEET SIZE
22.77 in^2	#	#	#	0.39 kg	PL 02	A3

SURFACE FINISH ▽▽▽▽ ▽▽▽ ▽▽ ▽ HEAT TREATMENT ---

DRN.BY	CHKD.BY	APPD.BY	REFERENCE DWG.	DRG./PART CODE	REV.	SCALE
PRATIK P	KPP	SHIVA G	----	PRV73E028040	02	1 : 2
23/11/2023	23/11/2023	23/11/2023	PART CLASS. B			SHEET 1 OF 1

\\srv01043\ExDM Uploading\2022-23\PRV73\PRV73E028040.dft