

C Generics – Void *

Instructor: Jeeho Ryoo

What is this?



Question: How can we use our knowledge of memory and data representation to write code that works with any data type?

Learning Goals

Learn how to write C code that works with any data type.

Learn about how to use void * and avoid potential pitfalls.

Generics

- We always strive to write code that is as general-purpose as possible.
- Generic code reduces code duplication and means you can make improvements and fix bugs in one place rather than many.
- Generics is used throughout C for functions to sort any array, search any array, free arbitrary memory, and more.
- How can we write generic code in C?

Swap

You're asked to write a function that swaps two numbers.

```
void swap_int(int *a, int *b) {
    int temp = *a;
    *a = *b;
    *b = temp;
}

int main(int argc, char *argv[]) {
    int x = 2;
    int y = 5;
    swap_int(&x, &y);
    // want x = 5, y = 2
    printf("x = %d, y = %d\n", x, y);
    return 0;
}
```

Swap

You're asked to write a function that swaps two numbers.

```
void swap_int(int *a, int *b) {  
    int temp = *a;  
    *a = *b;  
    *b = temp;  
}
```

```
int main(int argc, char *argv[]) {  
    int x = 2;  
    int y = 5;  
    swap_int(&x, &y);  
    // want x = 5, y = 2  
    printf("x = %d, y = %d\n", x, y);  
    return 0;  
}
```

main()

Stack		Address	Value
		x 0xff14	2
		y 0xff10	5
			...

Swap

You're asked to write a function that swaps two numbers.

```
void swap_int(int *a, int *b) {
```

```
    int temp = *a;
```

```
    *a = *b;
```

```
    *b = temp;
```

```
}
```

main()

swap_int()

```
int main(int argc, char *argv[]) {
```

```
    int x = 2;
```

```
    int y = 5;
```

```
    swap_int(&x, &y);
```

```
    // want x = 5, y = 2
```

```
    printf("x = %d, y = %d\n", x, y);
```

```
    return 0;
```

```
}
```

		Stack
		Value
Address		
		...
x	0xff14	2
y	0xff10	5
		...
b	0xf18	0xff10
a	0xf10	0xff14
		...

Swap

You're asked to write a function that swaps two numbers.

```
void swap_int(int *a, int *b) {  
    int temp = *a;  
    *a = *b;  
    *b = temp;  
}
```

```
int main(int argc, char *argv[]) {  
    int x = 2;  
    int y = 5;  
    swap_int(&x, &y);  
    // want x = 5, y = 2  
    printf("x = %d, y = %d\n", x, y);  
    return 0;  
}
```

main()

swap_int()

		Stack
		Value
Address		
		...
x 0xff14		2
y 0xff10		5
		...
b 0xf18		0xff10
a 0xf10		0xff14
temp 0xf0c		2
		...

Swap

You're asked to write a function that swaps two numbers.

```
void swap_int(int *a, int *b) {  
    int temp = *a;  
    *a = *b;  
    *b = temp;  
}
```

```
int main(int argc, char *argv[]) {  
    int x = 2;  
    int y = 5;  
    swap_int(&x, &y);  
    // want x = 5, y = 2  
    printf("x = %d, y = %d\n", x, y);  
    return 0;  
}
```

main()

swap_int()

		Stack
		Value
Address		
		...
x	0xff14	5
y	0xff10	5
		...
b	0xf18	0xff10
a	0xf10	0xff14
temp	0xf0c	2
		...

Swap

You're asked to write a function that swaps two numbers.

```
void swap_int(int *a, int *b) {  
    int temp = *a;  
    *a = *b;  
    *b = temp;  
}
```

```
int main(int argc, char *argv[]) {  
    int x = 2;  
    int y = 5;  
    swap_int(&x, &y);  
    // want x = 5, y = 2  
    printf("x = %d, y = %d\n", x, y);  
    return 0;  
}
```

main()

swap_int()

		Stack
		Value
Address		
		...
x 0xff14		5
y 0xff10		2
		...
b 0xf18		0xff10
a 0xf10		0xff14
temp 0xf0c		2
		...

Swap

You're asked to write a function that swaps two numbers.

```
void swap_int(int *a, int *b) {  
    int temp = *a;  
    *a = *b;  
    *b = temp;  
}
```

```
int main(int argc, char *argv[]) {  
    int x = 2;  
    int y = 5;  
    swap_int(&x, &y);  
    // want x = 5, y = 2  
    printf("x = %d, y = %d\n", x, y);  
    return 0;  
}
```

main()

		Stack
		Value
main()	x 0xff14	...
	y 0xff10	5
		2
		...

Swap

You're asked to write a function that swaps two numbers.

```
void swap_int(int *a, int *b) {  
    int temp = *a;  
    *a = *b;  
    *b = temp;  
}
```

```
int main(int argc, char *argv[]) {  
    int x = 2;  
    int y = 5;  
    swap_int(&x, &y);  
    // want x = 5, y = 2  
    printf("x = %d, y = %d\n", x, y);  
    return 0;  
}
```

main()



		Stack
		Value
Address		
	x	0xff14
	y	0xff10
		...

Swap

You're asked to write a function that swaps two numbers.

```
void swap_int(int *a, int *b) {  
    int temp = *a;  
    *a = *b;  
    *b = temp;  
}
```

```
int main(int argc, char *argv[]) {  
    int x = 2;  
    int y = 5;  
    swap_int(&x, &y);  
    // want x = 5, y = 2  
    printf("x = %d, y = %d\n", x, y);  
    return 0;  
}
```

main()

		Stack
		Value
main()	x 0xff14	...
	y 0xff10	5
		2
		...

“Oh, when I said ‘numbers’ I meant shorts, not ints.”

Swap

```
void swap_short(short *a, short *b) {  
    short temp = *a;  
    *a = *b;  
    *b = temp;  
}  
  
int main(int argc, char *argv[]) {  
    short x = 2;  
    short y = 5;  
    swap_short(&x, &y);  
    // want x = 5, y = 2  
    printf("x = %d, y = %d\n", x, y);  
    return 0;  
}
```


Swap

```
void swap_short(short *a, short *b) {  
    short temp = *a;  
    *a = *b;  
    *b = temp;  
}
```

```
int main(int argc, char *argv[]) {  
    short x = 2;  
    short y = 5;  
    swap_short(&x, &y);  
    // want x = 5, y = 2  
    printf("x = %d, y = %d\n", x, y);  
    return 0;  
}
```

main()

swap_short()

		Stack
		Value
Address		
x	0xff12	2
y	0xff10	5
		...
b	0xf18	0xff10
a	0xf10	0xff12
temp	0xf0e	2
		...

“You know what, I goofed. We’re going to use strings. Could you write something to swap those?”


Swap

```
void swap_string(char **a, char **b) {  
    char *temp = *a;  
    *a = *b;  
    *b = temp;  
}  
  
int main(int argc, char *argv[]) {  
    char *x = "2";  
    char *y = "5";  
    swap_string(&x, &y);  
    // want x = 5, y = 2  
    printf("x = %s, y = %s\n", x, y);  
  
    return 0;  
}
```

Swap

```
void swap_string(char **a, char **b) {  
    char *temp = *a;  
    *a = *b;  
    *b = temp;  
}
```


```
int main(int argc, char *argv[]) {  
    char *x = "2";  
    char *y = "5";  
    swap_string(&x, &y);  
    // want x = 5, y = 2  
    printf("x = %s, y = %s\n", x, y);  
  
    return 0;  
}
```

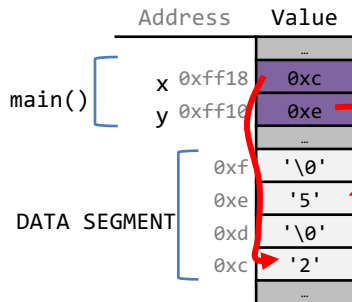

Swap

```
void swap_string(char **a, char **b) {  
    char *temp = *a;  
    *a = *b;  
    *b = temp;  
}
```


```
int main(int argc, char *argv[]) {  
    char *x = "2";  
    char *y = "5";  
    swap_string(&x, &y);  
    // want x = 5, y = 2  
    printf("x = %s, y = %s\n", x, y);  
    return 0;  
}
```

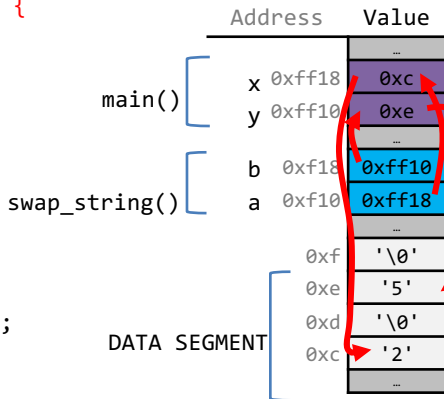

Swap

```
void swap_string(char **a, char **b) {  
    char *temp = *a;  
    *a = *b;  
    *b = temp;  
}
```


```
int main(int argc, char *argv[]) {  
    char *x = "2";  
    char *y = "5";  
    swap_string(&x, &y);  
    // want x = 5, y = 2  
    printf("x = %s, y = %s\n", x, y);  
    return 0;  
}
```

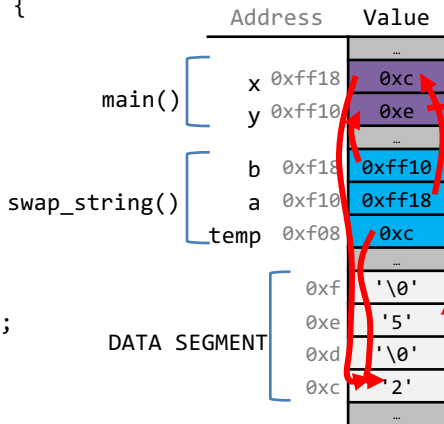

Swap

```
void swap_string(char **a, char **b) {  
    char *temp = *a;  
    *a = *b;  
    *b = temp;  
}
```


```
int main(int argc, char *argv[]) {  
    char *x = "2";  
    char *y = "5";  
    swap_string(&x, &y);  
    // want x = 5, y = 2  
    printf("x = %s, y = %s\n", x, y);  
    return 0;  
}
```

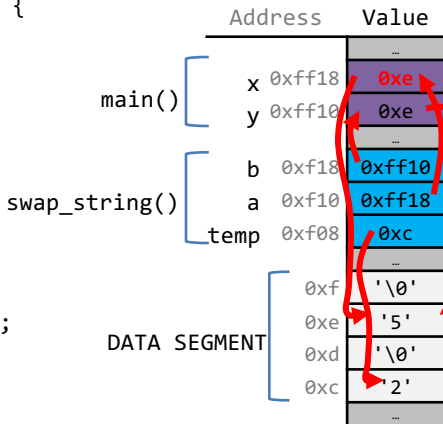

Swap

```
void swap_string(char **a, char **b) {  
    char *temp = *a;  
    *a = *b;  
    *b = temp;  
}
```


```
int main(int argc, char *argv[]) {  
    char *x = "2";  
    char *y = "5";  
    swap_string(&x, &y);  
    // want x = 5, y = 2  
    printf("x = %s, y = %s\n", x, y);  
    return 0;  
}
```

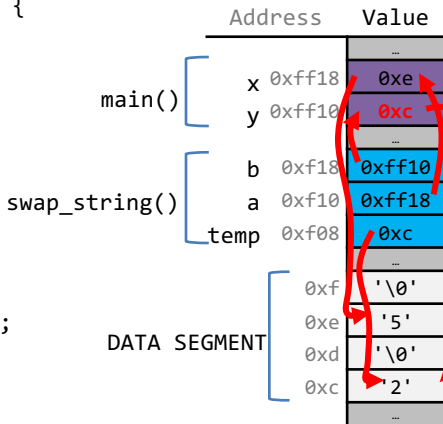

Swap

```
void swap_string(char **a, char **b) {  
    char *temp = *a;  
    *a = *b;  
    *b = temp;  
}
```


```
int main(int argc, char *argv[]) {  
    char *x = "2";  
    char *y = "5";  
    swap_string(&x, &y);  
    // want x = 5, y = 2  
    printf("x = %s, y = %s\n", x, y);  
  
    return 0;  
}
```

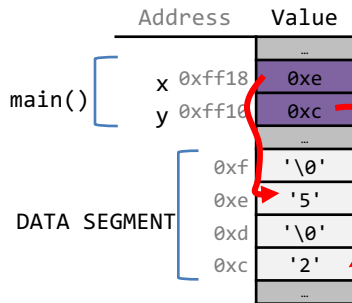

Swap

```
void swap_string(char **a, char **b) {  
    char *temp = *a;  
    *a = *b;  
    *b = temp;  
}
```


```
int main(int argc, char *argv[]) {  
    char *x = "2";  
    char *y = "5";  
    swap_string(&x, &y);  
    // want x = 5, y = 2  
    printf("x = %s, y = %s\n", x, y);  
  
    return 0;  
}
```

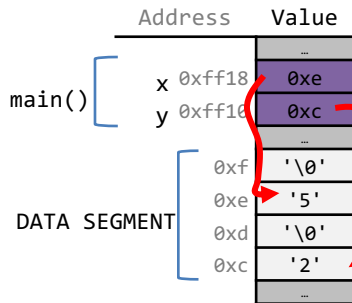

Swap

```
void swap_string(char **a, char **b) {  
    char *temp = *a;  
    *a = *b;  
    *b = temp;  
}
```

```
int main(int argc, char *argv[]) {  
    char *x = "2";  
    char *y = "5";  
    swap_string(&x, &y);  
    // want x = 5, y = 2  
    printf("x = %s, y = %s\n", x, y);  
  
    return 0;  
}
```

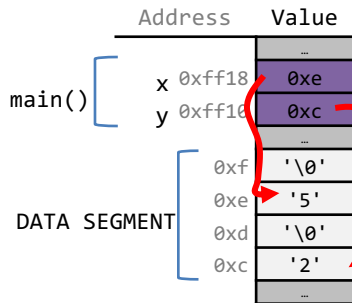

"Awesome! Thanks. We also have 20 custom struct types. Could you write swap for those too?"

Generic Swap

What if we could write *one* function to swap two values of any single type?

```
void swap_int(int *a, int *b) { ... }  
void swap_float(float *a, float *b) { ... }  
void swap_size_t(size_t *a, size_t *b) { ... }  
void swap_double(double *a, double *b) { ... }  
void swap_string(char **a, char **b) { ... }  
void swap_mystruct(mystruct *a, mystruct *b) { ... }  
...
```

Generic Swap

```
void swap_int(int *a, int *b) {  
    int temp = *a;  
    *a = *b;  
    *b = temp;  
}
```

```
void swap_short(short *a, short *b) {  
    short temp = *a;  
    *a = *b;  
    *b = temp;  
}
```

```
void swap_string(char **a, char **b) {  
    char *temp = *a;  
    *a = *b;  
    *b = temp;  
}
```

Generic Swap

```
void swap_int(int *a, int *b) {  
    int temp = *a;  
    *a = *b;  
    *b = temp;  
}
```

```
void swap_short(short *a, short *b) {  
    short temp = *a;  
    *a = *b;  
    *b = temp;  
}
```

```
void swap_string(char **a, char **b) {  
    char *temp = *a;  
    *a = *b;  
    *b = temp;  
}
```

All 3:

- Take pointers to values to swap
- Create temporary storage to store one of the values
- Move data at **b** into where **a** points
- Move data in temporary storage into where **b** points

Generic Swap

```
void swap(pointer to data1, pointer to data2) {  
    store a copy of data1 in temporary storage  
    copy data2 to location of data1  
    copy data in temporary storage to location of data2  
}
```


Generic Swap

```
void swap(pointer to data1, pointer to data2) {  
    store a copy of data1 in temporary storage  
    copy data2 to location of data1  
    copy data in temporary storage to location of data2  
}
```

4 bytes

```
int temp = *data1ptr;
```

2 bytes

```
short temp = *data1ptr;
```

8 bytes

```
char *temp = *data1ptr;
```

Problem: each type may need a different size temp! (modern machine * = 8B)

Generic Swap

```
void swap(pointer to data1, pointer to data2) {  
    store a copy of data1 in temporary storage  
    copy data2 to location of data1  
    copy data in temporary storage to location of data2  
}
```

4 bytes

```
int temp = *data1ptr;
```

2 bytes

```
short temp = *data1ptr;
```

8 bytes

```
char *temp = *data1ptr;
```

Problem: each type needs to copy a different amount of data!

Generic Swap

```
void swap(pointer to data1, pointer to data2) {  
    store a copy of data1 in temporary storage  
    copy data2 to location of data1  
    copy data in temporary storage to location of data2  
}
```

4 bytes

```
int temp = *data1ptr;
```

2 bytes

```
short temp = *data1ptr;
```

8 bytes

```
char *temp = *data1ptr;
```

Problem: each type needs to copy a different amount of data!

C knows the size of temp, and knows how many bytes to copy, because of the variable types.

**Is there a way to make a version
that doesn't care about the variable
types?**

Generic Swap

```
void swap(pointer to data1, pointer to data2) {  
    store a copy of data1 in temporary storage  
    copy data2 to location of data1  
    copy data in temporary storage to location of data2  
}
```

Generic Swap

```
void swap(pointer to data1, pointer to data2) {  
    store a copy of data1 in temporary storage  
    copy data2 to location of data1  
    copy data in temporary storage to location of data2  
}
```

Generic Swap

```
void swap(void *data1ptr, void *data2ptr) {  
    store a copy of data1 in temporary storage  
    copy data2 to location of data1  
    copy data in temporary storage to location of data2  
}
```


Generic Swap

```
void swap(void *data1ptr, void *data2ptr) {  
    // store a copy of data1 in temporary storage  
    // copy data2 to location of data1  
    // copy data in temporary storage to location of data2  
}
```

Generic Swap

```
void swap(void *data1ptr, void *data2ptr) {  
    // store a copy of data1 in temporary storage  
    // copy data2 to location of data1  
    // copy data in temporary storage to location of data2  
}
```

If we don't know the data type, we don't know how many bytes it is. Let's take that as another parameter.

Generic Swap

```
void swap(void *data1ptr, void *data2ptr, size_t nbytes) {  
    // store a copy of data1 in temporary storage  
    // copy data2 to location of data1  
    // copy data in temporary storage to location of data2  
}
```

If we don't know the data type, we don't know how many bytes it is. Let's take that as another parameter.

Generic Swap

```
void swap(void *data1ptr, void *data2ptr, size_t nbytes) {  
    // store a copy of data1 in temporary storage  
    // copy data2 to location of data1  
    // copy data in temporary storage to location of data2  
}
```

Let's start by making space to store the temporary value. How can we make **nbytes** of temp space?

Generic Swap

```
void swap(void *data1ptr, void *data2ptr, size_t nbytes) {  
    void temp; ???  
    // store a copy of data1 in temporary storage  
    // copy data2 to location of data1  
    // copy data in temporary storage to location of data2  
}
```

Let's start by making space to store the temporary value. How can we make **nbytes** of temp space?

Generic Swap

```
void swap(void *data1ptr, void *data2ptr, size_t nbytes) {  
    char temp[nbytes];  
    // store a copy of data1 in temporary storage  
    // copy data2 to location of data1  
    // copy data in temporary storage to location of data2  
}
```

temp is **nbytes** of memory,
since each **char** is 1 byte!

Generic Swap

```
void swap(void *data1ptr, void *data2ptr, size_t nbytes) {  
    char temp[nbytes];  
    // store a copy of data1 in temporary storage  
    // copy data2 to location of data1  
    // copy data in temporary storage to location of data2  
}
```

Now, how can we copy in what
data1ptr points to into **temp**?

Generic Swap

```
void swap(void *data1ptr, void *data2ptr, size_t nbytes) {  
    char temp[nbytes];  
    // store a copy of data1 in temporary storage  
    temp = *data1ptr; ???  
    // copy data2 to location of data1  
    // copy data in temporary storage to location of data2  
}
```

Now, how can we copy in what
data1ptr points to into **temp**?

Generic Swap

```
void swap(void *data1ptr, void *data2ptr, size_t nbytes) {  
    char temp[nbytes];  
    // store a copy of data1 in temporary storage  
    temp = *data1ptr; ???  
    // copy data2 to location of data1  
    // copy data in temporary storage to location of data2  
}
```

We can't dereference a **void *** (or set an array equal to something). C doesn't know what it points to! Therefore, it doesn't know how many bytes there it should be looking at.

memcpy

memcpy is a function that copies a specified amount of bytes at one address to another address.

```
void *memcpy(void *dest, const void *src, size_t n);
```

It copies the next *n* bytes that *src* points to to the location contained in *dest*. (It also returns **dest**). It does not support regions of memory that overlap.

```
int x = 5;  
int y = 4;  
memcpy(&x, &y, sizeof(x)); // like x = y
```

memcpy must take **pointers** to the bytes to work with to know where they live and where they should be copied to.

memmove



memmove is the same as `memcpy`, but supports overlapping regions of memory. (Unlike its name implies, it still “copies”).

```
void *memmove(void *dest, const void *src, size_t n);
```

It copies the next `n` bytes that `src` points to to the location contained in `dest`. (It also returns **`dest`**).

memmove

When might memmove be useful?



Generic Swap

```
void swap(void *data1ptr, void *data2ptr, size_t nbytes) {  
    char temp[nbytes];  
    // store a copy of data1 in temporary storage  
    temp = *data1ptr; ???  
    // copy data2 to location of data1  
    // copy data in temporary storage to location of data2  
}
```

We can't dereference a **void ***. C doesn't know what it points to! Therefore, it doesn't know how many bytes there it should be looking at.

Generic Swap

```
void swap(void *data1ptr, void *data2ptr, size_t nbytes) {  
    char temp[nbytes];  
    // store a copy of data1 in temporary storage  
    temp = *data1ptr; ???  
    // copy data2 to location of data1  
    // copy data in temporary storage to location of data2  
}
```

How can **memcpy** or **memmove** help us here?

```
void *memcpy(void *dest, const void *src, size_t n);
```

```
void *memmove(void *dest, const void *src, size_t n);
```

Generic Swap

```
void swap(void *data1ptr, void *data2ptr, size_t nbytes) {  
    char temp[nbytes];  
    // store a copy of data1 in temporary storage  
    memcpy(temp, data1ptr, nbytes);  
    // copy data2 to location of data1  
    // copy data in temporary storage to location of data2  
}
```

Generic Swap

```
void swap(void *data1ptr, void *data2ptr, size_t nbytes) {  
    char temp[nbytes];  
    // store a copy of data1 in temporary storage  
    memcpy(temp, data1ptr, nbytes);  
    // copy data2 to location of data1  
    // copy data in temporary storage to location of data2  
}
```

We can copy the bytes ourselves into temp! This is equivalent to **temp = *data1ptr** in non-generic versions, but this works for *any* type of *any* size.

Generic Swap

```
void swap(void *data1ptr, void *data2ptr, size_t nbytes) {  
    char temp[nbytes];  
    // store a copy of data1 in temporary storage  
    memcpy(temp, data1ptr, nbytes);  
    // copy data2 to location of data1  
    // copy data in temporary storage to location of data2  
}
```

How can we copy data2 to the location of data1?

Generic Swap

```
void swap(void *data1ptr, void *data2ptr, size_t nbytes) {  
    char temp[nbytes];  
    // store a copy of data1 in temporary storage  
    memcpy(temp, data1ptr, nbytes);  
    // copy data2 to location of data1  
    *data1ptr = *data2ptr; ???  
    // copy data in temporary storage to location of data2  
}
```

How can we copy data2 to the location of data1?

Generic Swap

```
void swap(void *data1ptr, void *data2ptr, size_t nbytes) {  
    char temp[nbytes];  
    // store a copy of data1 in temporary storage  
    memcpy(temp, data1ptr, nbytes);  
    // copy data2 to location of data1  
    memcpy(data1ptr, data2ptr, nbytes);  
    // copy data in temporary storage to location of data2  
}
```

How can we copy data2 to the location of data1?
memcpy!

Generic Swap

```
void swap(void *data1ptr, void *data2ptr, size_t nbytes) {  
    char temp[nbytes];  
    // store a copy of data1 in temporary storage  
    memcpy(temp, data1ptr, nbytes);  
    // copy data2 to location of data1  
    memcpy(data1ptr, data2ptr, nbytes);  
    // copy data in temporary storage to location of data2  
}
```

How can we copy temp's data to the location of data2?

Generic Swap

```
void swap(void *data1ptr, void *data2ptr, size_t nbytes) {  
    char temp[nbytes];  
    // store a copy of data1 in temporary storage  
    memcpy(temp, data1ptr, nbytes);  
    // copy data2 to location of data1  
    memcpy(data1ptr, data2ptr, nbytes);  
    // copy data in temporary storage to location of data2  
    memcpy(data2ptr, temp, nbytes);  
}
```

How can we copy temp's data to the location of data2? **memcpy!**

Generic Swap

```
void swap(void *data1ptr, void *data2ptr, size_t nbytes) {  
    char temp[nbytes];  
    // store a copy of data1 in temporary storage  
    memcpy(temp, data1ptr, nbytes);  
    // copy data2 to location of data1  
    memcpy(data1ptr, data2ptr, nbytes);  
    // copy data in temporary storage to location of data2  
    memcpy(data2ptr, temp, nbytes);  
}
```

```
int x = 2;  
int y = 5;  
swap(&x, &y, sizeof(x));
```

Generic Swap

```
void swap(void *data1ptr, void *data2ptr, size_t nbytes) {  
    char temp[nbytes];  
    // store a copy of data1 in temporary storage  
    memcpy(temp, data1ptr, nbytes);  
    // copy data2 to location of data1  
    memcpy(data1ptr, data2ptr, nbytes);  
    // copy data in temporary storage to location of data2  
    memcpy(data2ptr, temp, nbytes);  
}
```

```
short x = 2;  
short y = 5;  
swap(&x, &y, sizeof(x));
```

Generic Swap

```
void swap(void *data1ptr, void *data2ptr, size_t nbytes) {  
    char temp[nbytes];  
    // store a copy of data1 in temporary storage  
    memcpy(temp, data1ptr, nbytes);  
    // copy data2 to location of data1  
    memcpy(data1ptr, data2ptr, nbytes);  
    // copy data in temporary storage to location of data2  
    memcpy(data2ptr, temp, nbytes);  
}
```

```
char *x = "2";  
char *y = "5";  
swap(&x, &y, sizeof(x));
```


Generic Swap

```
void swap(void *data1ptr, void *data2ptr, size_t nbytes) {  
    char temp[nbytes];  
    // store a copy of data1 in temporary storage  
    memcpy(temp, data1ptr, nbytes);  
    // copy data2 to location of data1  
    memcpy(data1ptr, data2ptr, nbytes);  
    // copy data in temporary storage to location of data2  
    memcpy(data2ptr, temp, nbytes);  
}
```

```
mystruct x = {...};  
mystruct y = {...};  
swap(&x, &y, sizeof(x));
```

C Generics

We can use **void *** and **memcpy** to handle memory as generic bytes. If we are given where the data of importance is, and how big it is, we can handle it!

```
void swap(void *data1ptr, void *data2ptr, size_t nbytes)
{
    char temp[nbytes];
    memcpy(temp, data1ptr, nbytes);
    memcpy(data1ptr, data2ptr, nbytes);
    memcpy(data2ptr, temp, nbytes);
}
```

Void * Pitfalls

void *s are powerful, but dangerous - C cannot do as much checking!

E.g. with **int**, C would never let you swap *half* of an int. With **void** *s, this can happen! (*How? Let's find out!*)

Demo: Void *s Gone Wrong



swap.c

Void *Pitfalls

Void * has more room for error because it manipulates arbitrary bytes without knowing what they represent. This can result in some strange memory Frankensteins!

Swap Ends

You're asked to write a function that swaps the first and last elements in an array of numbers.

```
void swap_ends_int(int *arr, size_t nelems) {  
    int tmp = arr[0];  
    arr[0] = arr[nelems - 1];  
    arr[nelems - 1] = tmp;  
}
```

Wait – we just wrote a generic swap function. Let's use that!

```
int main(int argc, char *argv[]) {  
    int nums[] = {5, 2, 3, 4, 1};  
    size_t nelems = sizeof(nums) / sizeof(nums[0]);  
    swap_ends_int(nums, nelems);  
    // want nums[0] = 1, nums[4] = 5  
    printf("nums[0] = %d, nums[4] = %d\n", nums[0], nums[4]);  
    return 0;  
}
```

Swap Ends

You're asked to write a function that swaps the first and last elements in an array of numbers.

```
void swap_ends_int(int *arr, size_t nelems) {  
    swap(arr, arr + nelems - 1, sizeof(*arr));  
}
```

Wait – we just wrote a generic swap function. Let's use that!

```
int main(int argc, char *argv[]) {  
    int nums[] = {5, 2, 3, 4, 1};  
    size_t nelems = sizeof(nums) / sizeof(nums[0]);  
    swap_ends_int(nums, nelems);  
    // want nums[0] = 1, nums[4] = 5  
    printf("nums[0] = %d, nums[4] = %d\n", nums[0], nums[4]);  
    return 0;  
}
```

Swap Ends

Let's write out what some other versions would look like (just in case).

```
void swap_ends_int(int *arr, size_t nelems) {  
    swap(arr, arr + nelems - 1, sizeof(*arr));  
}  
  
void swap_ends_short(short *arr, size_t nelems) {  
    swap(arr, arr + nelems - 1, sizeof(*arr));  
}  
  
void swap_ends_string(char **arr, size_t nelems) {  
    swap(arr, arr + nelems - 1, sizeof(*arr));  
}  
  
void swap_ends_float(float *arr, size_t nelems) {  
    swap(arr, arr + nelems - 1, sizeof(*arr));  
}
```

The code seems to be the same regardless of the type!

Swap Ends

Let's write a version of `swap_ends` that works for any type of array.

```
void swap_ends(void *arr, size_t nelems) {  
    swap(arr, arr + nelems - 1, sizeof(*arr));  
}
```

Is this generic? Does this work?

Swap Ends

Let's write a version of `swap_ends` that works for any type of array.

```
void swap_ends(void *arr, size_t nelems) {  
    swap(arr, arr + nelems - 1, sizeof(*arr));  
}
```

Is this generic? Does this work?

Unfortunately not. First, we no longer know the element size. Second, pointer arithmetic depends on the type of data being pointed to. With a `void *`, we lose that information!

Swap Ends

Let's write a version of `swap_ends` that works for any type of array.

```
void swap_ends(void *arr, size_t nelems) {  
    swap(arr, arr + nelems - 1, sizeof(*arr));  
}
```

We need to know the element size, so let's add a parameter.

Swap Ends

Let's write a version of `swap_ends` that works for any type of array.

```
void swap_ends(void *arr, size_t nelems, size_t elem_bytes) {  
    swap(arr, arr + nelems - 1, elem_bytes);  
}
```

We need to know the element size, so let's add a parameter.

Pointer Arithmetic

`arr + nelems - 1`

Let's say `nelems = 4`. How many bytes beyond `arr` is this?

If it's an array of...

Int?

Pointer Arithmetic

`arr + nelems - 1`

Let's say `nelems = 4`. How many bytes beyond `arr` is this?

If it's an array of...

int: adds 3 places to `arr`, and `3 * sizeof(int) = 12` bytes

Pointer Arithmetic

`arr + nelems - 1`

Let's say `nelems = 4`. How many bytes beyond `arr` is this?

If it's an array of...

Int: adds 3 places to `arr`, and `3 * sizeof(int) = 12` bytes

Short?

Pointer Arithmetic

`arr + nelems - 1`

Let's say `nelems = 4`. How many bytes beyond `arr` is this?

If it's an array of...

Int: adds 3 places to `arr`, and $3 * \text{sizeof}(\text{int}) = 12$ bytes

Short: adds 3 places to `arr`, and $3 * \text{sizeof}(\text{short}) = 6$ bytes

Pointer Arithmetic

`arr + nelems - 1`

Let's say `nelems = 4`. How many bytes beyond `arr` is this?

If it's an array of...

Int: adds 3 places to `arr`, and $3 * \text{sizeof}(\text{int}) = 12$ bytes

Short: adds 3 places to `arr`, and $3 * \text{sizeof}(\text{short}) = 6$ bytes

Char *: adds 3 places to `arr`, and $3 * \text{sizeof}(\text{char} *) = 24$ bytes

In each case, we need to know the element size to do the arithmetic.

Swap Ends

Let's write a version of `swap_ends` that works for any type of array.

```
void swap_ends(void *arr, size_t nelems, size_t elem_bytes) {  
    swap(arr, arr + nelems - 1, elem_bytes);  
}
```

How many bytes past `arr` should we go to get to the last element?

`(nelems - 1) * elem_bytes`

Swap Ends

Let's write a version of `swap_ends` that works for any type of array.

```
void swap_ends(void *arr, size_t nelems, size_t elem_bytes) {  
    swap(arr, arr + (nelems - 1) * elem_bytes, elem_bytes);  
}
```

How many bytes past `arr` should we go to get to the last element?

`(nelems - 1) * elem_bytes`

Swap Ends

Let's write a version of `swap_ends` that works for any type of array.

```
void swap_ends(void *arr, size_t nelems, size_t elem_bytes) {  
    swap(arr, arr + (nelems - 1) * elem_bytes, elem_bytes);  
}
```

But C still can't do arithmetic with a `void*`. We need to tell it to not worry about it, and just add bytes. **How can we do this?**

Swap Ends

Let's write a version of `swap_ends` that works for any type of array.

```
void swap_ends(void *arr, size_t nelems, size_t elem_bytes) {  
    swap(arr, (char *)arr + (nelems - 1) * elem_bytes, elem_bytes);  
}
```

But C still can't do arithmetic with a `void*`. We need to tell it to not worry about it, and just add bytes. **How can we do this?**

`char *` pointers already add bytes!

Swap Ends

You're asked to write a function that swaps the first and last elements in an array of numbers. Well, now it can swap for an array of anything!

```
void swap_ends(void *arr, size_t nelems, size_t elem_bytes) {  
    swap(arr, (char *)arr + (nelems - 1) * elem_bytes, elem_bytes);  
}
```

Swap Ends

You're asked to write a function that swaps the first and last elements in an array of numbers. Well, now it can swap for an array of anything!

```
void swap_ends(void *arr, size_t nelems, size_t elem_bytes) {  
    swap(arr, (char *)arr + (nelems - 1) * elem_bytes, elem_bytes);  
}
```

```
int nums[] = {5, 2, 3, 4, 1};  
size_t nelems = sizeof(nums) / sizeof(nums[0]);  
swap_ends(nums, nelems, sizeof(nums[0]));
```

Swap Ends

You're asked to write a function that swaps the first and last elements in an array of numbers. Well, now it can swap for an array of anything!

```
void swap_ends(void *arr, size_t nelems, size_t elem_bytes) {  
    swap(arr, (char *)arr + (nelems - 1) * elem_bytes, elem_bytes);  
}
```

```
short nums[] = {5, 2, 3, 4, 1};  
size_t nelems = sizeof(nums) / sizeof(nums[0]);  
swap_ends(nums, nelems, sizeof(nums[0]));
```


Swap Ends

You're asked to write a function that swaps the first and last elements in an array of numbers. Well, now it can swap for an array of anything!

```
void swap_ends(void *arr, size_t nelems, size_t elem_bytes) {  
    swap(arr, (char *)arr + (nelems - 1) * elem_bytes, elem_bytes);  
}
```

```
char *strs[] = {"Hi", "Hello", "Howdy"};  
size_t nelems = sizeof(strs) / sizeof(strs[0]);  
swap_ends(strs, nelems, sizeof(strs[0]));
```

Swap Ends

You're asked to write a function that swaps the first and last elements in an array of numbers. Well, now it can swap for an array of anything!

```
void swap_ends(void *arr, size_t nelems, size_t elem_bytes) {  
    swap(arr, (char *)arr + (nelems - 1) * elem_bytes, elem_bytes);  
}
```

```
mystruct structs[] = ...;  
size_t nelems = ...;  
swap_ends(structs, nelems, sizeof(structs[0]));
```

Demo: Void *s Gone Wrong



swap_ends.c