





<


Previous




















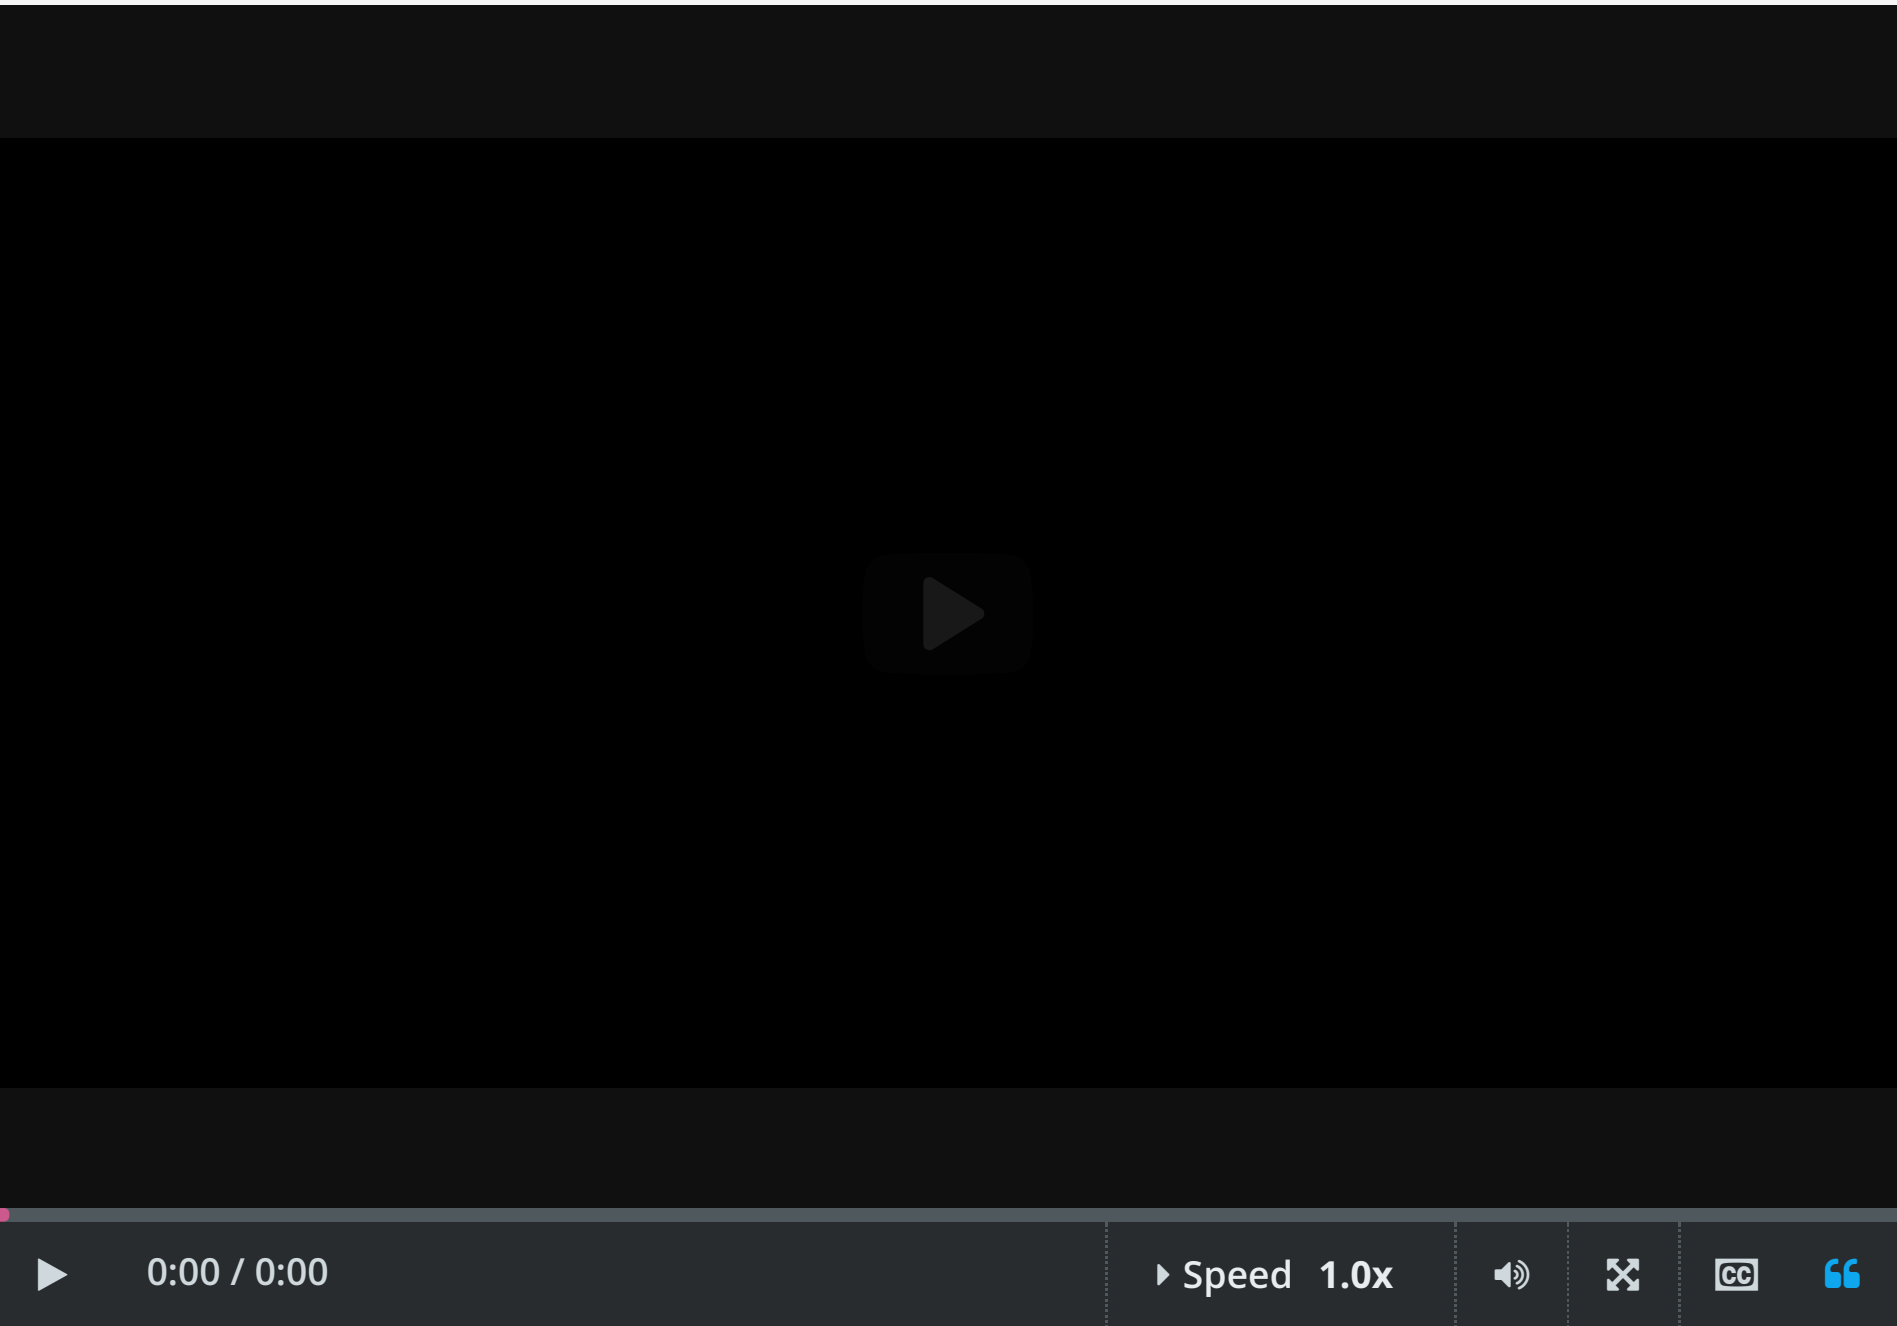
Next

>

## Use arguments passed to a program from the command line

 [Bookmark this page](#)

## Use arguments passed to a program from the command line



[Start of transcript. Skip to the end.](#)

PETRA: I will now show you a program that allows you to recover arguments of different types passed in your main function from the command line.

For example, you can see here my execution line is ./program

And then there are three parameters: -e, 43, and 27.88

Those are all of different types.

At least, that's what I intend for them to be.

Video

[Download video file](#)

Transcripts

[Download SubRip \(.srt\) file](#)

[Download Text \(.txt\) file](#)