

# Cucumber Report

17-Feb-2023, 7:25:17 PM

Start : Feb 17, 7:25:14.158 PM

End : Feb 17, 7:25:16.271 PM

Duration : 2.113 s

Features



Scenarios

Steps

PASSED - 0  
FAILED - 1  
SKIPPED - 0


PASSED - 0  
FAILED - 4  
SKIPPED - 0

PASSED - 0  
FAILED - 0  
SKIPPED - 26

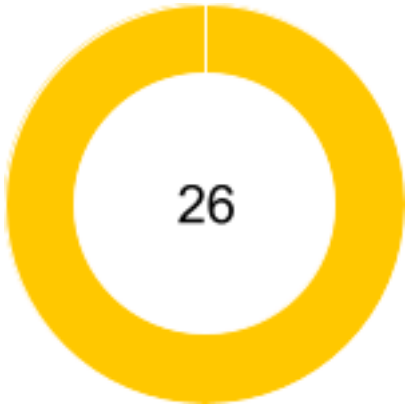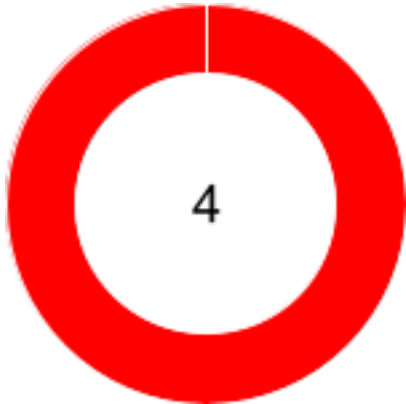


Feature		Scenario				Step			
Name	Duration	T	P	F	S	T	P	F	S
<u>Title of your feature</u>	2.113 s	4	0	4	0	26	0	0	26

<b>Tag</b>	<b>Scenario</b>				<b>Feature</b>			
<b>Name</b>	<b><i>T</i></b>	<b><i>P</i></b>	<b><i>F</i></b>	<b><i>S</i></b>	<b><i>T</i></b>	<b><i>P</i></b>	<b><i>F</i></b>	<b><i>S</i></b>
@tag	4	0	4	0	1	0	1	0
@tag1	2	0	2	0	1	0	1	0
@tag2	1	0	1	0	1	0	1	0
@tag3	1	0	1	0	1	0	1	0

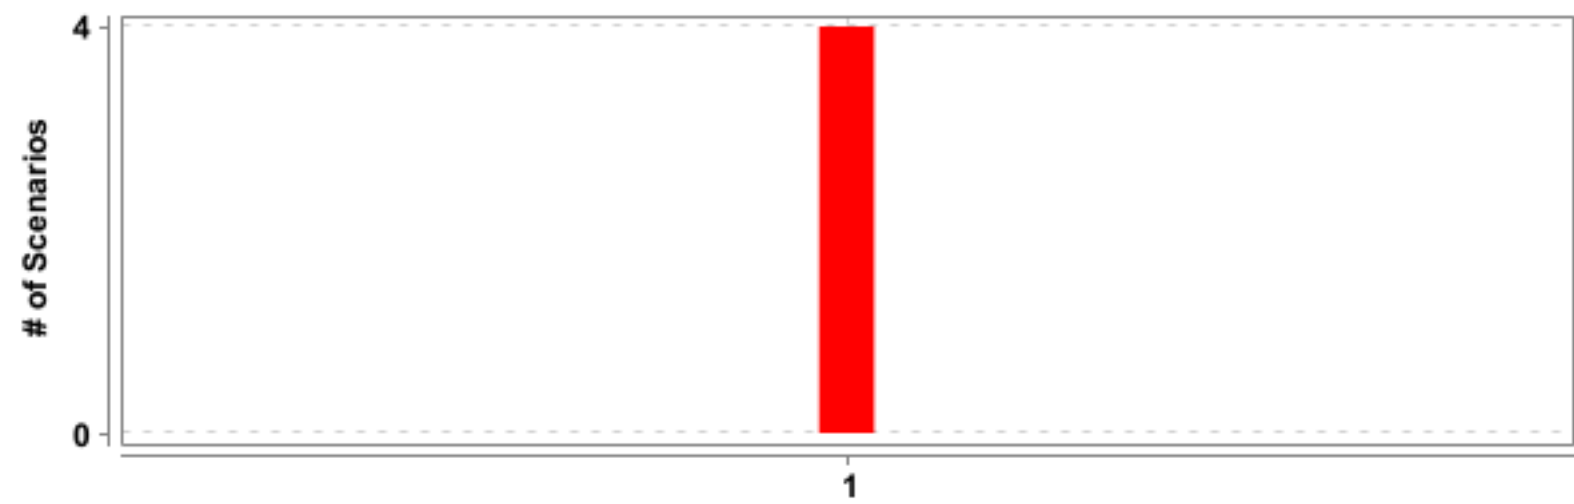

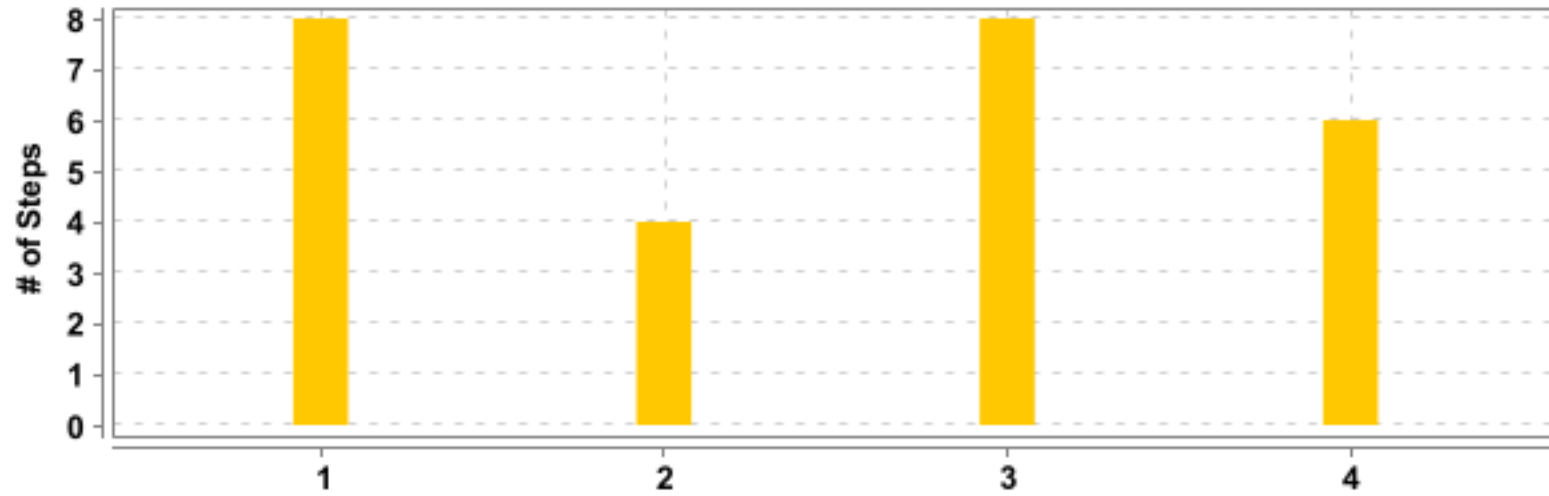

#	Feature Name	T	P	F	S	Duration
1	<u>Title of your feature</u>	4	0	4	0	2.113 s





#	Feature Name	Scenario Name	T	P	F	S	Duration
1	<u>Title of your feature</u>	<u>login</u>	8	0	0	8	1.569 s
2	<u>Title of your feature</u>	<u>login</u>	4	0	0	4	0.134 s
3	<u>Title of your feature</u>	<u>Add customer</u>	8	0	0	8	0.180 s
4	<u>Title of your feature</u>	<u>search the customer</u>	6	0	0	6	0.178 s

## Title of your feature

FAILED	DURATION - 2.113 s	Scenarios Total - 4 Pass - 0 Fail - 4 Skip - 0		Steps Total - 26 Pass - 0 Fail - 0 Skip - 26	
/ 7:25:14.158 PM // 7:25:16.271 PM /					

## login

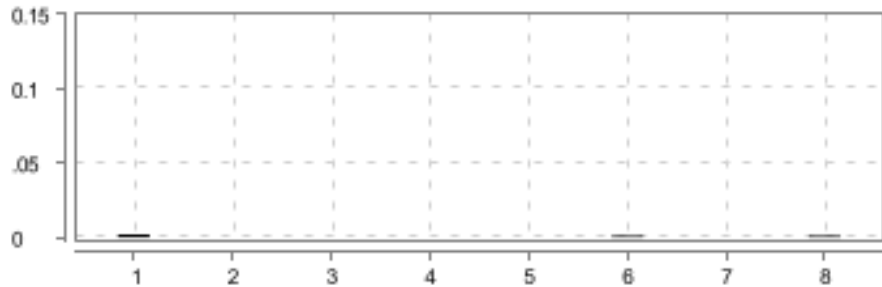FAILED		DURATION - 1.569 s			Steps Total - 8 Pass - 0 Fail - 0 Skip - 8	
/ 7:25:14.165 PM // 7:25:15.734 PM /						
Title of your feature						
@tag @tag1						

#	Step / Hook Details	Status	Duration
	<p>BEFORE - Stepdefinitions.stepdefinitions.setupbrowser()</p> <p>org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Possible causes are invalid address of the remote server or browser start-up failure. Host info: host: 'LAPTOP-KNCJI4TL', ip: '192.168.199.129' Build info: version: '4.6.0', revision: '79f1c02ae20' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '11.0.17' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, newSession {capabilities=[Capabilities {browserName: chrome, goog:chromeOptions: {args: [], extensions: []}}, desiredCapabilities=Capabilities {browserName: chrome, goog:chromeOptions: {args: [], extensions: []}}]</p> <p>at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:559)  at org.openqa.selenium.remote.RemoteWebDriver.startSession(RemoteWebDriver.java:242)  at org.openqa.selenium.remote.RemoteWebDriver.&lt;init&gt;(RemoteWebDriver.java:157)  at org.openqa.selenium.chromium.ChromiumDriver.&lt;init&gt;(ChromiumDriver.java:101)  at org.openqa.selenium.chrome.ChromeDriver.&lt;init&gt;(ChromeDriver.java:81)  at org.openqa.selenium.chrome.ChromeDriver.&lt;init&gt;(ChromeDriver.java:49)  at Stepdefinitions.stepdefinitions.setupbrowser(stepdefinitions.java:52)</p> <p>Caused by: java.lang.NoClassDefFoundError: io/netty/handler/codec/DefaultHeaders\$ValueValidator  at org.asynchttpclient.RequestBuilderBase.&lt;init&gt;(RequestBuilderBase.java:98)  at org.asynchttpclient.RequestBuilderBase.&lt;init&gt;(RequestBuilderBase.java:92)  at org.asynchttpclient.RequestBuilder.&lt;init&gt;(RequestBuilder.java:35)  at org.asynchttpclient.RequestBuilder.&lt;init&gt;(RequestBuilder.java:31)</p>	FAILED	1.546 s



#	Step / Hook Details	Status	Duration
	at org.asynhttpclient.Dsl.request(Dsl.java:73) at org.openqa.selenium.remote.http.netty.NettyMessages.toNettyRequest(NettyMessages.java:58) at org.openqa.selenium.remote.http.netty.NettyHttpHandler.makeCall(NettyHttpHandler.java:56) at org.openqa.selenium.remote.http.AddSeleniumUserAgent.lambda\$apply\$0(AddSeleniumUserAgent.java:42) at org.openqa.selenium.remote.http.Filter.lambda\$andFinally\$1(Filter.java:56) at org.openqa.selenium.remote.http.netty.NettyHttpHandler.execute(NettyHttpHandler.java:49) at org.openqa.selenium.remote.http.AddSeleniumUserAgent.lambda\$apply\$0(AddSeleniumUserAgent.java:42) at org.openqa.selenium.remote.http.Filter.lambda\$andFinally\$1(Filter.java:56) at org.openqa.selenium.remote.http.netty.NettyClient.execute(NettyClient.java:99) at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:122) at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:101) at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:67) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:156) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:541) at org.openqa.selenium.remote.RemoteWebDriver.startSession(RemoteWebDriver.java:242) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:157) at org.openqa.selenium.chromium.ChromiumDriver.<init>(ChromiumDriver.java:101) at org.openqa.selenium.chrome.ChromeDriver.<init>(ChromeDriver.java:81) at org.openqa.selenium.chrome.ChromeDriver.<init>(ChromeDriver.java:49) at Stepdefinitions.stepdefinitions.setupbrowser(stepdefinitions.java:52) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:62) at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) at java.base/java.lang.reflect.Method.invoke(Method.java:566) at io.cucumber.java.Invoker.doInvoke(Invoker.java:66) at io.cucumber.java.Invoker.invoke(Invoker.java:24) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64) at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46) at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.TestCase.run(TestCase.java:78) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129)		

#	Step / Hook Details	Status	Duration
	at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:290) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:71) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:288) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:58) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:268) at org.junit.runners.ParentRunner.run(ParentRunner.java:363) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:290) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:71) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:288) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:58) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:268) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner.run(ParentRunner.java:363) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.ClassNotFoundException: io.netty.handler.codec.DefaultHeaders\$ValueValidator at java.base/jdk.internal.loader.BuiltinClassLoader.loadClass(BuiltinClassLoader.java:581) at java.base/jdk.internal.loader.ClassLoaders\$AppClassLoader.loadClass(ClassLoaders.java:178) at java.base/java.lang.ClassLoader.loadClass(ClassLoader.java:521)		
1	Given I open browser	SKIPPED	0.002 s
2	When i enter send keys "admin@yourstore.com" And "admin"	SKIPPED	0.000 s
3	When i click login	SKIPPED	0.000 s
4	Then see the dashboardpage	SKIPPED	0.000 s
5	When i click the productpage and " Products" option	SKIPPED	0.000 s
6	Then i see the products page	SKIPPED	0.001 s
7	When i click the edit option	SKIPPED	0.000 s



#	Step / Hook Details	Status	Duration
8	When i click multimedia table and add the picture	SKIPPED	0.001 s
	AFTER - Stepdefinitions.stepdefinitions.takescreenshot(io.cucumber.java.Scenario)	FAILED	0.002 s
	java.lang.NullPointerException at Stepdefinitions.stepdefinitions.takescreenshot(stepdefinitions.java:64)		

## login

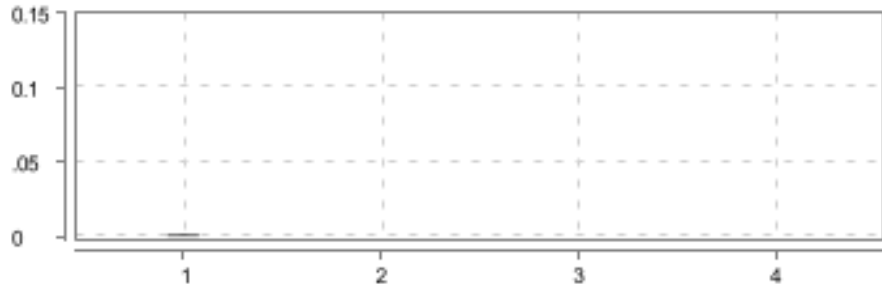

FAILED		DURATION - 0.134 s			Steps Total - 4 Pass - 0 Fail - 0 Skip - 4			
/ 7:25:15.758 PM // 7:25:15.892 PM /								
Title of your feature								
@tag @tag1								

#	Step / Hook Details	Status	Duration
	BEFORE - Stepdefinitions.stepdefinitions.setupbrowser()	FAILED	0.131 s
	org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Possible causes are invalid address of the remote server or browser start-up failure. Host info: host: 'LAPTOP-KNCJI4TL', ip: '192.168.199.129' Build info: version: '4.6.0', revision: '79f1c02ae20' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '11.0.17' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, newSession {capabilities=[Capabilities {browserName: chrome, goog:chromeOptions: {args: [], extensions: []}}, desiredCapabilities=Capabilities {browserName: chrome, goog:chromeOptions: {args: [], extensions: []}}] at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:559) at org.openqa.selenium.remote.RemoteWebDriver.startSession(RemoteWebDriver.java:242) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:157) at org.openqa.selenium.chromium.ChromiumDriver.<init>(ChromiumDriver.java:101) at org.openqa.selenium.chrome.ChromeDriver.<init>(ChromeDriver.java:81) at org.openqa.selenium.chrome.ChromeDriver.<init>(ChromeDriver.java:49) at Stepdefinitions.stepdefinitions.setupbrowser(stepdefinitions.java:52) Caused by: java.lang.NoClassDefFoundError: io/netty/handler/codec/DefaultHeaders\$ValueValidator at org.asynchttpclient.RequestBuilderBase.<init>(RequestBuilderBase.java:98) at org.asynchttpclient.RequestBuilderBase.<init>(RequestBuilderBase.java:92) at org.asynchttpclient.RequestBuilder.<init>(RequestBuilder.java:35) at org.asynchttpclient.RequestBuilder.<init>(RequestBuilder.java:31) at org.asynchttpclient.Dsl.request(Dsl.java:73) at org.openqa.selenium.remote.http.netty.NettyMessages.toNettyRequest(NettyMessages.java:58) at org.openqa.selenium.remote.http.netty.NettyHttpHandler.makeCall(NettyHttpHandler.java:56) at org.openqa.selenium.remote.http.AddSeleniumUserAgent.lambda\$apply\$0(AddSeleniumUserAgent.java:42)		

#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.remote.http.Filter.lambda\$andFinally\$1(Filter.java:56) at org.openqa.selenium.remote.http.netty.NettyHttpHandler.execute(NettyHttpHandler.java:49) at org.openqa.selenium.remote.http.AddSeleniumUserAgent.lambda\$apply\$0(AddSeleniumUserAgent.java:42) at org.openqa.selenium.remote.http.Filter.lambda\$andFinally\$1(Filter.java:56) at org.openqa.selenium.remote.http.netty.NettyClient.execute(NettyClient.java:99) at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:122) at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:101) at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:67) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:156) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:541) at org.openqa.selenium.remote.RemoteWebDriver.startSession(RemoteWebDriver.java:242) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:157) at org.openqa.selenium.chromium.ChromiumDriver.<init>(ChromiumDriver.java:101) at org.openqa.selenium.chrome.ChromeDriver.<init>(ChromeDriver.java:81) at org.openqa.selenium.chrome.ChromeDriver.<init>(ChromeDriver.java:49) at Stepdefinitions.stepdefinitions.setupbrowser(stepdefinitions.java:52) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:62) at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) at java.base/java.lang.reflect.Method.invoke(Method.java:566) at io.cucumber.java.Invoker.doInvoke(Invoker.java:66) at io.cucumber.java.Invoker.invoke(Invoker.java:24) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64) at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46) at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.TestCase.run(TestCase.java:78) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:290)		

#	Step / Hook Details	Status	Duration
	<pre> at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:71) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:288) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:58) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:268) at org.junit.runners.ParentRunner.run(ParentRunner.java:363) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:290) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:71) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:288) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:58) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:268) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner.run(ParentRunner.java:363) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.ClassNotFoundException: io.netty.handler.codec.DefaultHeaders\$ValueValidator at java.base/jdk.internal.loader.BuiltinClassLoader.loadClass(BuiltinClassLoader.java:581) at java.base/jdk.internal.loader.ClassLoaders\$AppClassLoader.loadClass(ClassLoaders.java:178) at java.base/java.lang.ClassLoader.loadClass(ClassLoader.java:521) </pre>		
1	Given I open browser	SKIPPED	0.001 s
2	When i enter send keys "admin@yourstore.com" And "admin"	SKIPPED	0.000 s
3	When i click login	SKIPPED	0.000 s
4	Then see the dashboardpage	SKIPPED	0.000 s
	AFTER - Stepdefinitions.stepdefinitions.takescreenshot(io.cucumber.java.Scenario)	FAILED	0.000 s
	<pre> java.lang.NullPointerException at Stepdefinitions.stepdefinitions.takescreenshot(stepdefinitions.java:64) </pre>		

Add customer

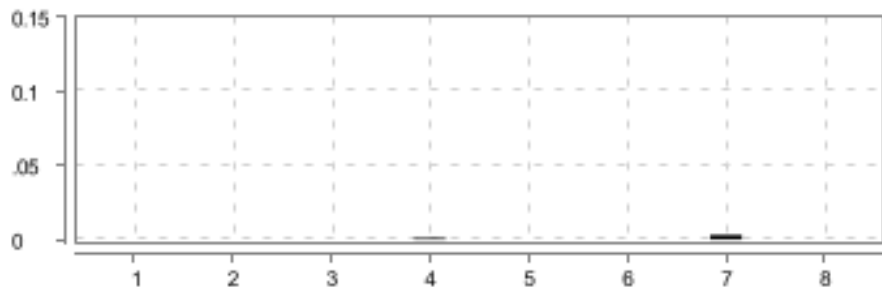

<div>FAILED</div> <div>DURATION - 0.180 s</div>			<div>Steps</div> <div>Total - 8</div> <div>Pass - 0</div> <div>Fail - 0</div> <div>Skip - 8</div>	
/ 7:25:15.904 PM // 7:25:16.084 PM /				
Title of your feature				
@tag @tag2				

#	Step / Hook Details	Status	Duration
	<b>BEFORE - Stepdefinitions.stepdefinitions.setupbrowser()</b> org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Possible causes are invalid address of the remote server or browser start-up failure. Host info: host: 'LAPTOP-KNCJI4TL', ip: '192.168.199.129' Build info: version: '4.6.0', revision: '79f1c02ae20' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '11.0.17' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, newSession {capabilities=[Capabilities {browserName: chrome, goog:chromeOptions: {args: [], extensions: []}}, desiredCapabilities=Capabilities {browserName: chrome, goog:chromeOptions: {args: [], extensions: []}}] at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:559) at org.openqa.selenium.remote.RemoteWebDriver.startSession(RemoteWebDriver.java:242) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:157) at org.openqa.selenium.chromium.ChromiumDriver.<init>(ChromiumDriver.java:101) at org.openqa.selenium.chrome.ChromeDriver.<init>(ChromeDriver.java:81) at org.openqa.selenium.chrome.ChromeDriver.<init>(ChromeDriver.java:49) at Stepdefinitions.stepdefinitions.setupbrowser(stepdefinitions.java:52) Caused by: java.lang.NoClassDefFoundError: io/netty/handler/codec/DefaultHeaders\$ValueValidator at org.asynchttpclient.RequestBuilderBase.<init>(RequestBuilderBase.java:98) at org.asynchttpclient.RequestBuilderBase.<init>(RequestBuilderBase.java:92) at org.asynchttpclient.RequestBuilder.<init>(RequestBuilder.java:35) at org.asynchttpclient.RequestBuilder.<init>(RequestBuilder.java:31) at org.asynchttpclient.Dsl.request(Dsl.java:73) at org.openqa.selenium.remote.http.netty.NettyMessages.toNettyRequest(NettyMessages.java:58) at org.openqa.selenium.remote.http.netty.NettyHttpHandler.makeCall(NettyHttpHandler.java:56) at org.openqa.selenium.remote.http.AddSeleniumUserAgent.lambda\$apply\$0(AddSeleniumUserAgent.java:42) at org.openqa.selenium.remote.http.Filter.lambda\$andFinally\$1(Filter.java:56) at org.openqa.selenium.remote.http.netty.NettyHttpHandler.execute(NettyHttpHandler.java:49) at org.openqa.selenium.remote.http.AddSeleniumUserAgent.lambda\$apply\$0(AddSeleniumUserAgent.java:42) at org.openqa.selenium.remote.http.Filter.lambda\$andFinally\$1(Filter.java:56) at org.openqa.selenium.remote.http.netty.NettyClient.execute(NettyClient.java:99) at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:122) at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:101) at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:67)	<b>FAILED</b>	0.172 s

#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:156) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:541) at org.openqa.selenium.remote.RemoteWebDriver.startSession(RemoteWebDriver.java:242) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:157) at org.openqa.selenium.chromium.ChromiumDriver.<init>(ChromiumDriver.java:101) at org.openqa.selenium.chrome.ChromeDriver.<init>(ChromeDriver.java:81) at org.openqa.selenium.chrome.ChromeDriver.<init>(ChromeDriver.java:49) at Stepdefinitions.stepdefinitions.setupbrowser(stepdefinitions.java:52) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:62) at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) at java.base/java.lang.reflect.Method.invoke(Method.java:566) at io.cucumber.java.Invoker.doInvoke(Invoker.java:66) at io.cucumber.java.Invoker.invoke(Invoker.java:24) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64) at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46) at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.TestCase.run(TestCase.java:78) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:290) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:71) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:288) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:58) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:268) at org.junit.runners.ParentRunner.run(ParentRunner.java:363) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89)		

#	Step / Hook Details	Status	Duration																		
	<div>at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:290)</div> <div>at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:71)</div> <div>at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:288)</div> <div>at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:58)</div> <div>at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:268)</div> <div>at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266)</div> <div>at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281)</div> <div>at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233)</div> <div>at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248)</div> <div>at org.junit.runners.ParentRunner.run(ParentRunner.java:363)</div> <div>at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93)</div> <div>at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40)</div> <div>at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529)</div> <div>at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756)</div> <div>at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452)</div> <div>at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210)</div> <div>Caused by: java.lang.ClassNotFoundException: io.netty.handler.codec.DefaultHeaders\$ValueValidator</div> <div>at java.base/jdk.internal.loader.BuiltinClassLoader.loadClass(BuiltinClassLoader.java:581)</div> <div>at java.base/jdk.internal.loader.ClassLoaders\$AppClassLoader.loadClass(ClassLoaders.java:178)</div> <div>at java.base/java.lang.ClassLoader.loadClass(ClassLoader.java:521)</div>																				
1	Given I open browser	SKIPPED	0.000 s																		
2	When i enter send keys "admin@yourstore.com" And "admin"	SKIPPED	0.000 s																		
3	When i click login	SKIPPED	0.000 s																		
4	Then see the dashboardpage	SKIPPED	0.001 s																		
5	When i click customers link And i click customers option "customers"	SKIPPED	0.000 s																		
6	When i click Add new button	SKIPPED	0.000 s																		
7	When i set customer info <table><tr><td>Email</td><td>Password</td><td>firstname</td><td>lastname</td><td>Gender</td><td>Date of birth</td><td>companyname</td><td>customer roles</td><td>vendor</td></tr><tr><td>durgatejam814@gmail.com</td><td>14221A0387a@</td><td>durga</td><td>teja</td><td>Male</td><td>04/08/1997</td><td>teja</td><td>Administrators</td><td>Vendor 1</td></tr></table>	Email	Password	firstname	lastname	Gender	Date of birth	companyname	customer roles	vendor	durgatejam814@gmail.com	14221A0387a@	durga	teja	Male	04/08/1997	teja	Administrators	Vendor 1	SKIPPED	0.003 s
Email	Password	firstname	lastname	Gender	Date of birth	companyname	customer roles	vendor													
durgatejam814@gmail.com	14221A0387a@	durga	teja	Male	04/08/1997	teja	Administrators	Vendor 1													
8	When i enter all details And click save button	SKIPPED	0.000 s																		
	AFTER - Stepdefinitions.stepdefinitions.takescreenshot(io.cucumber.java.Scenario) <div>java.lang.NullPointerException</div> <div>at Stepdefinitions.stepdefinitions.takescreenshot(stepdefinitions.java:64)</div>	FAILED	0.000 s																		

search the customer
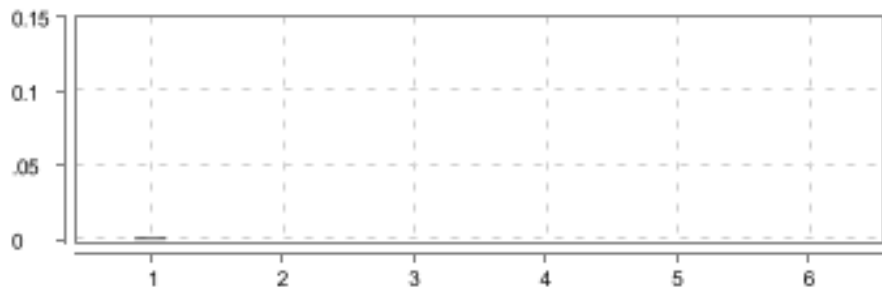
<div>FAILED</div> <div>DURATION - 0.178 s</div>			<div>Steps</div> <div>Total - 6</div> <div>Pass - 0</div> <div>Fail - 0</div> <div>Skip - 6</div>	
/ 7:25:16.093 PM // 7:25:16.271 PM /				
Title of your feature				
@tag3 @tag				

#	Step / Hook Details	Status	Duration
	<b>BEFORE - Stepdefinitions.stepdefinitions.setupbrowser()</b> <pre> org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Possible causes are invalid address of the remote server or browser start-up failure. Host info: host: 'LAPTOP-KNCJI4TL', ip: '192.168.199.129' Build info: version: '4.6.0', revision: '79f1c02ae20' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '11.0.17' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, newSession {capabilities=[Capabilities {browserName: chrome, goog:chromeOptions: {args: [], extensions: []}}, desiredCapabilities=Capabilities {browserName: chrome, goog:chromeOptions: {args: [], extensions: []}}]     at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:559)     at org.openqa.selenium.remote.RemoteWebDriver.startSession(RemoteWebDriver.java:242)     at org.openqa.selenium.remote.RemoteWebDriver.&lt;init&gt;(RemoteWebDriver.java:157)     at org.openqa.selenium.chromium.ChromiumDriver.&lt;init&gt;(ChromiumDriver.java:101)     at org.openqa.selenium.chrome.ChromeDriver.&lt;init&gt;(ChromeDriver.java:81)     at org.openqa.selenium.chrome.ChromeDriver.&lt;init&gt;(ChromeDriver.java:49)     at Stepdefinitions.stepdefinitions.setupbrowser(stepdefinitions.java:52) Caused by: java.lang.NoClassDefFoundError: io/netty/handler/codec/DefaultHeaders\$ValueValidator     at org.asynchttpclient.RequestBuilderBase.&lt;init&gt;(RequestBuilderBase.java:98)     at org.asynchttpclient.RequestBuilderBase.&lt;init&gt;(RequestBuilderBase.java:92)     at org.asynchttpclient.RequestBuilder.&lt;init&gt;(RequestBuilder.java:35)     at org.asynchttpclient.RequestBuilder.&lt;init&gt;(RequestBuilder.java:31)     at org.asynchttpclient.Dsl.request(Dsl.java:73)     at org.openqa.selenium.remote.http.netty.NettyMessages.toNettyRequest(NettyMessages.java:58)     at org.openqa.selenium.remote.http.netty.NettyHttpHandler.makeCall(NettyHttpHandler.java:56)     at org.openqa.selenium.remote.http.AddSeleniumUserAgent.lambda\$apply\$0(AddSeleniumUserAgent.java:42)     at org.openqa.selenium.remote.http.Filter.lambda\$andFinally\$1(Filter.java:56)     at org.openqa.selenium.remote.http.netty.NettyHttpHandler.execute(NettyHttpHandler.java:49)     at org.openqa.selenium.remote.http.AddSeleniumUserAgent.lambda\$apply\$0(AddSeleniumUserAgent.java:42)     at org.openqa.selenium.remote.http.Filter.lambda\$andFinally\$1(Filter.java:56)     at org.openqa.selenium.remote.http.netty.NettyClient.execute(NettyClient.java:99)     at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:122)     at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:101)     at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:67) </pre>	<b>FAILED</b>	0.172 s

#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:156) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:541) at org.openqa.selenium.remote.RemoteWebDriver.startSession(RemoteWebDriver.java:242) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:157) at org.openqa.selenium.chromium.ChromiumDriver.<init>(ChromiumDriver.java:101) at org.openqa.selenium.chrome.ChromeDriver.<init>(ChromeDriver.java:81) at org.openqa.selenium.chrome.ChromeDriver.<init>(ChromeDriver.java:49) at Stepdefinitions.stepdefinitions.setupbrowser(stepdefinitions.java:52) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:62) at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) at java.base/java.lang.reflect.Method.invoke(Method.java:566) at io.cucumber.java.Invoker.doInvoke(Invoker.java:66) at io.cucumber.java.Invoker.invoke(Invoker.java:24) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64) at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46) at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.TestCase.run(TestCase.java:78) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:290) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:71) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:288) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:58) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:268) at org.junit.runners.ParentRunner.run(ParentRunner.java:363) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89)		



#	Step / Hook Details	Status	Duration
	at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:290) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:71) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:288) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:58) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:268) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner.run(ParentRunner.java:363) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.ClassNotFoundException: io.netty.handler.codec.DefaultHeaders\$ValueValidator at java.base/jdk.internal.loader.BuiltinClassLoader.loadClass(BuiltinClassLoader.java:581) at java.base/jdk.internal.loader.ClassLoaders\$AppClassLoader.loadClass(ClassLoaders.java:178) at java.base/java.lang.ClassLoader.loadClass(ClassLoader.java:521)		
1	Given I open browser	SKIPPED	0.001 s
2	When i enter send keys "admin@yourstore.com" And "admin"	SKIPPED	0.000 s
3	When i click login	SKIPPED	0.000 s
4	Then see the dashboardpage	SKIPPED	0.000 s
5	When i click customers link And i click customers option "customers"	SKIPPED	0.000 s
6	When i enter the sendkeys email "durgam799@gmail.com"	SKIPPED	0.000 s
	AFTER - Stepdefinitions.stepdefinitions.takescreenshot(io.cucumber.java.Scenario)	FAILED	0.001 s
	java.lang.NullPointerException at Stepdefinitions.stepdefinitions.takescreenshot(stepdefinitions.java:64)		