
Cucumber Report



Feature		Scenario				Step			
Name	Duration	T	P	F	S	T	P	F	S
Title of your feature	1 m 32.680 s	1	0	1	0	8	0	0	8


Tag		Scer	nario		Feature				
Name	T	P	F	S	T	P	F	S	
@tag	1	0	1	0	1	0	1	0	
@tag1	1	0	1	0	1	0	1	0	

FEATURES SUMMARY -- 4 -

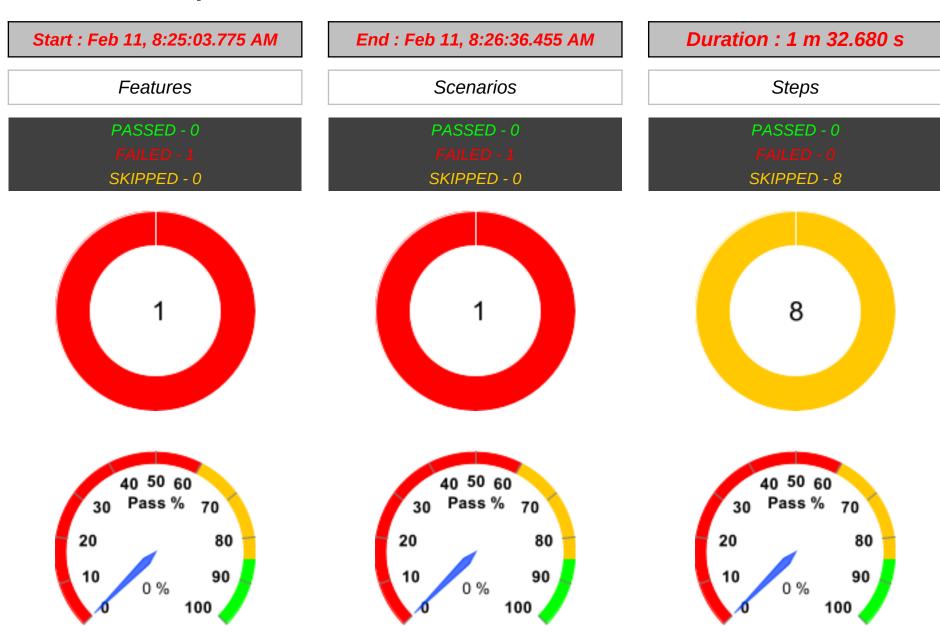

#	Feature Name	T	P	F	S	Duration
1	Title of your feature	1	0	1	0	1 m 32.680 s


SCENARIOS SUMMARY -- 5 --

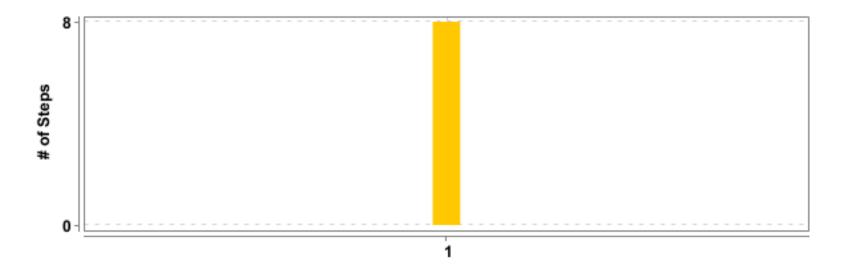


#	Feature Name	Scenario Name	T	P	F	S	Duration	
1	Title of your feature	<u>login</u>	8	0	0	8	1 m 32.677 s	

DETAILED SECTION -- 6 --

Title of your feature

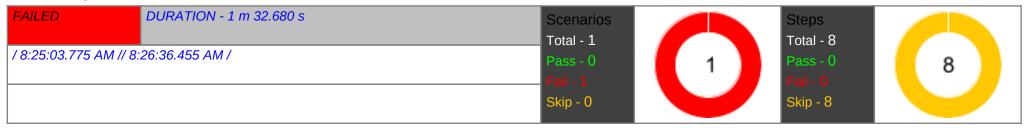

login

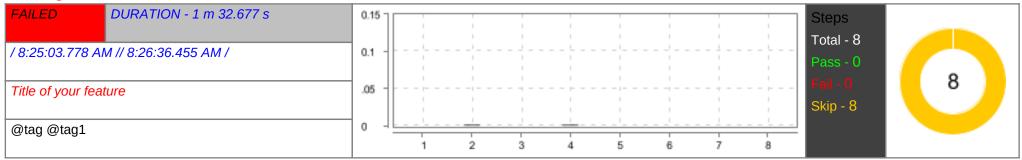

#	Step / Hook Details	Status	Duration
	BEFORE - Stepdefinitions.stepdefinitions.setupbrowser()	FAILED	1 m 32.617 s
	org.openqa.selenium.remote.UnreachableBrowserException: Error communicating with the remote browser. It may have died. Build info: version: '4.6.0', revision: '79f1c02ae20' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '11.0.17' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [90c158a0be6dc474a4dbc0ee5e2cf83a, get {url=https://admin-demo.nopcommerce.com/admin/}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 109.0.5414.120, chrome: {chromedriverVersion: 109.0.5414.74 (e7c5703604da, userDataDir: C:\Users\MTEJA\AppData\Loca}, goog:chromeOptions: {debuggerAddress: localhost:51584}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:51584/devtoo, se:cdpVersion: 109.0.5414.120, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} Session ID: 90c158a0be6dc474a4dbc0ee5e2cf83a at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:565) at org.openqa.selenium.remote.RemoteWebDriver.get(RemoteWebDriver.java:310) at Stepdefinitions.setupbrowser(stepdefinitions.java:56) Caused by: java.io.UncheckedIOException: java.io.IOException: An existing connection was forcibly closed by the remote host at org.openqa.selenium.remote.http.netty.NettyHttpHandler.makeCall(NettyHttpHandler.java:73)		
	at org.openqa.selenium.remote.http.AddSeleniumUserAgent.lambda\$apply\$0(AddSeleniumUserAgent.java:42) at org.openqa.selenium.remote.http.Filter.lambda\$andFinally\$1(Filter.java:56)		
	at org.openqa.selenium.remote.http.netty.NettyHttpHandler.execute(NettyHttpHandler.java:49)		
	at org.openqa.selenium.remote.http.AddSeleniumUserAgent.lambda\$apply\$0(AddSeleniumUserAgent.java:42)		

#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.remote.http.Filter.lambda\$andFinally\$1(Filter.java:56)		
	at org.openqa.selenium.remote.http.netty.NettyClient.execute(NettyClient.java:99)		
	at org.openga.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:181)		
	at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167)		
	at org.openga.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142)		
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:541)		
	at org.openqa.selenium.remote.RemoteWebDriver.get(RemoteWebDriver.java:310)		
	at Stepdefinitions.stepdefinitions.setupbrowser(stepdefinitions.java:56)		
	at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method)		
	at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:62)		
	at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43)		
	at java.base/java.lang.reflect.Method.invoke(Method.java:566)		
	at io.cucumber.java.Invoker.doInvoke(Invoker.java:66)		
	at io.cucumber.java.Invoker.invoke(Invoker.java:24)		
	at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47)		
	at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64)		
	at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46)		
	at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21)		
	at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10)		
	at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85)		
	at io.cucumber.core.runner.TestStep.run(TestStep.java:57)		
	at io.cucumber.core.runner.TestCase.run(TestCase.java:78)		
	at io.cucumber.core.runner.Runner.runPickle(Runner.java:75)		
	at io.cucumber.testng.TestNGCucumberRunner.lambda\$runScenario\$1(TestNGCucumberRunner.java:132)		
	at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129)		
	at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23)		
	at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129)		
	at io.cucumber.testng.TestNGCucumberRunner.runScenario(TestNGCucumberRunner.java:129)		
	at io.cucumber.testng.AbstractTestNGCucumberTests.runScenario(AbstractTestNGCucumberTests.java:35)		
	at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method)		
	at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:62)		
	at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43)		
	at java.base/java.lang.reflect.Method.invoke(Method.java:566)		
	at org.testng.internal.invokers.MethodInvocationHelper.invokeMethod(MethodInvocationHelper.java:139)		
	at org.testng.internal.invokers.TestInvoker.invokeMethod(TestInvoker.java:677)		
	at org.testng.internal.invokers.TestInvoker.invokeTestMethod(TestInvoker.java:221)		
	at org.testng.internal.invokers.MethodRunner.runInSequence(MethodRunner.java:50)		
	at org.testng.internal.invokers.TestInvoker\$MethodInvocationAgent.invoke(TestInvoker.java:962)		
	at org.testng.internal.invokers.TestInvoker.invokeTestMethods(TestInvoker.java:194)		
	at org.testng.internal.invokers.TestMethodWorker.invokeTestMethods(TestMethodWorker.java:148)		
	at org.testng.internal.invokers.TestMethodWorker.run(TestMethodWorker.java:128)		

#	Step / Hook Details	Status	Duration
	at java.base/java.util.ArrayList.forEach(ArrayList.java:1541)		
	at org.testng.TestRunner.privateRun(TestRunner.java:806)		
	at org.testng.TestRunner.run(TestRunner.java:601)		
	at org.testng.SuiteRunner.runTest(SuiteRunner.java:433)		
	at org.testng.SuiteRunner.runSequentially(SuiteRunner.java:427)		
	at org.testng.SuiteRunner.privateRun(SuiteRunner.java:387)		
	at org.testng.SuiteRunner.run(SuiteRunner.java:330)		
	at org.testng.SuiteRunnerWorker.runSuite(SuiteRunnerWorker.java:52)		
	at org.testng.SuiteRunnerWorker.run(SuiteRunnerWorker.java:95)		
	at org.testng.TestNG.runSuitesSequentially(TestNG.java:1256)		
	at org.testng.TestNG.runSuitesLocally(TestNG.java:1176)		
	at org.testng.TestNG.runSuites(TestNG.java:1099)		
	at org.testng.TestNG.run(TestNG.java:1067)		
	at org.testng.remote.AbstractRemoteTestNG.run(AbstractRemoteTestNG.java:115)		
	at org.testng.remote.RemoteTestNG.initAndRun(RemoteTestNG.java:251)		
	at org.testng.remote.RemoteTestNG.main(RemoteTestNG.java:77)		
	Caused by: java.io.IOException: An existing connection was forcibly closed by the remote host		
	at java.base/sun.nio.ch.SocketDispatcher.read0(Native Method)		
	at java.base/sun.nio.ch.SocketDispatcher.read(SocketDispatcher.java:43)		
	at java.base/sun.nio.ch.IOUtil.readIntoNativeBuffer(IOUtil.java:276)		
	at java.base/sun.nio.ch.IOUtil.read(IOUtil.java:233)		
	at java.base/sun.nio.ch.IOUtil.read(IOUtil.java:223)		
	at java.base/sun.nio.ch.SocketChannelImpl.read(SocketChannelImpl.java:358)		
	at io.netty.buffer.PooledByteBuf.setBytes(PooledByteBuf.java:259)		
	at io.netty.buffer.AbstractByteBuf.writeBytes(AbstractByteBuf.java:1132)		
	at io.netty.channel.socket.nio.NioSocketChannel.doReadBytes(NioSocketChannel.java:357)		
	at io.netty.channel.nio.AbstractNioByteChannel\$NioByteUnsafe.read(AbstractNioByteChannel.java:151)		
	at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:788)		
	at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724)		
	at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650)		
	at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562)		
	at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997)		
	at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74)		
	at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30)		
	at java.base/java.lang.Thread.run(Thread.java:834)		
1	Given I open browser	SKIPPED	0.000 s
2	When i enter send keys "admin@yourstore.com" And "admin"	SKIPPED	0.001 s
3	When i click login	SKIPPED	0.000 s
4	Then see the dashboardpage	SKIPPED	0.001 s

#	Step / Hook Details	Status	Duration
5	When i click the productpage and " Products" option	SKIPPED	0.000 s
6	Then i see the products page	SKIPPED	0.000 s
7	When i click the edit option	SKIPPED	0.000 s
8	When i click multimedia table and add the picture	SKIPPED	0.000 s
	AFTER - Stepdefinitions.stepdefinitions.takescreenshot(io.cucumber.java.Scenario)	FAILED	0.023 s
	org.openga.selenium.remote.UnreachableBrowserException: Error communicating with the remote browser. It may have died. Build info: version: '4.6.0', revision: '79f1c02ae20' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '11.0.17' Driver info: org.openga.selenium.chrome.ChromeDriver Command: [90c158a0be6dc474a4dbc0ee5e2ct83a, screenshot []] Capabilities {acceptinsecureCerts: false, browserName: chrome, browserVersion: 109.0.5414.120, chrome: {chromedriverVersion: 109.0.5414.74 (e7c5703604da, userDataDir: C1UsersiMTEJAAppDataLto.a), goog: chromeOptions: (debuggerAddress: localhost.51584), networkConnectionEnabled: false, pagetoadStrategy.normal, platformName: WINDOWS, proxy; Proxy(), sex-cdp: ws://localhost.51584/devtoo, sex.cdpVersion: 109.0.5414.120, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000], unhandledPromptBehavior: dismiss and notify, webauthnexitension:redBlob: true, webauthnexitension:largeBlob: true, webauthnevirtualAuthenticators: true) Session ID: 90c158a0be6dc474addbc0ee5e2ct83a at org.openga.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:596) at org.openga.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:596) at org.openga.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:331) at Stepdefinitions.stepdefinitions.takescreenshot(stepdefinitions.java:64) Caused by; java.io.UncheckedIOException: java.net.ConnectException: Connection refused: no further information: localhost/ 0:00:00:00:01:01:01:025228 at org.openga.selenium.remote.http.netty.NettyHttpHandler.makeCall(NettyHttpHandler.java:73) at org.openga.selenium.remote.http.netty.NettyHttpHandler.awae049 at org.openga.selenium.remote.http.filter.lambdaSandFinally51(Filter.java:56) at org.openga.selenium.remote.http.netty.NettyHttpHandler.execute(NettyHttpHandler.java:49) at org.openga.selenium.remote.http.netty.NettyHttpHandler.execute(NettyHttpHandler.java:49) at org.openga.selenium.remote.http.	PAILED	0.023 \$

#	Step / Hook Details	Status	Duration
	at io.cucumber.java.Invoker.doInvoke(Invoker.java:66)		
	at io.cucumber.java.Invoker.invoke(Invoker.java:24)		
	at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47)		
	at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64)		
	at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46)		
	at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21)		
	at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10)		
	at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85)		
	at io.cucumber.core.runner.TestStep.run(TestStep.java:57)		
	at io.cucumber.core.runner.TestCase.run(TestCase.java:90)		
	at io.cucumber.core.runner.Runner.runPickle(Runner.java:75)		
	at io.cucumber.testng.TestNGCucumberRunner.lambda\$runScenario\$1(TestNGCucumberRunner.java:132)		
	at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129)		
	at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23)		
	at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129)		
	at io.cucumber.testng.TestNGCucumberRunner.runScenario(TestNGCucumberRunner.java:129)		
	at io.cucumber.testng.AbstractTestNGCucumberTests.runScenario(AbstractTestNGCucumberTests.java:35)		
	at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method)		
	at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:62)		
	at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43)		
	at java.base/java.lang.reflect.Method.invoke(Method.java:566)		
	at org.testng.internal.invokers.MethodInvocationHelper.invokeMethod(MethodInvocationHelper.java:139)		
	at org.testng.internal.invokers.TestInvoker.invokeMethod(TestInvoker.java:677)		
	at org.testng.internal.invokers.TestInvoker.invokeTestMethod(TestInvoker.java:221)		
	at org.testng.internal.invokers.MethodRunner.runlnSequence(MethodRunner.java:50)		
	at org.testng.internal.invokers.TestInvoker\$MethodInvocationAgent.invoke(TestInvoker.java:962)		
	at org.testng.internal.invokers.TestInvoker.invokeTestMethods(TestInvoker.java:194)		
	at org.testng.internal.invokers.TestMethodWorker.invokeTestMethods(TestMethodWorker.java:148)		
	at org.testng.internal.invokers.TestMethodWorker.run(TestMethodWorker.java:128)		
	at java.base/java.util.ArrayList.forEach(ArrayList.java:1541)		
	at org.testng.TestRunner.privateRun(TestRunner.java:806)		
	at org.testng.TestRunner.run(TestRunner.java:601)		
	at org.testng.SuiteRunner.runTest(SuiteRunner.java:433)		
	at org.testng.SuiteRunner.runSequentially(SuiteRunner.java:427)		
	at org.testng.SuiteRunner.privateRun(SuiteRunner.java:387)		
	at org.testng.SuiteRunner.run(SuiteRunner.java:330)		
	at org.testng.SuiteRunnerWorker.runSuite(SuiteRunnerWorker.java:52)		
	at org.testng.SuiteRunnerWorker.run(SuiteRunnerWorker.java:95)		
	at org.testng.TestNG.runSuitesSequentially(TestNG.java:1256)		
	at org.testng.TestNG.runSuitesLocally(TestNG.java:1176)		
	at org.testng.TestNG.runSuites(TestNG.java:1099)		

#	Step / Hook Details	Status	Duration
	at org.testng.TestNG.run(TestNG.java:1067)		
	at org.testng.remote.AbstractRemoteTestNG.run(AbstractRemoteTestNG.java:115)		
	at org.testng.remote.RemoteTestNG.initAndRun(RemoteTestNG.java:251)		
	at org.testng.remote.RemoteTestNG.main(RemoteTestNG.java:77)		
	Caused by: java.net.ConnectException: Connection refused: no further information: localhost/0:0:0:0:0:0:0:0:1:25228		
	at org.asynchttpclient.netty.channel.NettyConnectListener.onFailure(NettyConnectListener.java:179)		
	at org.asynchttpclient.netty.channel.NettyChannelConnector\$1.onFailure(NettyChannelConnector.java:108)		
	at org.asynchttpclient.netty.SimpleChannelFutureListener.operationComplete(SimpleChannelFutureListener.java:28)		
	at org.asynchttpclient.netty.SimpleChannelFutureListener.operationComplete(SimpleChannelFutureListener.java:20)		
	at io.netty.util.concurrent.DefaultPromise.notifyListener0(DefaultPromise.java:578)		
	at io.netty.util.concurrent.DefaultPromise.notifyListeners0(DefaultPromise.java:571)		
	at io.netty.util.concurrent.DefaultPromise.notifyListenersNow(DefaultPromise.java:550)		
	at io.netty.util.concurrent.DefaultPromise.notifyListeners(DefaultPromise.java:491)		
	at io.netty.util.concurrent.DefaultPromise.setValue0(DefaultPromise.java:616)		
	at io.netty.util.concurrent.DefaultPromise.setFailure0(DefaultPromise.java:609)		
	at io.netty.util.concurrent.DefaultPromise.tryFailure(DefaultPromise.java:117)		
	at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.fulfillConnectPromise(AbstractNioChannel.java:321)		
	at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:337)		
	at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776)		
	at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724)		
	at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650)		
	at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562)		
	at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997)		
	at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74)		
	at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30)		
	at java.base/java.lang.Thread.run(Thread.java:834)		
	Caused by: io.netty.channel.AbstractChannel\$AnnotatedConnectException: Connection refused: no further information: localhost/		
	0:0:0:0:0:0:0:1:25228 Caused by: java.net.ConnectException: Connection refused: no further information		
	at java.base/sun.nio.ch.SocketChannelImpl.checkConnect(Native Method)		
	at java.base/sun.nio.ch.SocketChannelImpl.finishConnect(SocketChannelImpl.java:779)		
	at io.netty.channel.socket.nio.NioSocketChannel.doFinishConnect(NioSocketChannel.java:337)		
	at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:334)		
	at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776)		
	at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724)		
	at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650)		
	at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562)		
	at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997)		
	at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74)		
	at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30)		
	at java.base/java.lang.Thread.run(Thread.java:834)		