

# Cucumber Report

18-Feb-2023, 9:32:55 PM

Start : Feb 18, 9:32:52.943 PM

End : Feb 18, 9:32:54.166 PM

Duration : 1.223 s

Features

Scenarios

Steps

PASSED - 0  
FAILED - 1  
SKIPPED - 0

PASSED - 0  
FAILED - 1  
SKIPPED - 0

PASSED - 0  
FAILED - 0  
SKIPPED - 8



Feature		Scenario				Step			
Name	Duration	T	P	F	S	T	P	F	S
<u>Title of your feature</u>	1.223 s	1	0	1	0	8	0	0	8

<b>Tag</b>	<b>Scenario</b>				<b>Feature</b>			
<b>Name</b>	<b><i>T</i></b>	<b><i>P</i></b>	<b><i>F</i></b>	<b><i>S</i></b>	<b><i>T</i></b>	<b><i>P</i></b>	<b><i>F</i></b>	<b><i>S</i></b>
@tag	1	0	1	0	1	0	1	0
@tag1	1	0	1	0	1	0	1	0





#	Feature Name	T	P	F	S	Duration
1	<u>Title of your feature</u>	1	0	1	0	1.223 s

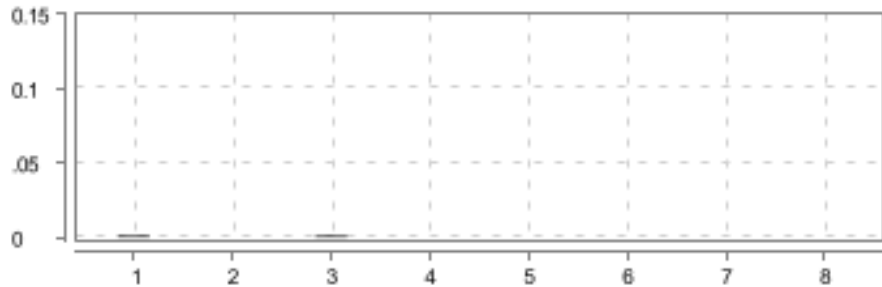



#	Feature Name	Scenario Name	T	P	F	S	Duration
1	<u>Title of your feature</u>	<u>login</u>	8	0	0	8	1.218 s

## Title of your feature

FAILED	DURATION - 1.223 s	Scenarios Total - 1 Pass - 0 Fail - 1 Skip - 0		Steps Total - 8 Pass - 0 Fail - 0 Skip - 8	
/ 9:32:52.943 PM // 9:32:54.166 PM /					

## login

FAILED		DURATION - 1.218 s			Steps Total - 8 Pass - 0 Fail - 0 Skip - 8	
/ 9:32:52.948 PM // 9:32:54.166 PM /						
Title of your feature						
@tag @tag1						

#	Step / Hook Details	Status	Duration
	<p>BEFORE - Stepdefinitions.stepdefinitions.setupbrowser()</p> <p>org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Possible causes are invalid address of the remote server or browser start-up failure. Host info: host: 'LAPTOP-KNCJI4TL', ip: '192.168.123.129' Build info: version: '4.6.0', revision: '79f1c02ae20' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '11.0.17' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, newSession {capabilities=[Capabilities {browserName: chrome, goog:chromeOptions: {args: [], extensions: []}}, desiredCapabilities=Capabilities {browserName: chrome, goog:chromeOptions: {args: [], extensions: []}}]</p> <p>at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:559)  at org.openqa.selenium.remote.RemoteWebDriver.startSession(RemoteWebDriver.java:242)  at org.openqa.selenium.remote.RemoteWebDriver.&lt;init&gt;(RemoteWebDriver.java:157)  at org.openqa.selenium.chromium.ChromiumDriver.&lt;init&gt;(ChromiumDriver.java:101)  at org.openqa.selenium.chrome.ChromeDriver.&lt;init&gt;(ChromeDriver.java:81)  at org.openqa.selenium.chrome.ChromeDriver.&lt;init&gt;(ChromeDriver.java:49)  at Stepdefinitions.stepdefinitions.setupbrowser(stepdefinitions.java:51)</p> <p>Caused by: java.lang.NoClassDefFoundError: io/netty/handler/codec/DefaultHeaders\$ValueValidator  at org.asynchttpclient.RequestBuilderBase.&lt;init&gt;(RequestBuilderBase.java:98)  at org.asynchttpclient.RequestBuilderBase.&lt;init&gt;(RequestBuilderBase.java:92)  at org.asynchttpclient.RequestBuilder.&lt;init&gt;(RequestBuilder.java:35)  at org.asynchttpclient.RequestBuilder.&lt;init&gt;(RequestBuilder.java:31)</p>	FAILED	1.201 s

#	Step / Hook Details	Status	Duration
	<pre> at org.asynhttpclient.Dsl.request(Dsl.java:73) at org.openqa.selenium.remote.http.netty.NettyMessages.toNettyRequest(NettyMessages.java:58) at org.openqa.selenium.remote.http.netty.NettyHttpHandler.makeCall(NettyHttpHandler.java:56) at org.openqa.selenium.remote.http.AddSeleniumUserAgent.lambda\$apply\$0(AddSeleniumUserAgent.java:42) at org.openqa.selenium.remote.http.Filter.lambda\$andFinally\$1(Filter.java:56) at org.openqa.selenium.remote.http.netty.NettyHttpHandler.execute(NettyHttpHandler.java:49) at org.openqa.selenium.remote.http.AddSeleniumUserAgent.lambda\$apply\$0(AddSeleniumUserAgent.java:42) at org.openqa.selenium.remote.http.Filter.lambda\$andFinally\$1(Filter.java:56) at org.openqa.selenium.remote.http.netty.NettyClient.execute(NettyClient.java:99) at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:122) at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:101) at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:67) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:156) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:541) at org.openqa.selenium.remote.RemoteWebDriver.startSession(RemoteWebDriver.java:242) at org.openqa.selenium.remote.RemoteWebDriver.&lt;init&gt;(RemoteWebDriver.java:157) at org.openqa.selenium.chromium.ChromiumDriver.&lt;init&gt;(ChromiumDriver.java:101) at org.openqa.selenium.chrome.ChromeDriver.&lt;init&gt;(ChromeDriver.java:81) at org.openqa.selenium.chrome.ChromeDriver.&lt;init&gt;(ChromeDriver.java:49) at Stepdefinitions.stepdefinitions.setupbrowser(stepdefinitions.java:51) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:62) at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) at java.base/java.lang.reflect.Method.invoke(Method.java:566) at io.cucumber.java.Invoker.doInvoke(Invoker.java:66) at io.cucumber.java.Invoker.invoke(Invoker.java:24) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64) at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46) at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.TestCase.run(TestCase.java:78) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) </pre>		

#	Step / Hook Details	Status	Duration
	at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:290) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:71) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:288) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:58) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:268) at org.junit.runners.ParentRunner.run(ParentRunner.java:363) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:290) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:71) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:288) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:58) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:268) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner.run(ParentRunner.java:363) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.ClassNotFoundException: io.netty.handler.codec.DefaultHeaders\$ValueValidator at java.base/jdk.internal.loader.BuiltinClassLoader.loadClass(BuiltinClassLoader.java:581) at java.base/jdk.internal.loader.ClassLoaders\$AppClassLoader.loadClass(ClassLoaders.java:178) at java.base/java.lang.ClassLoader.loadClass(ClassLoader.java:521)		
1	Given I open browser	SKIPPED	0.001 s
2	When i enter send keys "admin@yourstore.com" And "admin"	SKIPPED	0.000 s
3	When i click login	SKIPPED	0.001 s
4	Then see the dashboardpage	SKIPPED	0.000 s
5	When i click the productpage and " Products" option	SKIPPED	0.000 s
6	Then i see the products page	SKIPPED	0.000 s
7	When i click the edit option	SKIPPED	0.000 s



#	Step / Hook Details	Status	Duration
8	When i click multimedia table and add the picture	SKIPPED	0.000 s
	AFTER - Stepdefinitions.stepdefinitions.takescreenshot(io.cucumber.java.Scenario)	FAILED	0.002 s
	java.lang.NullPointerException at Stepdefinitions.stepdefinitions.takescreenshot(stepdefinitions.java:63)		