


| Feature | | | Scer | nario | | | St | ер | |
|-----------------------|--------------|---|------|-------|---|----|----|----|---|
| Name | Duration | T | P | F | S | T | P | F | S |
| Title of your feature | 3 m 27.430 s | 4 | 1 | 3 | 0 | 26 | 17 | 2 | 7 |


| Tag | | Scer | nario | | | Fea | ture | | |
|-------|---|------|-------|---|---|-----|------|---|--|
| Name | T | P | F | S | T | P | F | S | |
| @tag | 4 | 1 | 3 | 0 | 1 | 0 | 1 | 0 | |
| @tag1 | 2 | 1 | 1 | 0 | 1 | 0 | 1 | 0 | |
| @tag2 | 1 | 0 | 1 | 0 | 1 | 0 | 1 | 0 | |
| @tag3 | 1 | 0 | 1 | 0 | 1 | 0 | 1 | 0 | |

FEATURES SUMMARY

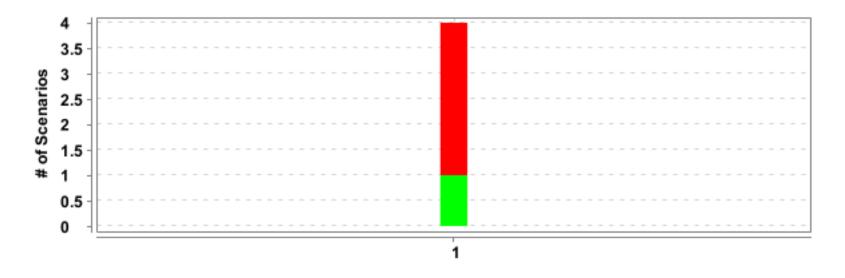

| # | Feature Name | T | P | F | S | Duration |
|---|-----------------------|---|---|---|---|--------------|
| 1 | Title of your feature | 4 | 1 | 3 | 0 | 3 m 27.430 s |

SCENARIOS SUMMARY -- 5 -

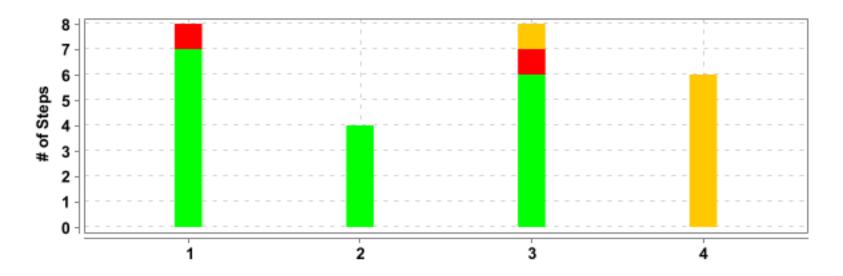


| # | Feature Name | Scenario Name | T | P | F | S | Duration |
|---|-----------------------|---------------------|---|---|---|---|--------------|
| 1 | Title of your feature | <u>login</u> | 8 | 7 | 1 | 0 | 58.929 s |
| 2 | Title of your feature | <u>login</u> | 4 | 4 | 0 | 0 | 27.204 s |
| 3 | Title of your feature | Add customer | 8 | 6 | 1 | 1 | 1 m 29.617 s |
| 4 | Title of your feature | search the customer | 6 | 0 | 0 | 6 | 31.622 s |

DETAILED SECTION -- 6 --


Title of your feature

| FAILED | DURATION - 3 m 27.430 s | Scenarios | | Steps | |
|-----------------------|-------------------------|-----------|---|------------|--------|
| | | Total - 4 | | Total - 26 | |
| / 1:41:58.656 PM // 1 | 1:45:26.086 PM / | Pass - 1 | 4 | Pass - 17 | 26 |
| | | Fail - 3 | | Fail - 2 | 👅 20 📕 |
| | | Skip - 0 | | Skip - 7 | |
| | | | | | |


login

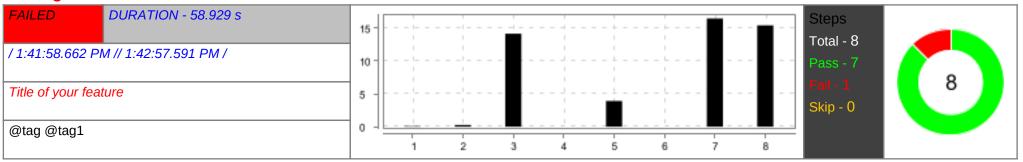

| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| 1 | Given I open browser | PASSED | 0.073 s |
| 2 | When i enter send keys "admin@yourstore.com" And "admin" | PASSED | 0.242 s |
| 3 | When i click login | PASSED | 14.161 s |
| 4 | Then see the dashboardpage | PASSED | 0.012 s |
| 5 | When i click the productpage and " Products" option | PASSED | 3.923 s |
| 6 | Then i see the products page | PASSED | 0.007 s |
| 7 | When i click the edit option | PASSED | 16.488 s |
| 8 | When i click multimedia table and add the picture | FAILED | 15.429 s |
| | org.openqa.selenium.ElementNotInteractableException: element not interactable: [object HTMLInputElement] has no size and location (Session info: chrome=110.0.5481.100) Build info: version: '4.6.0', revision: '79f1c02ae20' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '11.0.17' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [764a2b30f09baece935db6b4f3c8f702, actions {actions=[org.openqa.selenium.interactions.Sequence@1a0c5e9]}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 110.0.5481.100, chrome: {chromedriverVersion: 110.0.5481.77 (65ed616c6e8e, userDataDir: C:\Users\MTEJA\AppData\Loca}, goog:chromeOptions: {debuggerAddress: localhost:50227}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:50227/devtoo, se:cdpVersion: 110.0.5481.100, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, | | |

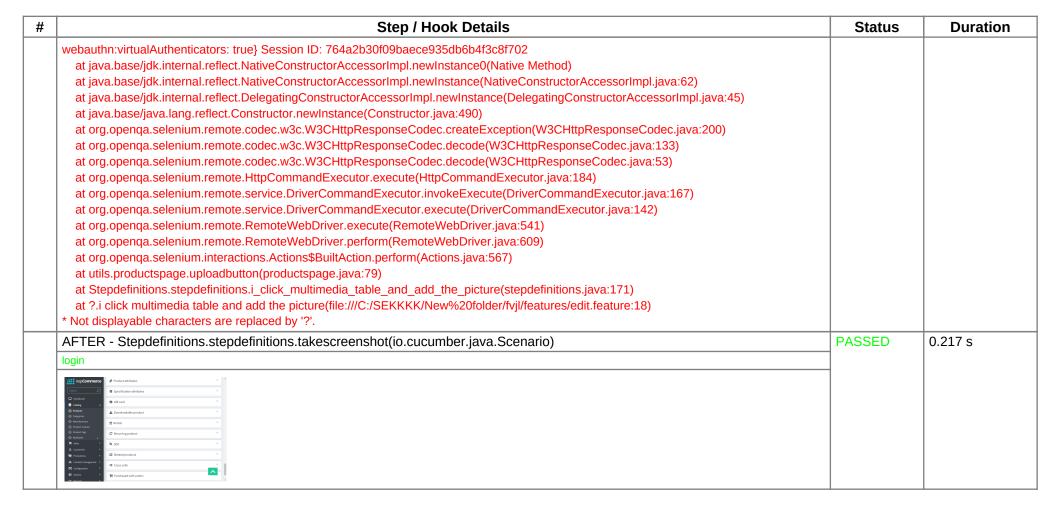


login

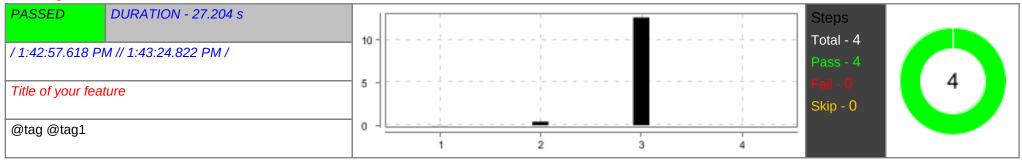

| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| 1 | Given I open browser | PASSED | 0.027 s |
| 2 | When i enter send keys "admin@yourstore.com" And "admin" | PASSED | 0.418 s |
| 3 | When i click login | PASSED | 12.596 s |
| 4 | Then see the dashboardpage | PASSED | 0.006 s |


Add customer

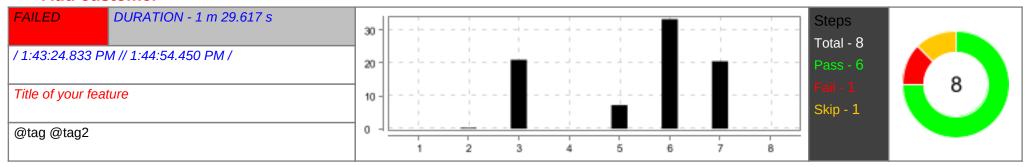

| # | | | | Step / H | look D | etails | | | | Status | Duration |
|---|--|--------------------|-----------|------------|----------|---------------|-------------|----------------|----------|---------|----------|
| 1 | Given I open browser | | | | | | | | | PASSED | 0.017 s |
| 2 | When i enter send keys "a | dmin@yourstore | e.com" An | d "admin" | | | | | | PASSED | 0.231 s |
| 3 | When i click login | | | | | | | | | PASSED | 20.972 s |
| 4 | Then see the dashboardpa | age | | | | | | | | PASSED | 0.008 s |
| 5 | When i click customers lin | k And i click cust | tomers op | tion "cust | omers" | | | | | PASSED | 7.173 s |
| 6 | When i click Add new butte | on | | | | | | | | PASSED | 33.364 s |
| 7 | When i set customer info | | | | | | | | | FAILED | 20.523 s |
| | Email | Password | firstname | lastname | Gender | Date of birth | companyname | customer roles | vendor | | |
| | durgatejam814@gmail.com | 14221A0387a@ | durga | teja | Male | 04/08/1997 | teja | Administrators | Vendor 1 | | |
| | org.openqa.selenium.NoSuchElementException: Cannot locate option with text: Administrators For documentation on this error, please visit: https://selenium.dev/exceptions/#no_such_element Build info: version: '4.6.0', revision: '79f1c02ae20' System info: os.name: 'Windows 11', os. arch: 'amd64', os.version: '10.0', java.version: '11.0.17' Driver info: driver.version: unknown at org.openqa.selenium.support.ui.Select.selectByVisibleText(Select.java:153) at utils.Addcustomers.setvendors(Addcustomers.java:152) at Stepdefinitions.stepdefinitions.i_set_customer_info(stepdefinitions.java:133) at ?.i set customer info(file:///C:/SEKKKK/New%20folder/fvjl/features/login.feature:24) * Not displayable characters are replaced by '?'. | | | | | | | | | | |
| 8 | When i enter all details An | d click save butt | on | | | | | | | SKIPPED | 0.002 s |
| | AFTER - Stepdefinitions.s | tepdefinitions.tal | kescreens | hot(io.cuc | cumber.j | ava.Scenario | D) | | | FAILED | 0.010 s |

| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| # | org.openqa.selenium.NoSuchWindowException: no such window: target window already closed from unknown error: web view not found (Session info: chrome=110.0.5481.100) Build info: version: '4.6.0', revision: '79f1c02ae20' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '11.0.17' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [c46a248dcc3a8f8dff67590e395fb6b4, screenshot {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 110.0.5481.100, chrome: {chromedriverVersion: 110.0.5481.77 (65ed616c6e8e, userDataDir: C:\Users\MTEJA\AppData\Loca}, goog:chromeOptions: {debuggerAddress: localhost:50327}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:50327/devtoo, se:cdpVersion: 110.0.5481.100, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} Session ID: c46a248dcc3a8f8dff67590e395fb6b4 at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) | Status | Duration |
| | at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:62) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:490) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) | | |
| | at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:184) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) | | |
| | at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:541) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:596) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:600) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:331) | | |
| | at Stepdefinitions.stepdefinitions.takescreenshot(stepdefinitions.java:65) | | |

search the customer

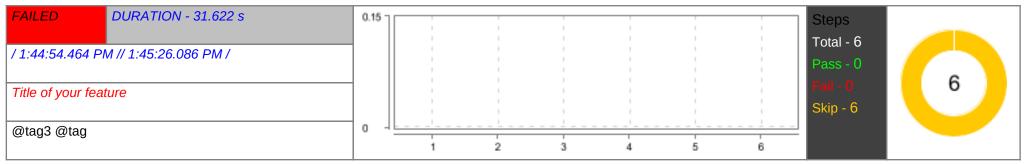

| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| | BEFORE - Stepdefinitions.stepdefinitions.setupbrowser() | FAILED | 31.610 s |
| | org.openqa.selenium.remote.UnreachableBrowserException: Error communicating with the remote browser. It may have died. Build info: | | |

| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| | version: '4.6.0', revision: '79f1c02ae20' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '11.0.17' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [f953c9f8c05bf4b16a4842e5ca6bed0f, get {url=http://admin-demo.nopcommerce.com}] Capabilities {acceptlnsecureCerts: false, browserName: chrome, browserVersion: 110.0.5481.100, chrome: {chromedriverVersion: 110.0.5481.77 (65ed616c6e8e, userDataDir: C:\Users\MTEJA\AppData\Loca}, goog:chromeOptions: {debuggerAddress: localhost:50404}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:50404/devtoo, se:cdpVersion: 110.0.5481.100, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, | | |
| | webauthn:virtualAuthenticators: true} Session ID: f953c9f8c05bf4b16a4842e5ca6bed0f | | |
| | at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:565) | | |
| | at org.openqa.selenium.remote.RemoteWebDriver.get(RemoteWebDriver.java:310) | | |
| | at Stepdefinitions.stepdefinitions.setupbrowser(stepdefinitions.java:57) | | |
| | Caused by: java.io.UncheckedIOException: java.io.IOException: An existing connection was forcibly closed by the remote host | | |
| | at org.openqa.selenium.remote.http.netty.NettyHttpHandler.makeCall(NettyHttpHandler.java:73) | | |
| | at org.openqa.selenium.remote.http.AddSeleniumUserAgent.lambda\$apply\$0(AddSeleniumUserAgent.java:42) | | |
| | at org.openqa.selenium.remote.http.Filter.lambda\$andFinally\$1(Filter.java:56) | | |
| | at org.openqa.selenium.remote.http.netty.NettyHttpHandler.execute(NettyHttpHandler.java:49) | | |
| | at org.openqa.selenium.remote.http.AddSeleniumUserAgent.lambda\$apply\$0(AddSeleniumUserAgent.java:42) | | |
| | at org.openqa.selenium.remote.http.Filter.lambda\$andFinally\$1(Filter.java:56) | | |
| | at org.openqa.selenium.remote.http.netty.NettyClient.execute(NettyClient.java:99) | | |
| | at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:181) | | |
| | at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) | | |
| | at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) | | |
| | at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:541) | | |
| | at org.openqa.selenium.remote.RemoteWebDriver.get(RemoteWebDriver.java:310) | | |
| | at Stepdefinitions.stepdefinitions.setupbrowser(stepdefinitions.java:57) | | |
| | at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method) | | |
| | at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:62) | | |
| | at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) | | |
| | at java.base/java.lang.reflect.Method.invoke(Method.java:566) | | |
| | at io.cucumber.java.lnvoker.dolnvoke(Invoker.java:66) | | |
| | at io.cucumber.java.Invoker.invoke(Invoker.java:24) | | |
| | at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) | | |
| | at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64) | | |
| | at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46) | | |
| | at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21) | | |
| | at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) | | |
| | at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) | | |
| | at io.cucumber.core.runner.TestStep.run(TestStep.java:57) | | |
| | at io.cucumber.core.runner.TestCase.run(TestCase.java:78) | | |
| | at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) | | |
| | at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) | | |

| # | Step / Hook Details | Status | Duration |
|-------------------------|--|--------|----------|
| at io.cucumber.core.ru | ntime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) | | |
| at io.cucumber.core.ru | ntime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) | | |
| at io.cucumber.core.ru | ntime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) | | |
| at io.cucumber.junit.Pi | ckleRunners\$NoStepDescriptions.run(PickleRunners.java:148) | | |
| at io.cucumber.junit.Fe | atureRunner.runChild(FeatureRunner.java:144) | | |
| at io.cucumber.junit.Fe | atureRunner.runChild(FeatureRunner.java:28) | | |
| at org.junit.runners.Pa | entRunner\$3.run(ParentRunner.java:290) | | |
| at org.junit.runners.Pa | entRunner\$1.schedule(ParentRunner.java:71) | | |
| at org.junit.runners.Pa | entRunner.runChildren(ParentRunner.java:288) | | |
| at org.junit.runners.Pa | entRunner.access\$000(ParentRunner.java:58) | | |
| at org.junit.runners.Pa | entRunner\$2.evaluate(ParentRunner.java:268) | | |
| at org.junit.runners.Pa | entRunner.run(ParentRunner.java:363) | | |
| at io.cucumber.junit.Fe | atureRunner.run(FeatureRunner.java:137) | | |
| at io.cucumber.junit.Cu | cumber.runChild(Cucumber.java:196) | | |
| at io.cucumber.junit.Cu | cumber.runChild(Cucumber.java:89) | | |
| at org.junit.runners.Pa | entRunner\$3.run(ParentRunner.java:290) | | |
| at org.junit.runners.Pa | entRunner\$1.schedule(ParentRunner.java:71) | | |
| | entRunner.runChildren(ParentRunner.java:288) | | |
| | entRunner.access\$000(ParentRunner.java:58) | | |
| | entRunner\$2.evaluate(ParentRunner.java:268) | | |
| | cumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) | | |
| | cumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) | | |
| at io.cucumber.junit.Cu | cumber\$StartTestRun.evaluate(Cucumber.java:233) | | |
| | cumber\$FinishTestRun.evaluate(Cucumber.java:248) | | |
| | entRunner.run(ParentRunner.java:363) | | |
| | al.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) | | |
| | al.junit.runner.TestExecution.run(TestExecution.java:40) | | |
| | al.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) | | |
| | al.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) | | |
| | al.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) | | |
| | al.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) | | |
| | eption: An existing connection was forcibly closed by the remote host | | |
| | .SocketDispatcher.read0(Native Method) | | |
| | .SocketDispatcher.read(SocketDispatcher.java:43) | | |
| | .IOUtil.readIntoNativeBuffer(IOUtil.java:276) | | |
| | .IOUtil.read(IOUtil.java:233) | | |
| - I | IOUtil.read(IOUtil.java:223) | | |
| • | .SocketChannelImpl.read(SocketChannelImpl.java:358) | | |
| | dByteBuf.setBytes(PooledByteBuf.java:259) | | |
| | actByteBuf.writeBytes(AbstractByteBuf.java:1132) | | |
| | ket.nio.NioSocketChannel.doReadBytes(NioSocketChannel.java:357) | | |

DETAILED SECTION -- 12 --

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | at io.netty.channel.nio.AbstractNioByteChannel\$NioByteUnsafe.read(AbstractNioByteChannel.java:151) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:788) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:834) | | |
| 1 | Given I open browser | SKIPPED | 0.000 s |
| 2 | When i enter send keys "admin@yourstore.com" And "admin" | SKIPPED | 0.000 s |
| 3 | When i click login | SKIPPED | 0.000 s |
| 4 | Then see the dashboardpage | SKIPPED | 0.000 s |
| 5 | When i click customers link And i click customers option "customers" | SKIPPED | 0.000 s |
| 6 | When i enter the sendkeys email "durgam799@gmail.com" | SKIPPED | 0.000 s |
| | AFTER - Stepdefinitions.stepdefinitions.takescreenshot(io.cucumber.java.Scenario) | FAILED | 0.008 s |
| | org.openqa.selenium.remote.UnreachableBrowserException: Error communicating with the remote browser. It may have died. Build info: version: '4.6.0', revision: '79f1c02ae20' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '11.0.17' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [f953c9f8c05bf4b16a4842e5ca6bed0f, screenshot {}] Capabilities {acceptinsecureCerts: false, browserName: chrome, browserVersion: 110.0.5481.100, chrome: {chromedriverVersion: 110.0.5481.77 (65ed616c6e8e, userDataDir: C:\Users\MTEJA\AppData\Loca}, goog:chromeOptions: {debuggerAddress: localhost:50404}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: WINDOWS, proxy: Proxy(), ser.odp. ws://localhost:50404/devtoo, ser.odp/version: 110.0.5481.100, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} Session ID: f953c9f8c05bf4b16a4842e5ca6bed0f at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:596) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:596) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:331) at Stepdefinitions.stepdefinitions.takescreenshot(stepdefinitions.java:65) Caused by: java.io.UncheckedIOException: java.net.ConnectException: Connection refused: no further information: localhost/ 0.0:0:0:0:0:1:39041 at org.openqa.selenium.remote.http.netty.NettyHttpHandler.makeCall(NettyHttpHandler.java:73) at org.openqa.selenium.remote.http.AddSeleniumUserAgent.lambda\$apply\$0(AddSeleniumUserAgent.java:42) at org.openqa.selenium.remote.http.AddSeleniumUserAgent.lambda\$apply\$0(AddSeleniumUserAgent.java:42) at org.openqa.selenium.remote.http.AddSeleniumUserAgent.lambda\$apply\$0(AddSeleniumUserAgent.java:42) at org.openqa.selenium.remote.http.Filter.lambda\$andFinally\$1(Fil | | |

| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| | at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:181) | | |
| | at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) | | |
| | at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) | | |
| | at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:541) | | |
| | at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:596) | | |
| | at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:600) | | |
| | at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:331) | | |
| | at Stepdefinitions.stepdefinitions.takescreenshot(stepdefinitions.java:65) | | |
| | at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invokeO(Native Method) | | |
| | at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:62) | | |
| | at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) | | |
| | at java.base/java.lang.reflect.Method.invoke(Method.java:566) | | |
| | at io.cucumber.java.lnvoker.dolnvoke(lnvoker.java:66) | | |
| | at io.cucumber.java.Invoker.invoke(Invoker.java:24) | | |
| | at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) | | |
| | at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64) | | |
| | at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46) | | |
| | at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21) | | |
| | at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) | | |
| | at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) | | |
| | at io.cucumber.core.runner.TestStep.run(TestStep.java:57) | | |
| | at io.cucumber.core.runner.TestCase.run(TestCase.java:90) | | |
| | at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) | | |
| | at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) | | |
| | at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) | | |
| | at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) | | |
| | at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) | | |
| | at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) | | |
| | at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) | | |
| | at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) | | |
| | at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:290) | | |
| | at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:71) | | |
| | at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:288) | | |
| | at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:58) | | |
| | at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:268) | | |
| | at org.junit.runners.ParentRunner.run(ParentRunner.java:363) | | |
| | at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) | | |
| | at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) | | |
| | at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) | | |
| | at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:290) | | |
| | at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:71) | | |

| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| | at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:288) | | |
| | at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:58) | | |
| | at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:268) | | |
| | at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) | | |
| | at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) | | |
| | at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) | | |
| | at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) | | |
| | at org.junit.runners.ParentRunner.run(ParentRunner.java:363) | | |
| | at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) | | |
| | at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) | | |
| | Caused by: java.net.ConnectException: Connection refused: no further information: localhost/0:0:0:0:0:0:0:0:1:39041 | | |
| | at org.asynchttpclient.netty.channel.NettyConnectListener.onFailure(NettyConnectListener.java:179) | | |
| | at org.asynchttpclient.netty.channel.NettyChannelConnector\$1.onFailure(NettyChannelConnector.java:108) | | |
| | at org.asynchttpclient.netty.SimpleChannelFutureListener.operationComplete(SimpleChannelFutureListener.java:28) | | |
| | at org.asynchttpclient.netty.SimpleChannelFutureListener.operationComplete(SimpleChannelFutureListener.java:20) | | |
| | at io.netty.util.concurrent.DefaultPromise.notifyListener0(DefaultPromise.java:578) | | |
| | at io.netty.util.concurrent.DefaultPromise.notifyListeners0(DefaultPromise.java:571) | | |
| | at io.netty.util.concurrent.DefaultPromise.notifyListenersNow(DefaultPromise.java:550) | | |
| | at io.netty.util.concurrent.DefaultPromise.notifyListeners(DefaultPromise.java:491) | | |
| | at io.netty.util.concurrent.DefaultPromise.setValue0(DefaultPromise.java:616) | | |
| | at io.netty.util.concurrent.DefaultPromise.setFailure0(DefaultPromise.java:609) | | |
| | at io.netty.util.concurrent.DefaultPromise.tryFailure(DefaultPromise.java:117) | | |
| | at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.fulfillConnectPromise(AbstractNioChannel.java:321) | | |
| | at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:337) | | |
| | at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776) | | |
| | at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) | | |
| | at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) | | |
| | at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) | | |
| | at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) | | |
| | at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) | | |
| | at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) | | |
| | at java.base/java.lang.Thread.run(Thread.java:834) | | |
| | Caused by: io.netty.channel.AbstractChannel\$AnnotatedConnectException: Connection refused: no further information: localhost/ | | |
| | 0:0:0:0:0:0:0:1:39041 Caused by: java.net.ConnectException: Connection refused: no further information | | |
| | at java.base/sun.nio.ch.SocketChannelImpl.checkConnect(Native Method) | | |
| | at java.base/sun.nio.ch.SocketChannelImpl.finishConnect(SocketChannelImpl.java:779) | | |
| | at io.netty.channel.socket.nio.NioSocketChannel.doFinishConnect(NioSocketChannel.java:337) | | |

DETAILED SECTION -- 15 --

| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| | at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:334) | | |
| | at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776) | | |
| | at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) | | |
| | at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) | | |
| | at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) | | |
| | at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) | | |
| | at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) | | |
| | at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) | | |
| | at java.base/java.lang.Thread.run(Thread.java:834) | | |