Start: Feb 19, 2:19:31.839 PM End: Feb 19, 2:19:33.748 PM **Duration** : 1.909 s Scenarios **Features** Steps PASSED - 0 PASSED - 0 PASSED - 0 SKIPPED - 0 SKIPPED - 0 SKIPPED - 8 8 40 50 60 40 50 60 40 50 60 30 Pass % 70 30 Pass % 70 30 Pass % 70 20 80 20 20 80 80 90 90 100

| Feature | | | Scer | nario | | Step | | | |
|-----------------------|----------|---|------|-------|---|------|---|---|---|
| Name | Duration | T | P | F | S | T | P | F | S |
| Title of your feature | 1.909 s | 1 | 0 | 1 | 0 | 8 | 0 | 0 | 8 |

| Tag | | Scer | nario | | Feature | | | | |
|-------|---|------|-------|---|---------|---|---|---|--|
| Name | T | P | F | S | T | P | F | S | |
| @tag | 1 | 0 | 1 | 0 | 1 | 0 | 1 | 0 | |
| @tag1 | 1 | 0 | 1 | 0 | 1 | 0 | 1 | 0 | |

FEATURES SUMMARY -- 4



| # | Feature Name | T | P | F | S | Duration |
|---|-----------------------|---|---|---|---|----------|
| 1 | Title of your feature | 1 | 0 | 1 | 0 | 1.909 s |

SCENARIOS SUMMARY -- 5 --




| # | | Scenario Name | T | P | F | S | Duration |
|---|-----------------------|---------------|---|---|---|---|----------|
| 1 | Title of your feature | <u>login</u> | 8 | 0 | 0 | 8 | 1.904 s |

DETAILED SECTION -- 6 --

Title of your feature

| FAILED | DURATION - 1.909 s | Scenarios | | Steps | |
|-----------------------|--------------------|-----------|---|-----------|-----|
| | | Total - 1 | | Total - 8 | |
| / 2:19:31.839 PM // 2 | 2:19:33.748 PM / | Pass - 0 | 1 | Pass - 0 | 8 N |
| | | Fail - 1 | | Fail - 0 | |
| | | Skip - 0 | | Skip - 8 | |
| | | | | | |

login

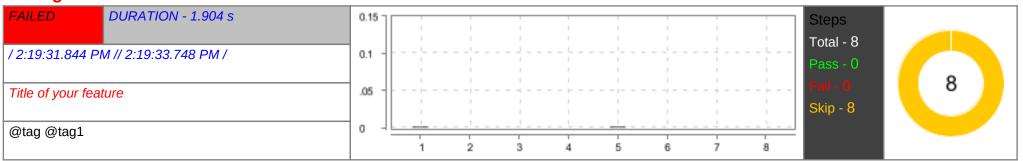

| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| | BEFORE - Stepdefinitions.stepdefinitions.setupbrowser() | FAILED | 1.884 s |
| | org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Possible causes are invalid address of the remote server or browser start-up failure. Host info: host: 'LAPTOP-KNCJI4TL', ip: '192.168.113.129' Build info: version: '4.6.0', revision: '79f1c02ae20' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '11.0.17' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, newSession {capabilities=[Capabilities {browserName: chrome, goog:chromeOptions: {args: [], extensions: []}}], desiredCapabilities=Capabilities {browserName: chrome, goog:chromeOptions: {args: [], extensions: []}}] at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:559) at org.openqa.selenium.remote.RemoteWebDriver.startSession(RemoteWebDriver.java:242) at org.openqa.selenium.remote.RemoteWebDriver. at org.openqa.selenium.chromium.ChromiumDriver. <init>(ChromiumDriver.java:157) at org.openqa.selenium.chrome.ChromeDriver.<init>(ChromeDriver.java:101) at org.openqa.selenium.chrome.ChromeDriver.<init>(ChromeDriver.java:49)</init></init></init> | FAILED | 1.884 S |
| | at Stepdefinitions.stepdefinitions.setupbrowser(stepdefinitions.java:51) Caused by: java.lang.NoClassDefFoundError: io/netty/handler/codec/DefaultHeaders\$ValueValidator | | |
| | at org.asynchttpclient.RequestBuilderBase. <init>(RequestBuilderBase.java:98)</init> | | |
| | at org.asynchttpclient.RequestBuilderBase. <init>(RequestBuilderBase.java:92)</init> | | |
| | at org.asynchttpclient.RequestBuilder. <init>(RequestBuilder.java:35)</init> | | |
| | at org.asynchttpclient.RequestBuilder. <init>(RequestBuilder.java:31)</init> | | |

| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| | at org.asynchttpclient.Dsl.request(Dsl.java:73) | | |
| | at org.openqa.selenium.remote.http.netty.NettyMessages.toNettyRequest(NettyMessages.java:58) | | |
| | at org.openqa.selenium.remote.http.netty.NettyHttpHandler.makeCall(NettyHttpHandler.java:56) | | |
| | at org.openqa.selenium.remote.http.AddSeleniumUserAgent.lambda\$apply\$0(AddSeleniumUserAgent.java:42) | | |
| | at org.openqa.selenium.remote.http.Filter.lambda\$andFinally\$1(Filter.java:56) | | |
| | at org.openqa.selenium.remote.http.netty.NettyHttpHandler.execute(NettyHttpHandler.java:49) | | |
| | at org.openqa.selenium.remote.http.AddSeleniumUserAgent.lambda\$apply\$0(AddSeleniumUserAgent.java:42) | | |
| | at org.openqa.selenium.remote.http.Filter.lambda\$andFinally\$1(Filter.java:56) | | |
| | at org.openqa.selenium.remote.http.netty.NettyClient.execute(NettyClient.java:99) | | |
| | at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:122) | | |
| | at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:101) | | |
| | at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:67) | | |
| | at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:156) | | |
| | at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) | | |
| | at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) | | |
| | at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:541) | | |
| | at org.openqa.selenium.remote.RemoteWebDriver.startSession(RemoteWebDriver.java:242) | | |
| | at org.openqa.selenium.remote.RemoteWebDriver. <init>(RemoteWebDriver.java:157)</init> | | |
| | at org.openqa.selenium.chromium.ChromiumDriver. <init>(ChromiumDriver.java:101)</init> | | |
| | at org.openqa.selenium.chrome.ChromeDriver. <init>(ChromeDriver.java:81)</init> | | |
| | at org.openqa.selenium.chrome.ChromeDriver. <init>(ChromeDriver.java:49)</init> | | |
| | at Stepdefinitions.stepdefinitions.setupbrowser(stepdefinitions.java:51) | | |
| | at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method) | | |
| | at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:62) | | |
| | at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) | | |
| | at java.base/java.lang.reflect.Method.invoke(Method.java:566) | | |
| | at io.cucumber.java.Invoker.doInvoke(Invoker.java:66) | | |
| | at io.cucumber.java.Invoker.invoke(Invoker.java:24) | | |
| | at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) | | |
| | at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64) | | |
| | at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46) | | |
| | at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21) | | |
| | at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) | | |
| | at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) | | |
| | at io.cucumber.core.runner.TestStep.run(TestStep.java:57) | | |
| | at io.cucumber.core.runner.TestCase.run(TestCase.java:78) | | |
| | at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) | | |
| | at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) | | |
| | at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) | | |
| | at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) | | |
| | at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) | | |

| # | Step / Hook Details | Status | Duration |
|---|--|----------|----------|
| | at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) | | |
| | at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) | | |
| | at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) | | |
| | at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:290) | | |
| | at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:71) | | |
| | at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:288) | | |
| | at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:58) | | |
| | at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:268) | | |
| | at org.junit.runners.ParentRunner.run(ParentRunner.java:363) | | |
| | at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) | | |
| | at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) | | |
| | at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) | | |
| | at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:290) | | |
| | at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:71) | | |
| | at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:288) | | |
| | at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:58) | | |
| | at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:268) | | |
| | at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) | | |
| | at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) | | |
| | at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) | | |
| | at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) | | |
| | at org.junit.runners.ParentRunner.run(ParentRunner.java:363) | | |
| | at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) | | |
| | at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) | | |
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) | | |
| | Caused by: java.lang.ClassNotFoundException: io.netty.handler.codec.DefaultHeaders\$ValueValidator | | |
| | at java.base/jdk.internal.loader.BuiltinClassLoader.loadClass(BuiltinClassLoader.java:581) | | |
| | at java.base/jdk.internal.loader.ClassLoaders\$AppClassLoader.loadClass(ClassLoaders.java:178) | | |
| | at java.base/java.lang.ClassLoader.loadClass(ClassLoader.java:521) | 0.415555 | 2 224 |
| 1 | Given I open browser | SKIPPED | 0.001 s |
| 2 | When i enter send keys "admin@yourstore.com" And "admin" | SKIPPED | 0.000 s |
| 3 | When i click login | SKIPPED | 0.000 s |
| 4 | Then see the dashboardpage | SKIPPED | 0.000 s |
| 5 | When i click the productpage and " Products" option | SKIPPED | 0.001 s |
| 6 | Then i see the products page | SKIPPED | 0.000 s |
| 7 | When i click the edit option | SKIPPED | 0.000 s |

DETAILED SECTION -- 9 --

| # | Step / Hook Details | Status | Duration |
|---|--|---------|----------|
| 8 | When i click multimedia table and add the picture | SKIPPED | 0.000 s |
| | AFTER - Stepdefinitions.stepdefinitions.takescreenshot(io.cucumber.java.Scenario) | FAILED | 0.003 s |
| | java.lang.NullPointerException at Stepdefinitions.stepdefinitions.takescreenshot(stepdefinitions.java:63) | | |