

Spring Boot Application :

Code --> Main logic (Do not change)

Configurations --> DO change.2

Environments :


Local Machine --> localhost:8080

Dev Envriornment

QA/ Staging

...

Production --> Live

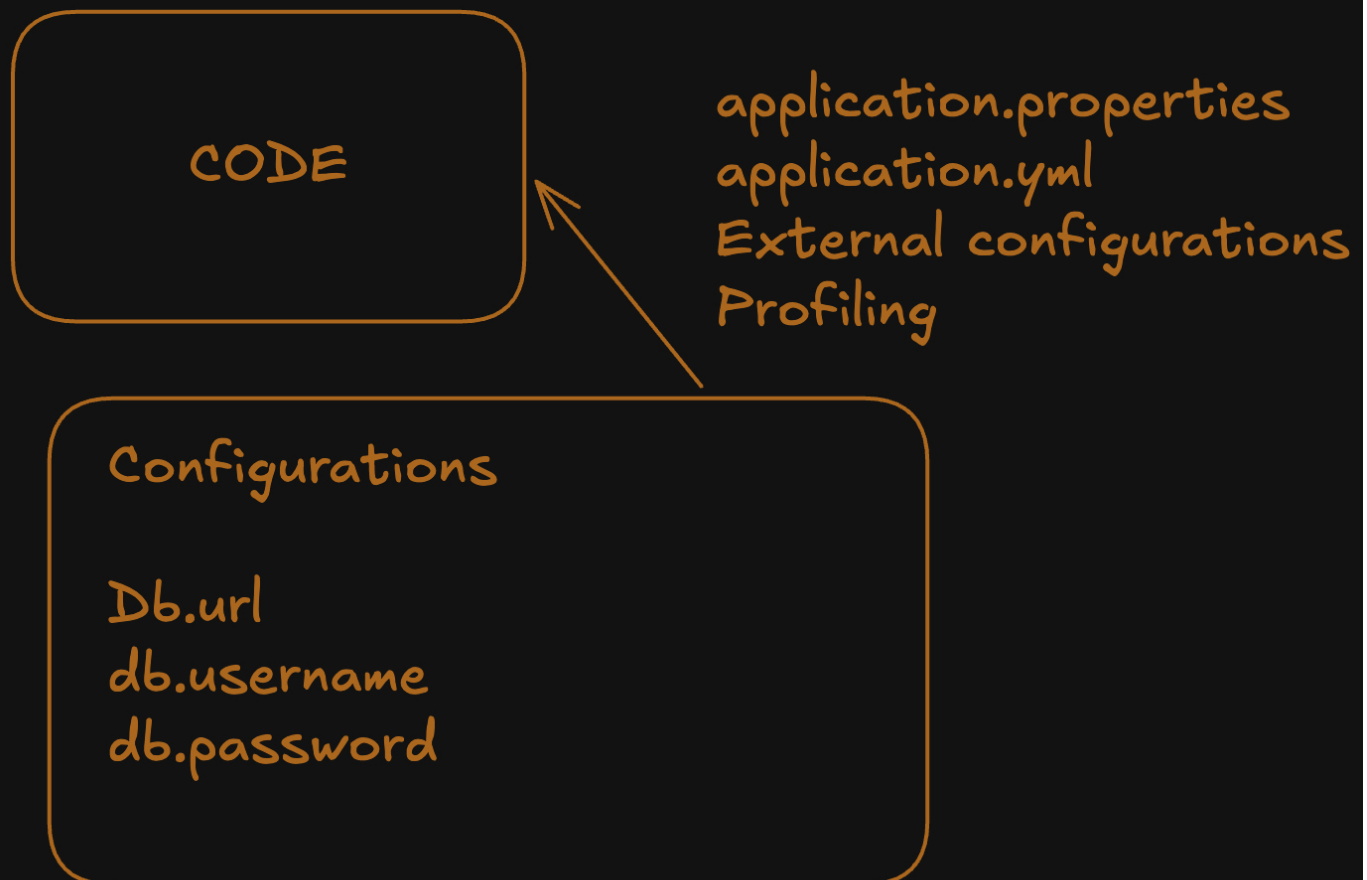

Profiling

application.properties


application-{profile}.properties

SpringBoot
Application

JAR

Command line

Environment
variables

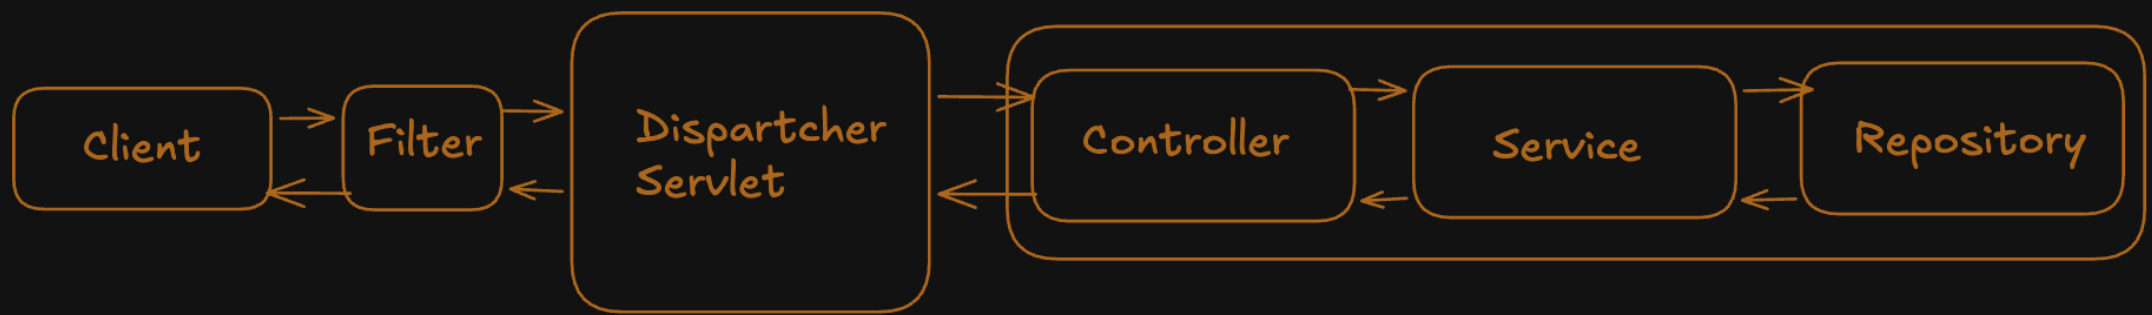

GET /api/students
Host : localhost:8080

50 APIs

Log request
Authenticate user
RequestId

Add RequestId
to response

Filters vs Interceptors

Filters are commonly used for :

1. Logging Req / Response
2. Security check (Authentication)
3. Req/Response modify
4. Encoding (UTF-8)

Inspect the request

Inspect headers

Inspect cookies

Check authentication information

Add response headers

Modify request or response wrappers

Block the request

Allow the request to continue

Log request details

Measure total request duration



/static/logo.png
/error
favicon.ico

Filter Lifecycle :

init()

doFilter()

destroy()

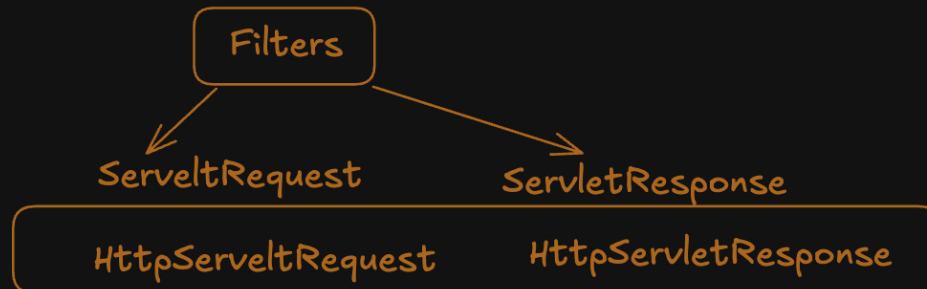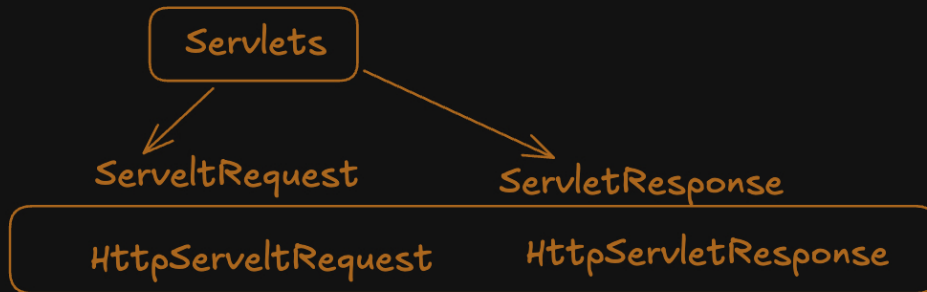

Filter :

1. Logging Purpose
2. Authentication
3. RequestId (new ReqId --> ReqId response)
4. Request time
5. Error Response to client