


## Week 7 Practical


### Database created:

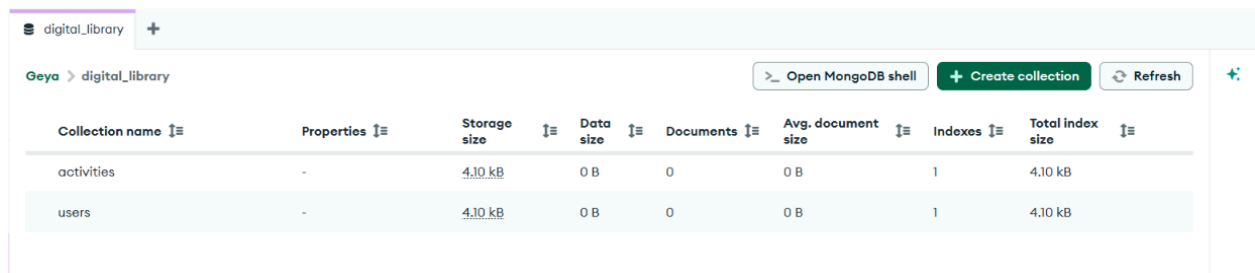

The screenshot shows the MongoDB Compass interface for a database named 'digital\_library'. It lists two collections: 'activities' and 'users'. Both collections have 0 documents, 0 B of data size, 0 B of average document size, 1 index, and 4.10 kB of total index size.


| Collection name | Properties | Storage size | Data size | Documents | Avg. document size | Indexes | Total index size |
|-----------------|------------|--------------|-----------|-----------|--------------------|---------|------------------|
| activities      | -          | 4.10 kB      | 0 B       | 0         | 0 B                | 1       | 4.10 kB          |
| users           | -          | 4.10 kB      | 0 B       | 0         | 0 B                | 1       | 4.10 kB          |

### POST/user:

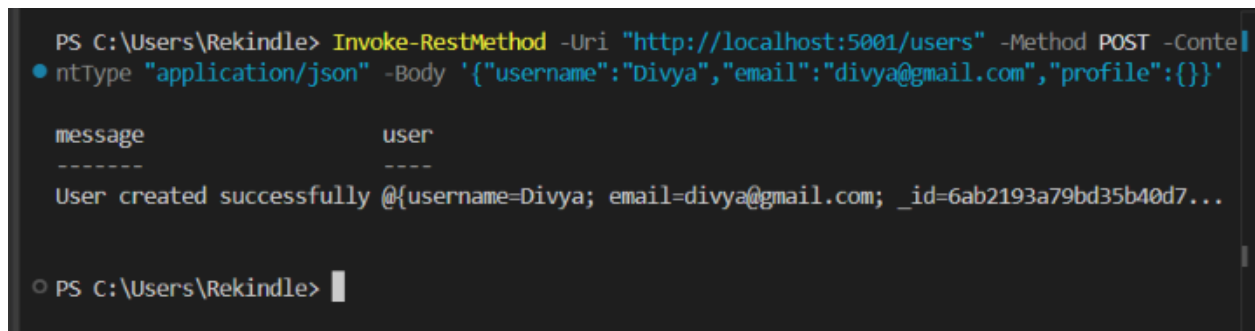

```
PS C:\Users\Rekindle> Invoke-RestMethod -Uri "http://localhost:5001/users" -Method POST -ContentType "application/json" -Body '{"username":"Divya","email":"divya@gmail.com","profile":{}}'

message          user
-----
User created successfully @{username=Divya; email=divya@gmail.com; _id=6ab2193a79bd35b40d73d086}
```

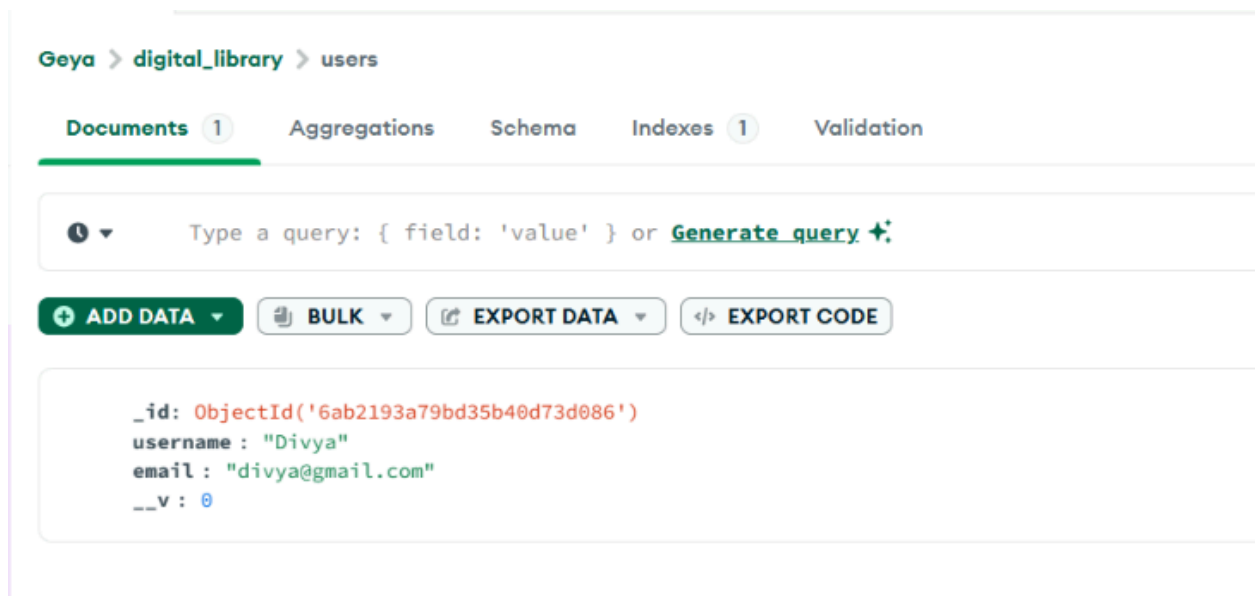


The screenshot shows the MongoDB Compass interface for the 'users' collection. It displays one document with the following fields: `_id` (ObjectId), `username` (Divya), `email` (divya@gmail.com), and `__v` (0).

Documents 1 Aggregations Schema Indexes 1 Validation



Type a query: { field: 'value' } or [Generate query](#)

[ADD DATA](#) [BULK](#) [EXPORT DATA](#) [EXPORT CODE](#)


```
_id: ObjectId('6ab2193a79bd35b40d73d086')
username: "Divya"
email: "divya@gmail.com"
__v: 0
```

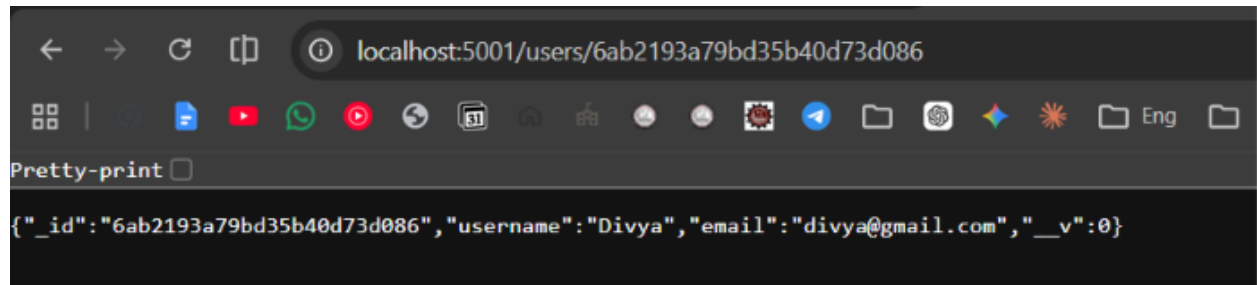

## POST/activities

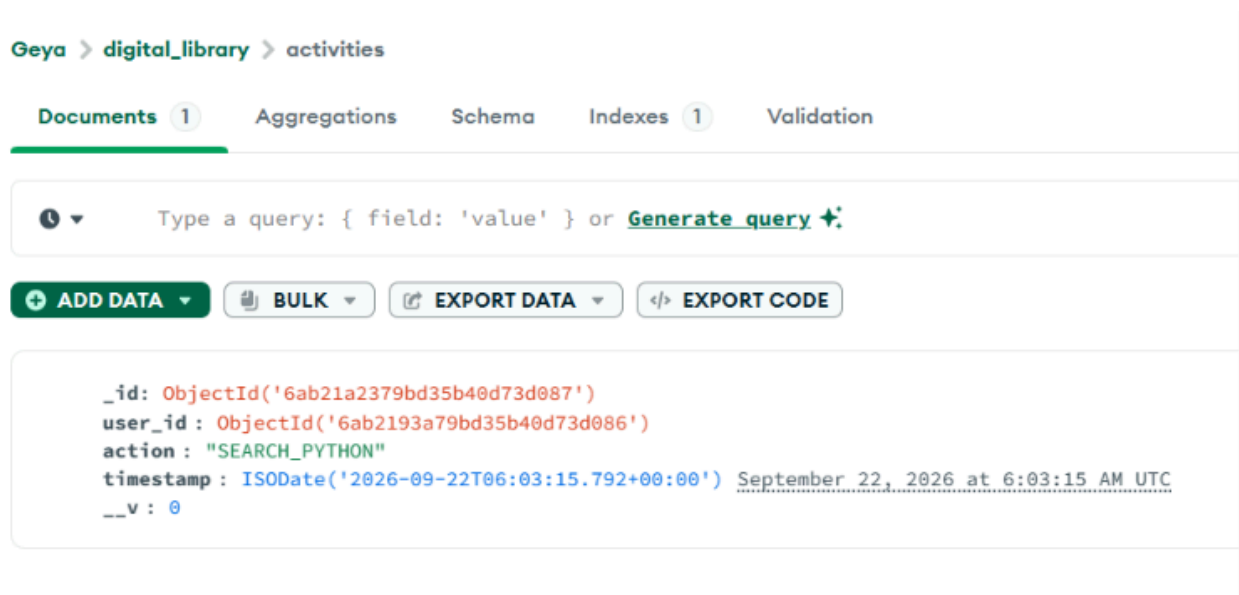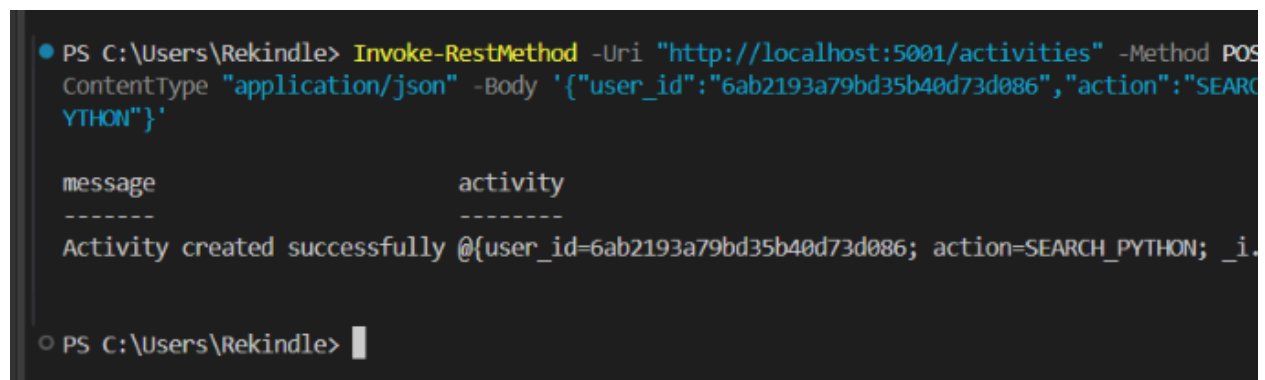

GET /activities/:user\_id

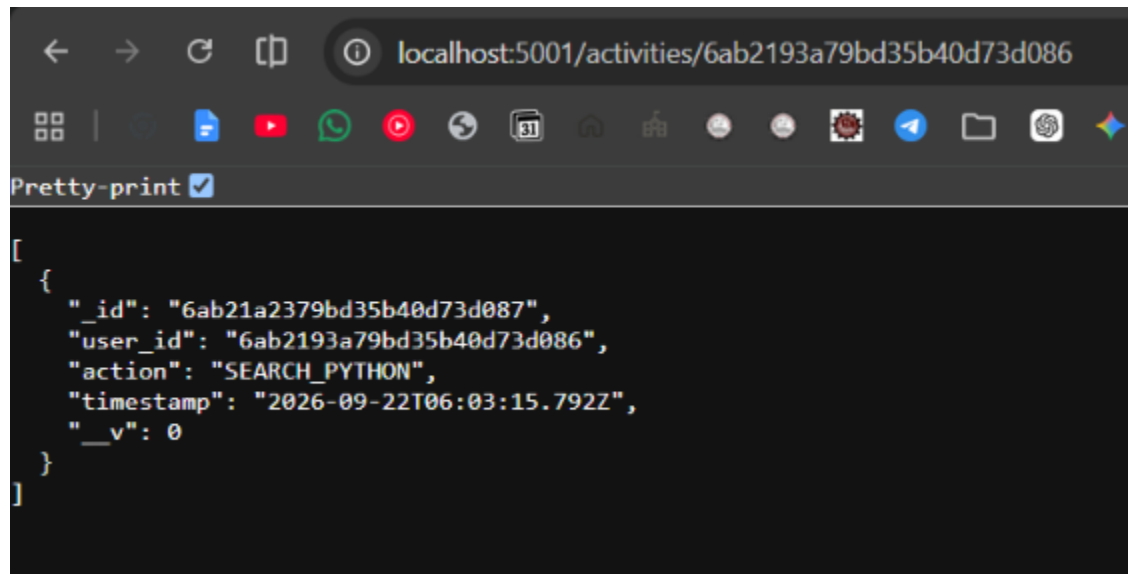

```
[
  {
    "_id": "6ab21a2379bd35b40d73d087",
    "user_id": "6ab2193a79bd35b40d73d086",
    "action": "SEARCH_PYTHON",
    "timestamp": "2026-09-22T06:03:15.792Z",
    "__v": 0
  }
]
```