VYBORA | BEGINNER GUIDE

AWS S3 Website Hosting

Click-by-click guide for a complete beginner

Simple words. Small steps. Original screenshots in order.

> **READ THIS FIRST** The screenshots show an uploaded HTML page opened from an S3 object URL. They do not show the separate “Static website hosting” setting. This guide marks that missing check clearly. Do not assume it was enabled.

PROJECT BY TEJAS SUDHAKAR KAMBLE

What you will build

You will put the VYBORA website file in an Amazon S3 bucket. A bucket is an online folder. You will then open a link and check that the page appears.

Guide map

- Before you start
- Screenshots 1–6: find S3 and create a bucket
- Screenshots 7–12: upload index.html
- Screenshot 13: find the file link
- Screenshots 14–16: open and check the page
- Extra check: turn on true S3 static website hosting
- Fixes, safety, and cleanup

1. Before you start

You need

- An AWS account that can create and change S3 buckets. AWS is the cloud service used in the screenshots.
- The ZIP file from this project. Unzip it on your computer.
- The file `Website-Landing-Page/index.html`. This is the web page file.
- A web browser and an internet connection.
- Time to check each setting before making it public.

Simple word list

Word	Simple meaning
S3 bucket	An online folder that stores files.
Object	A file stored in the bucket.
Public	Anyone with the link may be able to open the file.
Region	The AWS data-centre area. The screenshots show Mumbai, `ap-south-1`.
ACL	A file access list. It says who may read or change a file.
Encryption	A way to scramble stored files so they are harder to read without permission.
URL	A web link typed or pasted into a browser.
Website endpoint	A special S3 web address for a whole website. It is not the same as a file URL.

COST NOTE AWS may charge for storage or requests. Check your AWS account before you start. This guide does not estimate a price.

PROJECT BY TEJAS SUDHAKAR KAMBLE

SCREENSHOT NOTE AWS may change the names or places of buttons. If your screen looks different, stop and read the setting before you click. The pictures show one console version.

2. Create the S3 bucket

Follow screenshots 1 through 6 in order. A bucket name must be unique across S3. If the name shown in the screenshot is already used, make a new name with letters, numbers, and hyphens.

Step 1. Open S3

Where: Sign in to the AWS Console in your browser.

Click: Click the top search box. Type `S3`. Click the result named `S3` or `Amazon S3`.


Enter or choose: Nothing needs to be entered beyond `S3`.

What the screenshot shows: The search results show the S3 service.

What should happen next: The Amazon S3 page opens.

Common mistake and fix: If you see “S3 Glacier” or another service, choose the main S3 result.

PROJECT BY TEJAS SUDHAKAR KAMBLE

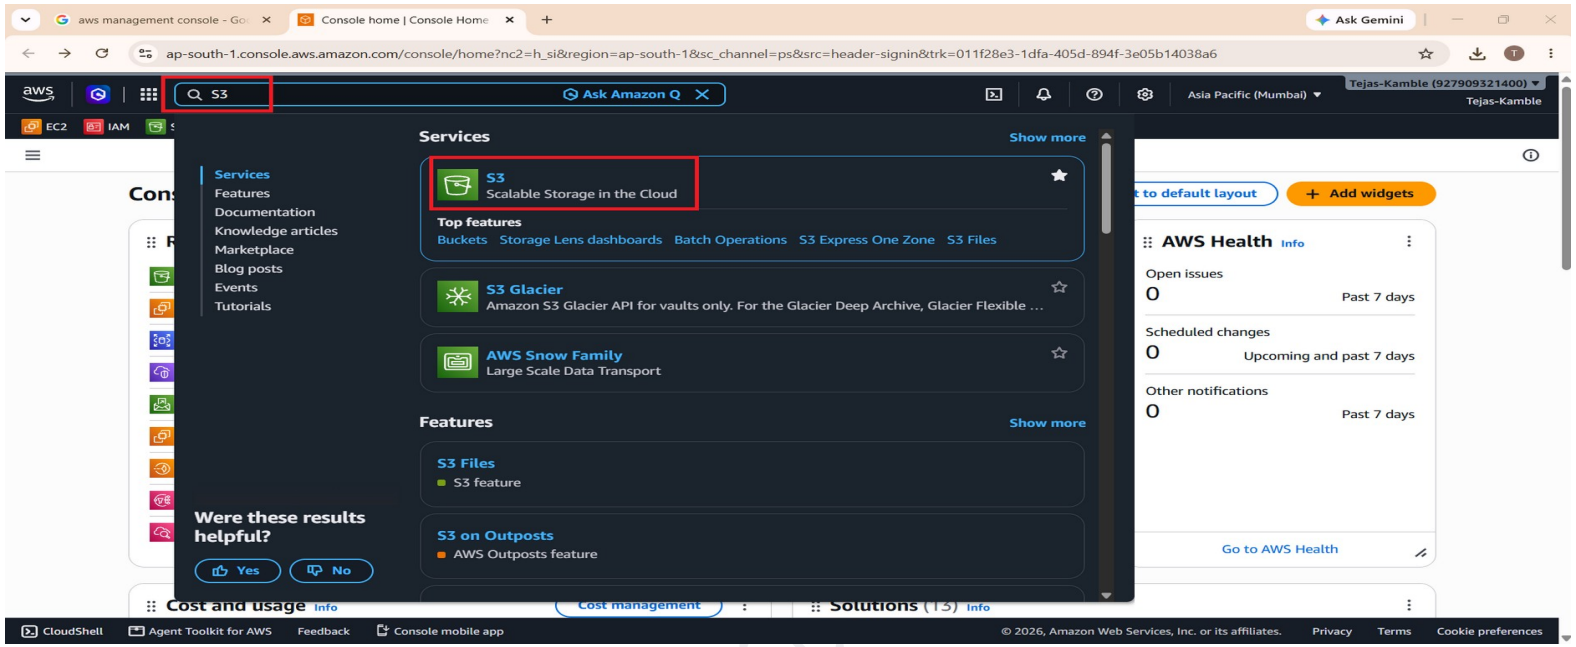

Screenshot 1 — AWS service search with S3 highlighted.

Step 2. Start a new bucket

Where: On the Amazon S3 page.

Click: Click `Create bucket`.


Enter or choose: No values on this page yet.

What the screenshot shows: The S3 home page and the `Create bucket` button.

What should happen next: The bucket form opens.

Common mistake and fix: If the button is missing, check that you opened Amazon S3 and have permission to create buckets.

PROJECT BY TEJAS S

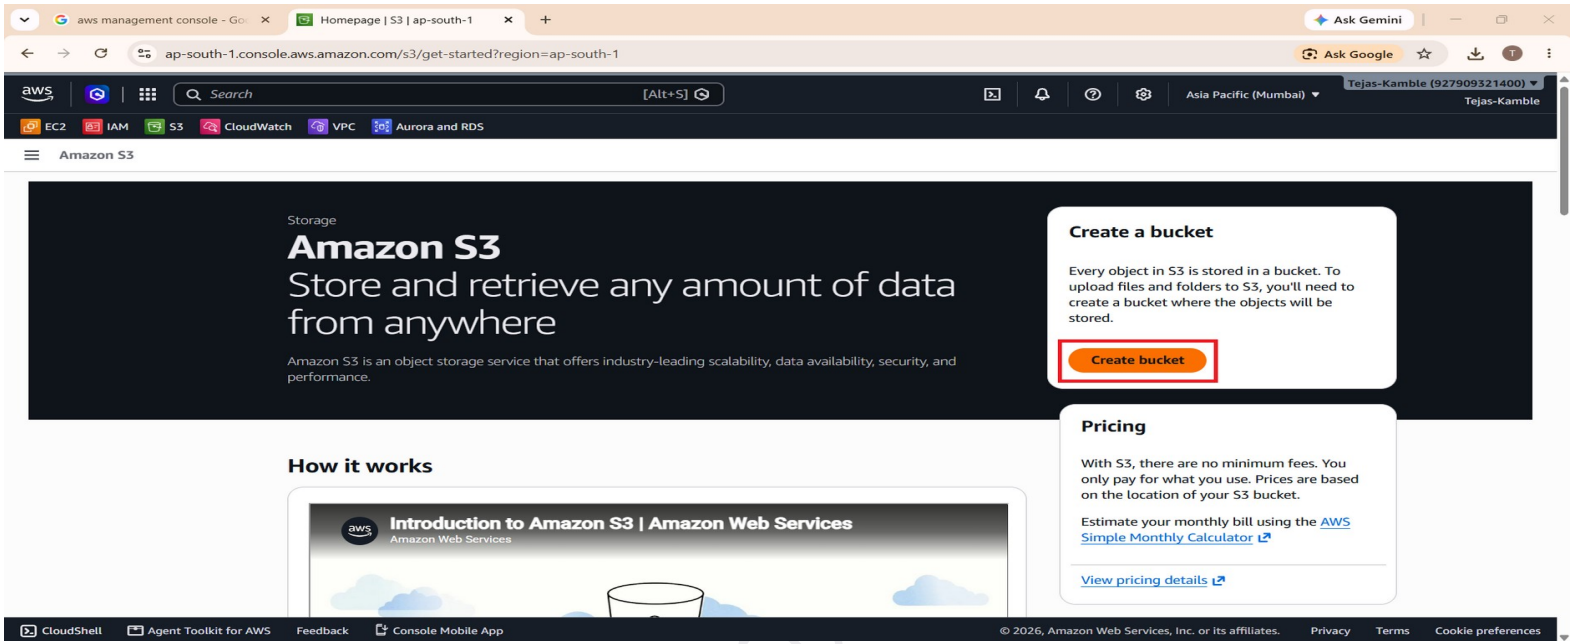

Screenshot 2 — S3 home page and Create bucket button.

Step 3. Choose region and bucket name

Where: At the top of the `Create bucket` form.

Click: Click the bucket name box.


Enter or choose: The picture shows `vybora-store-2026-tejas`. You may use it only if AWS says it is free. Otherwise, enter a different, unique name. The picture shows region `Asia Pacific (Mumbai) ap-south-1` and `General purpose`.

What the screenshot shows: The form shows a general-purpose bucket and a name. The global name choice is selected.

What should happen next: Scroll down to `Object Ownership`.

Common mistake and fix: Names must be unique. Try a small change, such as adding numbers, if AWS says the name is taken. Use lower-case letters, numbers, and hyphens.

PROJECT BY TEJAS S.K

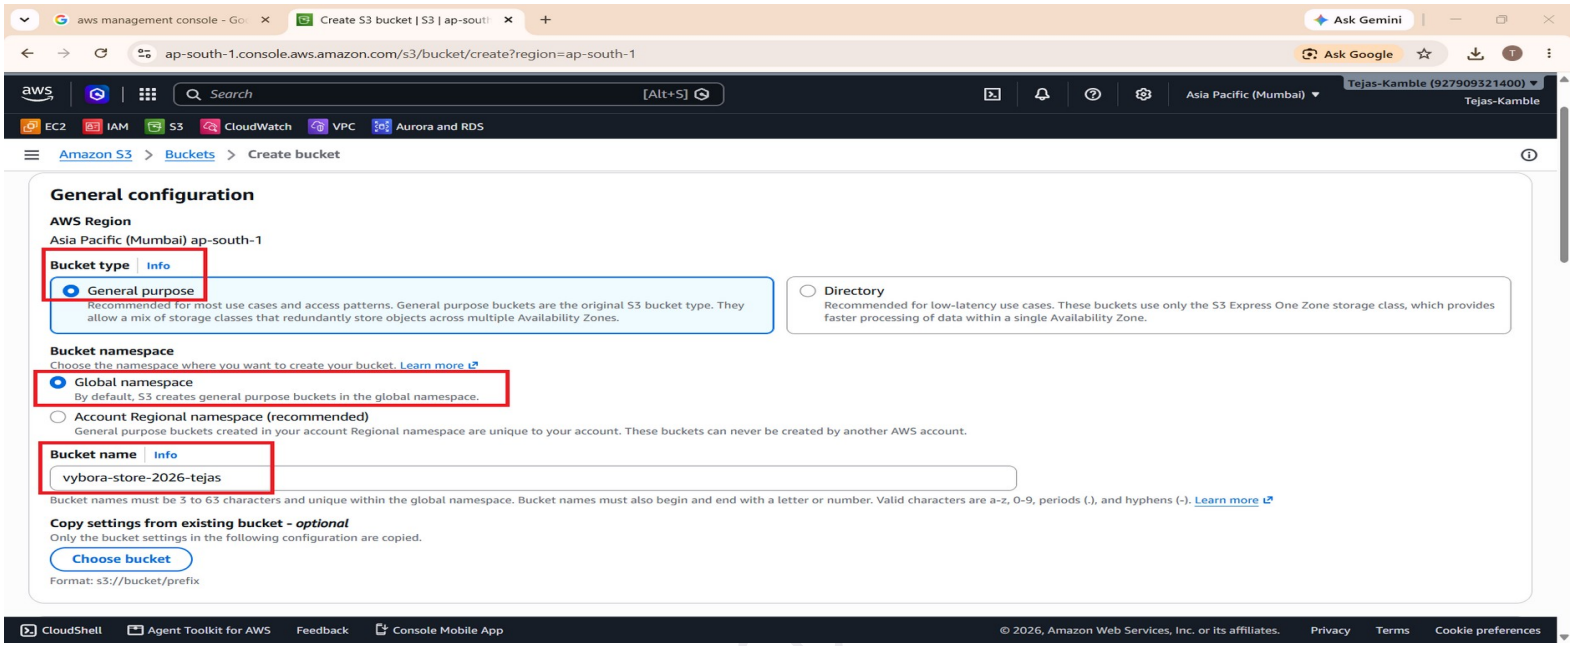

Screenshot 3 — Region, bucket type, namespace choice, and example name.

Step 4. Review who owns uploaded files

Where: Scroll to `Object Ownership`.

Click: The screenshot selects `ACLs enabled` and `Bucket owner preferred`. To match the picture, select those choices.


Enter or choose: Select `ACLs enabled`; keep `Bucket owner preferred` selected. ACLs are access lists. The page warns that ACLs are usually not recommended.

What the screenshot shows: The picture shows ACLs enabled and bucket owner preferred.

What should happen next: Scroll to the public-access settings.

Common mistake and fix: For a safer new setup, AWS usually recommends ACLs disabled. If you choose that safer option, later public-read ACL steps will not match. Use a bucket policy instead, or follow a safer private-bucket plus CDN setup. Do not mix the two methods.

PROJECT BY TEJAS S.

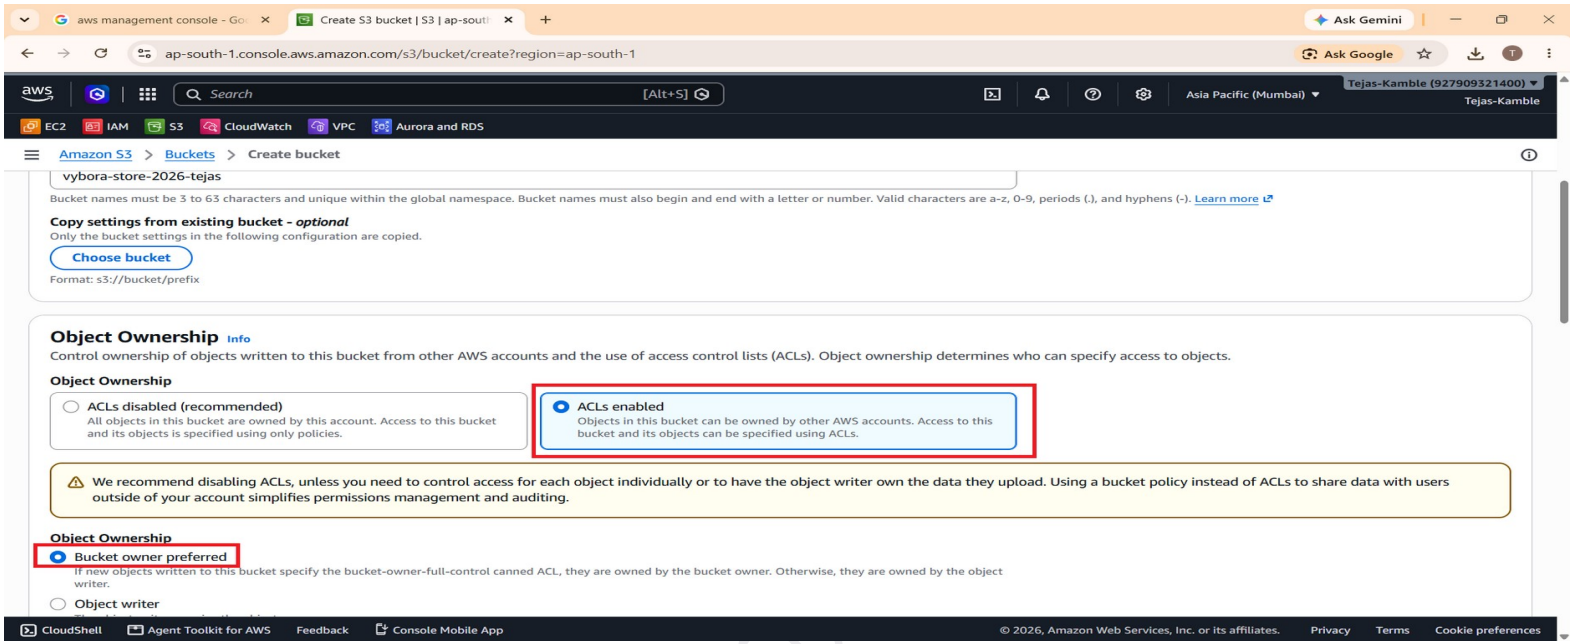

Screenshot 4 — Ownership choices, including the warning about ACLs.

Step 5. Review public access

Where: Scroll to `Block Public Access settings for this bucket`.

Click: The screenshot has `Block all public access` unchecked. It also checks the acknowledgement box. To repeat this public demo, only turn off public blocking if you understand that visitors may read the files.


Enter or choose: To match the picture: leave the block boxes unchecked and tick the acknowledgement. This makes public access possible.

What the screenshot shows: The screenshot shows a warning that files may become public.

What should happen next: Scroll to the encryption section.

Common mistake and fix: If you leave public access blocked, the later public-read step may fail. Do not turn it off for private or sensitive files. Only use a bucket with website files meant to be public.

PROJECT BY TEJAS S.

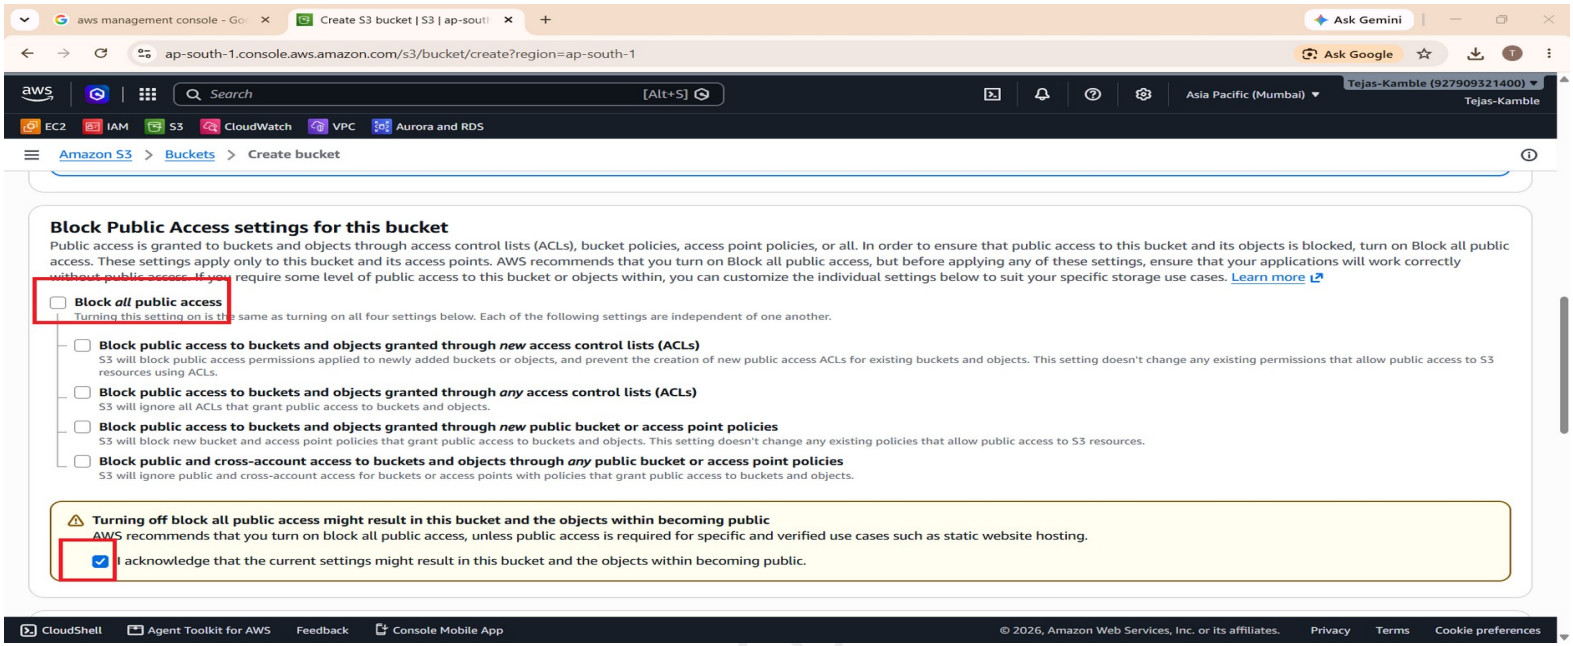

Screenshot 5 — Public access boxes and the warning acknowledgement.

Step 6. Review encryption and create the bucket

Where: Scroll to `Default encryption`.

Click: The screenshot selects `Server-side encryption with Amazon S3 managed keys (SSE-S3)`, turns `Bucket Key` on, and clicks `Create bucket`.


Enter or choose: For the screenshot setting, use SSE-S3 and enable Bucket Key. Then click `Create bucket`.

What the screenshot shows: The picture shows the encryption choices and orange `Create bucket` button.

What should happen next: Wait for the green bucket-created message.

Common mistake and fix: If the name is not unique, go back and choose another. If creation is denied, ask the AWS account owner to grant S3 bucket creation permission.

PROJECT BY TEJAS S.K

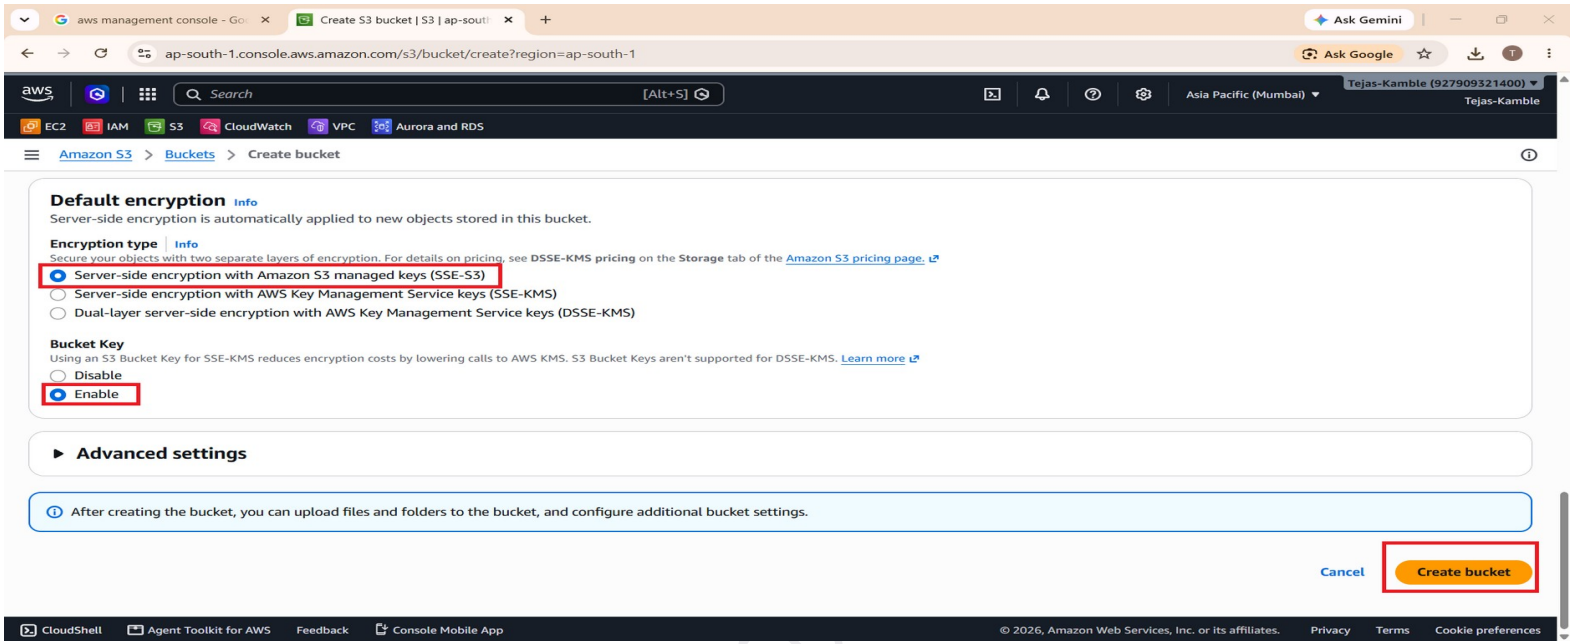

Screenshot 6 — SSE-S3, Bucket Key, and Create bucket.

3. Upload the website file

The screenshots use the file `index.html`. It is the main page file. Upload it to the top level of the bucket, not inside a new folder.

Step 7. Open the new bucket and start upload

Where: After the bucket is created, open its page.

Click: Click `Upload` or the `Upload` button in the empty Objects area.


Enter or choose: No value yet.

What the screenshot shows: A green message says the bucket was created. The Objects list is empty.

What should happen next: The upload page opens.

Common mistake and fix: If you are in the wrong bucket, click `Buckets` and open the name you just made.

PROJET BY TEJAS S

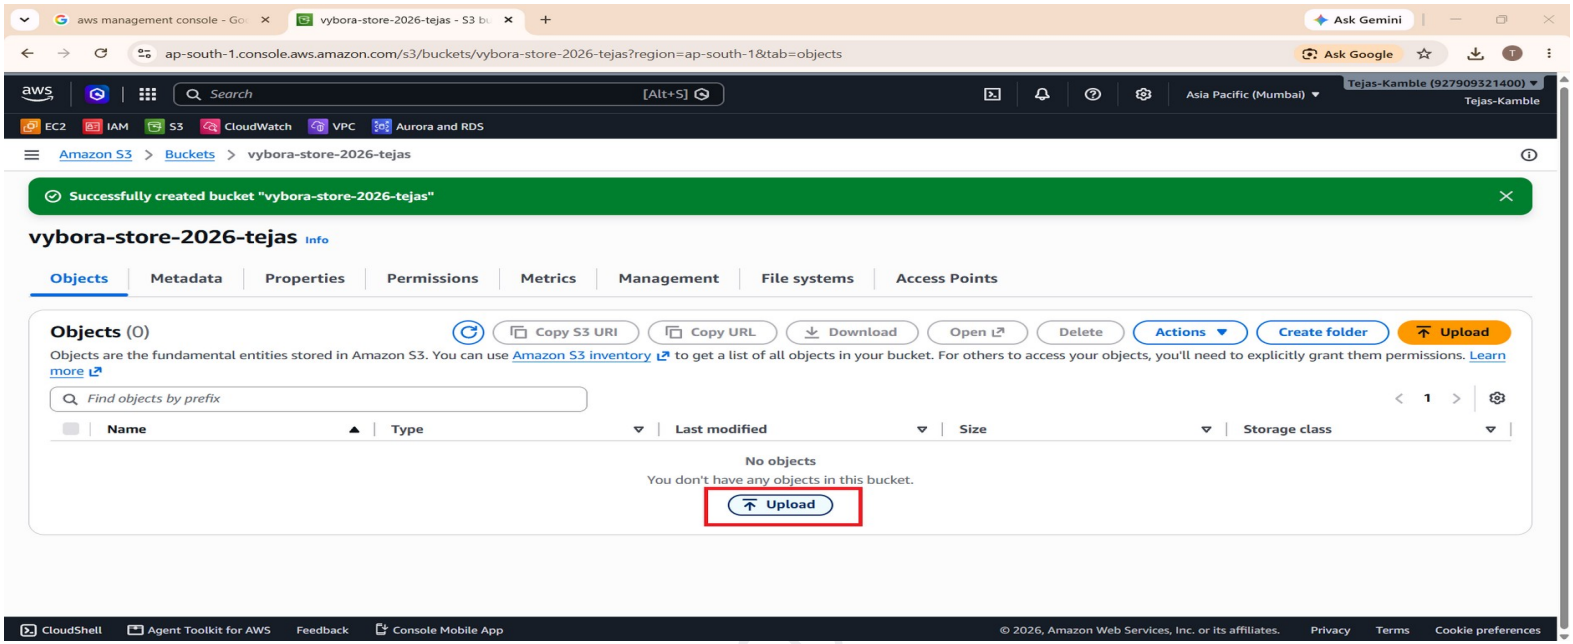

Screenshot 7 — Created bucket and Upload button.

Step 8. Choose to add a file

Where: On the S3 Upload page.

Click: Click `Add files`. Do not click `Add folder` for this step.


Enter or choose: No file chosen yet.

What the screenshot shows: The upload form shows the Add files button and destination bucket.

What should happen next: A file picker opens on your computer.

Common mistake and fix: If the picker does not open, allow the browser pop-up or click Add files again.

PROJECT BY TEJAS SU

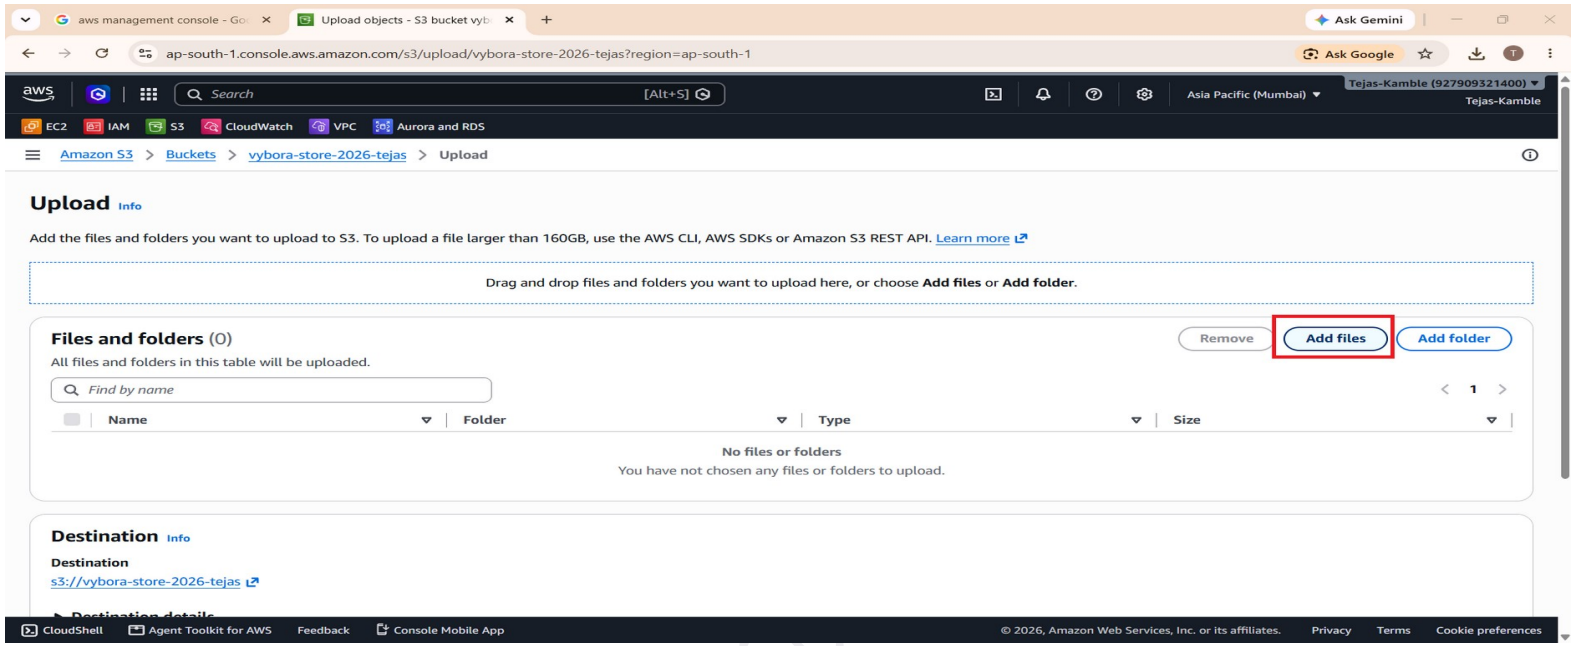

Screenshot 8 — Upload page with Add files selected.

Step 9. Select index.html

Where: In the file picker on your computer.

Click: Open the unzipped project folder, then open `Website-Landing-Page`. Click `index.html`, then click `Open`.


Enter or choose: Choose only `index.html` for this pictured upload.

What the screenshot shows: The screenshot shows `index.html` selected in a Windows file picker. The path on your computer can be different.

What should happen next: The file name appears in the S3 upload list.

Common mistake and fix: Do not choose the ZIP file. Do not rename the page file to something else. If you cannot see `.html`, check that file extensions are shown or confirm the file type.

PROJECT BY TEJAS S.

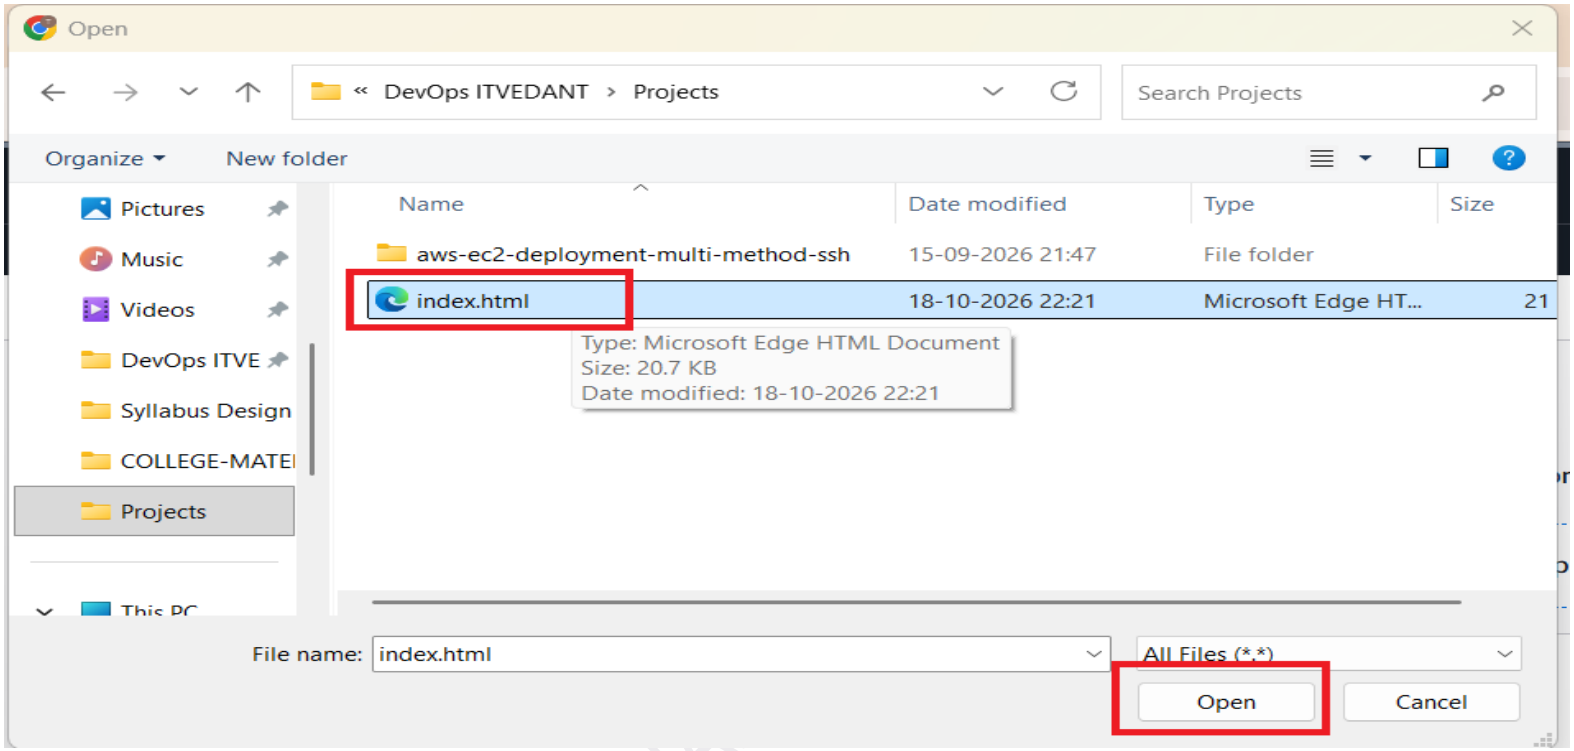

Screenshot 9 — File picker with index.html selected.

Step 10. Open upload permissions

Where: Back on the S3 Upload page after selecting the file.

Click: Scroll to `Permissions` and click the small arrow to open it.


Enter or choose: Keep the destination as the bucket you made.

What the screenshot shows: The screenshot shows one selected file and the closed Permissions area.

What should happen next: The permission choices appear below.

Common mistake and fix: If the file count is zero, go back to Add files and select index.html again.

PROJECT BY TEJAS

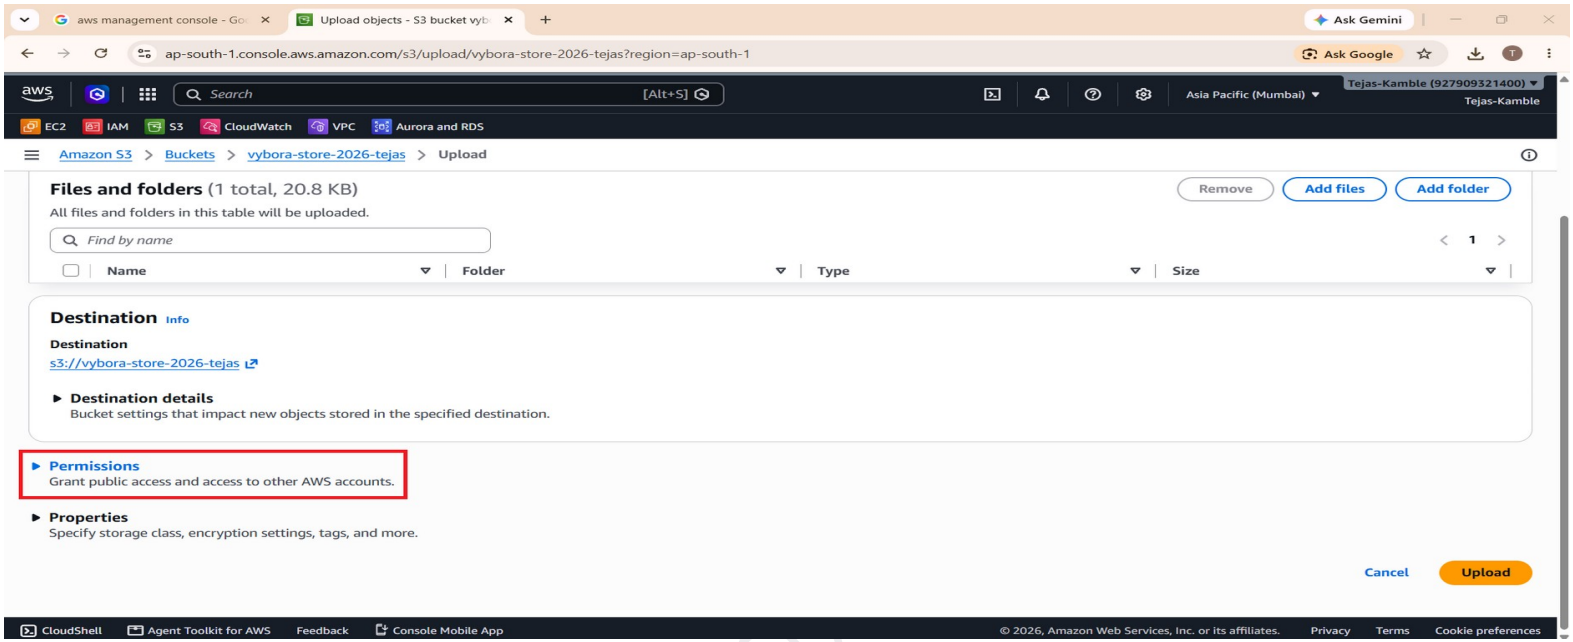

Screenshot 10 — Upload form and collapsed Permissions section.

Step 11. Choose public-read only for the demo

Where: Inside the open Permissions area.

Click: The screenshot selects `Grant public-read access` and ticks the risk acknowledgement. To match the picture, make those choices only for a public demo file. Then return to the bottom of the form.


Enter or choose: Choose the public-read option. Tick the box that says you understand the risk. Public-read means anyone can read this file.

What the screenshot shows: The screenshot shows the warning and public-read choice.

What should happen next: Click the orange `Upload` button at the bottom of the form.

Common mistake and fix: If the option is missing, ACLs may be disabled or public access may be blocked. Do not change security settings blindly. Check with the account owner or use a bucket policy. Never upload private information.

PROJECT BY TEJAS S

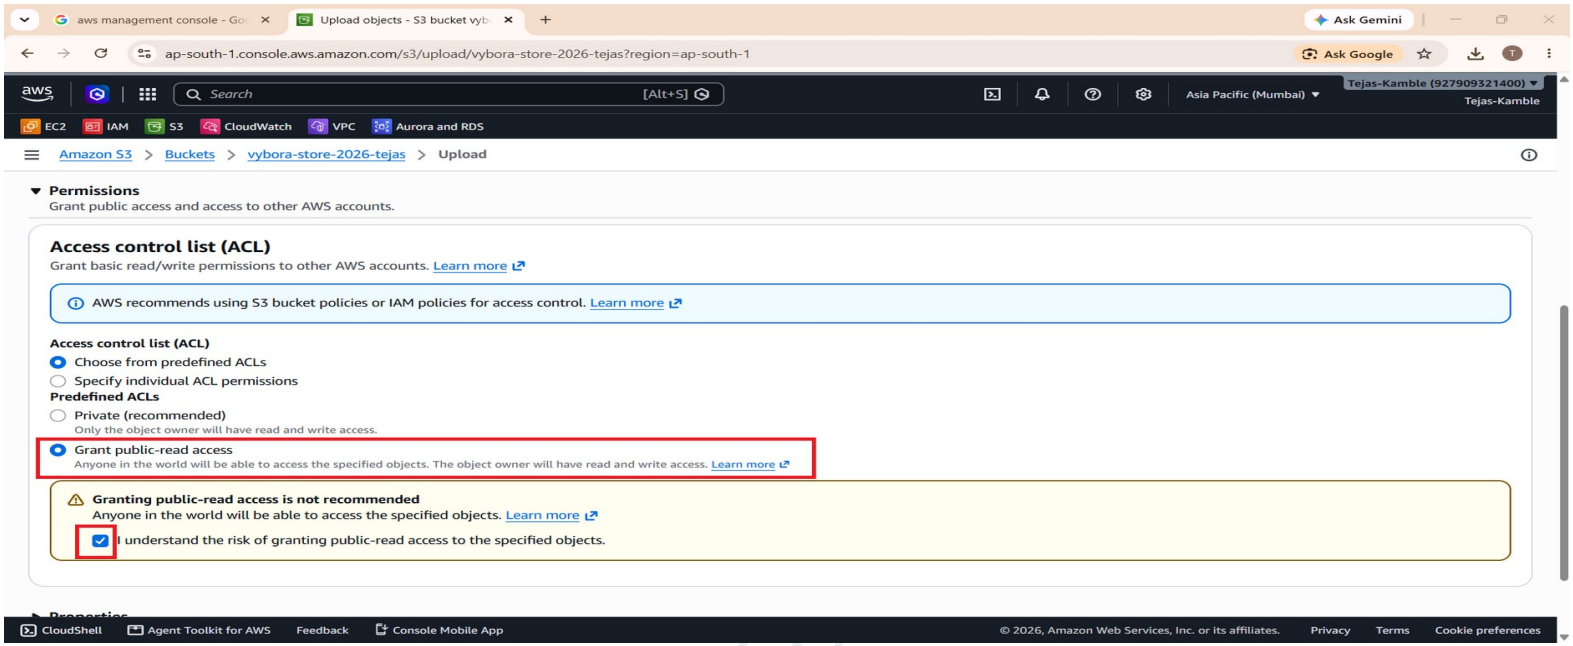

Screenshot 11 — Public-read choice and its warning.

Step 12. Upload and check success

Where: After clicking Upload.

Click: Wait for the upload result. The screenshot then clicks the `index.html` link.


Enter or choose: No new value.

What the screenshot shows: A green `Upload succeeded` message appears. One file named index.html is listed.

What should happen next: Click `index.html` to open its object details.

Common mistake and fix: If upload fails, read the error shown in the page. Check the file choice, access settings, and your AWS permissions. Retry only after you understand the error.

PROJECT BY TEJAS S.K.

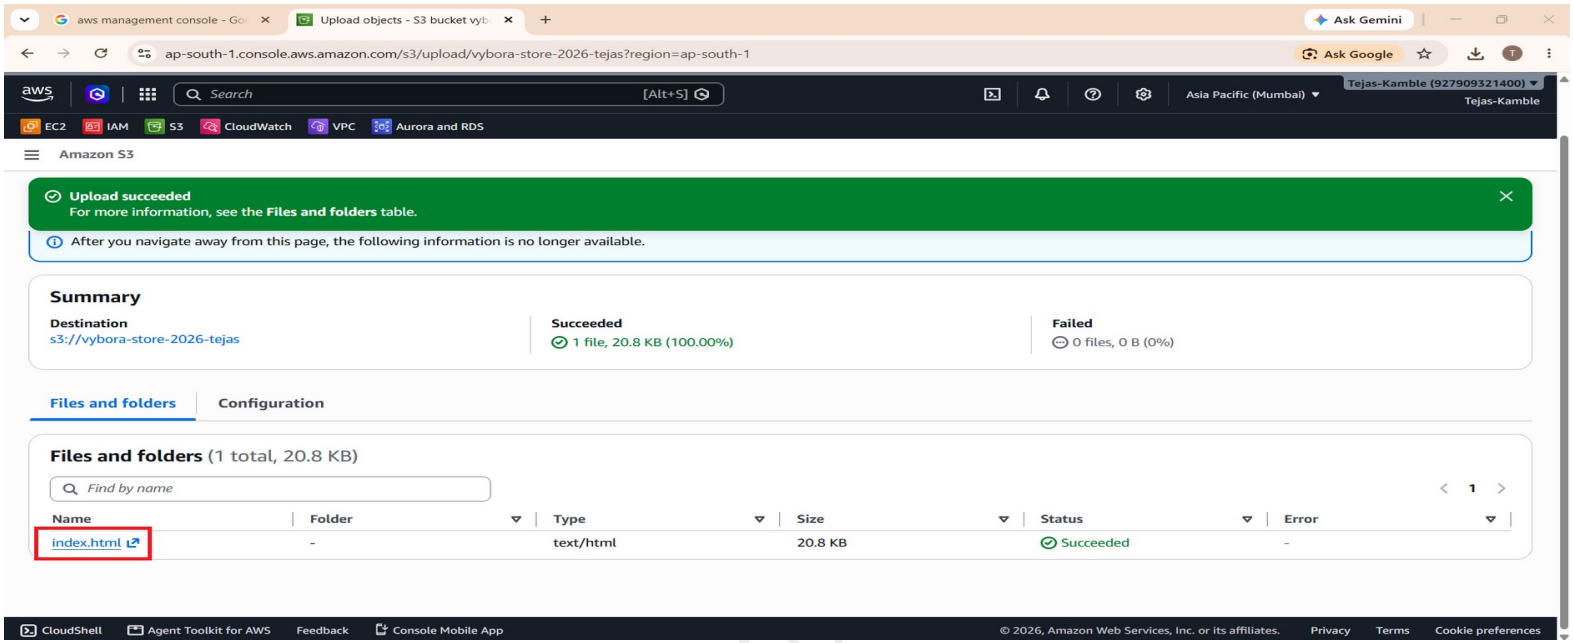

Screenshot 12 — Upload succeeded and index.html listed.

4. Find the link and check the page

Step 13. Find the object URL

Where: On the `index.html` object page.

Click: Find the `Object URL` line. Click its copy icon or select and copy the link.


Enter or choose: The screenshot URL contains the shown bucket name and ends in `/index.html`. Your URL will use your own bucket name.

What the screenshot shows: The picture shows object details and an Object URL.

What should happen next: Open a new browser tab and paste this URL.

Common mistake and fix: Do not copy the S3 URI. It begins `s3://` and is not a normal browser link. Copy the web address under `Object URL`. This is a file URL, not proof of a website endpoint.

PROJECT BY TEJAS SK

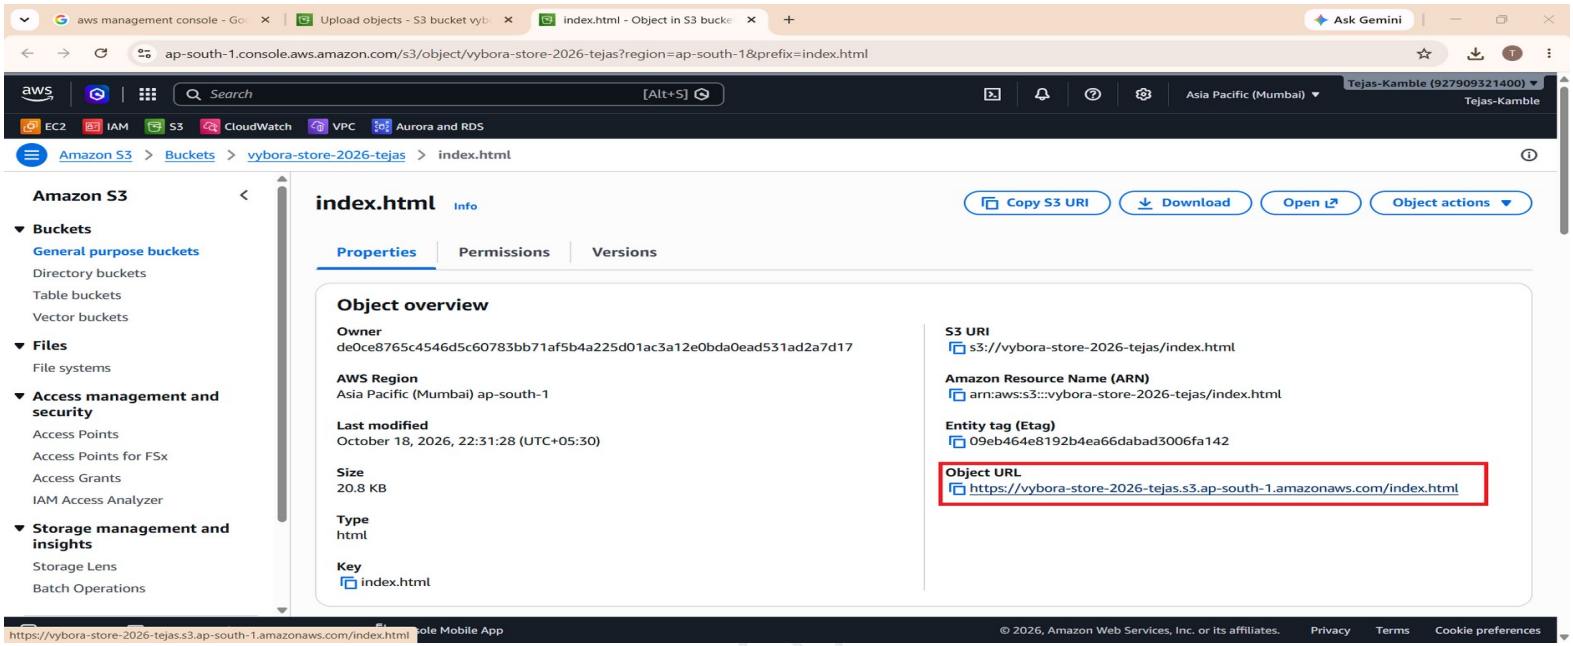

Screenshot 13 — Object details and Object URL.

Step 14. Open the object URL in a browser

Where: In a new browser tab.

Click: Paste the copied Object URL into the address bar and press Enter.


Enter or choose: Use your own copied URL. The screenshot URL uses HTTPS and ends with `/index.html`.

What the screenshot shows: The picture shows the VYBORA home page opened at an S3 object URL.

What should happen next: The page should show the VYBORA hero area. Then scroll down to test more parts.

Common mistake and fix: If you see Access Denied, check file permissions and public-block settings. If you see NoSuchBucket, check the bucket name and region. This URL serves the file directly; it is not the special S3 website endpoint.

PROJECT BY TEJAS S.

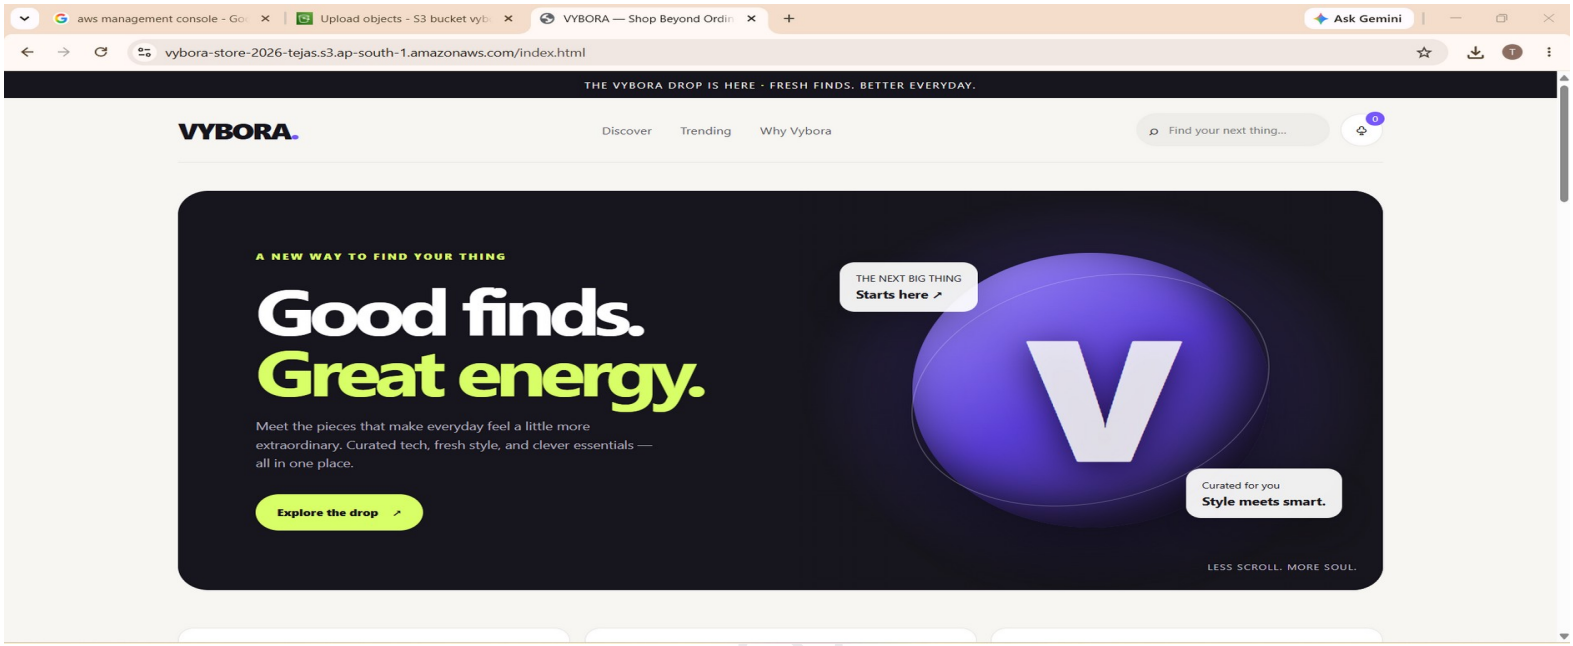

Screenshot 14 — Browser showing the VYBORA hero page at the object URL.

Step 15. Scroll to the category area

Where: On the loaded VYBORA page.

Click: Scroll down with the mouse wheel or page bar.


Enter or choose: No text to enter.

What the screenshot shows: The screenshot shows three store highlights and four category cards.

What should happen next: Scroll farther to the product list.

Common mistake and fix: If the page is blank or styles are missing, check that the full `index.html` uploaded. This project keeps its styles and script inside that file.

PROJECT BY TEJAS S

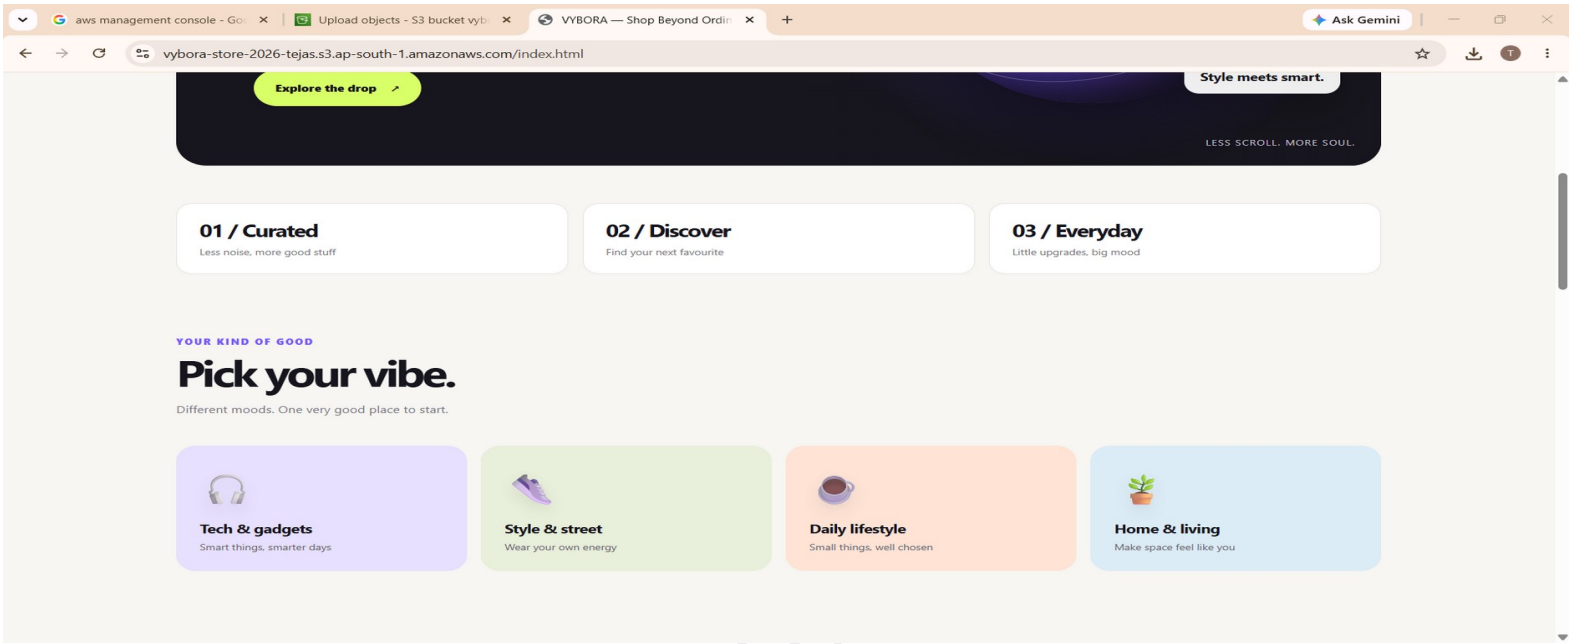

Screenshot 15 — Highlights and four product categories.

Step 16. Check the product cards

Where: Scroll farther down to the product area.

Click: Try clicking a filter such as `Tech`, `Style`, `Lifestyle`, or `Home`. The screenshot itself shows all products.


Enter or choose: No text to enter for the filter test.

What the screenshot shows: The screenshot shows product cards, prices, demo ratings, heart icons, and plus buttons.

What should happen next: A filter should show matching cards. You can also try search and the demo cart.

Common mistake and fix: These controls are sample browser features. The cart is not checkout. No purchase, payment, or order system is shown. If a button does nothing, reload the page and test again.

PROJECT BY TEJAS S.K.

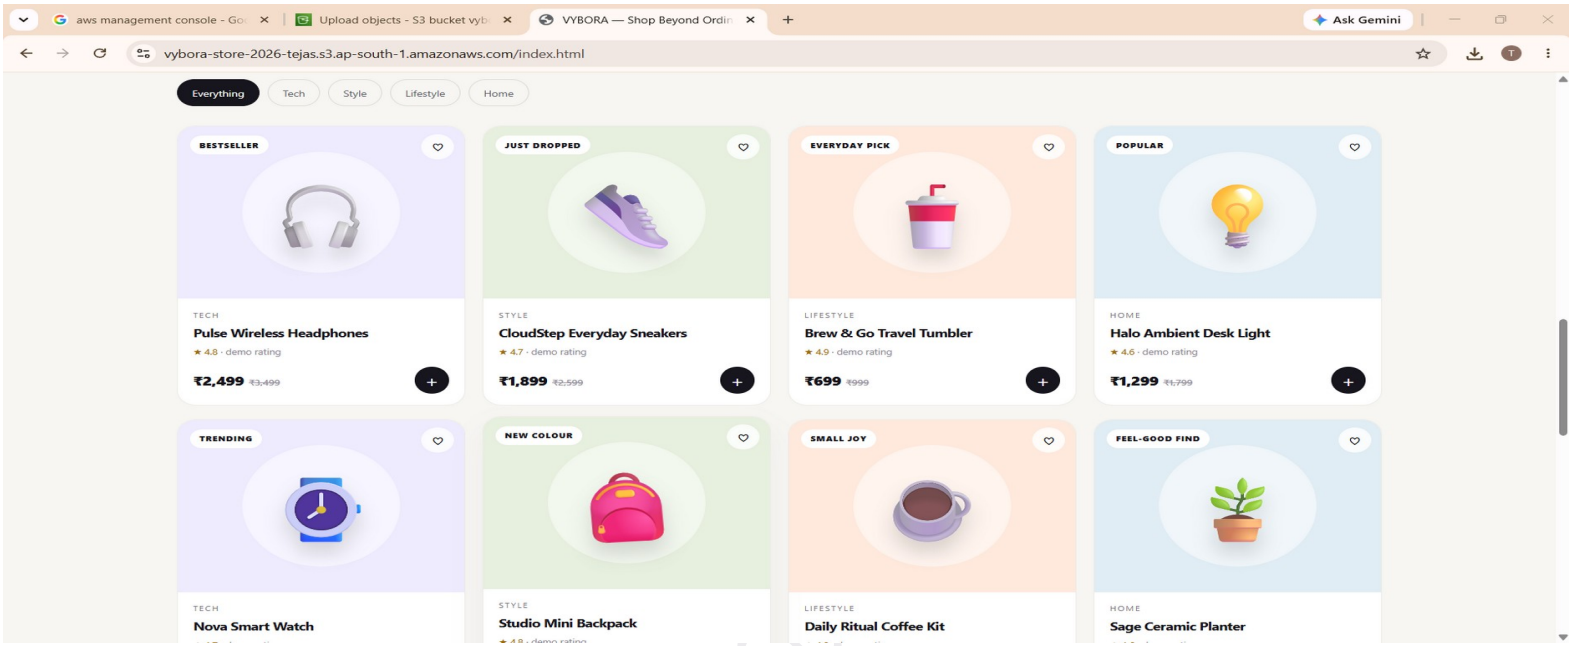

Screenshot 16 — Product grid and category filters.

5. Important missing check: true S3 website hosting

NOT SHOWN IN THE SCREENSHOTS None of the 16 pictures shows the S3 bucket Properties page or the “Static website hosting” setting. The URL shown in screenshots 13 and 14 is an object URL. Check this setting in your own bucket. Do not assume it is enabled.

If you need the special S3 website endpoint, use these extra steps. The exact screen can change. Look carefully before saving.

1. In the AWS S3 page, open your bucket. Click `Properties`.
2. Scroll to the card called `Static website hosting`. Click `Edit` if it is off.
3. Choose `Enable` and the option to host a static website, if those choices appear.
4. For the index document, enter `index.html`. This tells S3 which page to show first.
5. Save the change. Return to the same Properties card.
6. Copy the website endpoint shown there. Use the exact address AWS displays. Replace no part by guesswork.

The screenshot region is Mumbai (`ap-south-1`). A common endpoint shape for this region is `http://YOUR-BUCKET.s3-website.ap-south-1.amazonaws.com`. Treat this as a pattern only. Confirm the real endpoint in the S3 Properties page. S3 website endpoints use HTTP, not HTTPS. For HTTPS, a common next step is CloudFront, which is not shown in the screenshots.

> **CHECK THE RIGHT LINK** An Object URL opens one file. A Website endpoint opens the website using the website-hosting setting. They are different links. The provided screenshots verify the first kind only.

6. Quick verification list

- The bucket exists in the region you chose.
- The bucket contains `index.html` at the top level.
- The object URL opens the VYBORA page, if you chose public access.
- The category cards and product list appear after scrolling.
- If you need a Website endpoint, the Static website hosting card says it is enabled and gives you an endpoint.
- Try the website endpoint in a private/incognito window to check what a visitor can see. Do not put secrets in the public bucket.
- The screenshot shows an object URL with HTTPS. Do not confuse that with the separate S3 website endpoint.

7. Common problems and simple fixes

What you see	Try this
Bucket name already exists	Choose a different, unique name. S3 names are shared across AWS users.
Access Denied	Check whether the file is public. Check Block Public Access and the chosen access method. Do not turn off protection without approval.
NoSuchBucket	Check the spelling of the bucket name and region. Open the bucket from the S3 list.
404 or NoSuchKey	Check that `index.html` is uploaded at the bucket top level. Check the exact file name and

PROJECT BY TEJAS SUDHAKAR KAM

	capital letters.
Website endpoint gives an error	Check that Static website hosting is enabled, `index.html` is the index document, and the link came from the Properties page.
Upload permission option missing	The bucket may have ACLs disabled. Do not enable ACLs just to clear an error. Ask an AWS admin about a bucket policy or another safe setup.
Page shows old content	Reload the page. If you use a CDN later, it may keep an older copy until its cache is cleared.
A link opens XML or an error	Check that you copied the Object URL or the real Website endpoint, not an `s3://` address.

8. Safety tips

- Only make a bucket public when every file in it is meant for everyone to read.
- Never upload passwords, access keys, private photos, customer details, or school/work documents to a public bucket.
- The screenshots show ACLs enabled and public-read selected. AWS warns that this is not recommended. A safer setup often uses a bucket policy or keeps S3 private behind CloudFront. This safer setup is not shown in the screenshots.
- Keep Block Public Access on unless public access is needed and approved.
- Use a test bucket. Check the AWS account and region before changing access.
- Do not share account numbers or private console details in public screenshots.
- The screenshots show SSE-S3 selected. This protects stored data, but it does not make a public file private.

9. Cleanup: remove the test bucket

WARNING: DELETE IS PERMANENT Only do this after you no longer need the site. Save any files you want to keep first. The screenshots do not show cleanup. Button names may differ.

7. Open AWS S3 and select the test bucket you made. Check the bucket name twice.

8. Delete the objects inside first. Select `index.html` and choose `Delete`. Follow the confirmation screen. If the bucket has more files, remove them too.
9. Go back to the bucket list. Select the empty test bucket and choose `Delete`.
10. Type the bucket name if AWS asks you to confirm. Click the final delete button only when you are sure.
11. If AWS says the bucket is not empty, go inside again and remove every object, then retry.

If you do not want to remove it, you can leave the test bucket. Remember that AWS may charge for stored files or requests. Check the bucket later and remove it when it is no longer needed.

10. What this project does — and does not do

The supplied HTML makes a product page. It has sample product cards and simple browser controls. The screenshots show the page opened from a public S3 file link.

- It does show a static web page stored in S3.
- It does not show a real checkout, payment, order, user login, or product database.
- The cart message is a demo. It does not place an order.
- The exact Static website hosting setting is not visible in the screenshots. Check it yourself if you need the S3 Website endpoint.

Finish

You have now followed the screenshots in order, uploaded the page, and checked the result. The most important safety rule is simple: only make public the files that everyone is allowed to see.

PROJECT BY TEJAS SUDHAKAR KAMBLE