Markdown to PDF | CloudConv | C_PROGRAMMING_SLOT_A_AS | C Online Compiler | Ask Gemini

onecompiler.com/c

Action required

OneCompiler | Upgrade | AI | C | Run | Save | Login

Main.c

```c


#include <stdio.h>

int main() {
    int distance, member;
    int fare = 100;

    scanf("%d %d", &distance, &member);

    if (distance > 10) {
        fare = fare + (distance - 10) * 20;
    }

    if (member == 1) {
        fare = fare - (fare * 10 / 100);
    }

    printf("Final Fare: Rs.%d", fare);

    return 0;
}

```

Console | I/O | AI Agent | 1 ms | 4.5 MB

STDIN

```
15 1
```

Output:

```
Final Fare: Rs.180
```

Ready | Terminal | Light | Wiki

29° | Search | ENG IN | 20% | 19:32 15-10-2026

Markdown to PDF | CloudConv | C_PROGRAMMING_SLOT_A_AS | C Online Compiler | Ask Gemini

onecompiler.com/c

Action required

OneCompiler | Upgrade | AI | C | Run | Save | Login

Main.c

```c
#include <stdio.h>

int main() {
    int questionsAnswered, remainingTime, alreadySubmitted;

    scanf("%d", &questionsAnswered);
    scanf("%d", &remainingTime);
    scanf("%d", &alreadySubmitted);

    if (questionsAnswered >= 1 && remainingTime > 0 && alreadySubmitted == 0) {
        printf("Submission Allowed");
    } else {
        printf("Submission Not Allowed");
    }

    return 0;
}
```

Console | I/O | AI Agent | 1 ms | 4.4 MB

STDIN

```
45
12
0
```

Output:

```
Submission Allowed
```

Ready | Terminal | Light | Wiki

29° | Search | ENG IN | 20% | 19:33 15-10-2026

Markdown to PDF | CloudConv | C_PROGRAMMING_SLOT_A_AS | C Online Compiler | Ask Gemini

onecompiler.com/c

Action required

OneCompiler | Upgrade | AI | C | Run | Save | Login

Main.c

```c
#include <stdio.h>

int main() {
    int gold, x, y;
    int longBen, blackbeard, remaining, eachPirate;

    scanf("%d", &gold);
    scanf("%d", &x);
    scanf("%d", &y);

    longBen = gold * x / 100;
    remaining = gold - longBen;

    blackbeard = remaining * y / 100;
    remaining = remaining - blackbeard;

    eachPirate = remaining / 3;

    printf("%d\n", longBen);
    printf("%d\n", blackbeard);
    printf("%d\n", eachPirate);
    printf("%d\n", remaining % 3);

    return 0;
}
```

Console | I/O | AI Agent | 1 ms | 4.5 MB

STDIN

```
729
65
87
```

Output:

```
473
222
11
1
```

Ready | Terminal | Light | Wiki

29° | Search | ENG IN | 20% | 19:34 15-10-2026

Markdown to PDF | CloudConv | C_PROGRAMMING_SLOT_A_AS | C Online Compiler | Ask Gemini

onecompiler.com/c

Action required

OneCompiler | Upgrade | AI | C | Run | Save | Login

Main.c

```c

#include <stdio.h>

int main() {
    int dollar1, cent1, dollar2, cent2;
    int totalCents, dollars, cents;

    scanf("%d", &dollar1);
    scanf("%d", &cent1);
    scanf("%d", &dollar2);
    scanf("%d", &cent2);

    totalCents = cent1 + cent2;
    dollars = dollar1 + dollar2 + totalCents / 100;
    cents = totalCents % 100;

    printf("%d\n%d", dollars, cents);

    return 0;
}

```

Console | I/O | AI Agent | 1 ms | 4.4 MB

STDIN

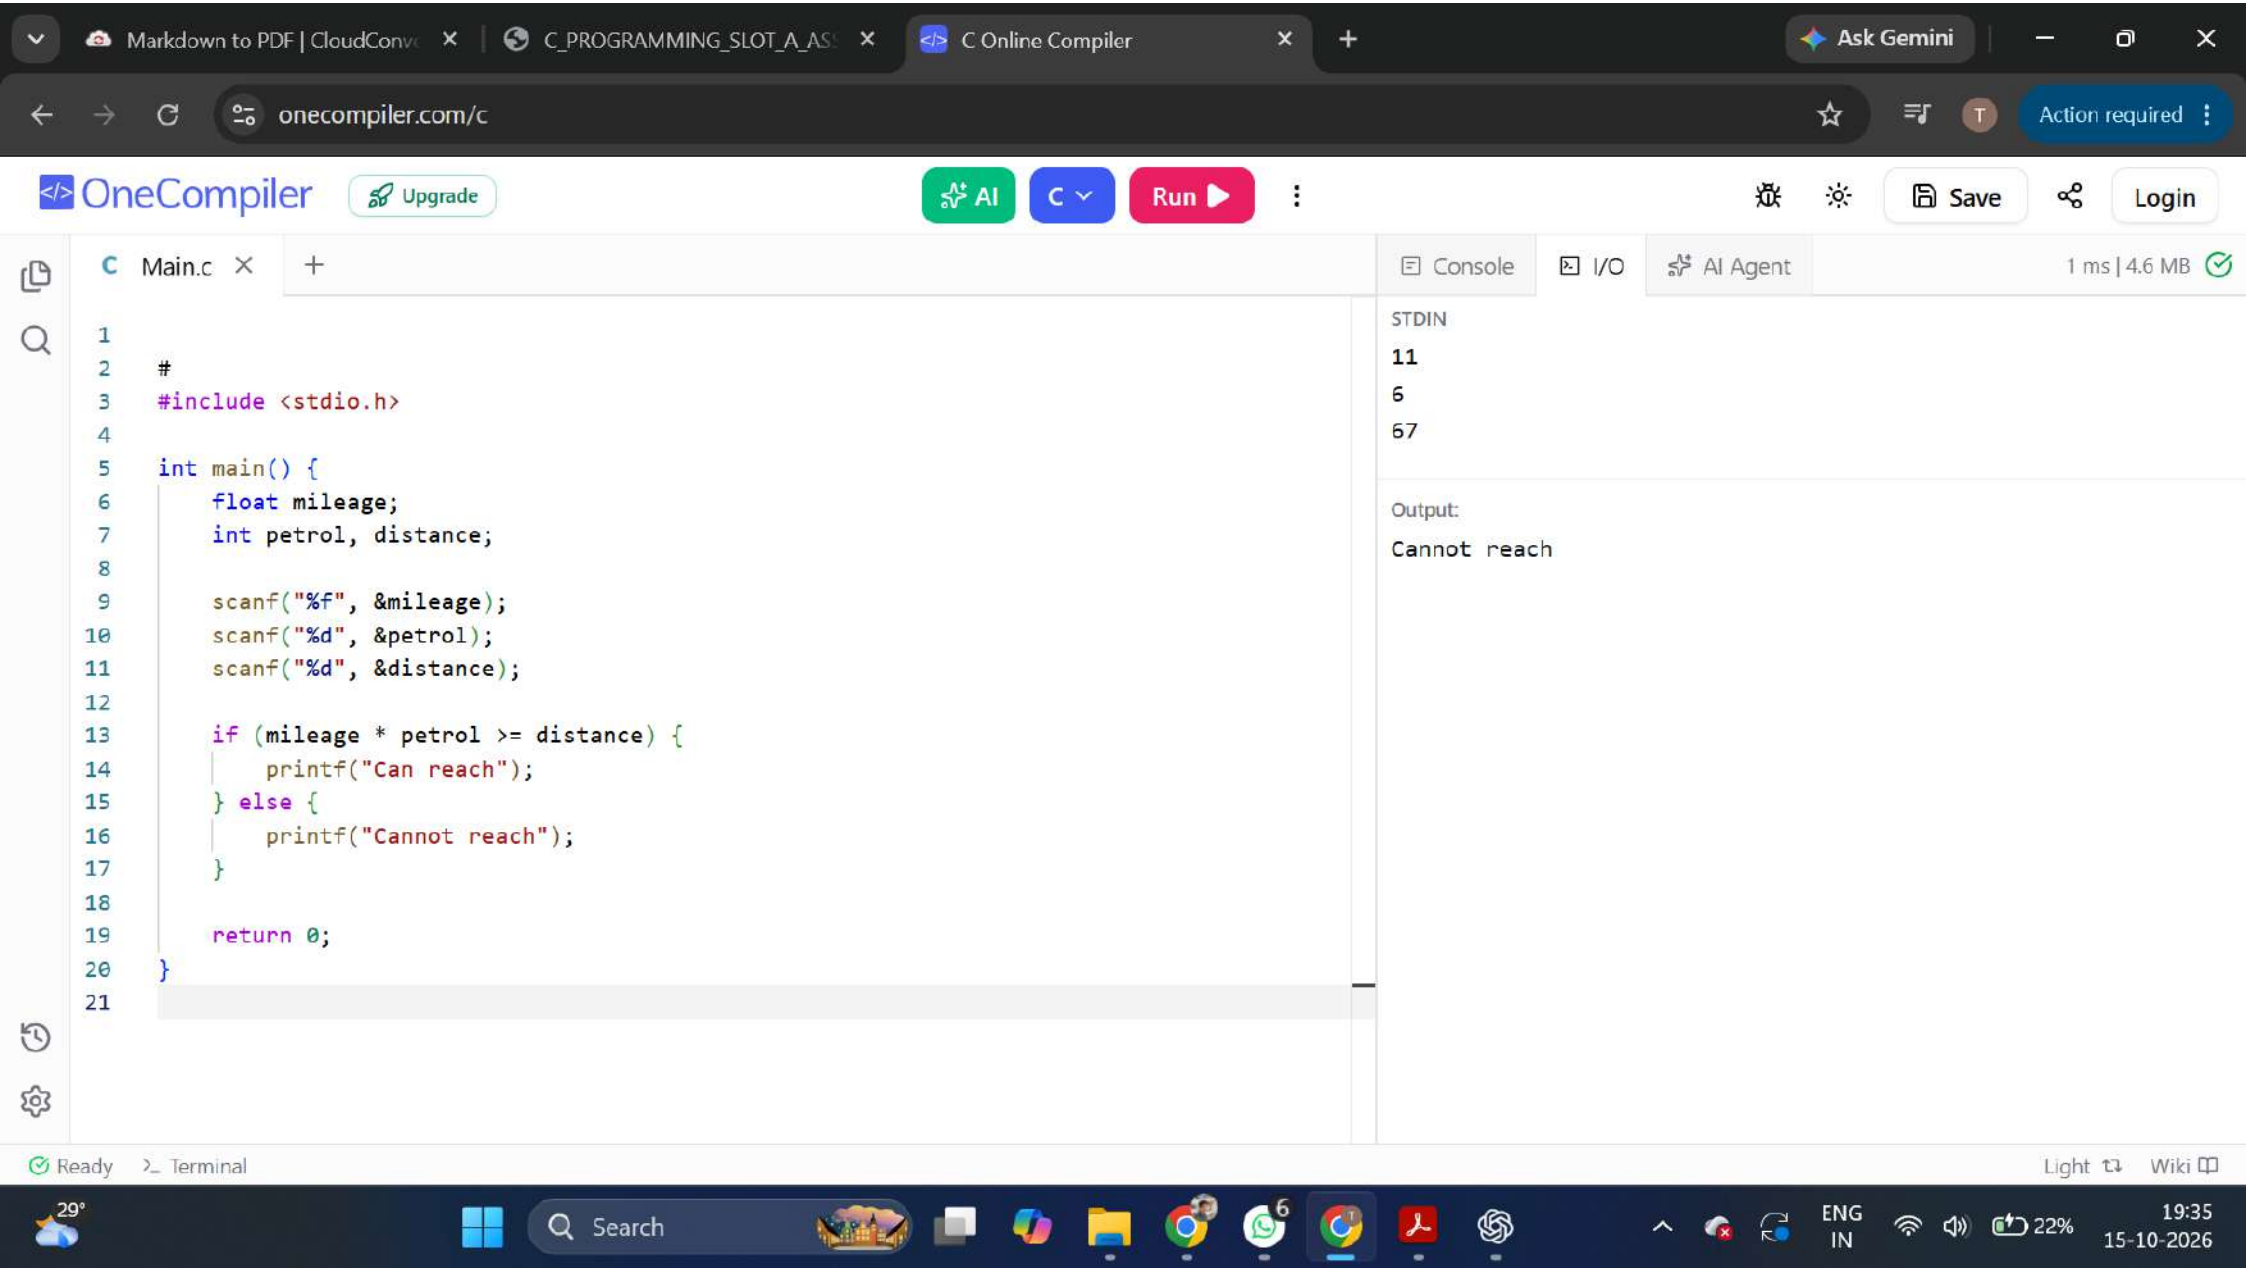
```
30
10
140
99
```

Output:

```
171
9
```

Ready | Terminal | Light | Wiki

29° | Search | ENG IN | 21% | 19:34 15-10-2026


Markdown to PDF | CloudConv
C_PROGRAMMING_SLOT_A_AS
C Online Compiler
Ask Gemini
onecompiler.com/c
Action required
OneCompiler
Upgrade
AI
C
Run
Save
Login
Main.c
Console
I/O
AI Agent
1 ms | 4.6 MB
STDIN
11
6
67
Output:
Cannot reach
#include <stdio.h>
int main() {
float mileage;
int petrol, distance;
scanf("%f", &mileage);
scanf("%d", &petrol);
scanf("%d", &distance);
if (mileage * petrol >= distance) {
printf("Can reach");
} else {
printf("Cannot reach");
}
return 0;
}
Ready
Terminal
Light
Wiki
Search
ENG
IN
22%
19:35
15-10-2026

Markdown to PDF | CloudConv | C_PROGRAMMING_SLOT_A_AS | C Online Compiler | Ask Gemini

onecompiler.com/c

Action required

OneCompiler | Upgrade | AI | C | Run | Save | Login

Main.c

```c

#include <stdio.h>

int main() {
    int A, B, C, car;
    int firstDigit;

    scanf("%d", &A);
    scanf("%d", &B);
    scanf("%d", &C);
    scanf("%d", &car);

    firstDigit = car;

    while (firstDigit >= 10) {
        firstDigit /= 10;
    }

    if (A / 100 == firstDigit ||
        (A / 10) % 10 == firstDigit ||
        A % 10 == firstDigit) {
        printf("Car 1 goes into road A");
    } else if (B / 100 == firstDigit ||
               (B / 10) % 10 == firstDigit ||
               B % 10 == firstDigit) {
```

Console | I/O | AI Agent | 1 ms | 4.5 MB

STDIN

```
243
136
567
17
```

Output:

```
Car 1 goes into road B
```

Ready | Terminal | Light | Wiki

29° | Search | ENG IN | 25% | 19:38 15-10-2026

Markdown to PDF | CloudConv | C_PROGRAMMING_SLOT_A_AS | C Online Compiler | Ask Gemini

onecompiler.com/c

Action required

OneCompiler | Upgrade | AI | C | Run | Save | Login

Main.c

```c
int main() {

    while (firstDigit >= 10) {
        firstDigit /= 10;
    }

    if (A / 100 == firstDigit ||
        (A / 10) % 10 == firstDigit ||
        A % 10 == firstDigit) {
        printf("Car 1 goes into road A");
    } else if (B / 100 == firstDigit ||
               (B / 10) % 10 == firstDigit ||
               B % 10 == firstDigit) {
        printf("Car 1 goes into road B");
    } else if (C / 100 == firstDigit ||
               (C / 10) % 10 == firstDigit ||
               C % 10 == firstDigit) {
        printf("Car 1 goes into road C");
    } else {
        printf("No path exists");
    }

    return 0;
}
```

Console | I/O | AI Agent | 1 ms | 4.5 MB

STDIN

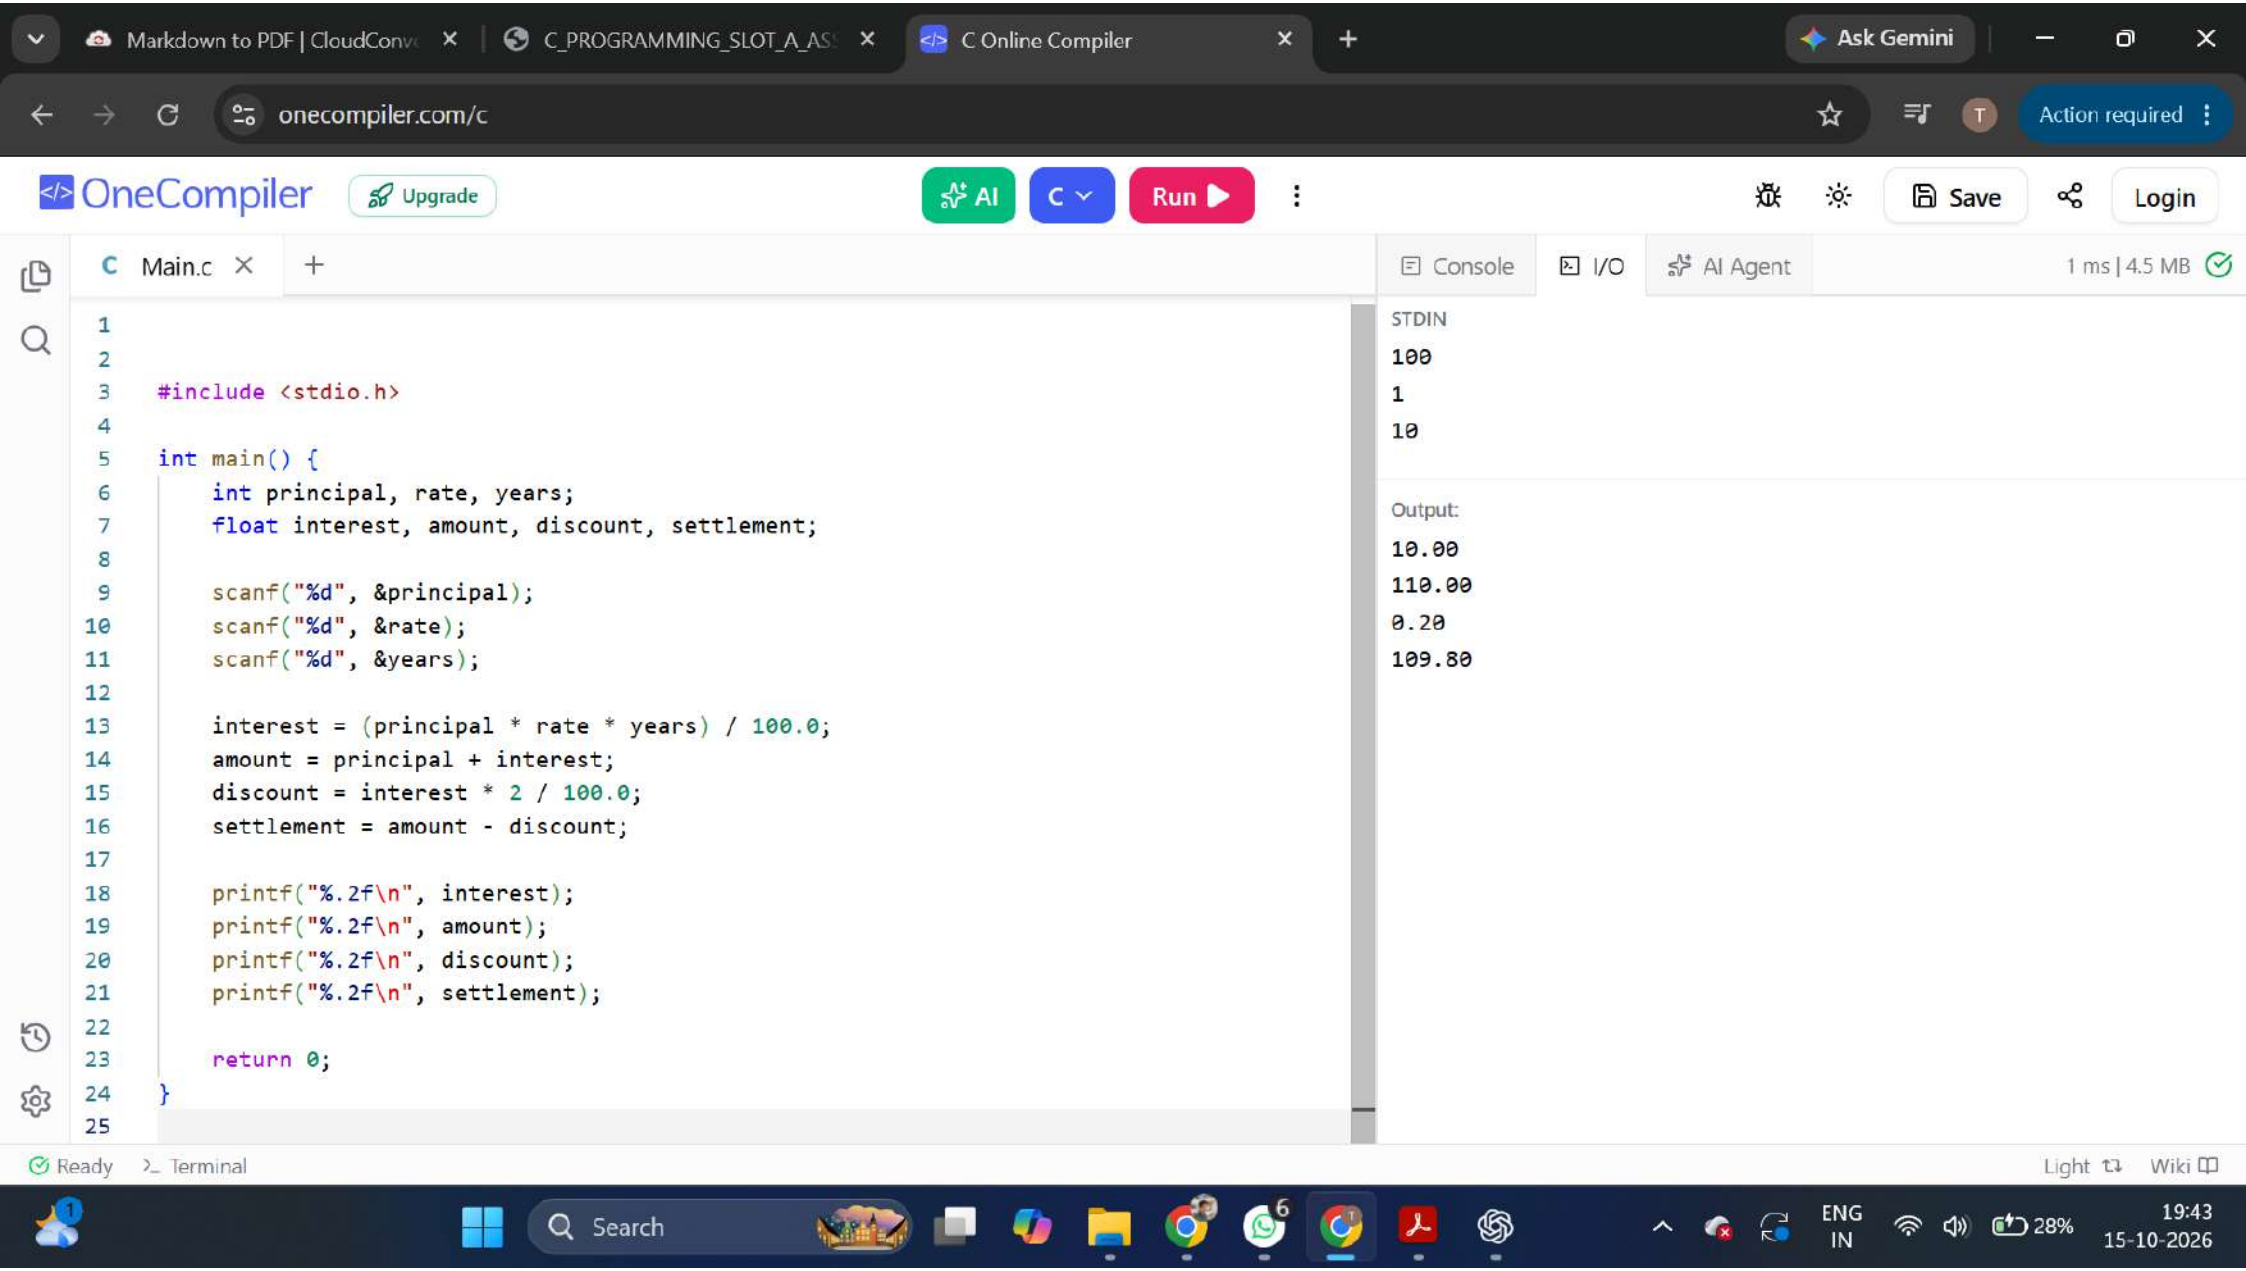
```
243
136
567
17
```

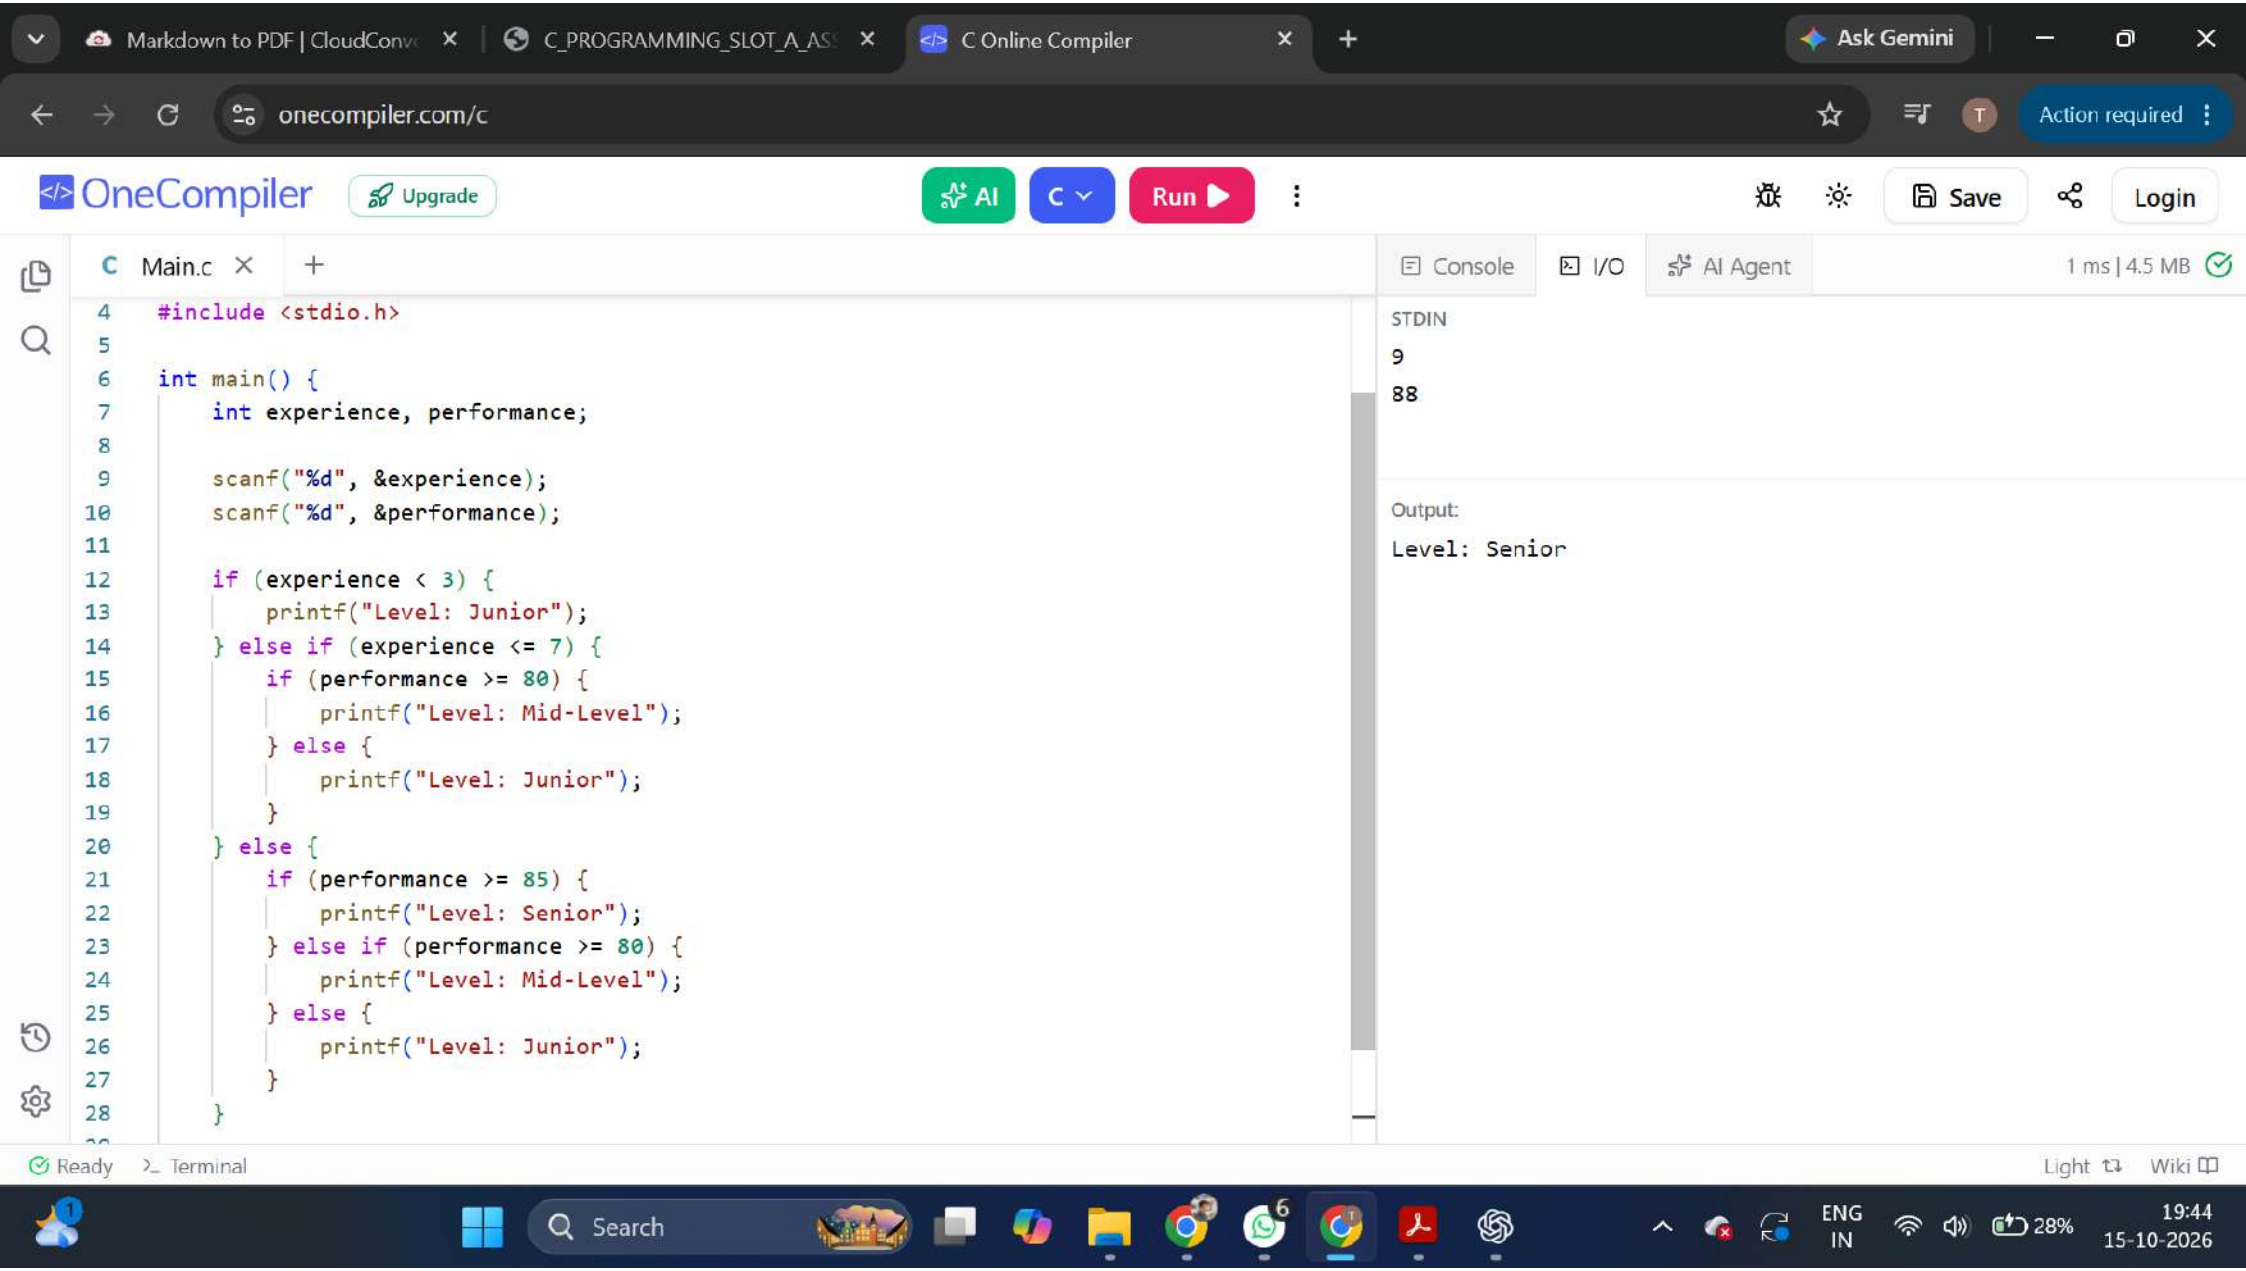
Output:

```
Car 1 goes into road B
```

Ready | Terminal | Light | Wiki

29° | Search | ENG IN | 25% | 19:39 15-10-2026


Markdown to PDF | CloudConv
C_PROGRAMMING_SLOT_A_AS
C Online Compiler
Ask Gemini
onecompiler.com/c
Action required
OneCompiler
Upgrade
AI
C
Run
Save
Login
Main.c
Console
I/O
AI Agent
1 ms | 4.5 MB
#include <stdio.h>
int main() {
int principal, rate, years;
float interest, amount, discount, settlement;
scanf("%d", &principal);
scanf("%d", &rate);
scanf("%d", &years);
interest = (principal * rate * years) / 100.0;
amount = principal + interest;
discount = interest * 2 / 100.0;
settlement = amount - discount;
printf("%.2f\n", interest);
printf("%.2f\n", amount);
printf("%.2f\n", discount);
printf("%.2f\n", settlement);
return 0;
}
STDIN
100
1
10
Output:
10.00
110.00
0.20
109.80
Ready
Terminal
Light
Wiki
Search
ENG
IN
28%
19:43
15-10-2026


Markdown to PDF | CloudConv
C_PROGRAMMING_SLOT_A_AS
C Online Compiler
Ask Gemini
onecompiler.com/c
Action required
OneCompiler
Upgrade
AI
C
Run
Save
Login
Main.c
#include <stdio.h>
int main() {
int experience, performance;
scanf("%d", &experience);
scanf("%d", &performance);
if (experience < 3) {
printf("Level: Junior");
} else if (experience <= 7) {
if (performance >= 80) {
printf("Level: Mid-Level");
} else {
printf("Level: Junior");
}
} else {
if (performance >= 85) {
printf("Level: Senior");
} else if (performance >= 80) {
printf("Level: Mid-Level");
} else {
printf("Level: Junior");
}
}
Console
I/O
AI Agent
1 ms | 4.5 MB
STDIN
9
88
Output:
Level: Senior
Ready
Terminal
Light
Wiki
Search
ENG
IN
28%
19:44
15-10-2026

Markdown to PDF | CloudConv | C_PROGRAMMING_SLOT_A_AS | C Online Compiler | Ask Gemini

onecompiler.com/c

Action required

OneCompiler | Upgrade | AI | C | Run | Save | Login

Main.c

```c
int main() {
    scanf("%d", &experience);
    scanf("%d", &performance);

    if (experience < 3) {
        printf("Level: Junior");
    } else if (experience <= 7) {
        if (performance >= 80) {
            printf("Level: Mid-Level");
        } else {
            printf("Level: Junior");
        }
    } else {
        if (performance >= 85) {
            printf("Level: Senior");
        } else if (performance >= 80) {
            printf("Level: Mid-Level");
        } else {
            printf("Level: Junior");
        }
    }

    return 0;
}
```

Console | I/O | AI Agent | 1 ms | 4.5 MB

STDIN

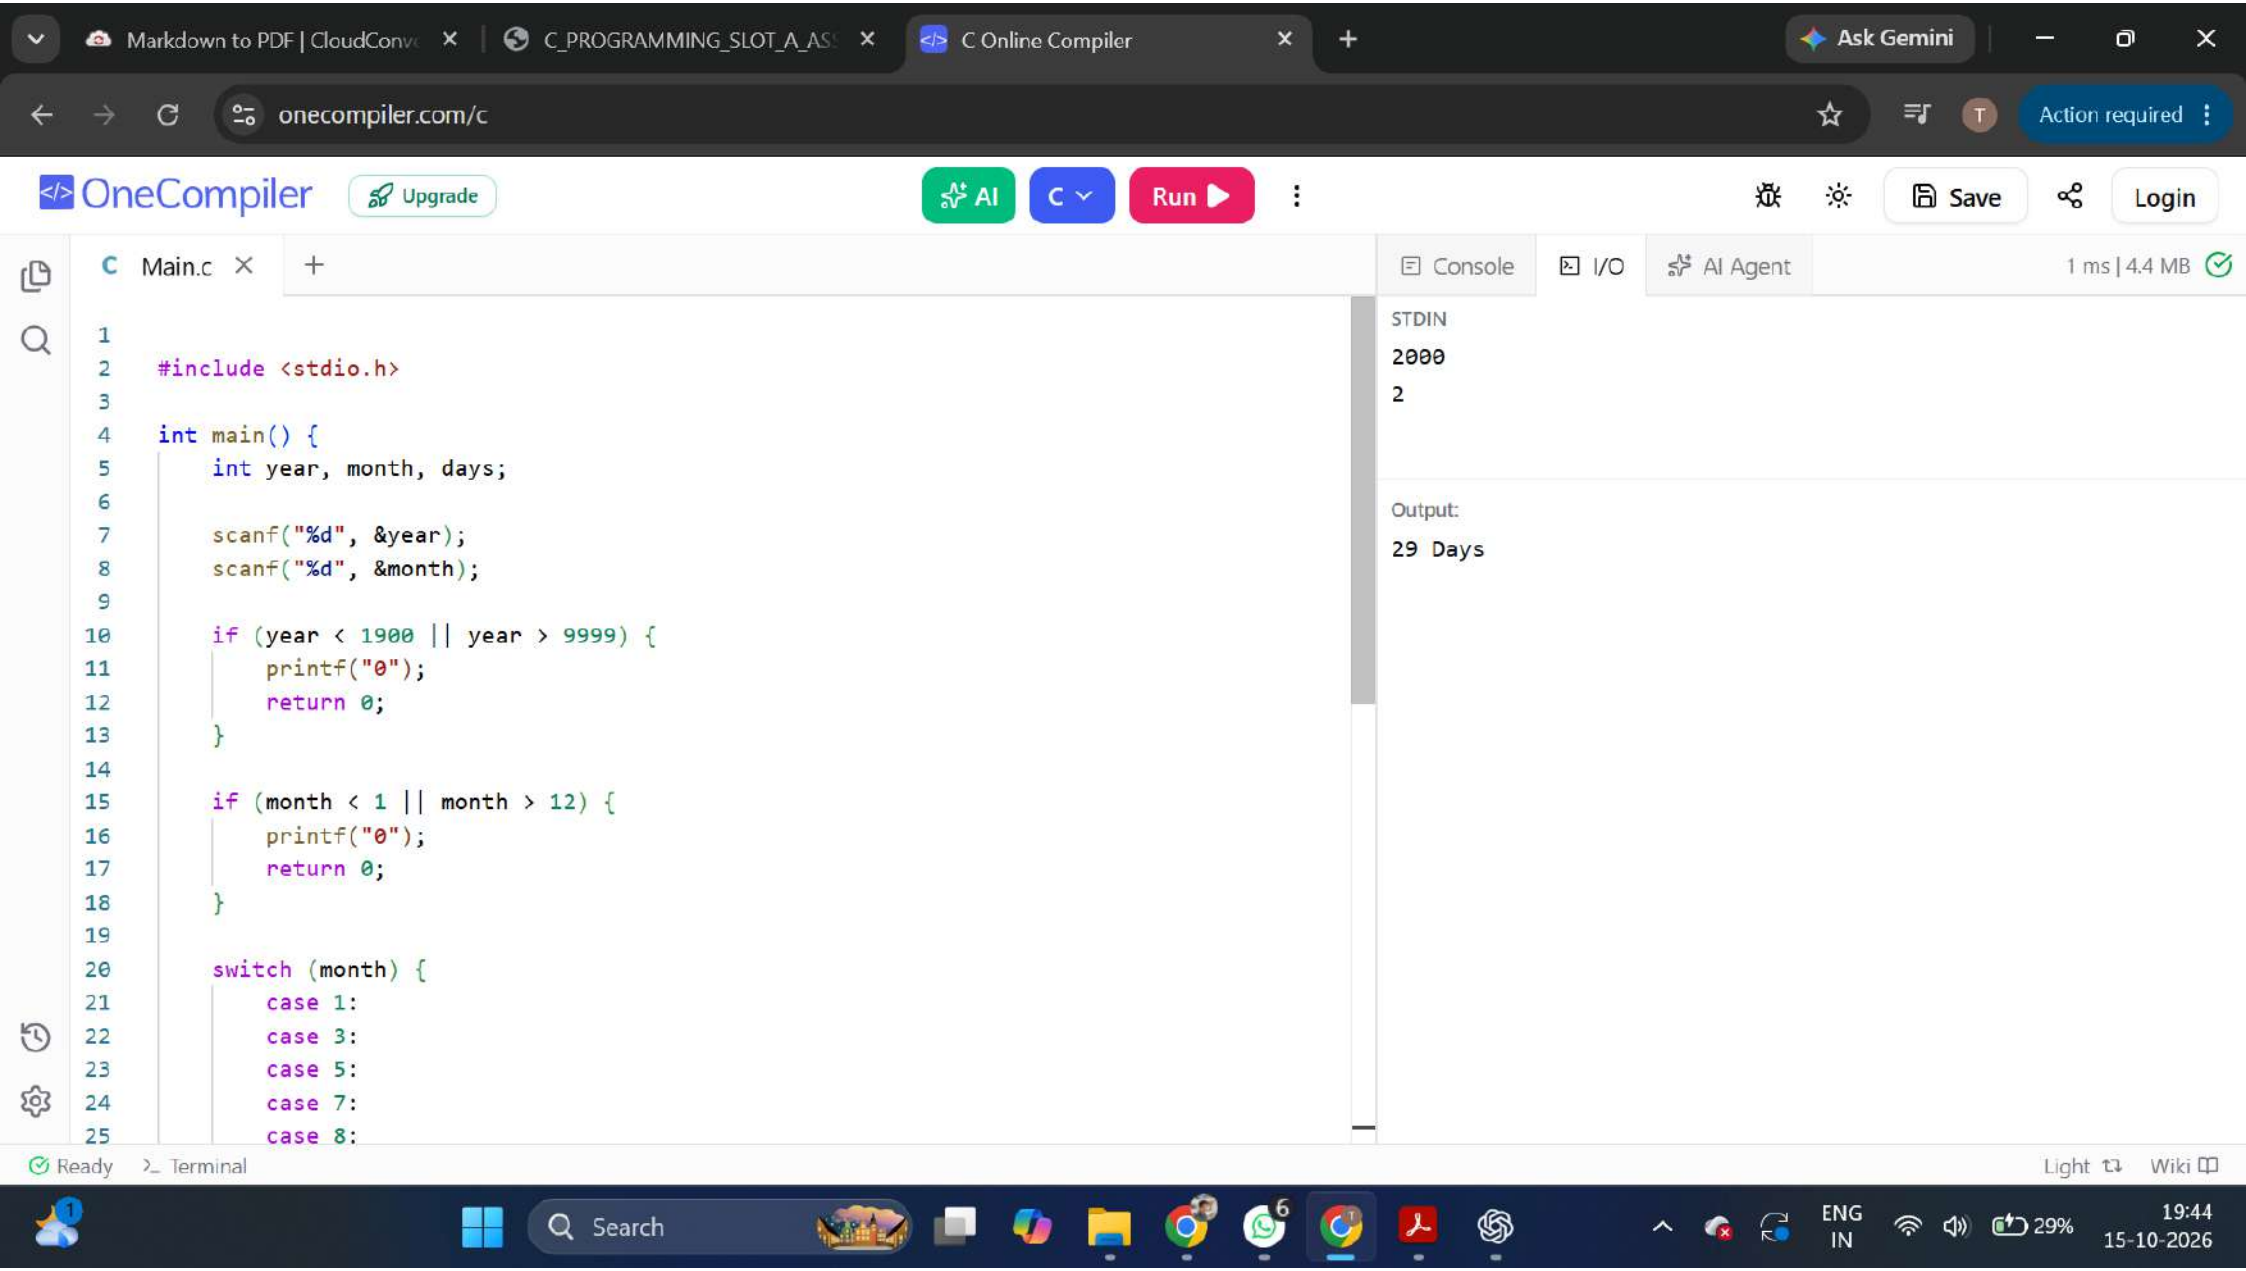
```
9
88
```

Output:

```
Level: Senior
```

Ready | Terminal | Light | Wiki

Search | ENG IN | 28% | 19:44 15-10-2026




```c

#include <stdio.h>

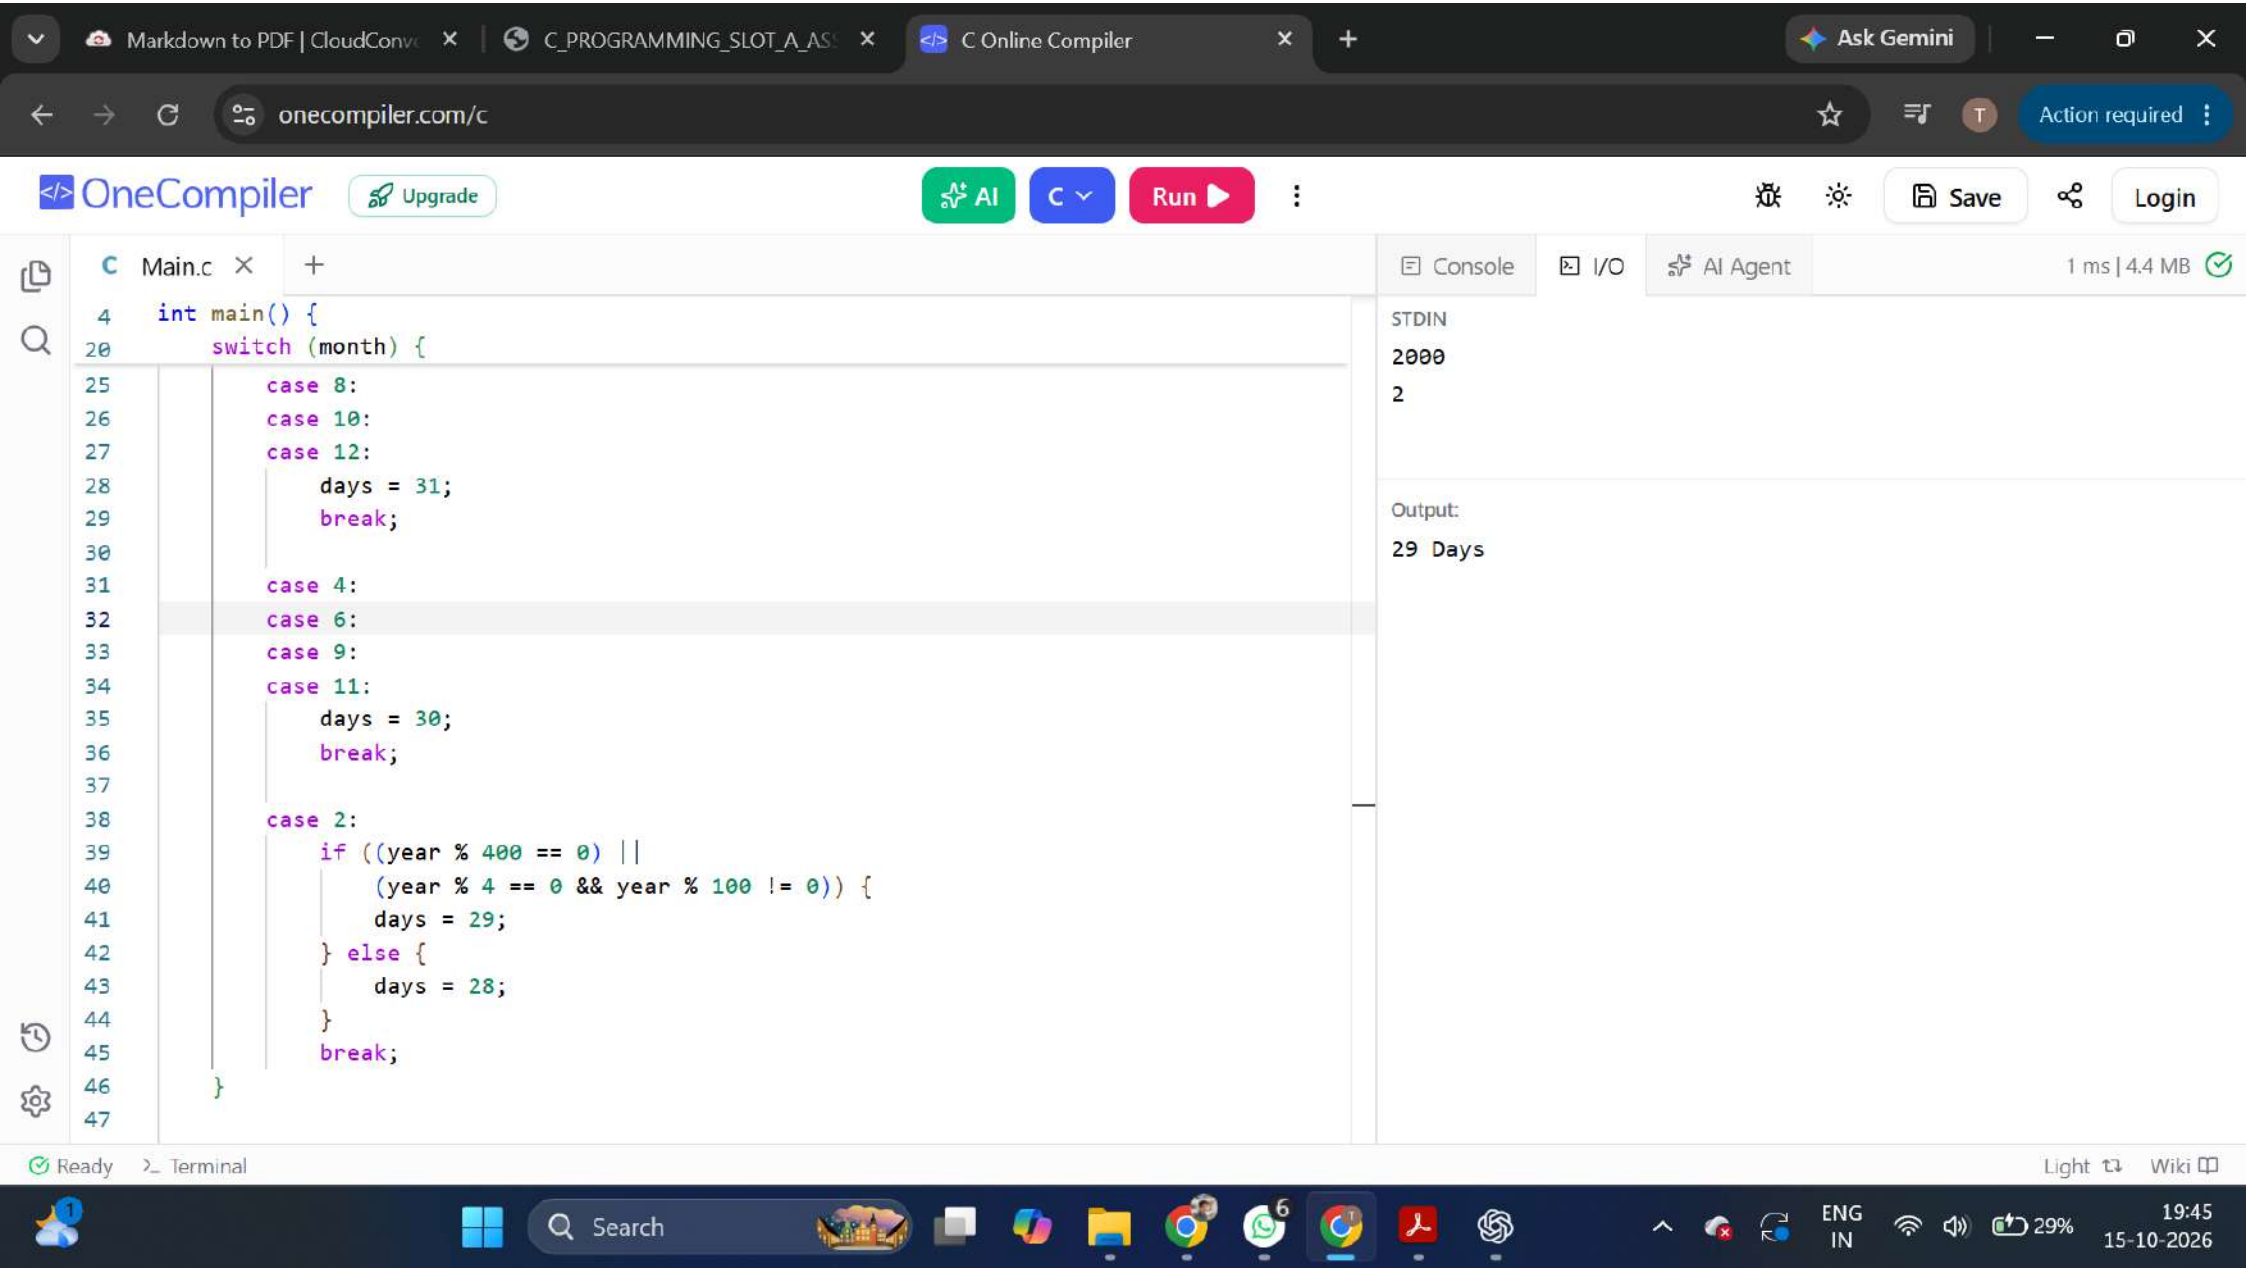
int main() {
    int year, month, days;

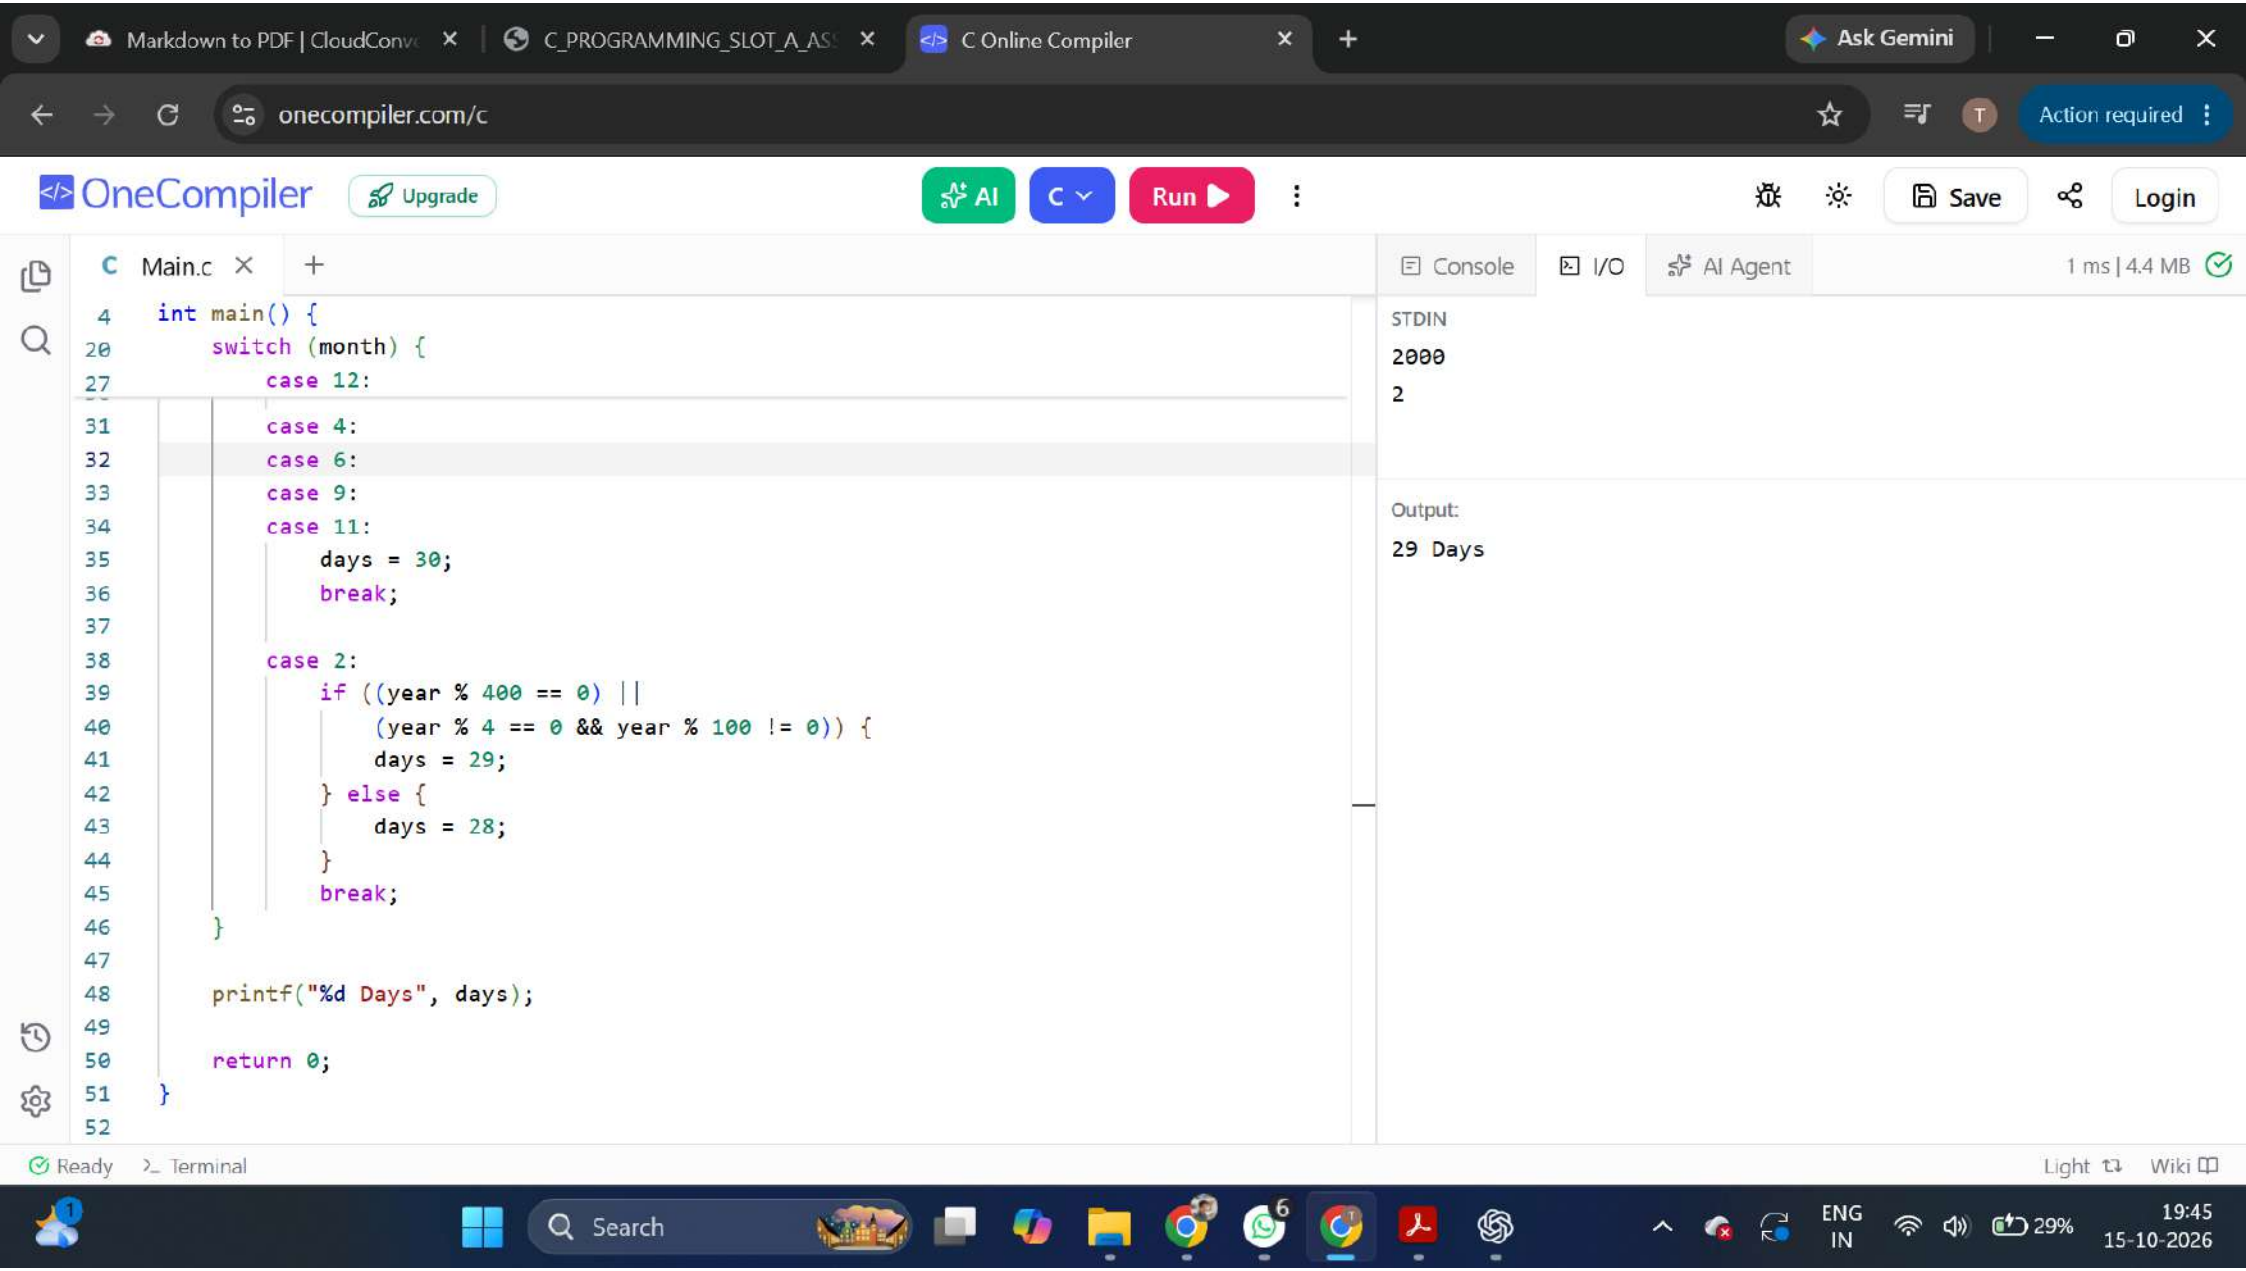
    scanf("%d", &year);
    scanf("%d", &month);

    if (year < 1900 || year > 9999) {
        printf("0");
        return 0;
    }

    if (month < 1 || month > 12) {
        printf("0");
        return 0;
    }

    switch (month) {
        case 1:
        case 3:
        case 5:
        case 7:
        case 8:
```


Markdown to PDF | CloudConv
C_PROGRAMMING_SLOT_A_AS
C Online Compiler
Ask Gemini
onecompiler.com/c
Action required
OneCompiler
Upgrade
AI
C
Run
Save
Login
Main.c
Console
I/O
AI Agent
1 ms | 4.4 MB
int main() {
switch (month) {
case 8:
case 10:
case 12:
days = 31;
break;
case 4:
case 6:
case 9:
case 11:
days = 30;
break;
case 2:
if ((year % 400 == 0) ||
(year % 4 == 0 && year % 100 != 0)) {
days = 29;
} else {
days = 28;
}
break;
}
STDIN
2000
2
Output:
29 Days
Ready
Terminal
Light
Wiki
Search
ENG
IN
29%
19:45
15-10-2026


Markdown to PDF | CloudConv
C_PROGRAMMING_SLOT_A_AS
C Online Compiler
Ask Gemini
onecompiler.com/c
Action required
OneCompiler
Upgrade
AI
C
Run
Save
Login
Main.c
Console
I/O
AI Agent
1 ms | 4.4 MB
4 int main() {
20 switch (month) {
27 case 12:
31 case 4:
32 case 6:
33 case 9:
34 case 11:
35 days = 30;
36 break;
37
38 case 2:
39 if ((year % 400 == 0) ||
40 (year % 4 == 0 && year % 100 != 0)) {
41 days = 29;
42 } else {
43 days = 28;
44 }
45 break;
46 }
47
48 printf("%d Days", days);
49
50 return 0;
51 }
52
STDIN
2000
2
Output:
29 Days
Ready
Terminal
Light
Wiki
Search
ENG
IN
29%
19:45
15-10-2026

Markdown to PDF | CloudConv | C_PROGRAMMING_SLOT_A_AS | C Online Compiler | Ask Gemini

onecompiler.com/c

Action required

OneCompiler | Upgrade | AI | C | Run | Save | Login

Main.c

```c

#include <stdio.h>

int main() {
    int units;
    float bill;

    scanf("%d", &units);

    if (units <= 200) {
        bill = units * 0.5;
    } else if (units <= 400) {
        bill = units * 0.65 + 100;
    } else if (units <= 600) {
        bill = units * 0.80 + 200;
    } else {
        bill = units * 1.25 + 425;
    }

    printf("Rs.%.0f", bill);

    return 0;
}

```

Console | I/O | AI Agent | 1 ms | 4.4 MB

STDIN

```
200
```

Output:

```
Rs.100
```

Ready | Terminal | Light | Wiki

Search | ENG IN | 30% | 19:45 15-10-2026