

# Canvas recovery: pause/reset scenario evidence

|                 |                                                                                |
|-----------------|--------------------------------------------------------------------------------|
| WRITTEN AGAINST | run1.log · 1 record(s) · 23:03:40.220->23:03:40.220                            |
| AUTHORED VIEW   | all event types                                                                |
| LOG             | run1.log - loaded snapshot; log unchanged-metadata; graph unchanged-metadat... |
| CREATED         | 2026-09-23T23:24:01.271670Z                                                    |
| RENDERED        | 2026-09-23 23:24:01.423                                                        |

## NARRATIVE - THE AUTHOR'S ACCOUNT, NOT LOG EVIDENCE

Answers the four scenario questions from the audit log (run1.log) and generated processor, with the log-format limitation documented.

## NARRATIVE - THE AUTHOR'S ACCOUNT, NOT LOG EVIDENCE

EVIDENCE-LINKED. Log run1.log lacks the audit-log Format 1 '---' record separators (0 occurrences; 9 eventLogRecord: blocks present), so the analyser loaded it as a single collapsed record (flagged below). Per-record aggregate/series/chart tools therefore only see the LAST value per field. All four answers below are taken from the raw text of that one record (still containing every eventLogRecord verbatim, in original order) plus MyProcessor.java / Child.java source, not from multi-record analyser aggregation.

## WHAT IS WRONG - RECORD #0

run1.log lacks the '---' record separators required by the audit log Format 1 spec (0 occurrences of a line matching ^---; 9 eventLogRecord: blocks present). The analyser therefore parsed the entire file as one record, so per-record aggregation/series/chart tools return only the LAST value seen for a field (e.g. rootNode.price=40.0), not the true 10/20/30/40 sequence. The graphml topology loaded also does not declare the `checked` sink node (coverage: loggedButNotInTopology=[checked]), consistent with the graphml being from a different/earlier build than this exact run.

## LIKELY CAUSE / SUGGESTED FIX

For a future run, use a sink writer that emits the "---" separator before each record per the Format 1 spec; then re-open in the analyser to get true per-record aggregation. The four scenario questions were answered instead by direct raw-text reading of the single collapsed record (which still contains all 9 eventLogRecord blocks verbatim) plus source inspection of Child.java/MyProcessor.java.

Record #0


```
event: PriceUpdate{symbol=DEMO, price=40.0, filterId=7}
1. child lifecycle=initialise
2. checked thread=main method=sinkRegistration
3. rootNode thread=main method=onPriceUpdate handledEvent=com.example.myapp.event.PriceUpdate
filterId=7 receivedEvent=PriceUpdate{symbol=DEMO, price=10.0, filterId=7} price=10.0
4. child thread=main method=onChild triggerFired=true
5. child thread=main method=onSignalPause handledEvent=com.telamin.fluxtion.runtime.event.Signal
filterString=pause
6. rootNode thread=main method=onPriceUpdate handledEvent=com.example.myapp.event.PriceUpdate
filterId=7 receivedEvent=PriceUpdate{symbol=DEMO, price=30.0, filterId=7} price=30.0
7. child thread=main method=onChild triggerFired=true
8. child thread=main method=reset
9. rootNode thread=main method=onPriceUpdate handledEvent=com.example.myapp.event.PriceUpdate
filterId=7 receivedEvent=PriceUpdate{symbol=DEMO, price=40.0, filterId=7} price=40.0
10. child thread=main method=onChild triggerFired=true
```

Record #0

```
event: PriceUpdate{symbol=DEMO, price=40.0, filterId=7}
1. child lifecycle=initialise
2. checked thread=main method=sinkRegistration
3. rootNode thread=main method=onPriceUpdate handledEvent=com.example.myapp.event.PriceUpdate
filterId=7 receivedEvent=PriceUpdate{symbol=DEMO, price=10.0, filterId=7} price=10.0
4. child thread=main method=onChild triggerFired=true
5. child thread=main method=onSignalPause handledEvent=com.telamin.fluxtion.runtime.event.Signal
filterString=pause
6. rootNode thread=main method=onPriceUpdate handledEvent=com.example.myapp.event.PriceUpdate
filterId=7 receivedEvent=PriceUpdate{symbol=DEMO, price=30.0, filterId=7} price=30.0
7. child thread=main method=onChild triggerFired=true
8. child thread=main method=reset
9. rootNode thread=main method=onPriceUpdate handledEvent=com.example.myapp.event.PriceUpdate
filterId=7 receivedEvent=PriceUpdate{symbol=DEMO, price=40.0, filterId=7} price=40.0
10. child thread=main method=onChild triggerFired=true
```

Trend · rootNode.price (collapsed log)

Follows time filter · DIMENSION: all · text: none

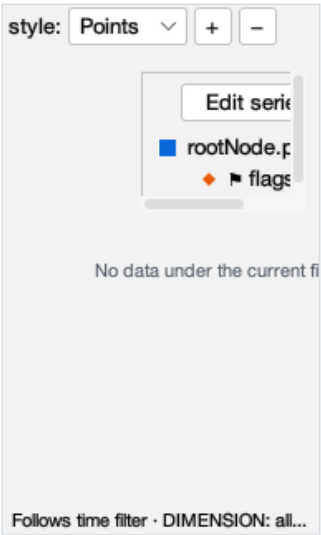

## Markers · rootNode.price (collapsed log)

| series     | glyph   | time (UTC)   | payload                                                              | record |
|------------|---------|--------------|----------------------------------------------------------------------|--------|
| flag flags | diamond | 23:03:40.220 | run1.log lacks the '---' record separators required by the audit ... | 0      |

### NARRATIVE - THE AUTHOR'S ACCOUNT, NOT LOG EVIDENCE

Q1 filterId 9 (price 20): measured in the record text - the PriceUpdate{symbol=DEMO, price=20.0, filterId=9} eventLogRecord has nodeLogs: (empty). No rootNode/child entry, no SINK checked line. Matches MyProcessor.java switch(filterId){case(7):...} with no other case.

### NARRATIVE - THE AUTHOR'S ACCOUNT, NOT LOG EVIDENCE

Q2 price while paused (price 30, filterId 7): measured - child: {method: onChild, triggerFired: true} fires (event is eligible), but no SINK checked line follows it; the next SINK checked line is Checked[price=40.0, count=1], not count=2. Matches Child.onChild()'s !paused guard (source-inspected, not analyser-verified field read).

### NARRATIVE - THE AUTHOR'S ACCOUNT, NOT LOG EVIDENCE

Q3 reset() publish: measured - the ExportFunctionAuditEvent record shows only child:{method: reset}; no SINK checked line accompanies it.

### NARRATIVE - THE AUTHOR'S ACCOUNT, NOT LOG EVIDENCE

Q4 after reset: measured - next PriceUpdate(40, filterId 7) publishes Checked[price=40.0, count=1] (count restarted at 1, not 2). No direct field snapshot of processedCount/paused immediately after reset exists in this log; that would require getter/state-dump instrumentation this run does not have - inference, not measurement.

### NARRATIVE - THE AUTHOR'S ACCOUNT, NOT LOG EVIDENCE

LIMITATIONS: (a) log missing separators collapses time-series charting to one point; (b) coverage flags the loaded graphml as possibly a different build than this exact run (checked sink node not declared in the graphml, though it appears in the log); (c) screenshot/PNG and PDF export to the exchange directory failed: 'Allow assistant file exchange' is not enabled in this analyser session, so no image/PDF file could be written - recorded as a blockage, not fabricated as available.