

Price processing acceptance - two fresh JVM runs

WRITTEN AGAINST	Acceptance runs C and D, fresh JVMs; corrected producer writes --- separato...
AUTHORED VIEW	all event types
LOG	run-d-audit.yaml (+1 rolled)
CREATED	2026-09-19T11:03:17.775117Z
RENDERED	2026-09-19 11:03:17.790


NARRATIVE - THE AUTHOR'S ACCOUNT, NOT LOG EVIDENCE

Runs C and D use the same generated processor in fresh Java processes (98353 and 98354). The scenario is PriceUpdate(DEMO,10,7), PriceUpdate(DEMO,20,9), pause, PriceUpdate(DEMO,30,7), exported reset(), PriceUpdate(DEMO,40,7).

NARRATIVE - THE AUTHOR'S ACCOUNT, NOT LOG EVIDENCE

Measurement sources: project/acceptance-evidence/run-c and run-d contain audit.yaml, state.csv and checked.csv; sibling run-c.stdout.txt and run-d.stdout.txt record PIDs and assertion results. Copies used by this analyser live under /tmp/spring-authoring-acceptance/run1/exchange as run-c-* and run-d-*. State CSVs measure live Child getters and cumulative checked callbacks after each input. Both hosts assert all seven checkpoints and exact outputs Checked(10,1), Checked(40,1).

Trend · Measured count and sink outputs

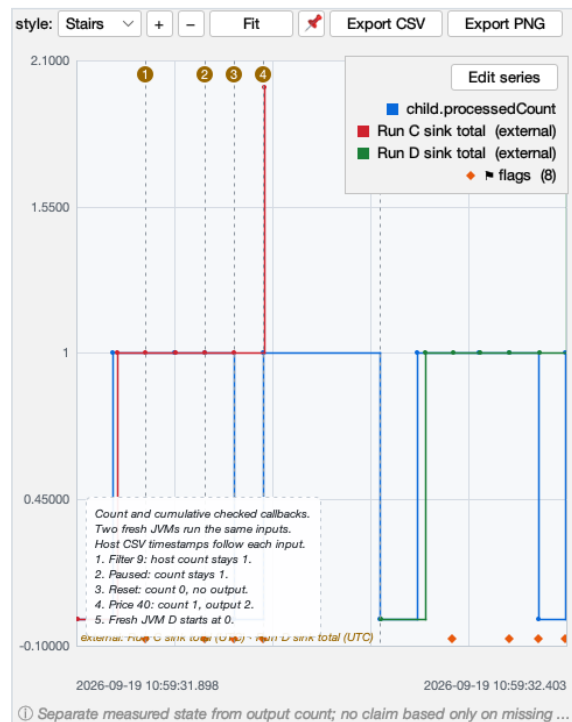

Markers · Measured count and sink outputs

series	glyph	time (UTC)	payload	record
? flags	diamond	10:59:31.969	Wrong filter 9: raw record contains no node values. Independent h...	5
? flags	diamond	10:59:32.030	Eligible price 30 reaches rootNode and Child while paused. Child ...	7
? flags	diamond	10:59:32.060	Exported reset calls Child.reset: audit shows count=0, lastProces...	8
? flags	diamond	10:59:32.090	Price 40 after reset is processed with count=1, lastProcessedPric...	9
? flags	diamond	10:59:32.285	Wrong filter 9: raw record contains no node values. Independent h...	17
? flags	diamond	10:59:32.344	Eligible price 30 reaches rootNode and Child while paused. Child ...	19
? flags	diamond	10:59:32.374	Exported reset calls Child.reset: audit shows count=0, lastProces...	20
? flags	diamond	10:59:32.402	Price 40 after reset is processed with count=1, lastProcessedPric...	21

Table

Record	Event	Count	Last price	Paused	Child action
0	EventLogControlEvent				
1	LifecycleEvent	0	0.0	false	initialise
2	LifecycleEvent				
3	SinkRegistration				
4	PriceUpdate	1	10.0	false	priceProcessed
5	PriceUpdate				
6	Signal	1	10.0	true	pause
7	PriceUpdate	1	10.0	true	priceIgnoredWhilePaused
8	ExportFunctionAuditEvent	0	0.0	false	reset
9	PriceUpdate	1	40.0	false	priceProcessed
10	LifecycleEvent				
11	LifecycleEvent				
12	EventLogControlEvent				
13	LifecycleEvent	0	0.0	false	initialise
14	LifecycleEvent				
15	SinkRegistration				
16	PriceUpdate	1	10.0	false	priceProcessed
17	PriceUpdate				
18	Signal	1	10.0	true	pause
19	PriceUpdate	1	10.0	true	priceIgnoredWhilePaused
20	ExportFunctionAuditEvent	0	0.0	false	reset
21	PriceUpdate	1	40.0	false	priceProcessed
22	LifecycleEvent				
23	LifecycleEvent				

WHAT IS WRONG - RECORD #5

Wrong filter 9: raw record contains no node values. Independent host measurements in run-c/state.csv and run-d/state.csv show count=1, lastProcessedPrice=10, sinkTotal=1 after this input. Missing audit values alone cannot prove non-execution.

LIKELY CAUSE / SUGGESTED FIX

No behavior fix required for these measured runs; generated PriceUpdate filter switch contains only case 7.

Record #5

```
event: PriceUpdate{symbol=DEMO, price=20.0, filterId=9}
```

Record #5

```
event: PriceUpdate{symbol=DEMO, price=20.0, filterId=9}
```

WHAT IS WRONG - RECORD #7

Eligible price 30 reaches rootNode and Child while paused. Child logs priceIgnoredWhilePaused, count=1, lastProcessedPrice=10, paused=true. Host sinkTotal stays 1.

Record #7

```
event: PriceUpdate{symbol=DEMO, price=30.0, filterId=7}
1. rootNode thread=main method=onPriceUpdate receivedEvent=PriceUpdate{symbol=DEMO, price=30.0, filterId=7} price=30.0
2. child thread=main method=onChild action=priceIgnoredWhilePaused processedCount=1 lastProcessedPrice=10.0 paused=true
```

WHAT IS WRONG - RECORD #8

Exported reset calls Child.reset: audit shows count=0, lastProcessedPrice=0, paused=false. Independent host callback count remains 1, so reset publishes no Checked in these runs. Audit alone does not count sink publications.

Record #8

```
event: @Override
1. child thread=main method=reset action=reset processedCount=0 lastProcessedPrice=0.0 paused=false
```

WHAT IS WRONG - RECORD #9

Price 40 after reset is processed with count=1, lastProcessedPrice=40, paused=false. Host captures Checked(40,1), the second and final callback; first was Checked(10,1).

Record #9

```
event: PriceUpdate{symbol=DEMO, price=40.0, filterId=7}
1. rootNode thread=main method=onPriceUpdate receivedEvent=PriceUpdate{symbol=DEMO, price=40.0,
filterId=7} price=40.0
2. child thread=main method=onChild action=priceProcessed processedCount=1
lastProcessedPrice=40.0 paused=false
```

NARRATIVE - THE AUTHOR'S ACCOUNT, NOT LOG EVIDENCE

Independent repeat: records 17, 19, 20 and 21 correspond to the same four findings in fresh JVM D. State rows match run C after excluding timestamps. These are two measured runs, not evidence of all possible event sequences or byte-identical raw audit output.

WHAT IS WRONG - RECORD #17

Wrong filter 9: raw record contains no node values. Independent host measurements in run-c/state.csv and run-d/state.csv show count=1, lastProcessedPrice=10, sinkTotal=1 after this input. Missing audit values alone cannot prove non-execution.

LIKELY CAUSE / SUGGESTED FIX

No behavior fix required for these measured runs; generated PriceUpdate filter switch contains only case 7.

Record #17

```
event: PriceUpdate{symbol=DEMO, price=20.0, filterId=9}
```

WHAT IS WRONG - RECORD #19

Eligible price 30 reaches rootNode and Child while paused. Child logs priceIgnoredWhilePaused, count=1, lastProcessedPrice=10, paused=true. Host sinkTotal stays 1.

Record #19

```
event: PriceUpdate{symbol=DEMO, price=30.0, filterId=7}
1. rootNode thread=main method=onPriceUpdate receivedEvent=PriceUpdate{symbol=DEMO, price=30.0,
filterId=7} price=30.0
2. child thread=main method=onChild action=priceIgnoredWhilePaused processedCount=1
lastProcessedPrice=10.0 paused=true
```

WHAT IS WRONG - RECORD #20

Exported reset calls Child.reset: audit shows count=0, lastProcessedPrice=0, paused=false. Independent host callback count remains 1, so reset publishes no Checked in these runs. Audit alone does not count sink publications.

Record #20

```
event: @Override
1. child thread=main method=reset action=reset processedCount=0 lastProcessedPrice=0.0
   paused=false
```

WHAT IS WRONG - RECORD #21

Price 40 after reset is processed with count=1, lastProcessedPrice=40, paused=false. Host captures Checked(40,1), the second and final callback; first was Checked(10,1).

Record #21

```
event: PriceUpdate{symbol=DEMO, price=40.0, filterId=7}
1. rootNode thread=main method=onPriceUpdate receivedEvent=PriceUpdate{symbol=DEMO, price=40.0,
   filterId=7} price=40.0
2. child thread=main method=onChild action=priceProcessed processedCount=1
   lastProcessedPrice=40.0 paused=false
```

NARRATIVE - THE AUTHOR'S ACCOUNT, NOT LOG EVIDENCE

Limits: the wrong-filter record has no Child state values; audit silence alone does not prove no execution or no mutation. Host getters provide the no-increment observation. Audit does not count every sink publish; checked.csv and host callback totals provide the no-output-on-reset observation. The descriptor reports checked as java.lang.Object, not a typed Checked contract. Analyser coverage reports checked absent from the topology, but the generated GraphML explicitly contains node id=checked (line 133) and its edges. This is an unresolved analyser interpretation inconsistency, not evidence that this processor used a different graph. No full-topology or universal coverage claim is made. Initially unseparated run-a/run-b logs are preserved but excluded from this report.