

R.3 Budgets: Create category and track spending

regression.spec.js:725

5.6s

chromium

Run

Errors

TypeError: page.getByDisplayValue is not a function

Copy prompt

731 |

732 | await openSettingsSection(page, /^Budgets\$/i);

> 733 | await expect(page.getByDisplayValue(catName).first()).toBeVisible({ timeout: 10000 });

^

734 |

735 | await page.getByTestId('nav-planner').click();


736 | await expectPlannerLoaded(page);

at E:\cashflow-app\tests\e2e\regression.spec.js:733:23

Test Steps

> ✓ Before Hooks	3.1s
> ✓ Click getByTestId('nav-settings') — regression.spec.js:154	237ms
> ✓ Expect "toBeVisible" — regression.spec.js:156	26ms
> ✓ Click getByRole('button', { name: /^Budgets\$/i }).first() — regression.spec.js:157	198ms
> ✓ Expect "toBeVisible" — regression.spec.js:158	36ms
> ✓ Expect "toBeVisible" — regression.spec.js:187	21ms
> ✓ Click getByRole('button', { name: /Add Category/i }) — regression.spec.js:188	1.6s
> ✓ Expect "toBeVisible" — regression.spec.js:190	121ms
> ✓ Fill "Ramen" getByLabel('Category Name').last() — regression.spec.js:191	64ms
> ✓ Fill "100.00" getByLabel('Monthly Limit').last() — regression.spec.js:192	99ms
> ✓ Click locator('section').filter({ hasText: /Budgets/i }).first().getByRole('button', { name: /Save budgets/i }) — regression...	214ms
> ✓ Wait for selector locator('section').filter({ hasText: /Budgets/i }).first().getByRole('button', { name: /Save budgets/i }) — ...	37ms
> ✓ Click getByTestId('nav-settings') — regression.spec.js:154	107ms
> ✓ Expect "toBeVisible" — regression.spec.js:156	10ms
> ✓ Click getByRole('button', { name: /^Budgets\$/i }).first() — regression.spec.js:157	56ms
> ✓ Expect "toBeVisible" — regression.spec.js:158	6ms
> ✓ After Hooks	289ms
> ✓ Worker Cleanup	671ms

▼ Screenshots

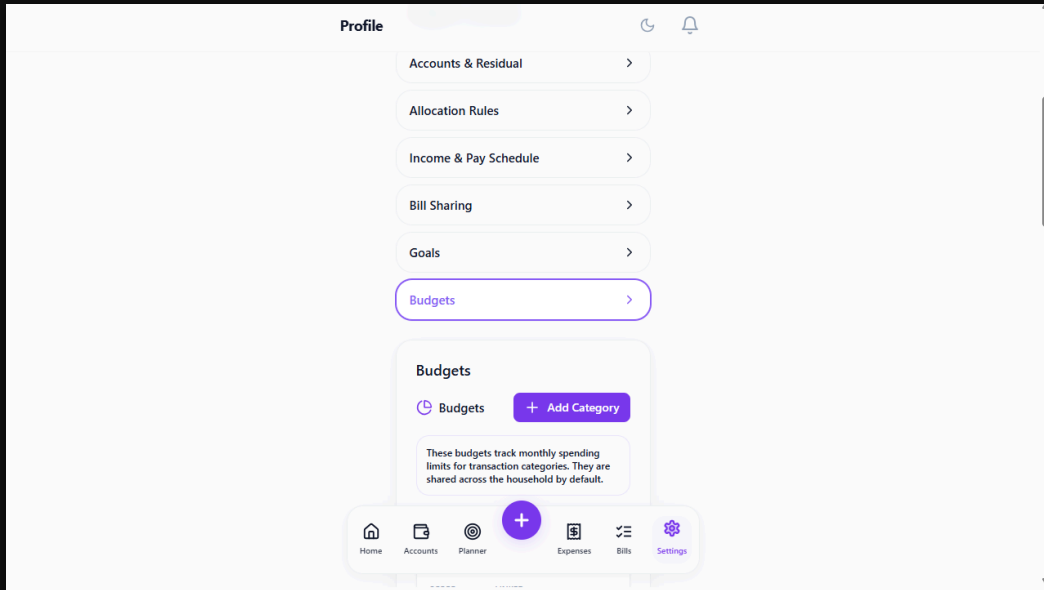

 [screenshot](#)

▼ Attachments

 [error-context](#)