Shared Center DB — Overview

Use this page to understand what Shared Center DB is and whether you need it. If you manage multiple T3000 PCs and want them to share trend logs and device data across the network — this is the feature for you.


- Full SQL Server install steps: SQL Server Express Setup
- Full T3000 UI walkthrough: T3000 Center DB Configuration

1. What Is It?

Summary: Shared Center DB changes T3000 from isolated PCs to one shared system. Instead of each PC keeping separate data, all PCs connect to one central SQL Server database so users see the same building view.

How to read this figure:

1. **Before (left):** each PC is standalone with its own local SQLite data.
2. **After (right):** one host PC runs SQL Server and all other PCs connect as clients.
3. **Dashboard panel:** users monitor shared network status, DB sync health, and trend activity from one place.

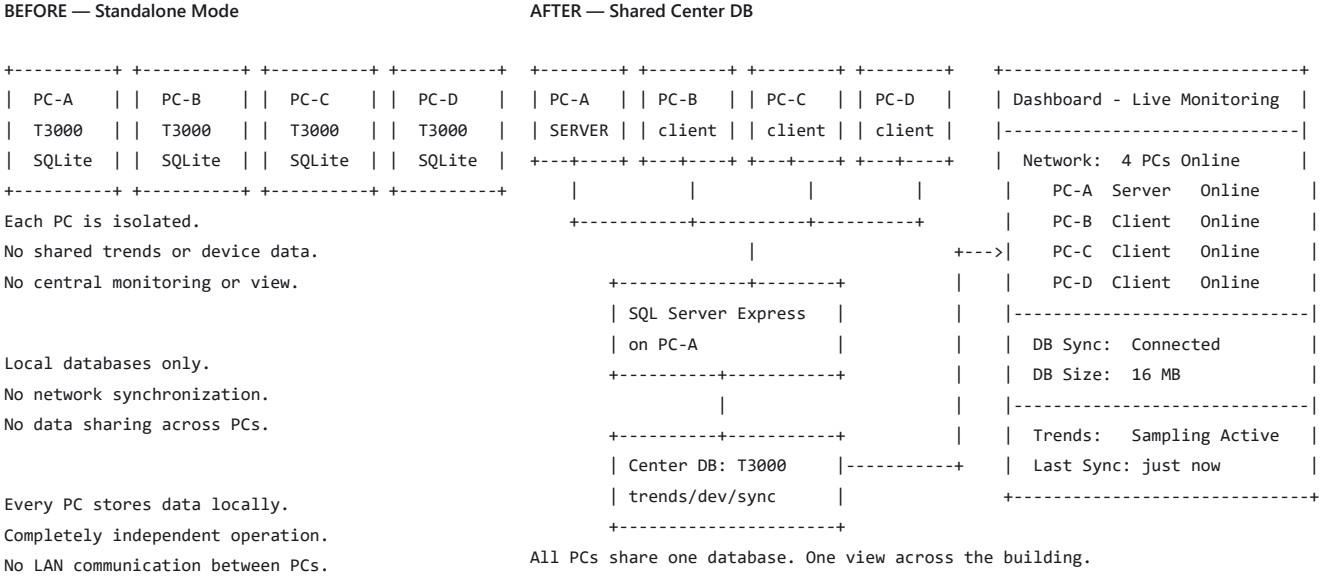


2. How It Works

Summary: Field data is collected by the Server PC, written to the Center DB, then read by all Client PCs. This keeps dashboards and trends consistent across the team.

Runtime flow (simple):

1. Field devices publish values and events.
2. Server PC collects data and writes shared/trend data to the center SQL DB.
3. Client PCs read shared/trend data from the center SQL DB and show the same status and trends.
4. Local SQLite keeps core local runtime info (not trendlog storage).

TEXT

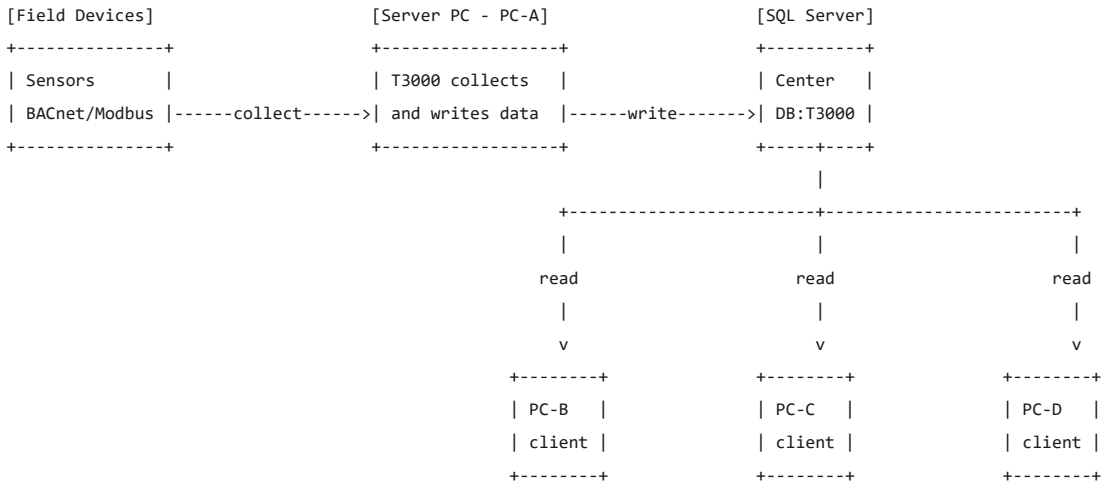

- **Server PC** — writes shared/trend data to the center SQL DB; local SQLite keeps core local runtime info only
- **Client PCs** — read shared/trend data from the center SQL DB; local SQLite keeps core local runtime info for offline continuity

---


3. Setup — Two Phases

Summary: This setup gives your team one shared view of the building. Users on any T3000 PC can see the same trends, device data, and connection status in real time.


How to use this section:

1. Do **Phase 1** once on the main PC that will host SQL Server.
2. Do **Phase 2** on every T3000 PC:
   - Host PC = **Server** role
   - All other PCs = **Client** role

Phase 1 — Host PC only (~30 min)

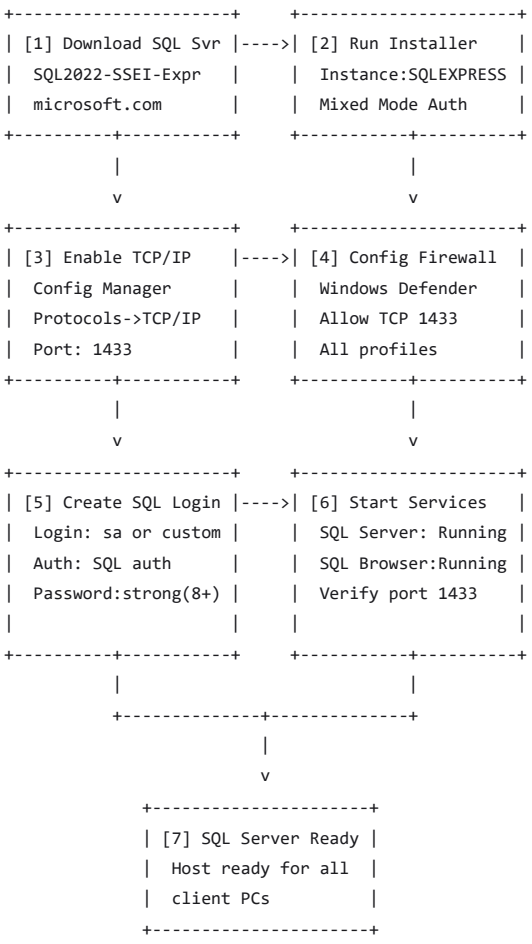

Phase 2 — Each T3000 PC (~5 min)

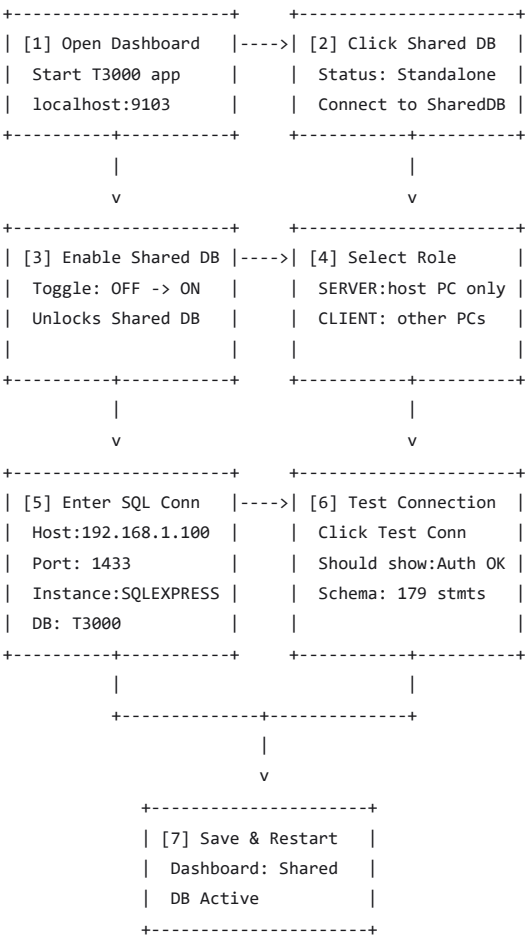

---

4. Server vs Client Role

Role	Choose when	What it does
Server	This PC hosts SQL Server	Writes shared/trend data to center DB; local SQLite stores core local runtime info only
Client	Any other PC on the LAN	Reads shared/trend data from center DB; local SQLite stores core local runtime info only

One Server. All other PCs are Clients.

---

5. What Success Looks Like

After saving the configuration and restarting T3000, open the Dashboard at `localhost:9103`. You should see:

TEXT

```
+-------------------------------------------------+
|  Shared DB                              ACTIVE  |
|  SQL Server . Server                 Connected  |
|                                                 |
|  Network Overview                               |
|    Server (This PC)   192.168.1.100     Online  |
|    Client - PC-B      192.168.1.101     Online  |
|    Client - PC-C      192.168.1.102     Online  |
|                                                 |
|  Sync & DB Health     Connected                 |
|  Center DB Target     SQL Server / T3000        |
|  Trend Logs (24h)     Sampling Active           |
+-------------------------------------------------+
```

---

6. Quick Troubleshooting

Symptom	Likely Cause	First Check
Connection timeout	SQL service stopped or firewall blocking	Start SQL service; allow TCP 1433 inbound
Login failed	Wrong credentials or Windows-only auth mode	Check username/password; enable Mixed Mode
Instance not found by Scan LAN	SQL Browser service not running	Start SQL Server Browser, or enter instance manually
Still shows Standalone after save	T3000 not restarted	Close and reopen T3000

---

7. Next Steps

- **Set up SQL Server on the host PC:** SQL Server Express Setup
- **Configure T3000 UI on each PC:** T3000 Center DB Configuration