T3000 Engineering

Merging the new editor · built Nov 13, 2026


Merging the new editor

Replacing the editor inside the shell is a merge, not a copy: the screenshots show the files and the order the change goes in.

Run VS as Administrtor





Compile “ProgramEditor”

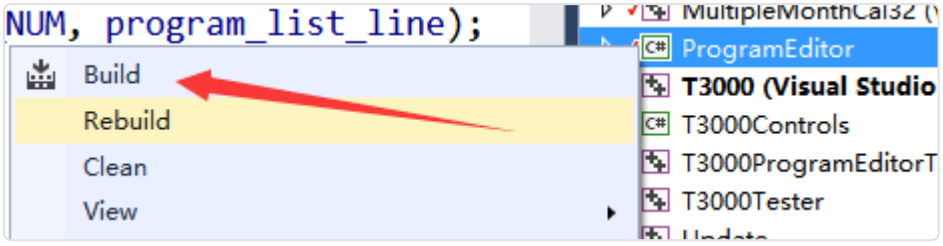



Add a Dialog for new editor


Cut Ctrl+X
Copy Ctrl+C
Paste Ctrl+V
Delete Del
Resource Includes...
Resource Symbols...
Open
Open Binary Data
Save T3000.rc Ctrl+S
Add Resource...
Insert Dialog
IDD_CSTABLE
IDD_DELAY [English (United States)]
IDD_DIA_Timer_Calibrate [English (United States)]
IDD_DIALOG_AIRQUALITY
IDD_DIALOG_BACNET_ADD_DEVICE
IDD_DIALOG_BACNET_ADD_LABEL
IDD_DIALOG_BACNET_ADD_VIRTUAL_DEVICE
on Explorer
Team Explorer
Class View
Resource View

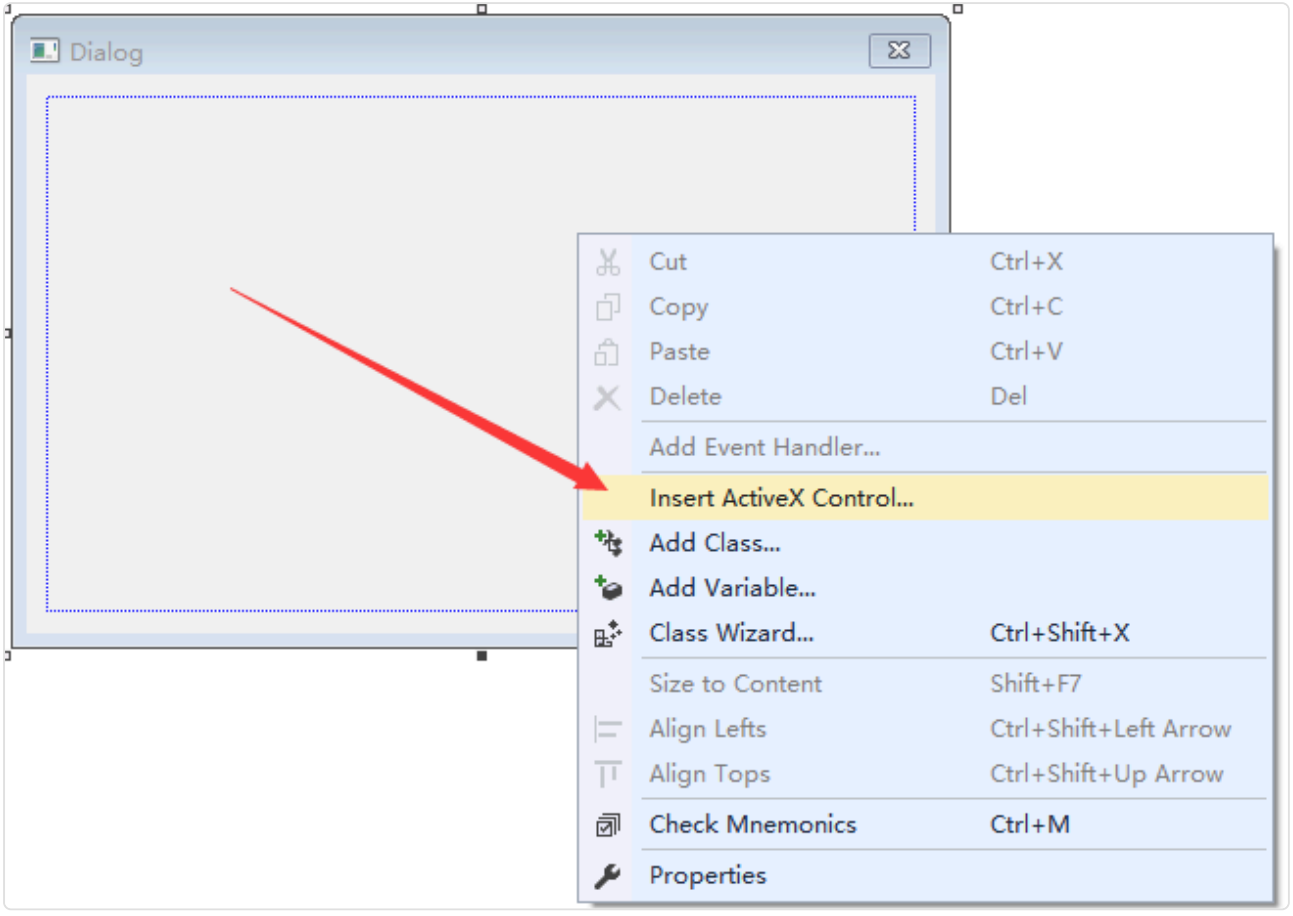

Dialog
Cut Ctrl+X
Copy Ctrl+C
Paste Ctrl+V
Delete Del
Add Event Handler...
Insert ActiveX Control...
Add Class...
Add Variable...
Class Wizard... Ctrl+Shift+X
Size to Content Shift+F7
Align Lefts Ctrl+Shift+Left Arrow
Align Tops Ctrl+Shift+Up Arrow
Check Mnemonics Ctrl+M
Properties

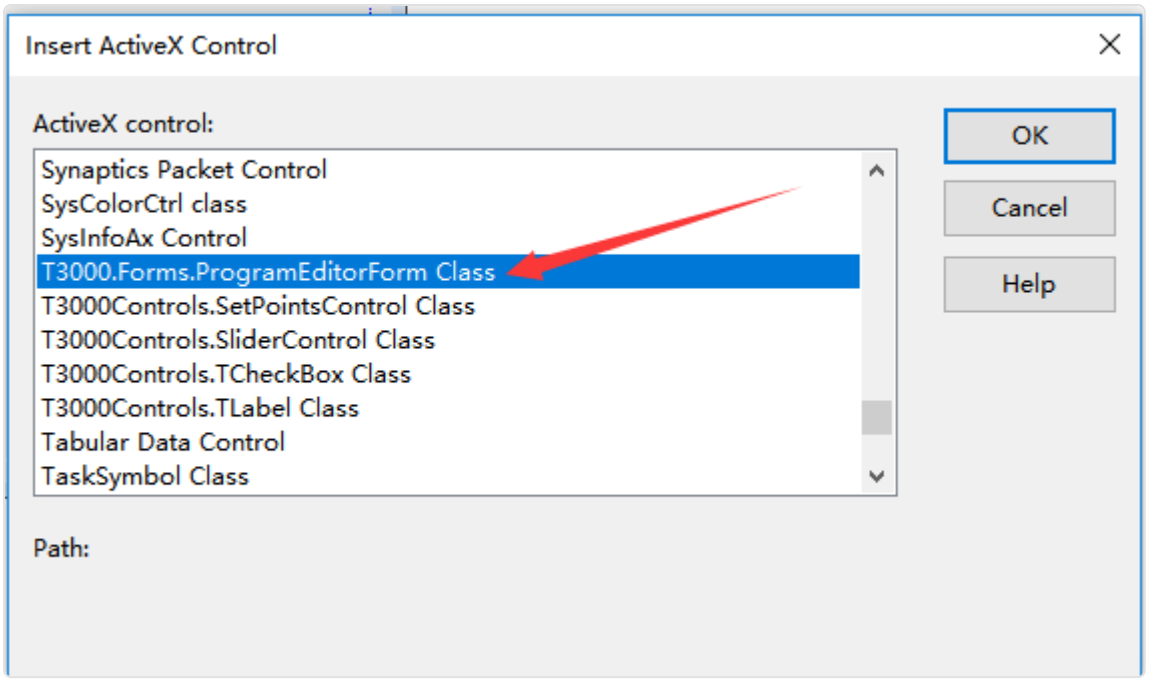

Insert ActiveX Control
ActiveX control:
Synaptics Packet Control
SysColorCtrl class
SysInfoAx Control
T3000.Forms.ProgramEditorForm Class
T3000Controls.SetPointsControl Class
T3000Controls.SliderControl Class
T3000Controls.TCheckBox Class
T3000Controls.TLabel Class
Tabular Data Control
TaskSymbol Class
OK
Cancel
Help
Path:

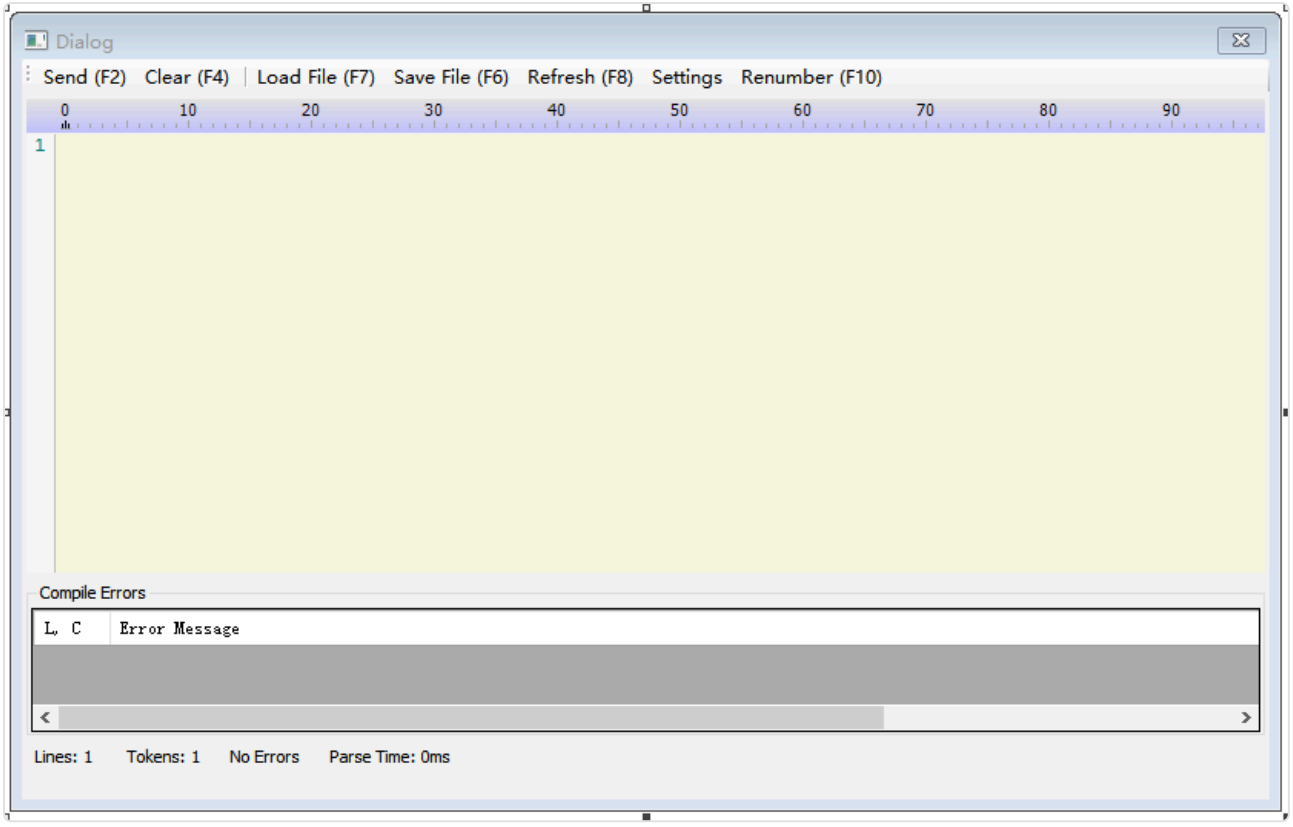

Dialog
Send (F2)
Clear (F4)
Load File (F7)
Save File (F6)
Refresh (F8)
Settings
Renumber (F10)
Compile Errors
L, C
Error Message
Lines: 1
Tokens: 1
No Errors
Parse Time: 0ms

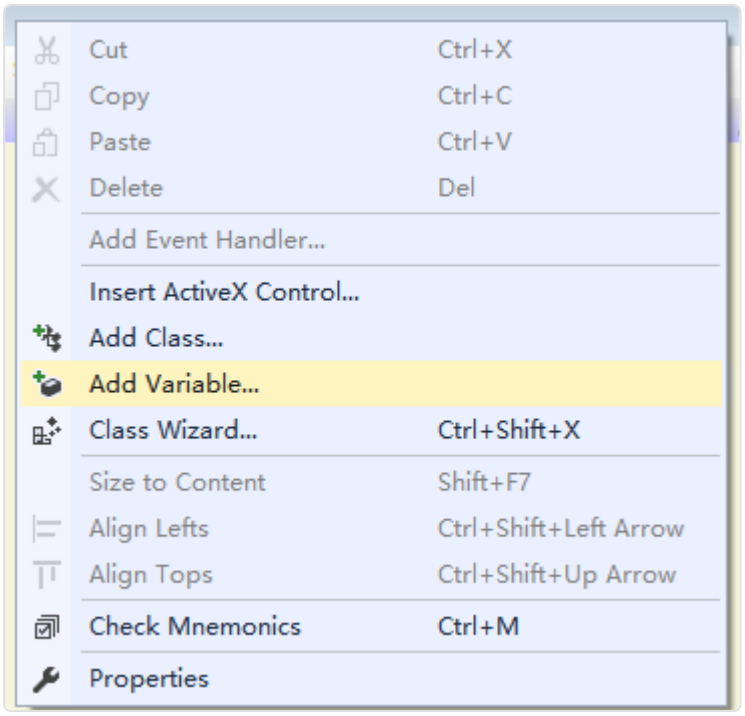


Add the programeeditor class .

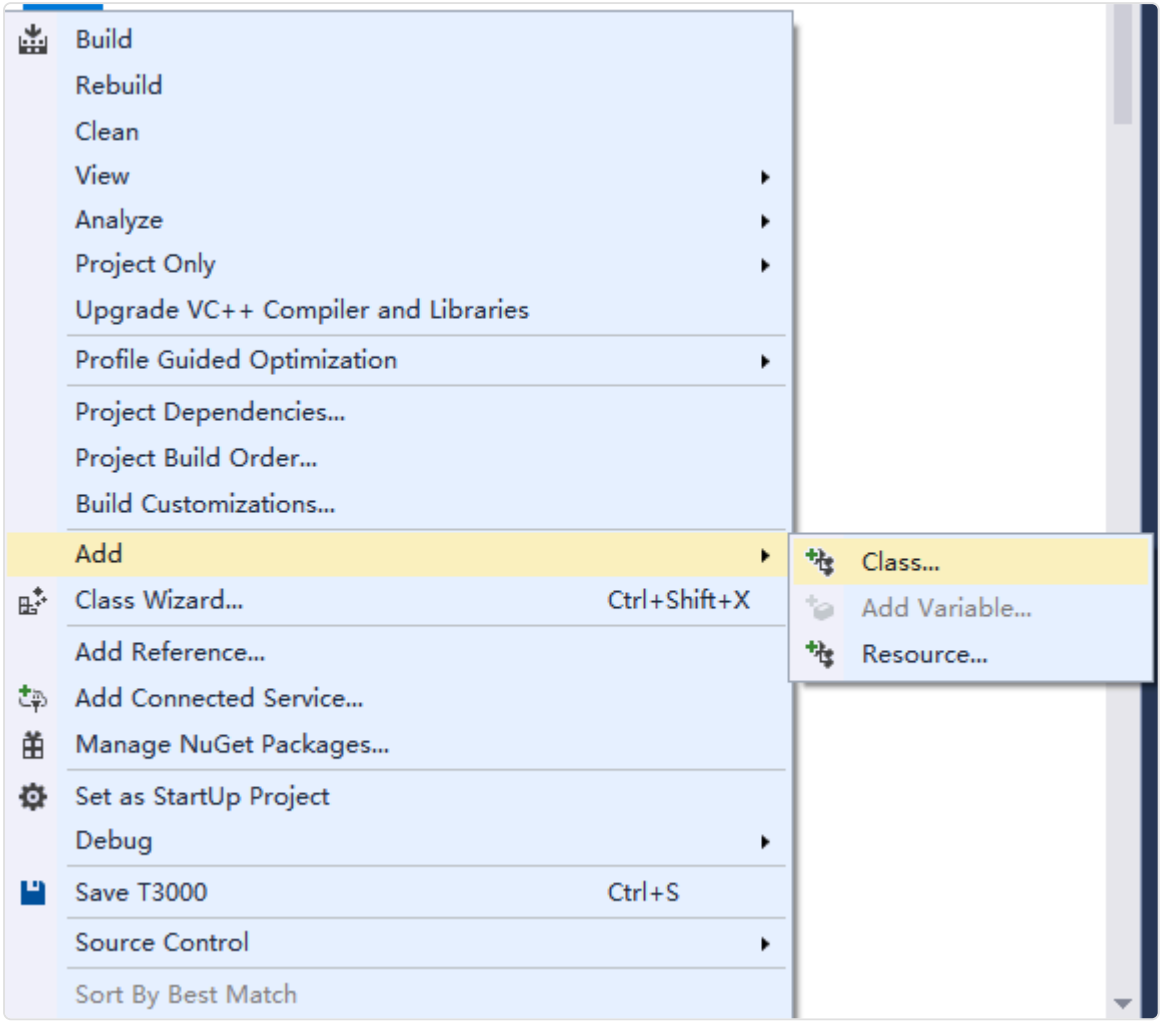


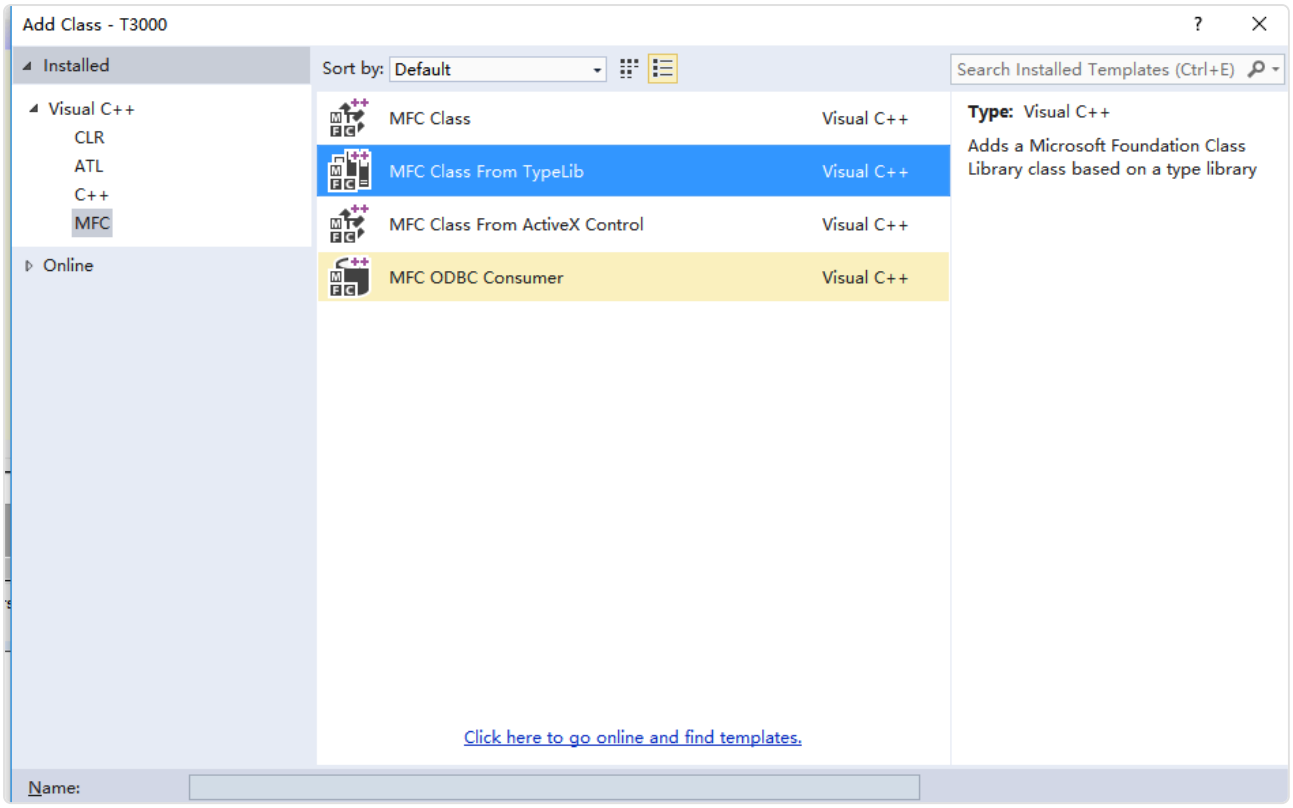
Add Class - T3000
Installed
Visual C++
CLR
ATL
C++
MFC
Online
Sort by: Default
Search Installed Templates (Ctrl+E)
MFC Class
Visual C++
MFC Class From TypeLib
Visual C++
MFC Class From ActiveX Control
Visual C++
MFC ODBC Consumer
Visual C++
Type: Visual C++
Adds a Microsoft Foundation Class Library class based on a type library
Click here to go online and find templates.
Name:

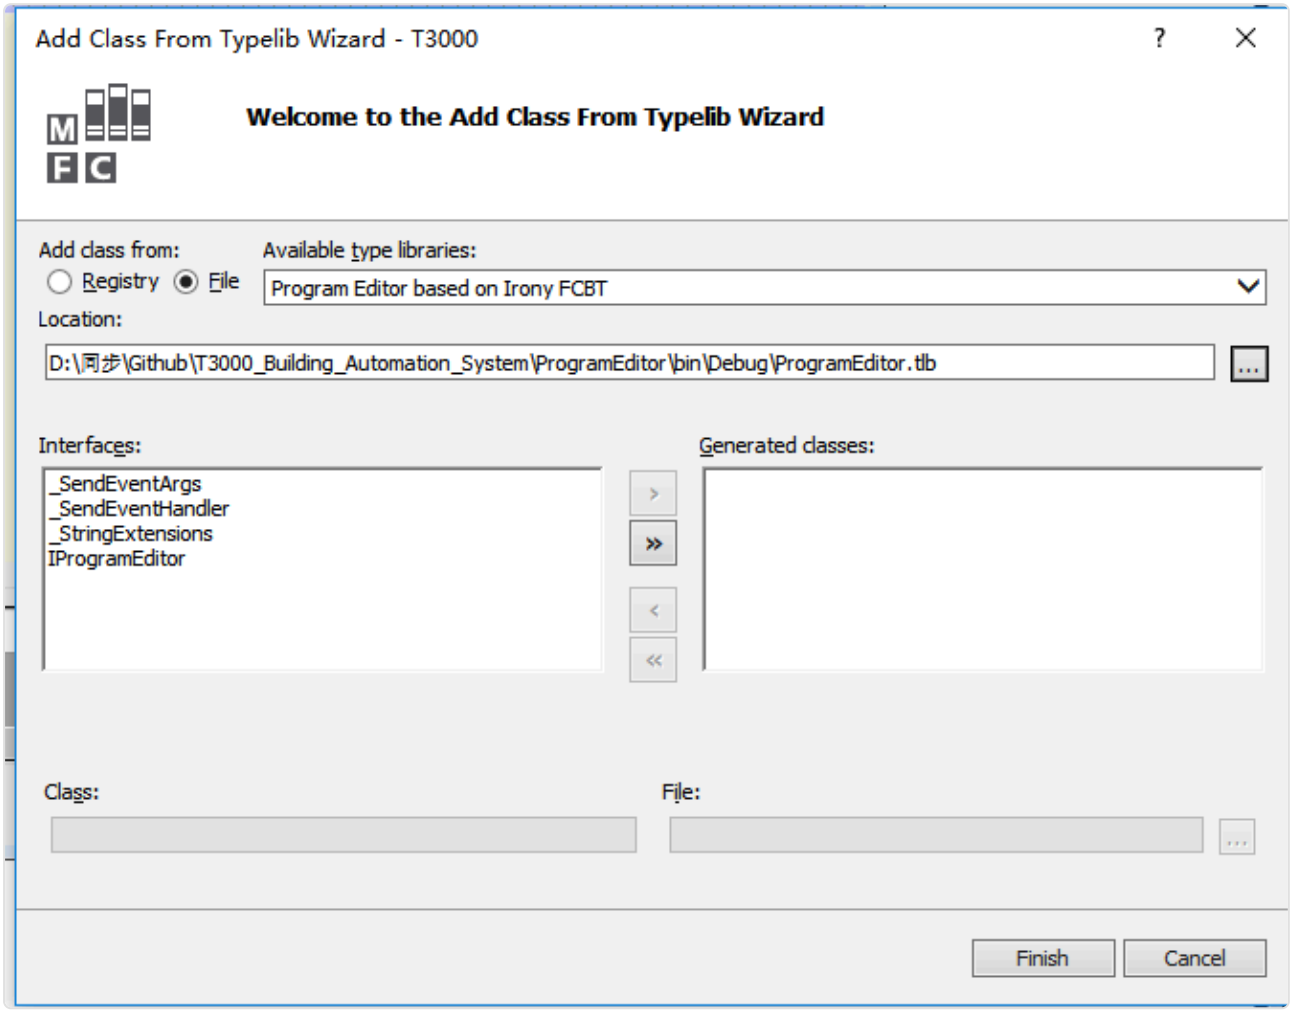

Add Class From Typelib Wizard - T3000
Welcome to the Add Class From Typelib Wizard
Add class from:
Registry
File
Available type libraries:
Program Editor based on Irony FCBT
Location:
D:\同步\Github\T3000_Building_Automation_System\ProgramEditor\bin\Debug\ProgramEditor.tlb
Interfaces:
_SendEventArgs
_SendEventHandler
_StringExtensions
IProgramEditor
Generated classes:
Class:
File:
Finish
Cancel

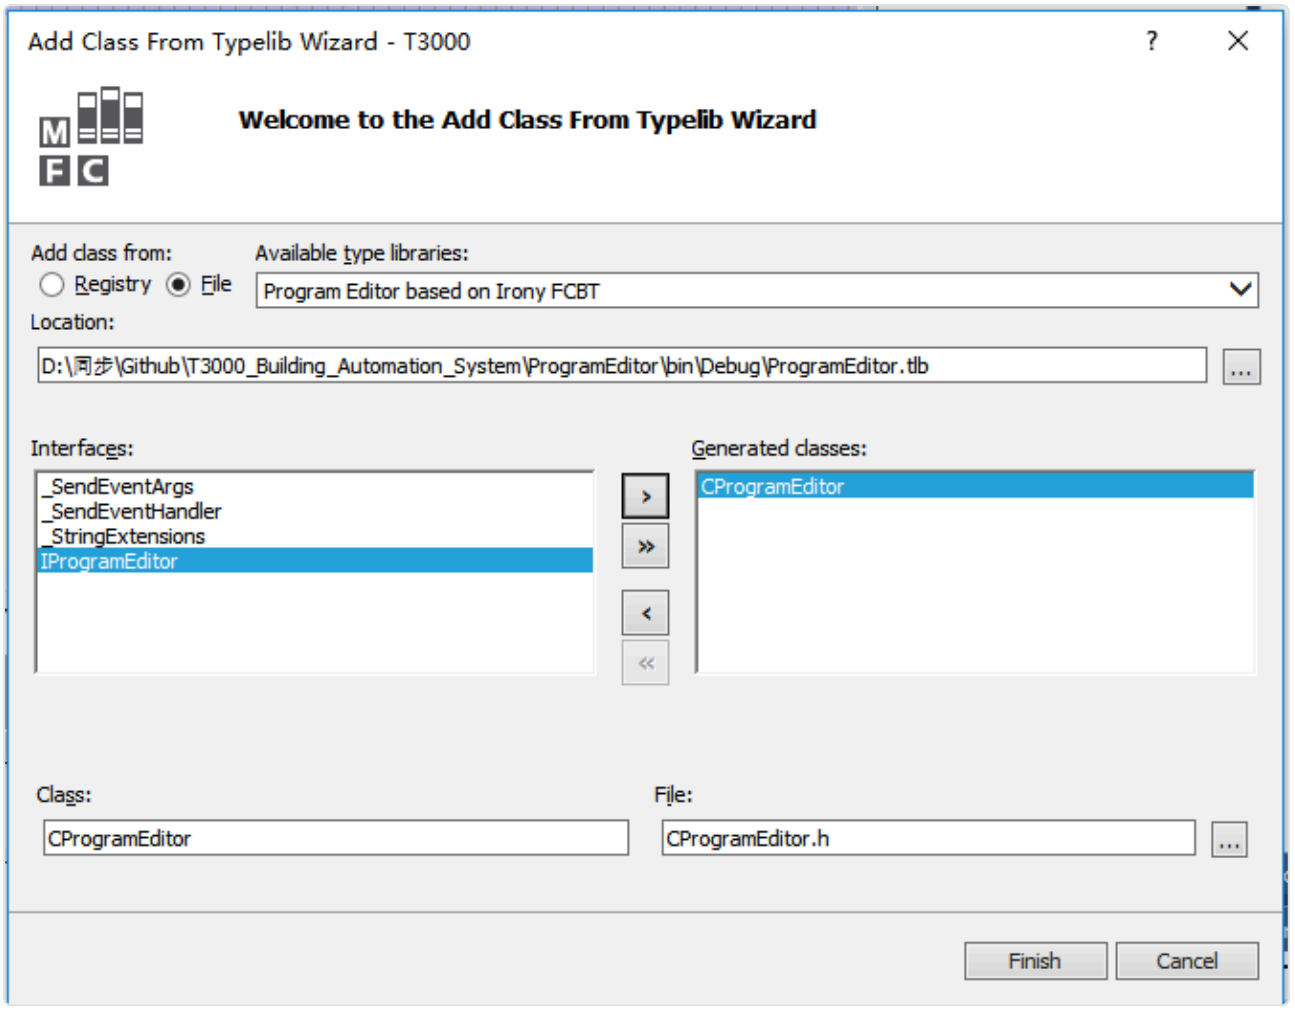


Add a variable

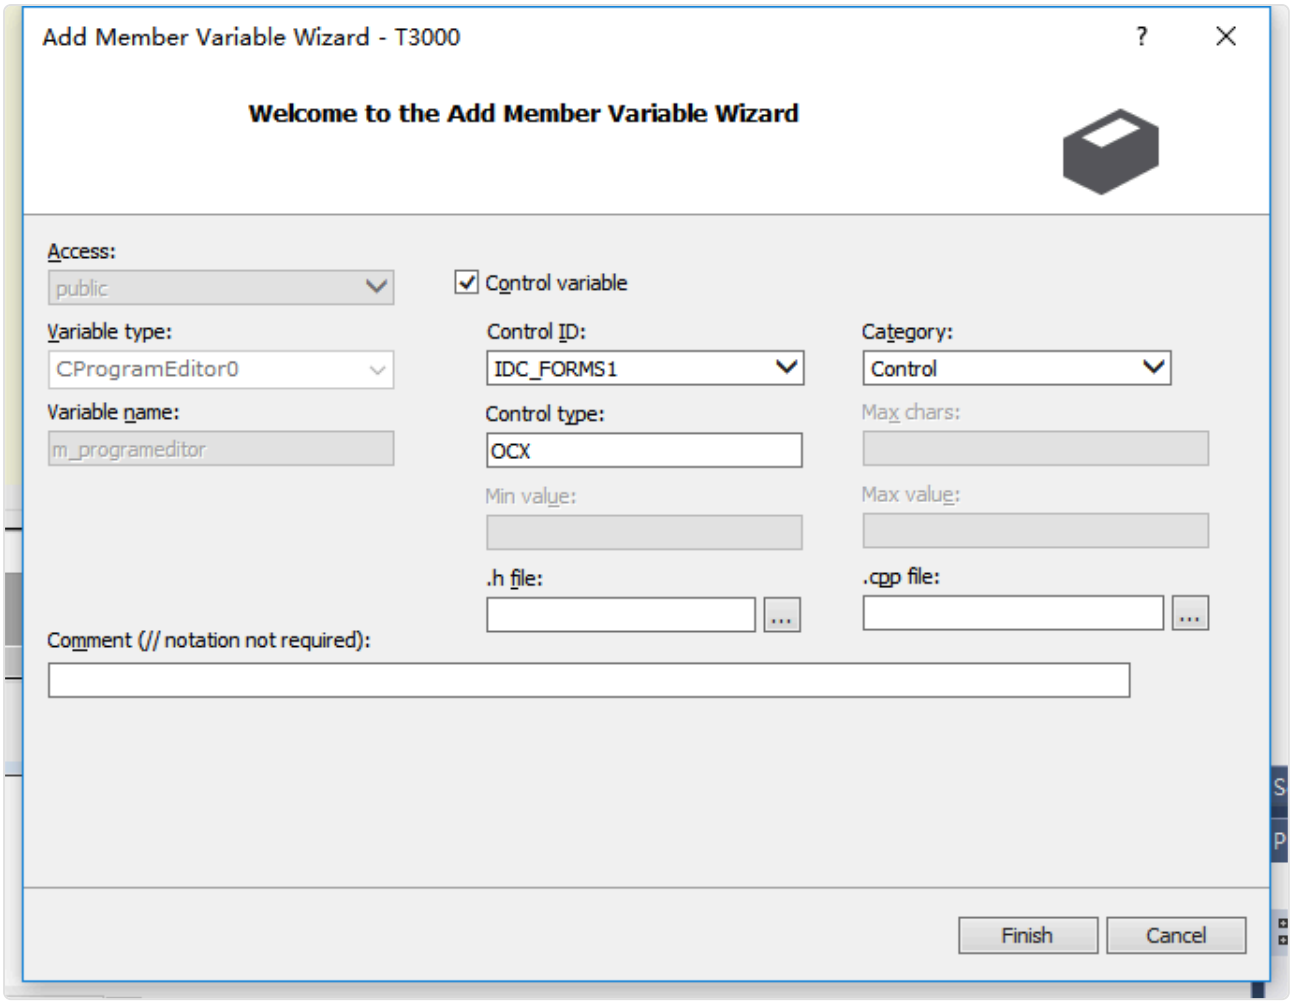

add a variable for the program editor

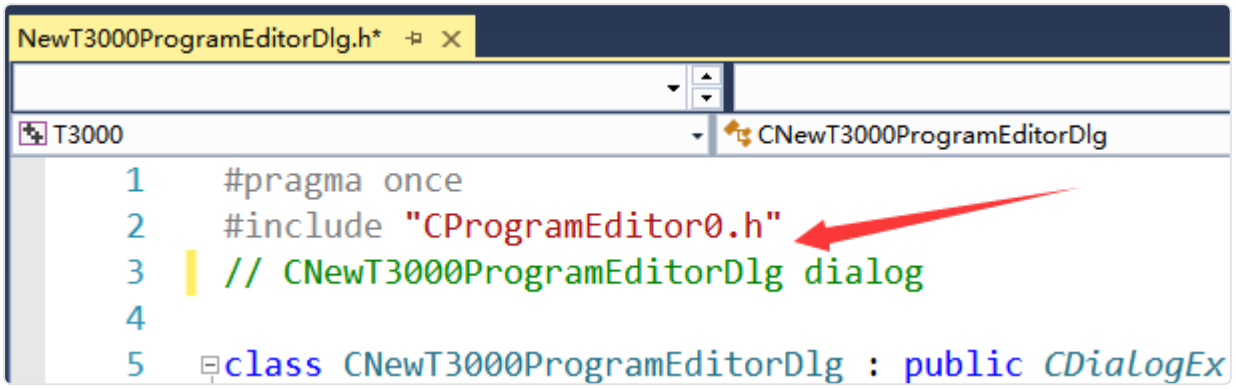

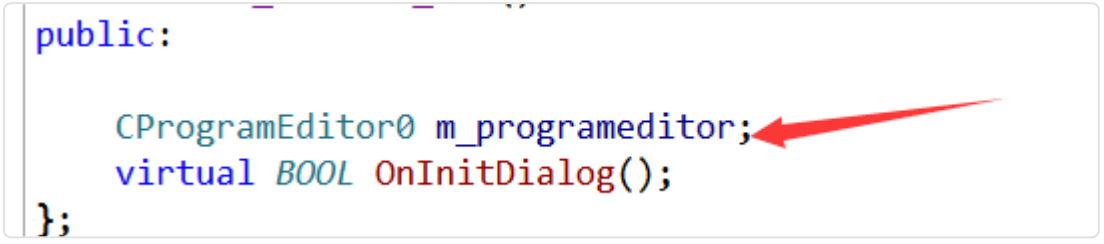

Call the put_code() function ,you can set the code string into the editor.

```
    // TODO:  Add extra initialization here
    m_programeditor.put_Code(strcode);
    return TRUE;  // return TRUE unless you set the focus to a control
                  // EXCEPTION: OCX Property Pages should return FALSE
}
```

