



# 47\_5deg

<b>Analyst</b>	temis
<b>Date</b>	5/21/2021 12:18 AM

## Table of Contents

[1 System Information](#)

[2 Geometry and Mesh](#)

[2.1 Mesh Size](#)

[2.2 Mesh Quality](#)

[2.3 Orthogonal Quality](#)

[3 Simulation Setup](#)

[3.1 Physics](#)

[3.1.1 Models](#)

[3.1.2 Material Properties](#)

[3.1.3 Cell Zone Conditions](#)

[3.1.4 Boundary Conditions](#)

[3.1.5 Reference Values](#)

[3.2 Solver Settings](#)

[4 Run Information](#)

[5 Report Definitions](#)

[6 Plots](#)

[7 Contours](#)

[8 Pathlines](#)

[9 XY Plots](#)

## System Information

<b>Application</b>	Fluent
<b>Settings</b>	3d, density-based implicit, SST k-omega
<b>Version</b>	21.1.0-10179
<b>Source Revision</b>	49a2c352da
<b>Build Time</b>	Nov 20 2020 15:49:11 EST
<b>CPU</b>	Intel(R) Core(TM) i7-8550U
<b>OS</b>	Windows

## Geometry and Mesh


# Mesh Size

Cells	Faces	Nodes
427568	934478	123686

# Mesh Quality

Name	Type	Min Orthogonal Quality	Max Aspect Ratio
solid	Mixed Cell	0.1077882	238.26564

# Orthogonal Quality

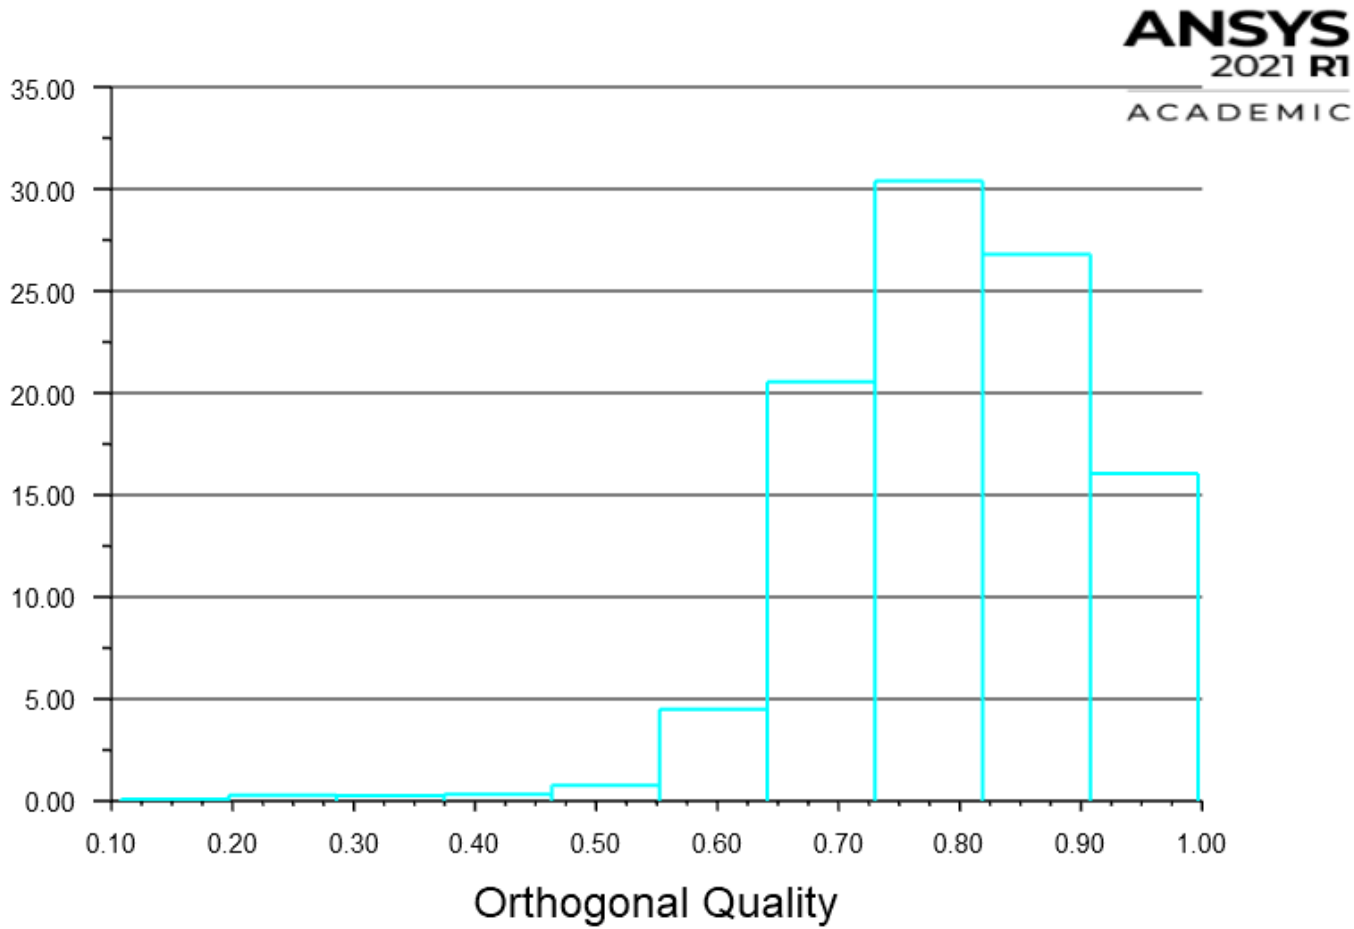

# Simulation Setup

## Physics

## Models

Model	Settings
Space	3D
Time	Steady
Viscous	SST k-omega turbulence model
Heat Transfer	Enabled

# Material Properties

— Fluid	
— air	
Density	ideal gas
Cp (Specific Heat)	kinetic theory
Thermal Conductivity	kinetic theory
Viscosity	kinetic theory
Molecular Weight	28.966 kg/kmol
L-J Characteristic Length	3.711 Angstrom
L-J Energy Parameter	-194.55 K
Thermal Expansion Coefficient	0
Degrees of Freedom	5
Speed of Sound	none
— Solid	
— aluminum	
Density	2719 kg/m^3
Cp (Specific Heat)	871 J/(kg K)
Thermal Conductivity	202.4 W/(m K)

# Cell Zone Conditions

— Fluid	
— solid	
Material Name	air
Specify source terms?	no
Specify fixed values?	no
Frame Motion?	no
Laminar zone?	no
Porous zone?	no

3D Fan Zone?	no
--------------	----

# Boundary Conditions

— Inlet	
— inlet	
Gauge Pressure [Pa]	1951
Mach Number	8
Temperature [K]	58
Coordinate System	Cartesian (X, Y, Z)
Component of Flow Direction (x,y,z)	(1, 0, 0)
Turbulent Specification Method	Intensity and Length Scale
Turbulent Intensity [%]	0.01
Turbulent Length Scale [m]	0.001
— Outlet	
— outlet	
Backflow Reference Frame	Absolute
Gauge Pressure [Pa]	1951
Pressure Profile Multiplier	1
Backflow Total Temperature [K]	58
Backflow Direction Specification Method	Normal to Boundary
Turbulent Specification Method	Intensity and Length Scale
Backflow Turbulent Intensity [%]	0.01
Backflow Turbulent Length Scale [m]	0.001
Acoustic Wave Model	Off
Backflow Pressure Specification	Total Pressure
Build artificial walls to prevent reverse flow?	no
Radial Equilibrium Pressure Distribution	no
Average Pressure Specification?	no
Specify targeted mass flow rate	no

— Symmetry	
symmetry	symmetry
— Wall	
— capsula	
Wall Thickness [m]	0
Heat Generation Rate [W/m^3]	0
Material Name	aluminum
Thermal BC Type	Heat Flux
Heat Flux [W/m^2]	0
Wall Motion	Stationary Wall
Shear Boundary Condition	No Slip
Wall Surface Roughness	0
Wall Roughness Height [m]	0
Wall Roughness Constant	0.5
Convective Augmentation Factor	1

## Reference Values

Area	7.6 m^2
Density	0.1171881 kg/m^3
Enthalpy	804122.5 J/kg
Length	3.74 m
Pressure	1950.999 Pa
Temperature	58.00007 K
Velocity	1221.355 m/s
Viscosity	1.7894e-05 kg/(m s)
Ratio of Specific Heats	1.4
Yplus for Heat Tran. Coef.	300
Reference Zone	solid

## Solver Settings

— Equations	
Flow	True

Turbulence	True
— Numerics	
Absolute Velocity Formulation	True
— Under-Relaxation Factors	
Turbulent Kinetic Energy	0.8
Specific Dissipation Rate	0.8
Turbulent Viscosity	1
Solid	1
— Discretization Scheme	
Flow	Second Order Upwind
Turbulent Kinetic Energy	Second Order Upwind
Specific Dissipation Rate	Second Order Upwind
— Time Marching	
Solver	Implicit
Courant Number	5
— Solution Limits	
Minimum Absolute Pressure [Pa]	1
Maximum Absolute Pressure [Pa]	5e+10
Minimum Temperature [K]	1
Maximum Temperature [K]	5000
Minimum Turb. Kinetic Energy [m^2/s^2]	1e-14
Minimum Spec. Dissipation Rate [s^-1]	1e-20
Maximum Turb. Viscosity Ratio	100000

## Run Information


Number of Machines	1
Number of Cores	3
Case Read	6.518 seconds
Data Read	1.376 seconds
Iteration	4697.57 seconds




AMG	2067.7 seconds
Virtual Current Memory	1.27345 GB
Virtual Peak Memory	1.4229 GB
Memory Per M Cell	2.68906

## Report Definitions



cd	0.7174011
cl	0.4976035
cm	-0.06199817
p_max	168626.8 Pa
t_max	836.1861 K

## Plots






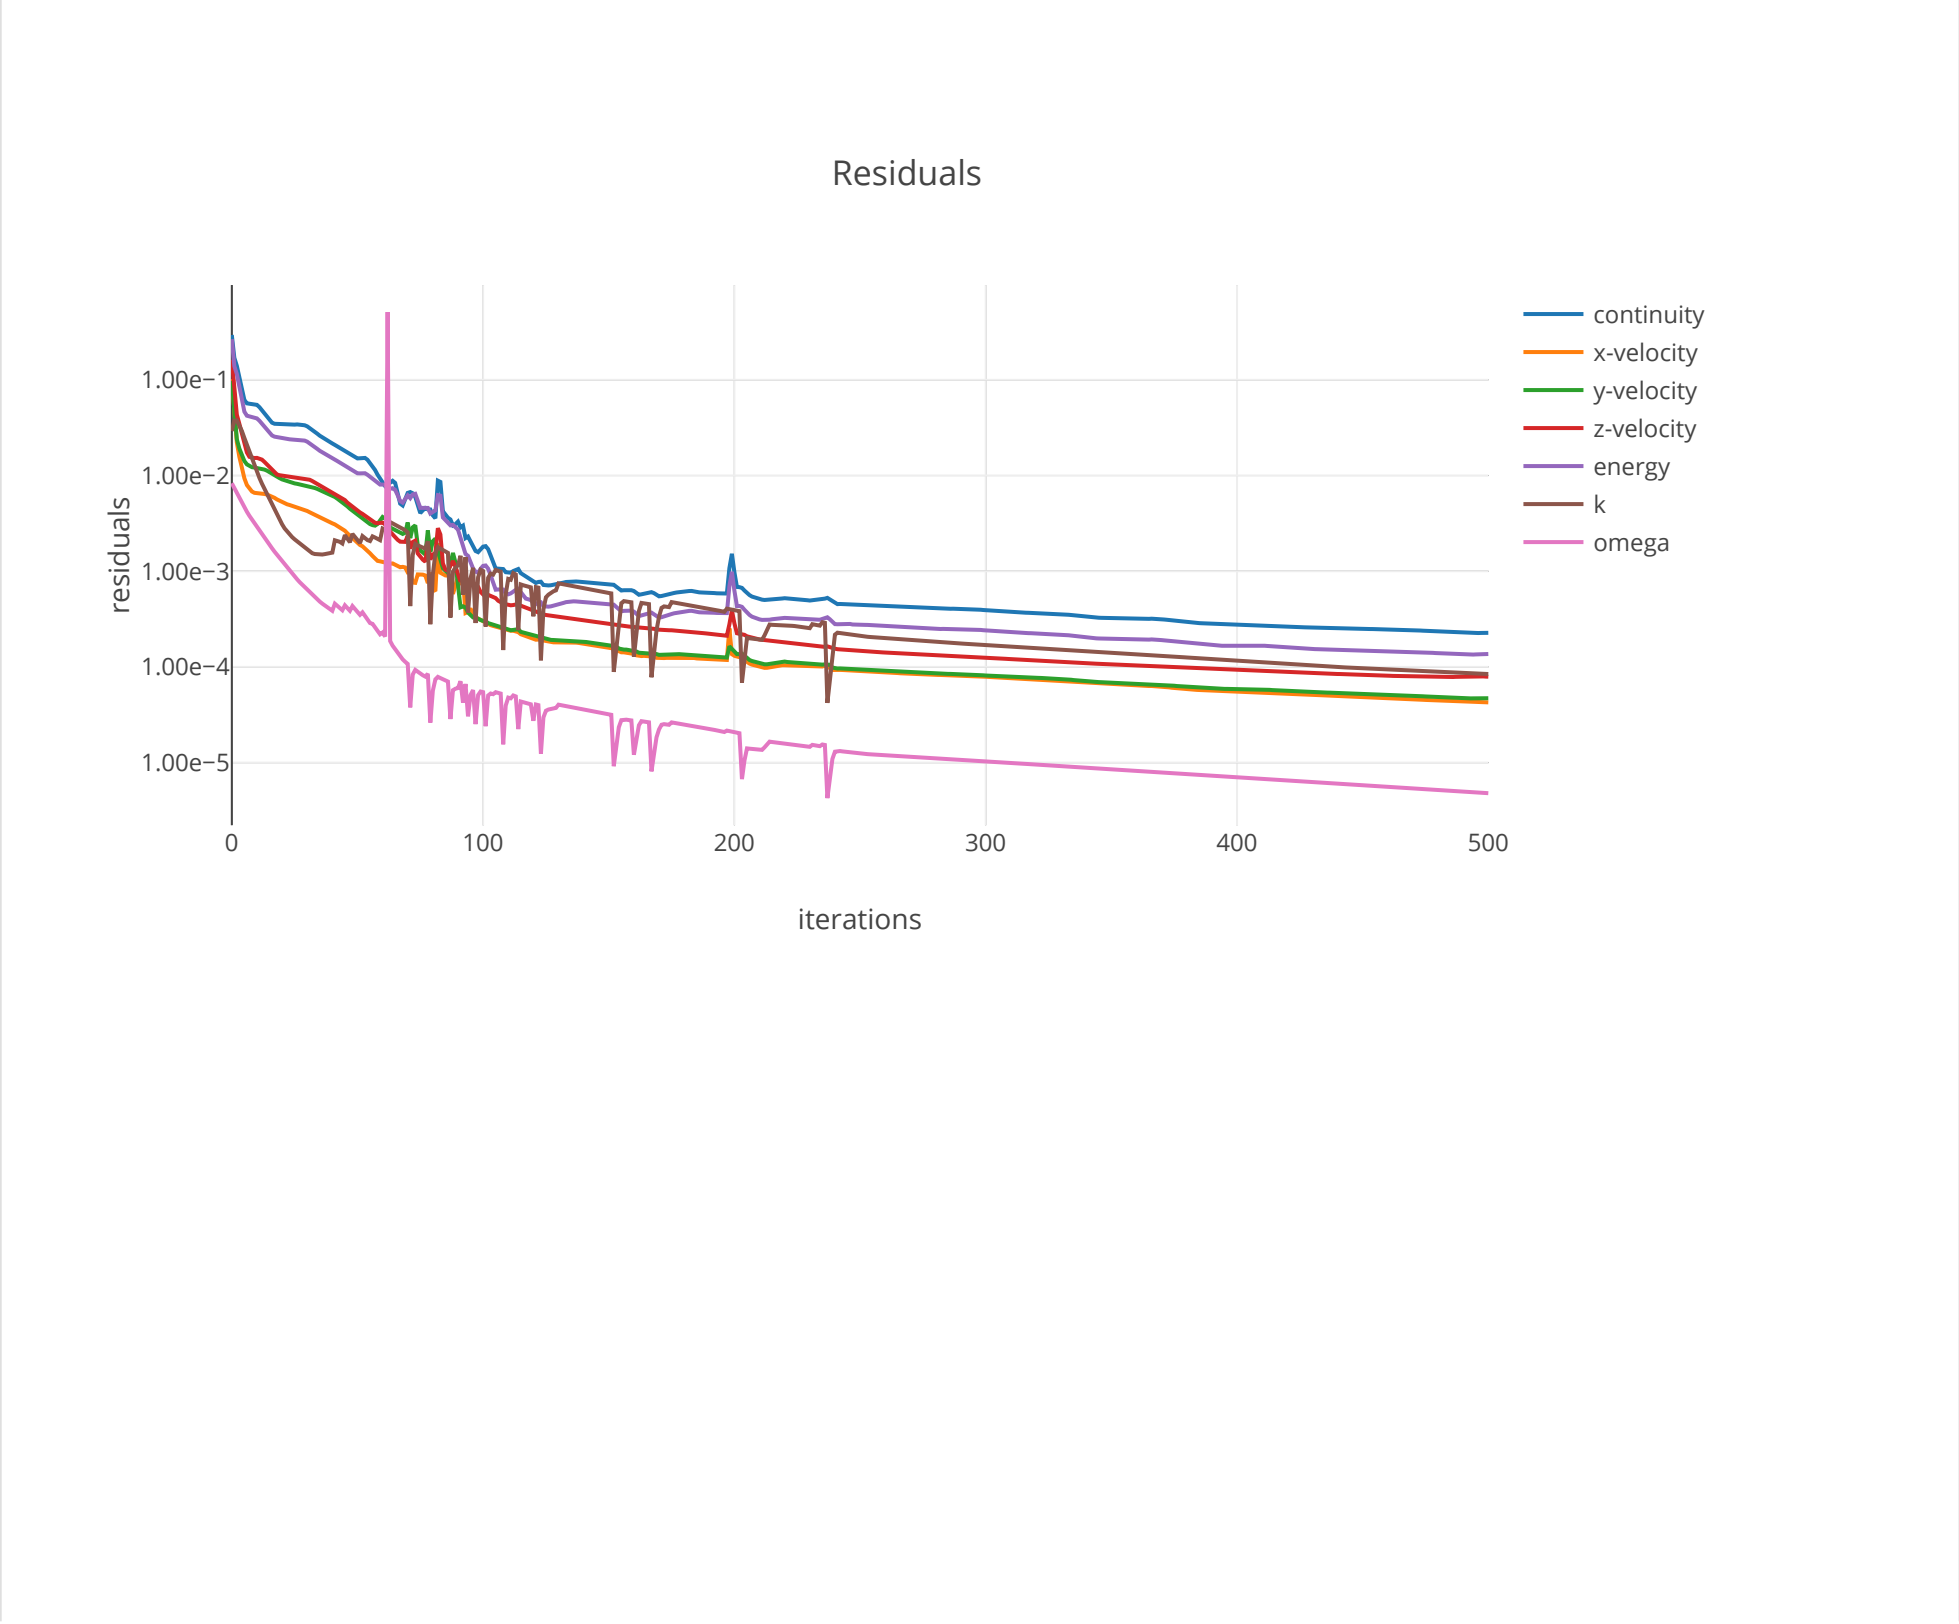


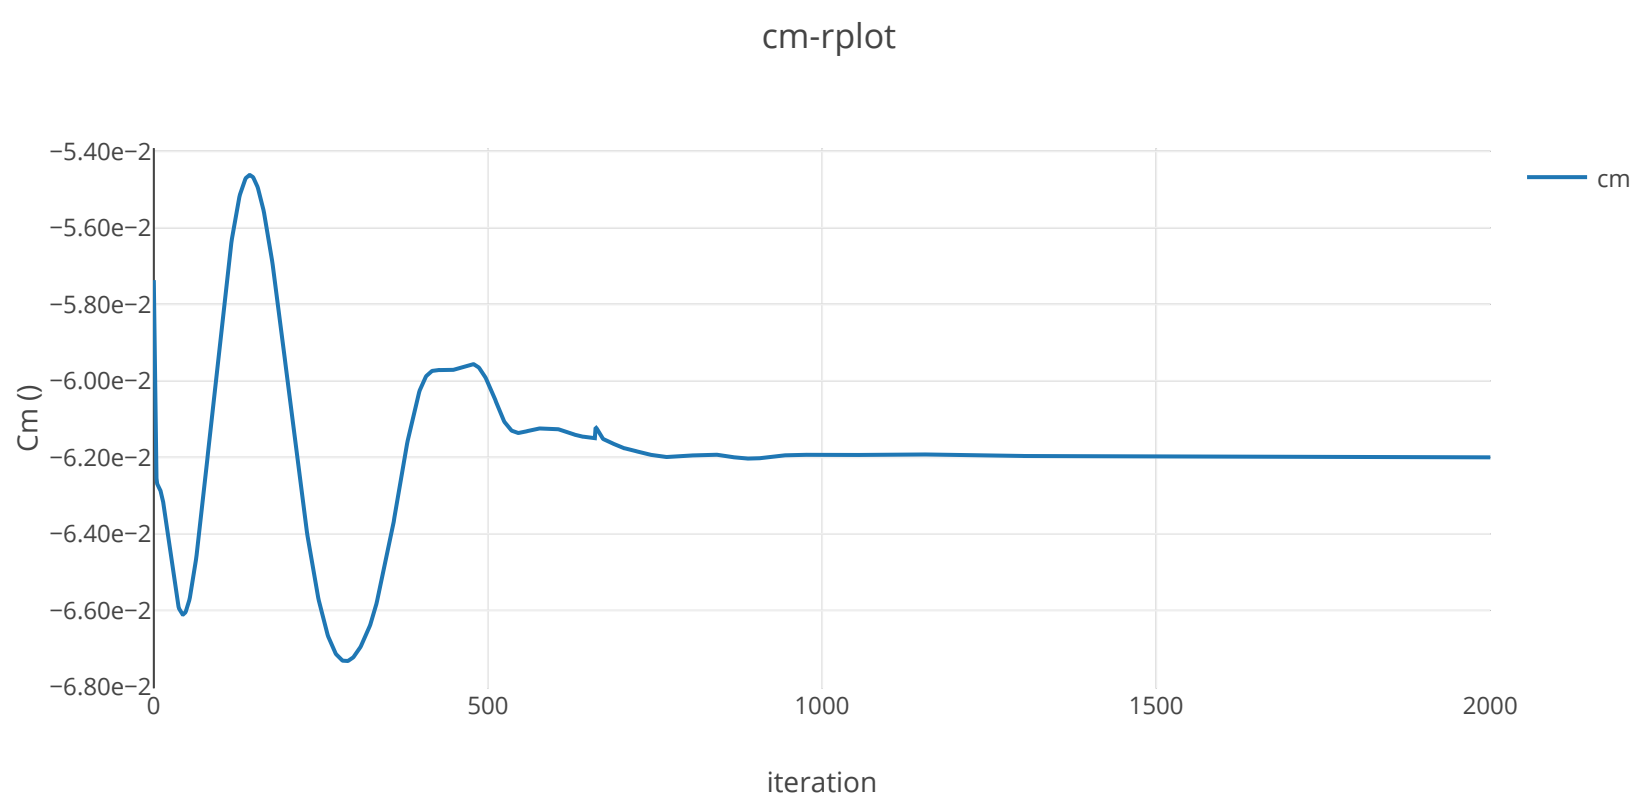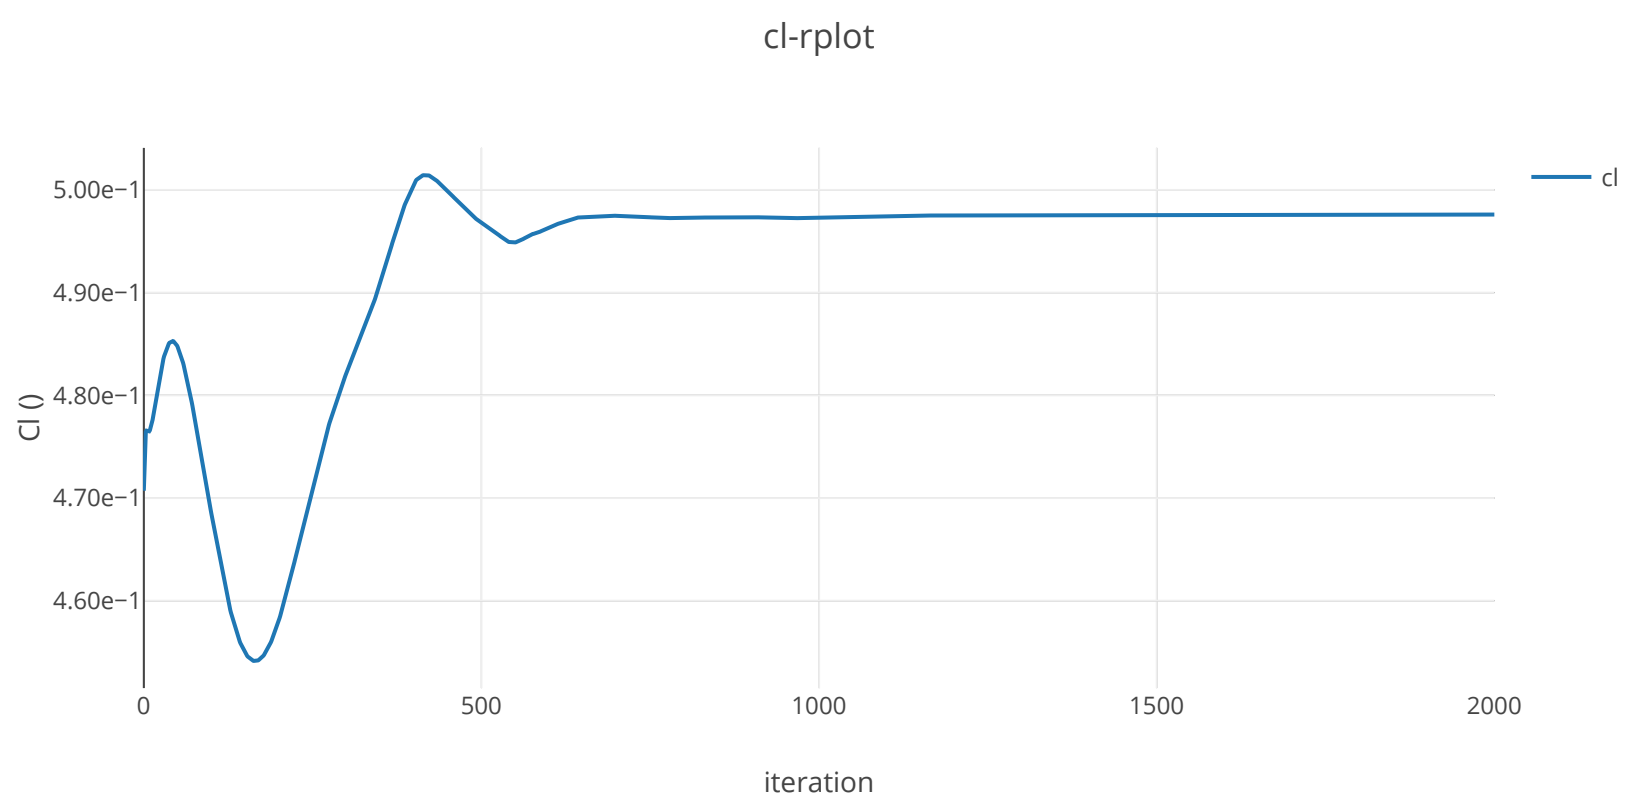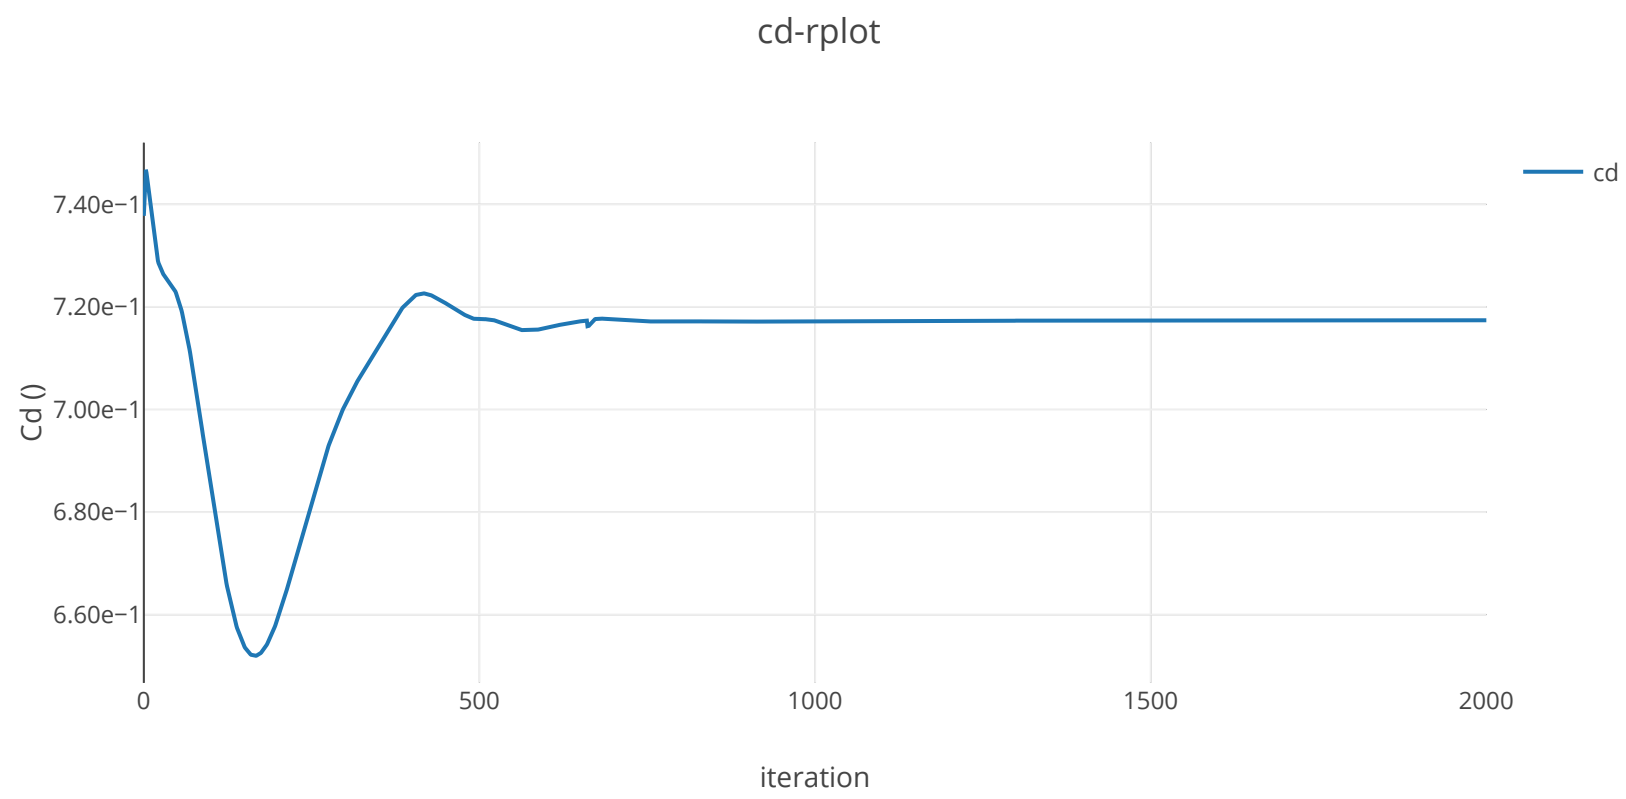






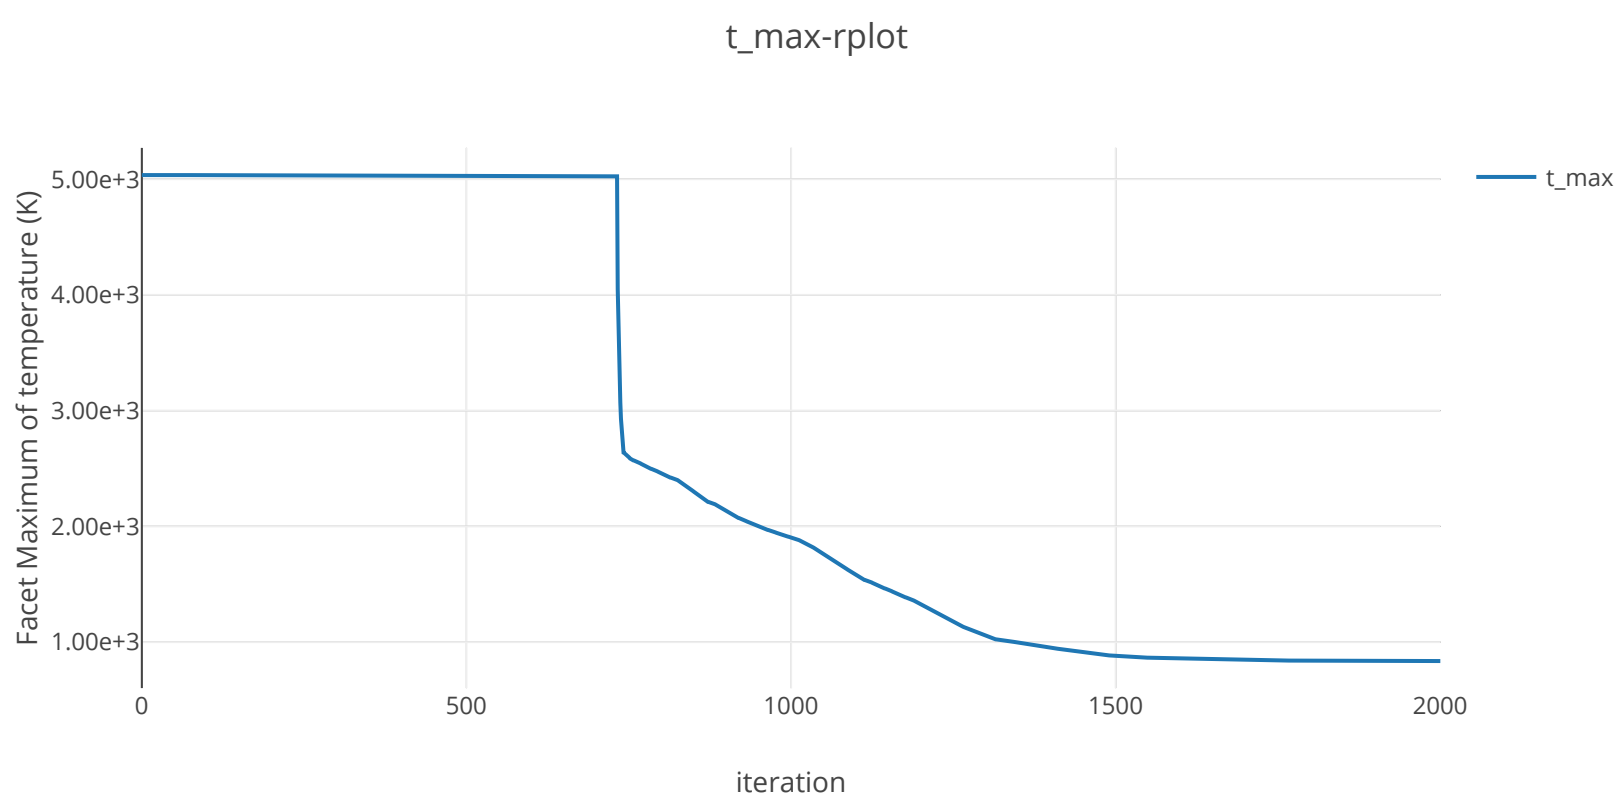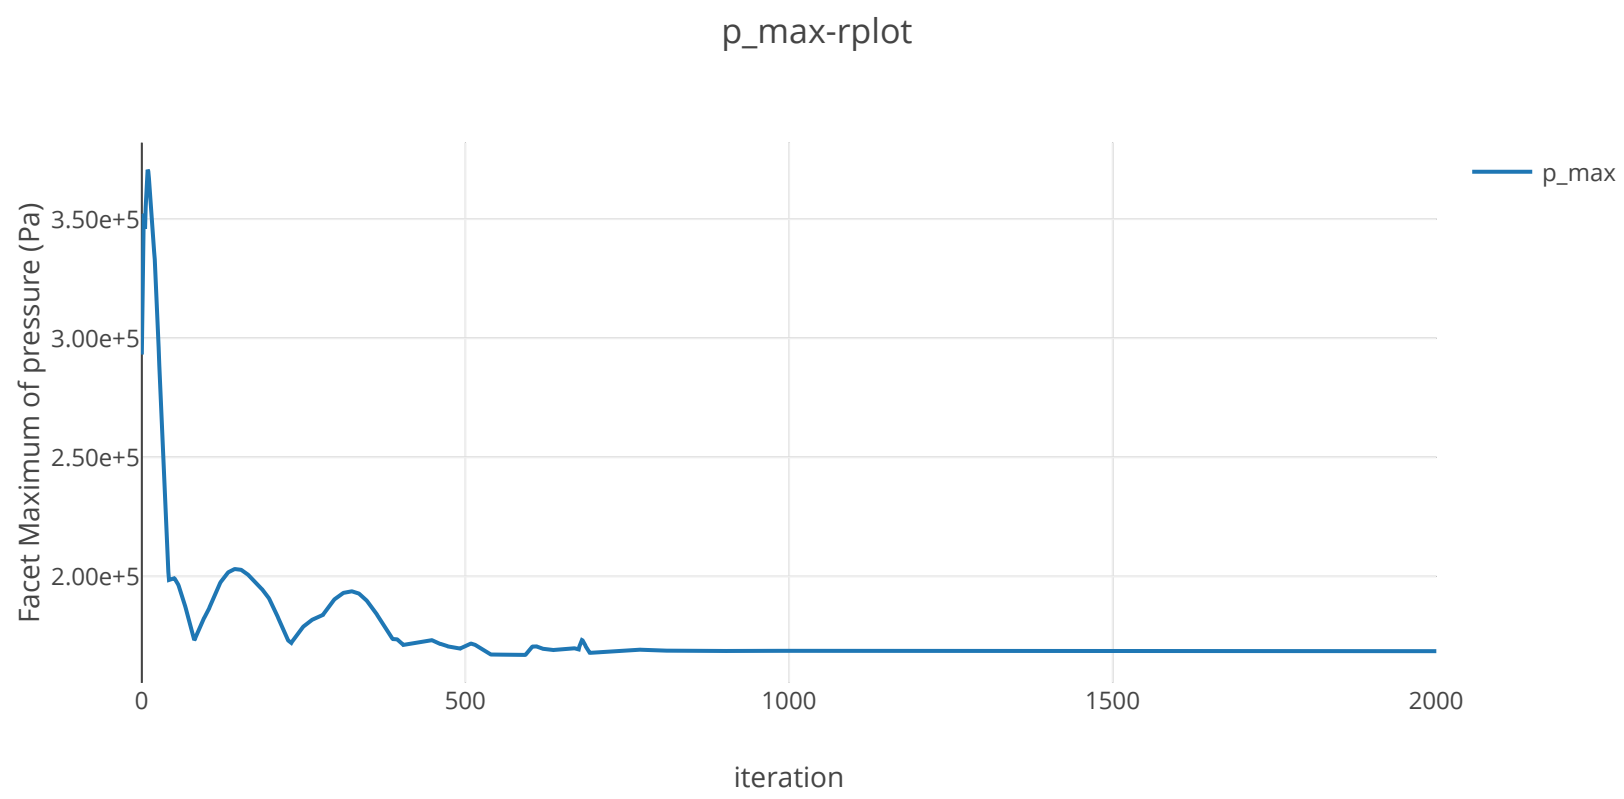

## Contours

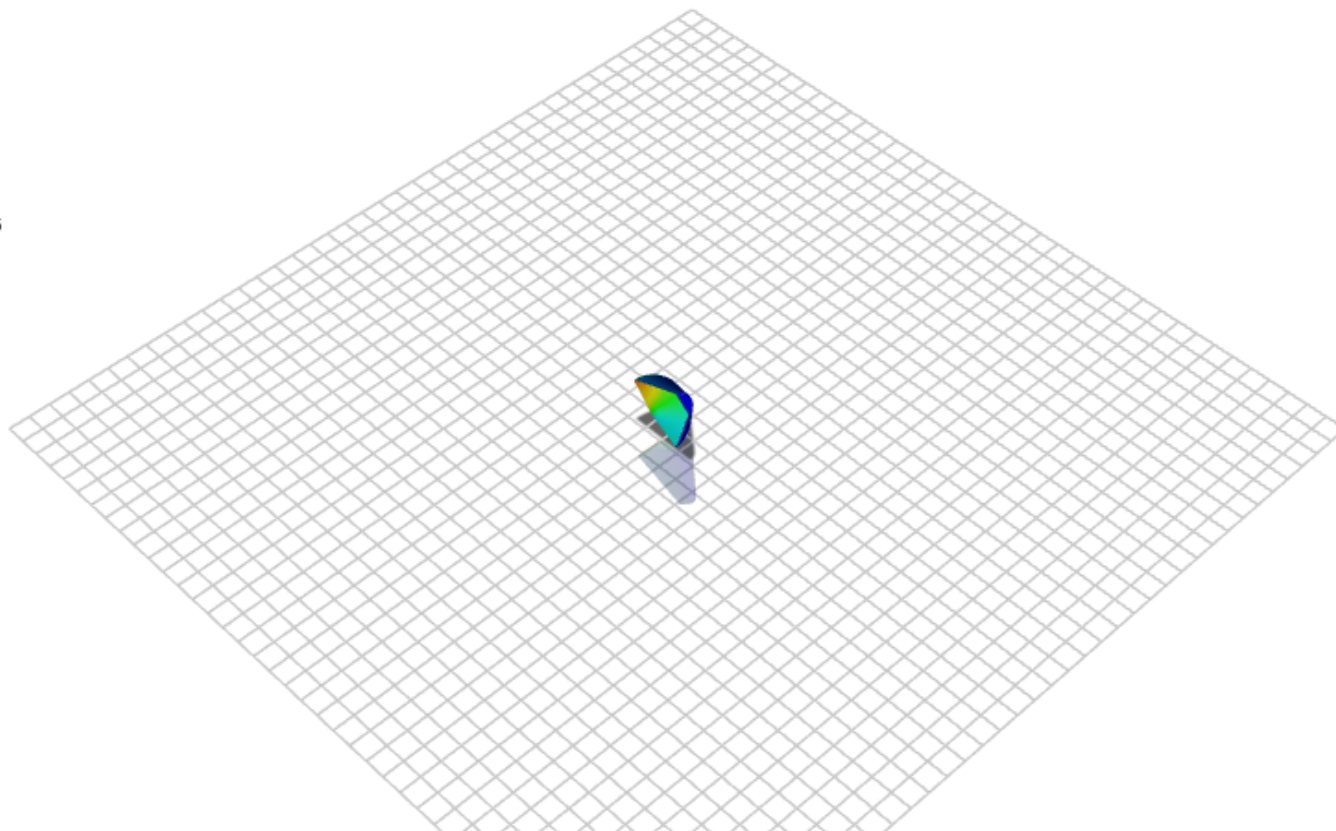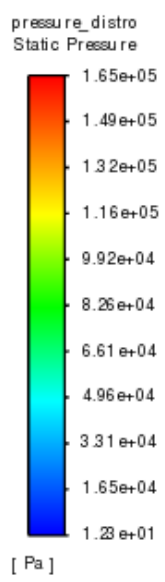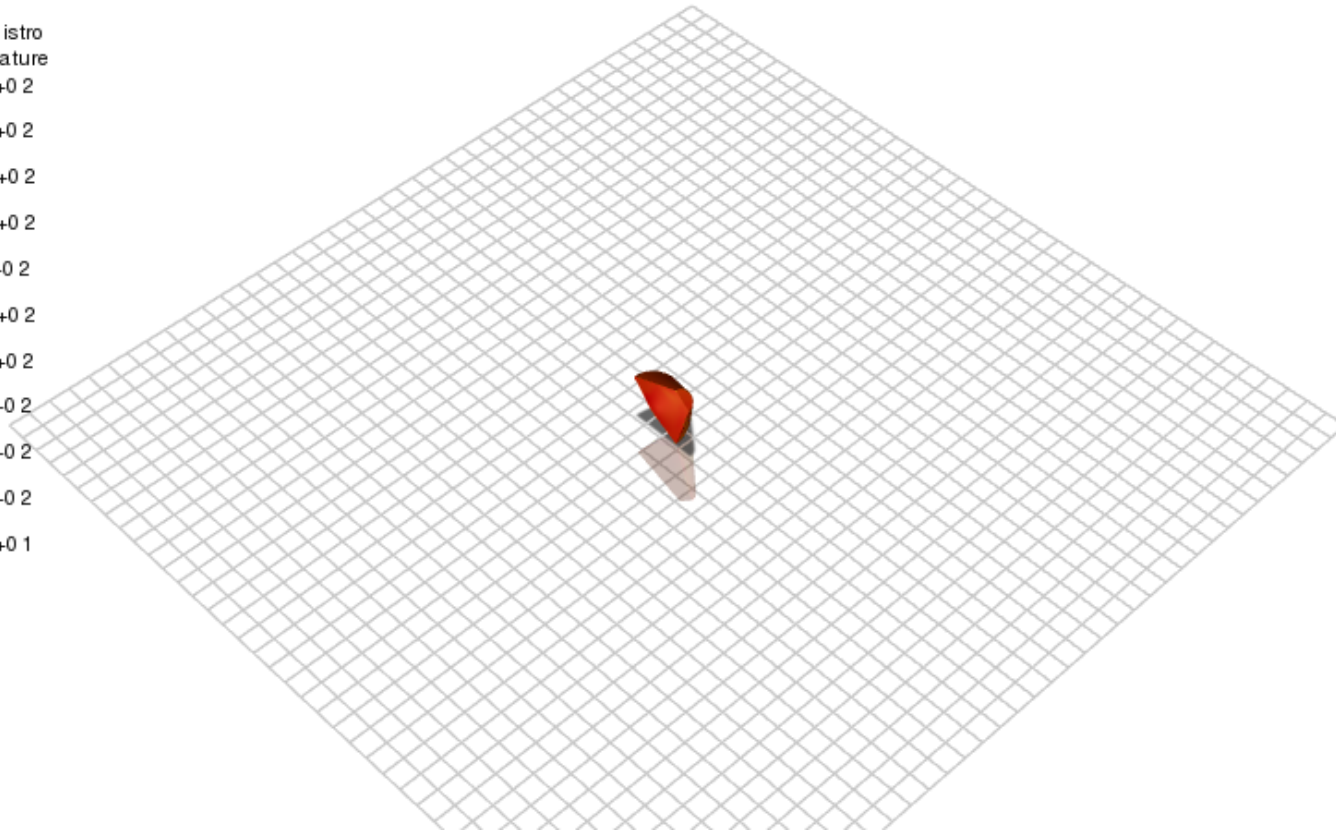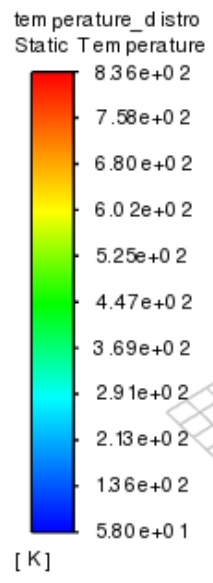


## Pathlines

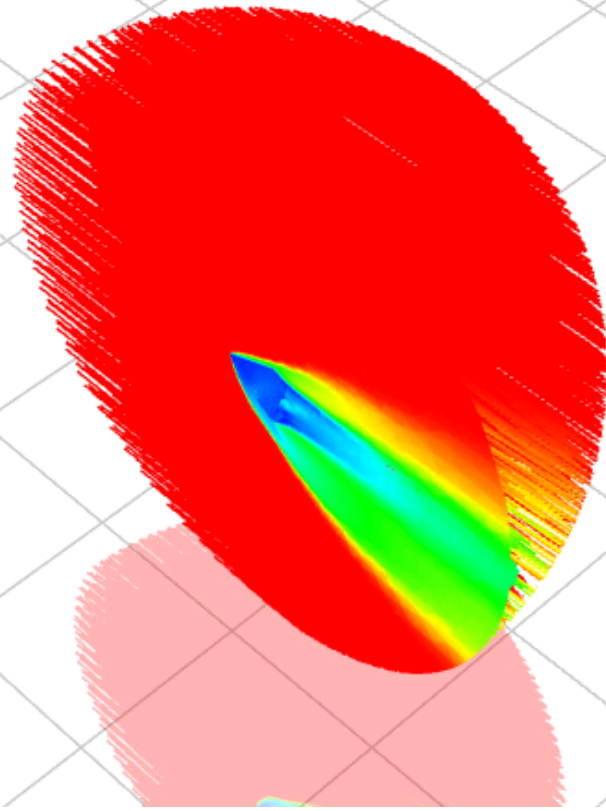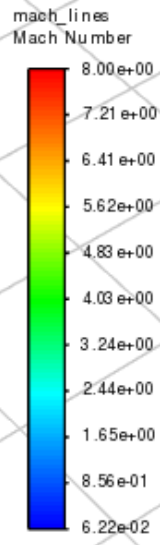

## XY Plots

Static Pressure

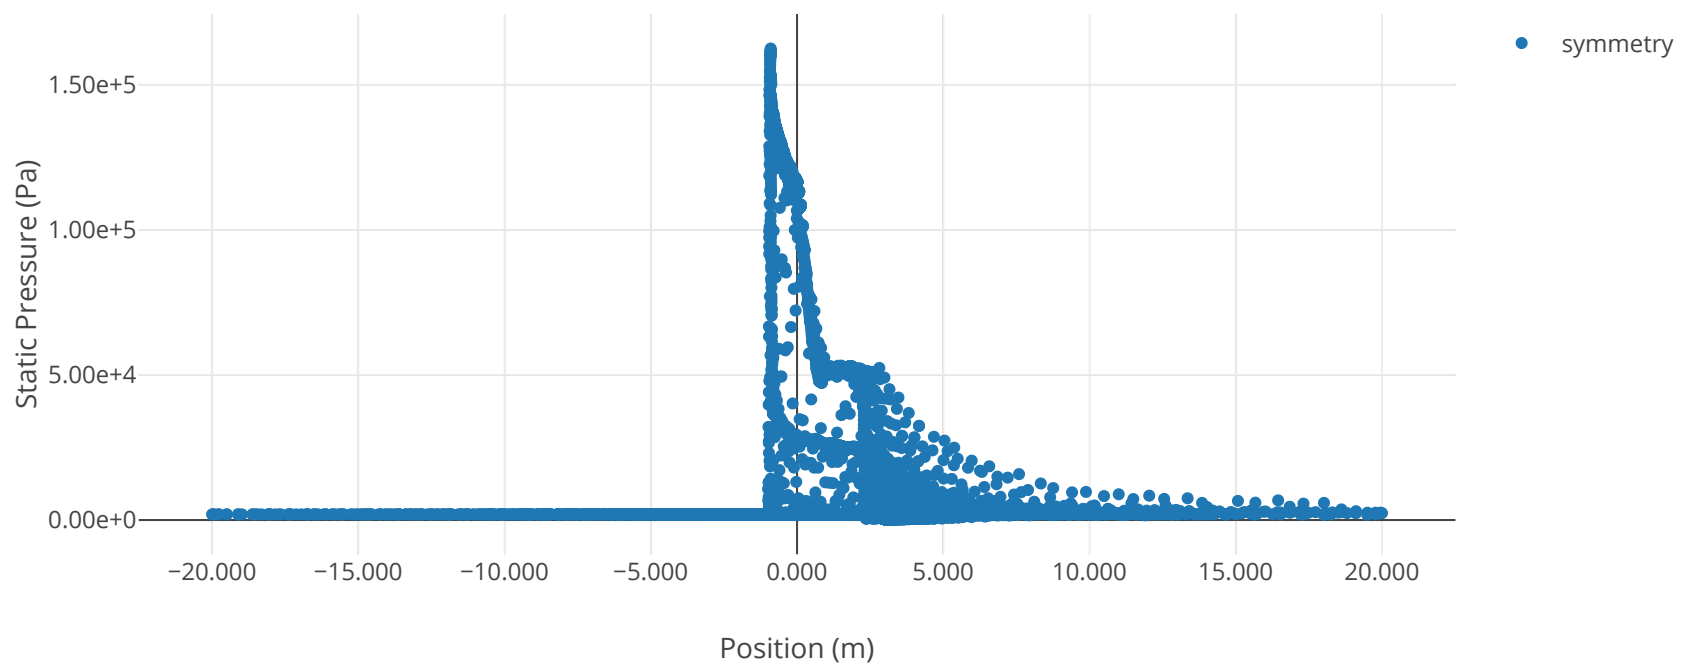

Static Temperature

