
## Solution: Swagger Documentation



 $\mathbf{\boxtimes}$ 

6. Go to http://localhost/ which should have Swagger running from the container (as defined in swagger.sh). If you changed the port number, use that new port number to reach the local Swagger service (for example, http://localhost:9000 if port 9000 is used).

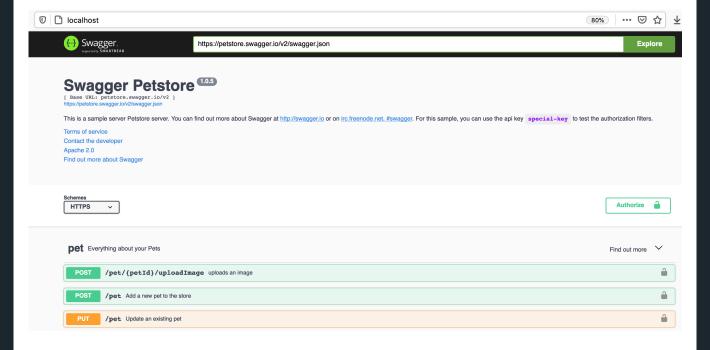

- 7. On the top bar, where petsore.swagger.io shows, change it to http://localhost:8000/swagger.json, then hit the Explore button. It should now display the contents of the API for the model
- 8. Look around at the different HTTP requests that are supported for your model, including the example.