




Old result data model

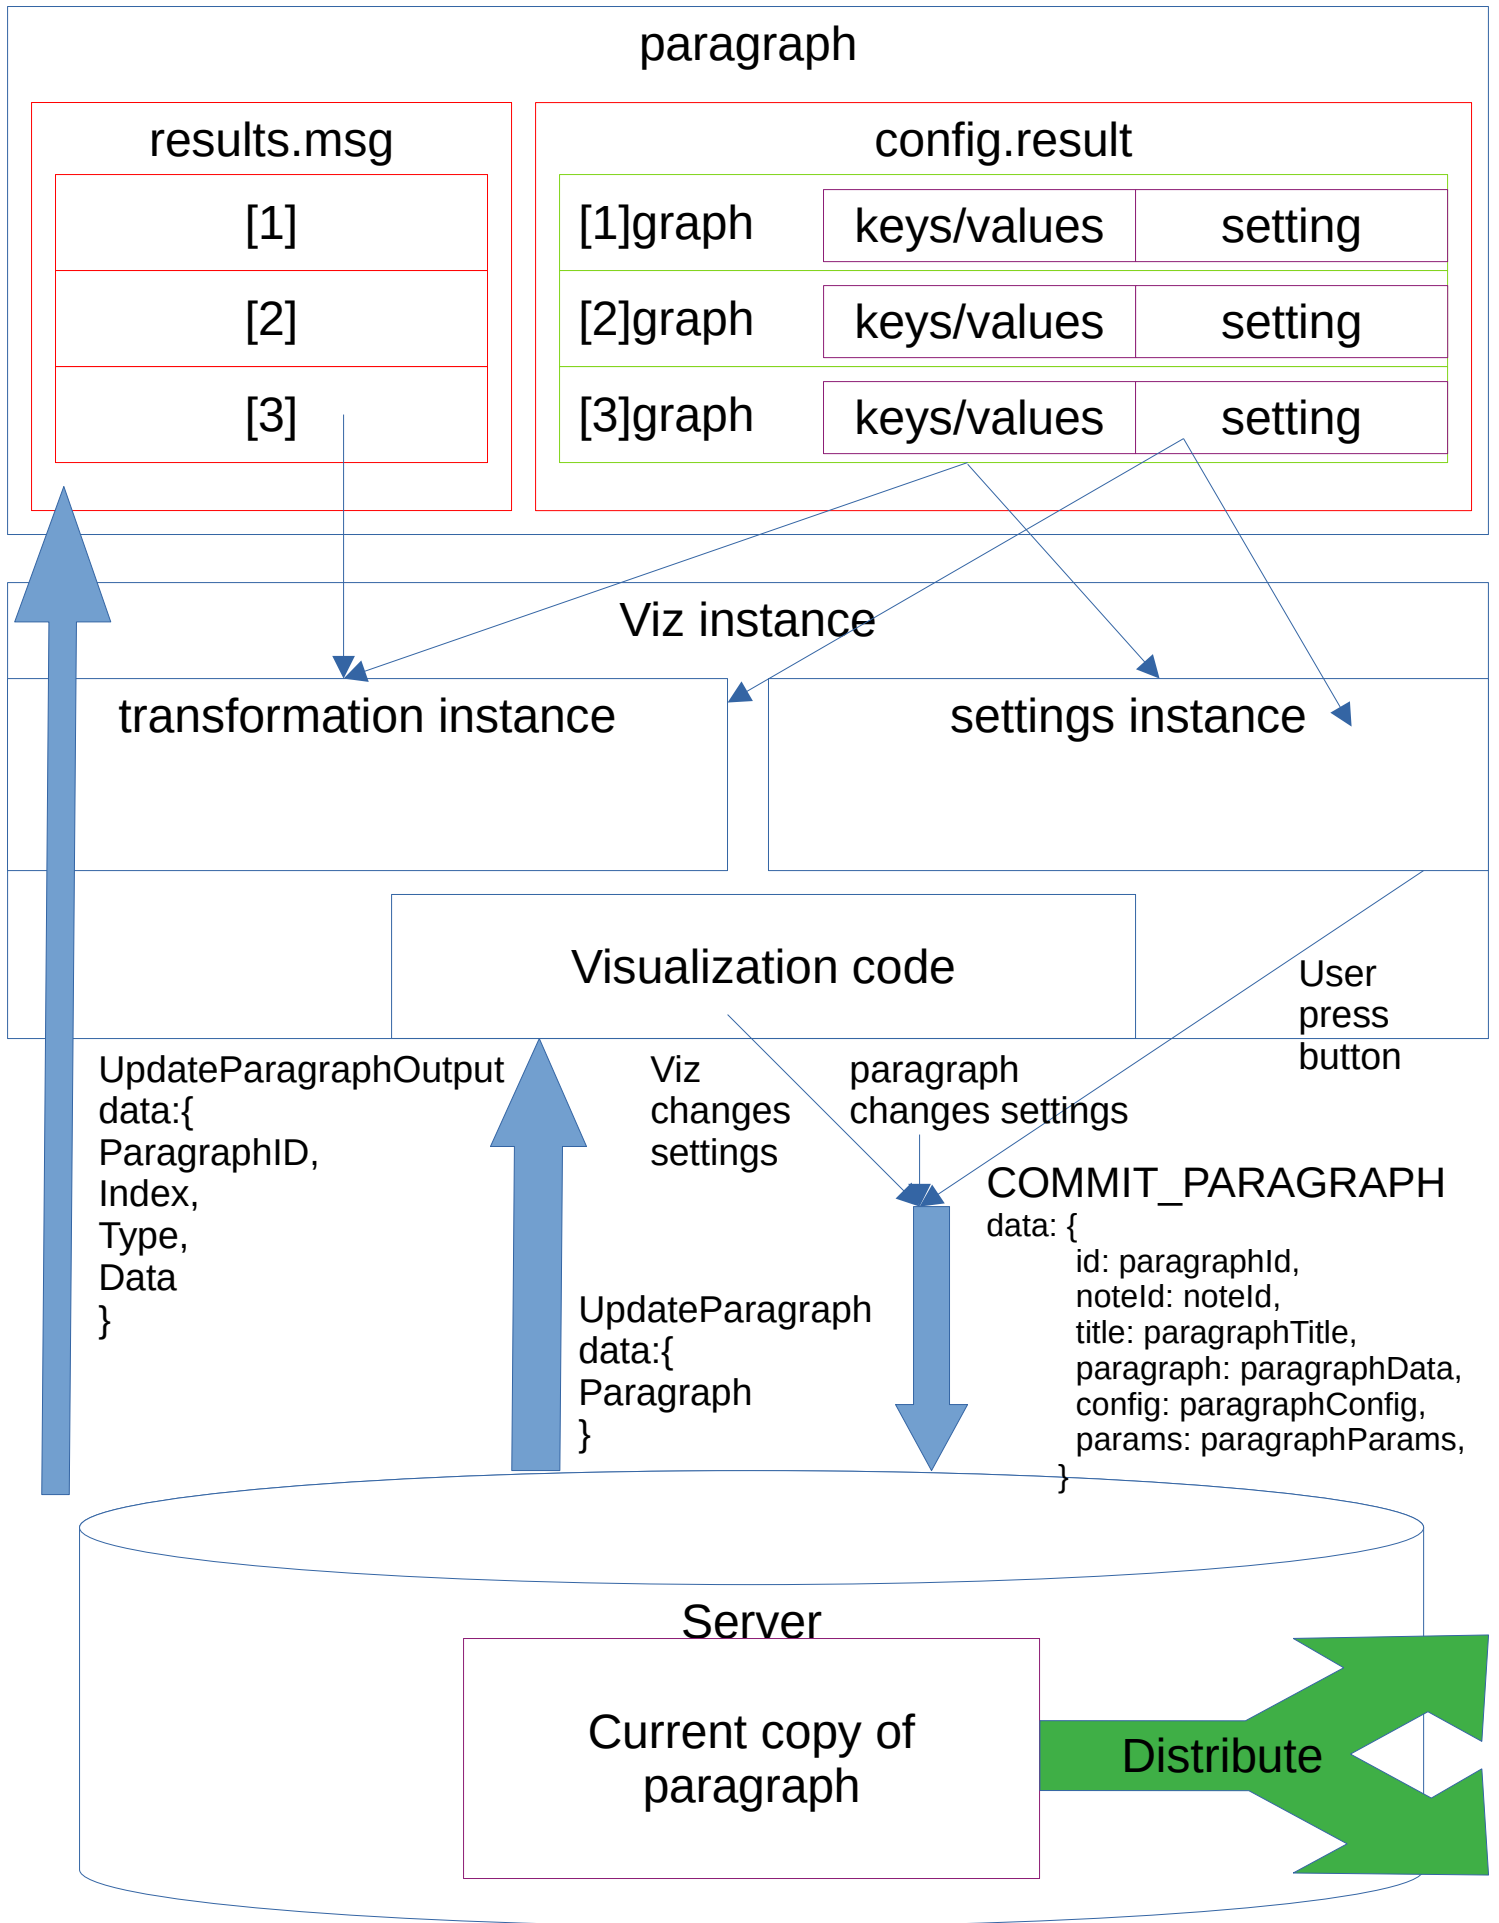

New result data model

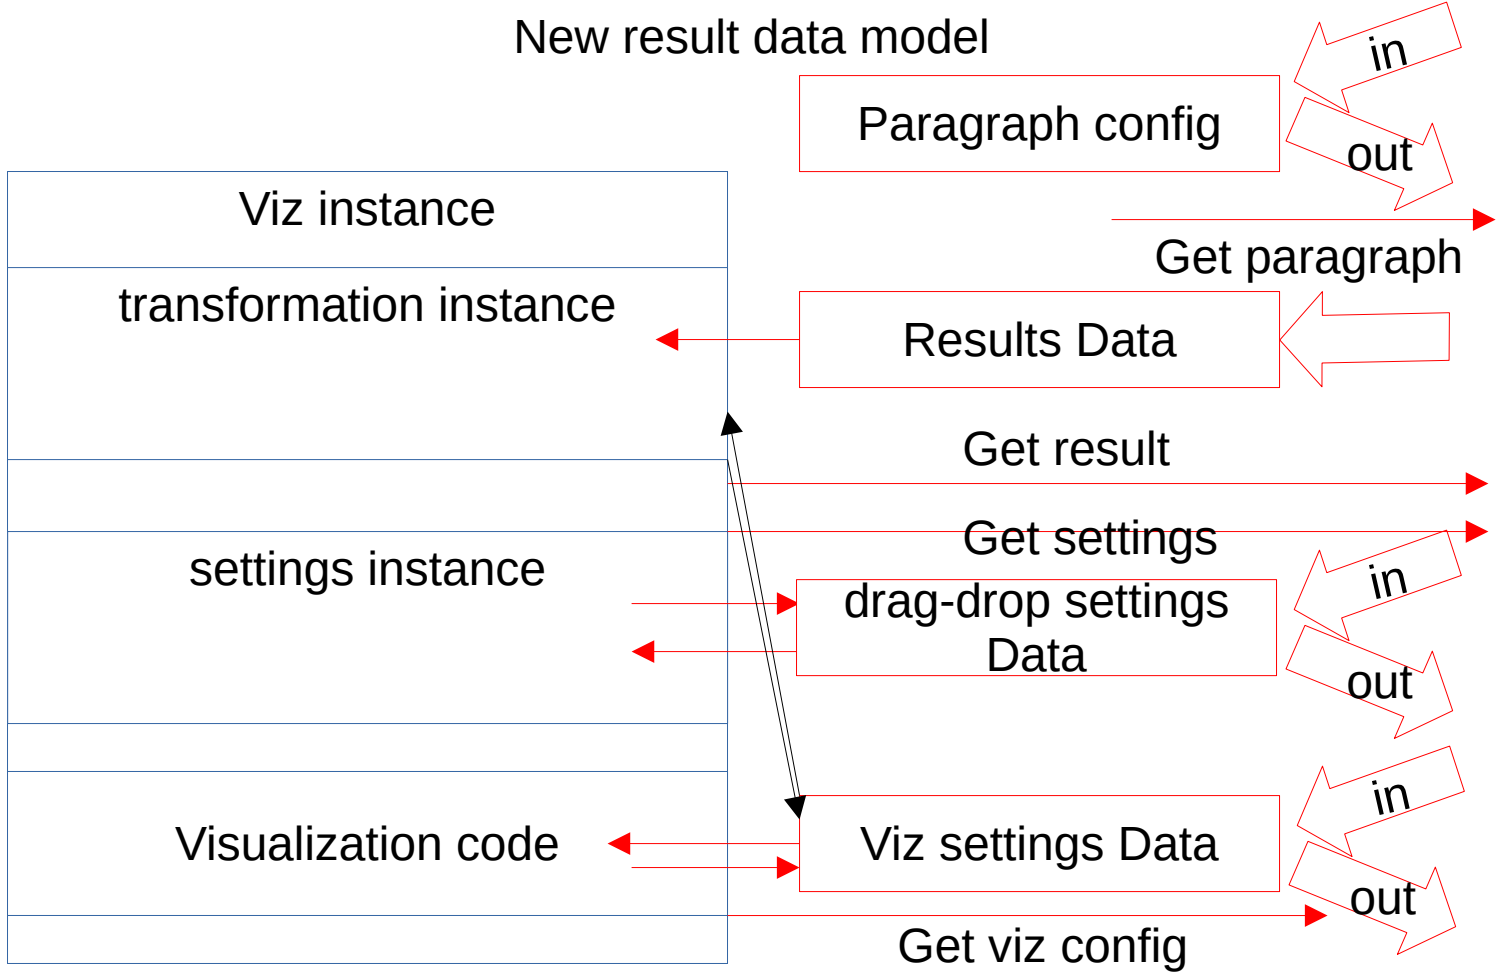

Paragraph object

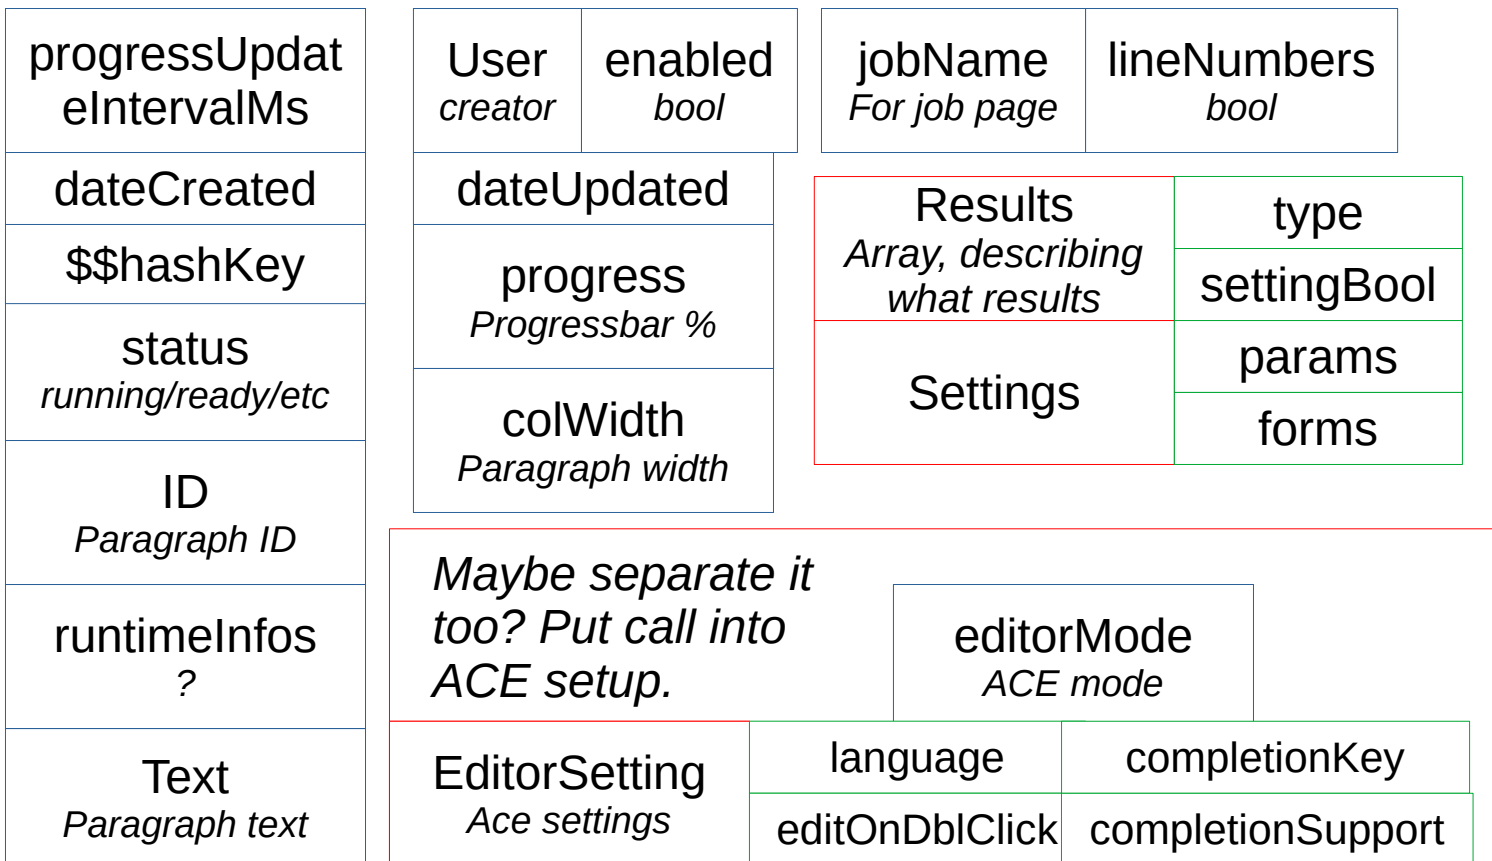

Result object

Code <i>success/error/etc</i>	ID <i>Paragraph ID</i>
---	----------------------------------

Type Old Type + mode This one was defining the container

Index <i>The position of the result</i>

Data Anything to display stored in a string format
--

This goes one-per-result, not all in one array.

Drag-drop settings object

tableDataColumns <i>tableData.columns</i>

name	aggr
index	UUID

zones <i>Array of objects for settings panel</i>
--

aggr	Content []
limit	Id (name)

Index <i>The position of the result</i>

ID <i>Paragraph ID</i>

Viz setting object:

Current mode <i>For reload and button active</i>
--

OptionOpen <i>Bool state of options. Maybe remove?</i>
--

commonSetting <i>I failed to find an example of that</i>
--

height <i>Viz height. Might be redundant</i>
--

Index <i>The position of the result</i>


ID <i>Paragraph ID</i>

+ Per viz type.
Look in config mindmap, #4.


Example

rotate	Other options
xLabelStatus	...

Old viz setup handling

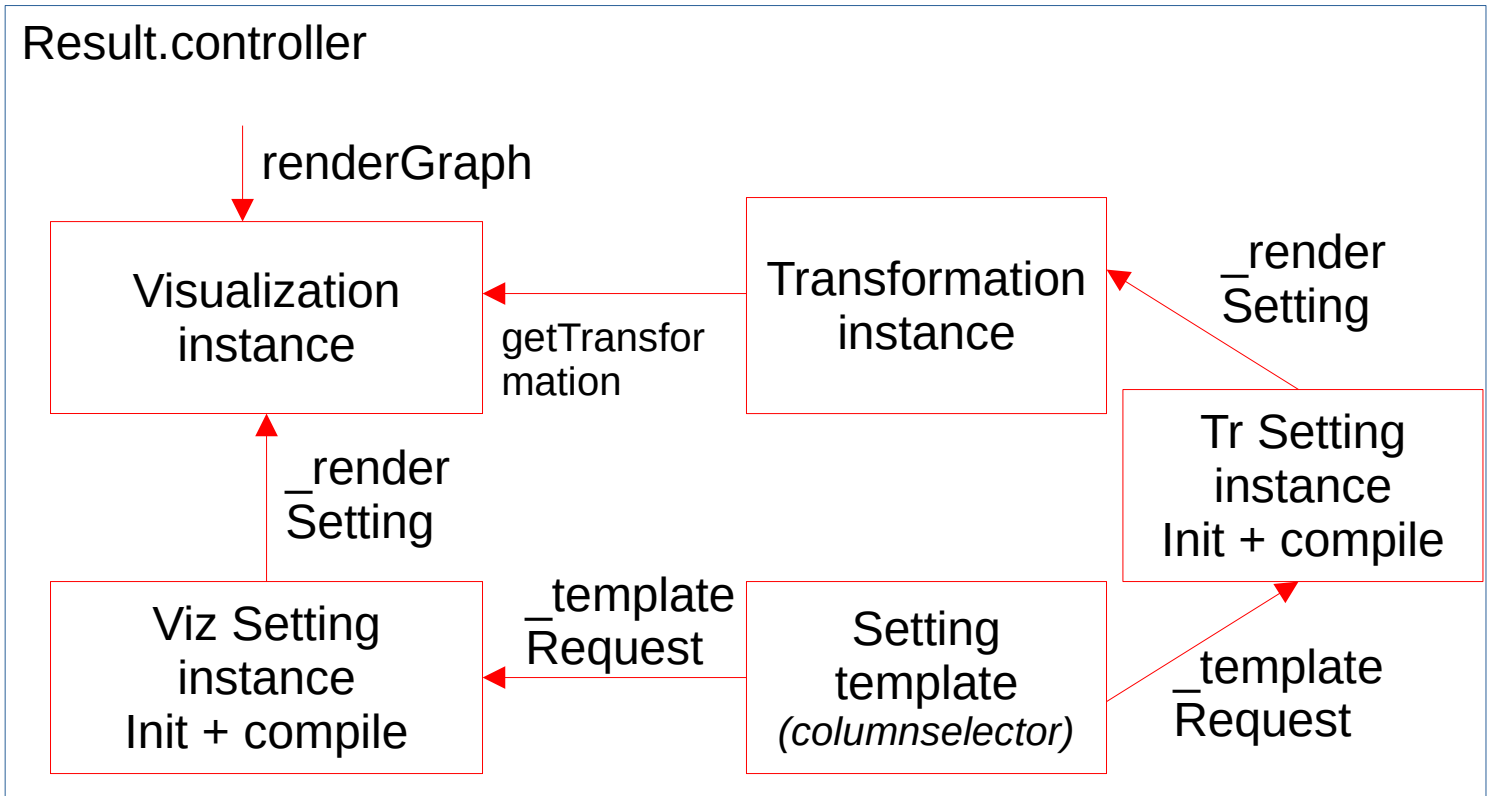

Not very OO.



?????
Break
components into
self-sufficient
objects?