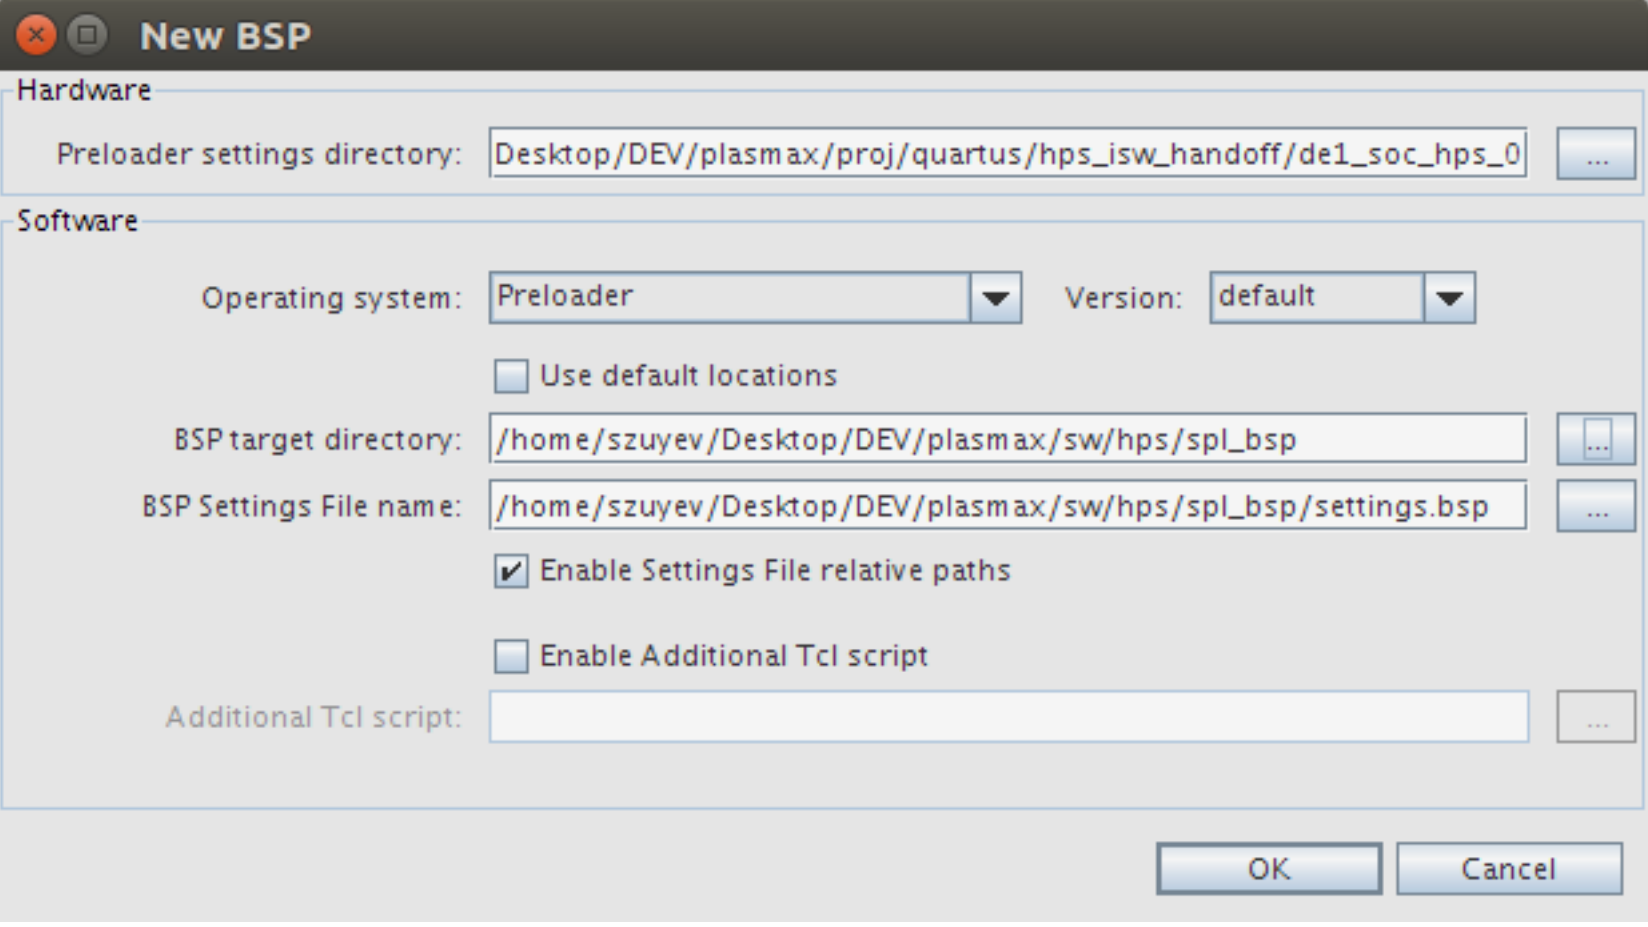
New BSP
Hardware
Preloader settings directory:
Desktop/DEV/plasmax/proj/quartus/hps_isw_handoff/de1_soc_hps_0
...
Software
Operating system:
Preloader
Version:
default
Use default locations
BSP target directory:
/home/szuyev/Desktop/DEV/plasmax/sw/hps/spl_bsp
BSP Settings File name:
/home/szuyev/Desktop/DEV/plasmax/sw/hps/spl_bsp/settings.bsp
Enable Settings File relative paths
Enable Additional Tcl script
Additional Tcl script:
OK
Cancel