


Nama : Fajri Harits Muzaki

NIM : 2011102441042

Prodi : S1 Teknik Informatika

Kelas : Z

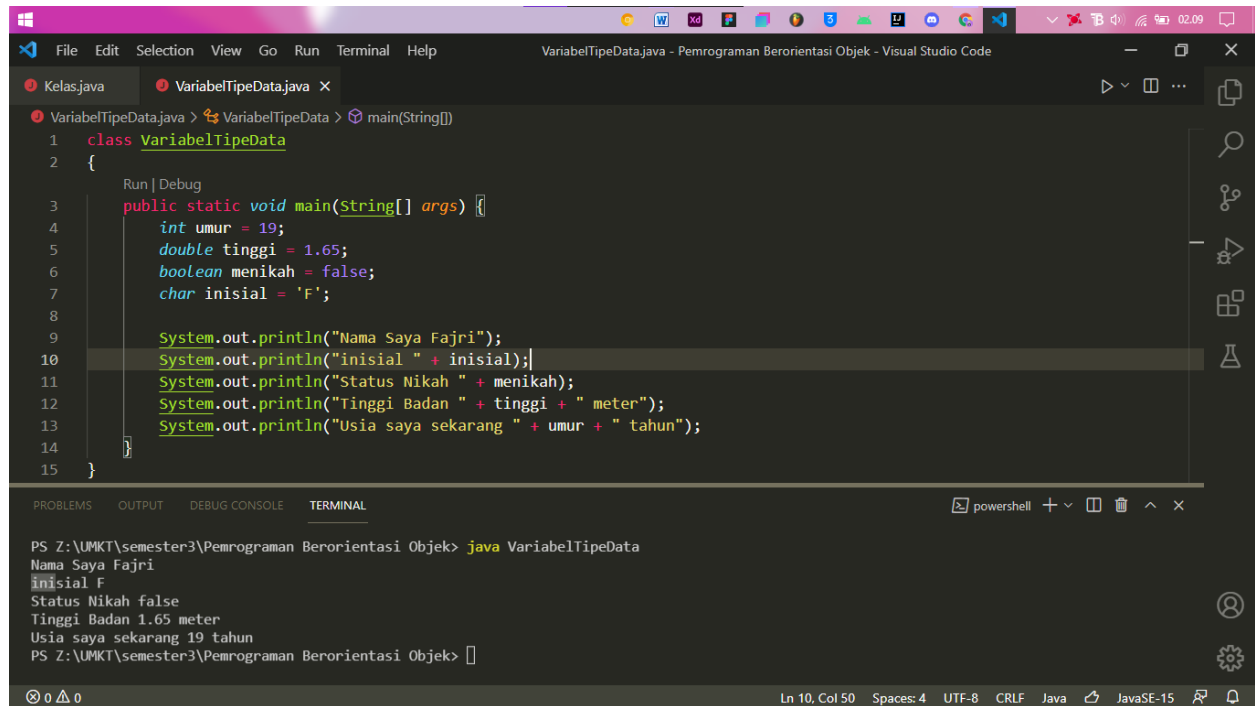

The screenshot displays the Visual Studio Code interface with a Java file named `VariabelTipeData.java` open. The code defines a class `VariabelTipeData` with a `main` method. The `main` method initializes variables for age, height, marital status, and initials, then prints their values. The terminal at the bottom shows the command `java VariabelTipeData` being executed, resulting in the following output:

```
PS Z:\UMKT\semester3\Pemrograman Berorientasi Objek> java VariabelTipeData
Nama Saya Fajri
inisial F
Status Nikah false
Tinggi Badan 1.65 meter
Usia saya sekarang 19 tahun
PS Z:\UMKT\semester3\Pemrograman Berorientasi Objek>
```

The status bar at the bottom indicates the current position is at line 10, column 50, with 4 spaces, UTF-8 encoding, CRLF line endings, and the Java language mode.