

Hash-Chained Verbatim Quotation: A Verifiable Provenance Layer for Grounded Retrieval

Mario Gutiérrez
Celiums Solutions LLC
Medellín, Colombia
terrizoaguimor@gmail.com

2026-05-28

Abstract

We introduce HYPHAE, a cognitive substrate that answers retrieval queries by emitting byte-identical quotations of stored memory fragments, joined by a curated connective lexicon, with no large language model (LLM) in the cognition path. HYPHAE’s distinguishing property is *architectural verifiability*: every quoted span is preserved byte-for-byte against a SHA-256 hash-chained journal, so any output can be independently confirmed to have been assembled from named, unaltered source fragments — a guarantee no retrieval-augmented LLM provides by construction, because generation paraphrases its sources. We evaluate against 18 LLM-based configurations (vanilla RAG, HyDE plus cross-encoder reranking, oracle context) over six generator models (from Anthropic, OpenAI, DeepSeek, two from Meta, and an in-house router; $6 \times 3 = 18$ configurations), plus a trivial **echo baseline** that emits the retrieved sentence verbatim with no model and no lexicon. The echo baseline is the critical control, and its result reframes the contribution: on standard correctness and NLI-grounding metrics (gold-answer match, unsupported-claim rate) echo *ties or exceeds* HYPHAE on both a 150-query TriviaQA sample and a 34-query composition corpus. Measured correctness is therefore a property of verbatim quotation itself — shared by any echo — not of HYPHAE’s composition machinery; our ablations independently confirm that the lexicon, cascade-shape composition, and boundary smoothing do not move the correctness metrics. What echo lacks, and what no metric in the standard benchmark captures, is verifiable provenance: echo emits text with no audit relation to a tamper-evident store. We therefore position HYPHAE not as a more-correct system but as a *correctness-neutral* one that adds cryptographic provenance and runs in microseconds on commodity CPU — five-to-six orders of magnitude below LLM inference, a corollary of not generating rather than a result in itself. We argue the durable contribution is the architectural audit property, that the standard correctness benchmark cannot measure it (a trivial echo saturates it), and that evaluating verifiable generation requires provenance-centric tasks the current literature does not provide. Code, corpora, result envelopes (including the echo control), and this paper’s source are at <https://github.com/terrizoaguimor/hyphae-v2>.

1 Introduction

Large language models (LLMs) augmented with retrieval have become the default architecture for grounded factual question answering, conversational memory, and document summarisation. The dominant pattern — chunk a corpus, embed each chunk, retrieve top- k at query time, and condition an LLM on the retrieved passages — is deployed at substantial cost: a 70-billion-parameter generator loaded into a high-memory GPU instance, billing per token, with per-query latencies in the multiple-second range. Recent extensions of this pattern (HyDE [Gao et al., 2022], RAG-Fusion

[Rackauckas, 2024], cross-encoder reranking [Nogueira and Cho, 2019, Reimers and Gurevych, 2019], GraphRAG [Edge et al., 2024]) improve retrieval quality without changing the fundamental architectural decision: the LLM remains the composer.

This paper investigates the alternative. We present HYPHAE, a cognitive substrate that produces grounded responses without invoking any LLM at inference time. HYPHAE achieves grounding not through training but through an architectural commitment: **retrieved memory fragments are quoted verbatim, and the connective tissue between quotations is drawn from a curated lexicon, never generated by a statistical model**. The substrate runs on a single CPU core, holds approximately 50 MB of resident memory, and produces composition outputs in microseconds.

We compare HYPHAE against 18 LLM-based system configurations spanning vanilla retrieval-augmented generation, HyDE plus cross-encoder reranking, and oracle context (the LLM receives the gold supporting passage directly). The six generator models (6×3 modes = 18 configurations) are local Llama-3.1-8B-Instruct, Llama-3.3-70B-Instruct, DeepSeek-V4-Pro, Claude-4.6-Sonnet (Anthropic), GPT-4.1 (OpenAI), and a production LLM-routing system (Atlas, our own previously-shipped product). All LLMs are accessed through a uniform OpenAI-compatible endpoint at zero infrastructure provisioning cost; HYPHAE runs locally on commodity hardware (Apple Silicon laptop; Intel Xeon Platinum 8168 server).

1.1 Contributions

1. **Hash-chained verbatim quotation as an architectural commitment.** Every emitted body in a HYPHAE response is byte-identical to a fragment stored in a SHA-256 hash-chained substrate journal. An external auditor can independently confirm that the response was assembled from named fragments without re-running the system. Hard Commitment 12 (Section 3.4) makes the property load-bearing for the architecture; the empirical sections quantify what that commitment is worth on standard tasks.
2. **An echo baseline that bounds what the standard benchmark can measure.** We include a trivial control — emit the retrieved seed sentence verbatim, no model, no lexicon, no composition — and evaluate it identically. On both corpora the echo baseline *ties or exceeds* HYPHAE on every comparable metric: gold-answer match, unsupported-claim rate, n-gram overlap, and verbatim-pass rate. This is the paper’s pivotal negative result: it demonstrates that the measured correctness and grounding are properties of verbatim quotation *per se*, which any echo possesses, and not of HYPHAE’s composition machinery. The standard correctness benchmark cannot distinguish HYPHAE from a **print** statement, because the property that does — verifiable provenance — is off-axis for every metric in it.
3. **A two-axis comparison against 18 LLM-based configurations, read as a sanity check rather than a win.** We score every system on an NLI-grounded unsupported-claim rate and a gold-answer match rate, across vanilla RAG, HyDE plus cross-encoder reranking, and oracle context. The result establishes that HYPHAE is *correctness-neutral*: it does not sacrifice gold-answer correctness relative to either the echo baseline or frontier LLMs in oracle mode (0.840–0.960). It does not establish that HYPHAE is *more* correct, and we explicitly retract any such reading — the echo control forecloses it.
4. **Per-query latency as a corollary of not generating.** HYPHAE’s realizer runs in 0.002–0.024 ms mean per query (single-seed to multi-fragment); the LLM baselines run in 1,858–6,083 ms whether hosted locally or via API, the network round-trip accounting for only $\sim 30\%$

(Section 5.5). The five-to-six-order-of-magnitude gap is real and matters for deployment economics, but it is a consequence of the architectural decision not to run a generative model, shared with the echo baseline, not an independent contribution. Memory footprint differs by $\sim$ five orders of magnitude (50 MB vs multiple GB).

5. **Component-level ablations that support the reframing.** We disable four HYPHAE components in turn (cascade-shape composition, ethics gate, lexicon scale, boundary smoothing). Only lexicon scale moves a correctness metric, and only marginally; the other three produce null deltas. Far from a weakness, this corroborates the central claim: the realizer’s machinery serves readability and multi-fragment structure, not the measured correctness — and *none* of the four components touches the hash-chained provenance guarantee, which is invariant across every ablation and every baseline.
6. **Hardware matrix.** We re-run the matrix on a server-class CPU-only Linux instance. Quality metrics are hardware-invariant within ± 0.03 . The HYPHAE:Llama-8B latency ratio *widens* from $\sim 1.9 \times 10^5$ on the laptop to $\sim 9.3 \times 10^5$ on the GPU-less droplet (HYPHAE speeds up on the dedicated Xeon while the LLM slows without Metal), confirming the architectural advantage generalises beyond the laptop’s Metal backend.

1.2 Roadmap

Section 2 positions HYPHAE against the relevant literature on retrieval-augmented generation, structured memory systems, and NLI-based grounding metrics. Section 3 describes the architecture, with emphasis on the verbatim-quotation commitment that underlies the empirical results. Section 4 documents the experimental protocol — the two corpora, the six generator models, the three retrieval modes, the metric set, and the hardware. Section 5 presents the headline rankings on both corpora. Section 6 disaggregates HYPHAE’s contribution by component. Section 7 discusses limitations (metric, corpus, statistical power, reader preference) and threats to validity. Section 8 concludes. The appendix contains full per-system result tables and reproduction instructions.

1.3 Reproducibility

The complete pipeline (HYPHAE source, comparator code, corpora, result envelopes, plotting code, and this paper’s L^AT_EX source) is committed at <https://github.com/terrizoaguimor/hyphae-v2>. Each result JSON envelope carries the model identifier, hardware metadata, decoding hyperparameters, and per-query trace. The TriviaQA subset is regeneratable from the original dataset under random seed 42 via the project’s `corpus_external.py` CLI. Total cost of reproducing the full experimental matrix at the LLM API layer is approximately USD 4 in inference tokens. The HYPHAE side has no cloud cost.

2 Related Work

2.1 Retrieval-Augmented Generation

The dominant pattern for grounding LLM responses in external knowledge couples a retrieval stage (chunking, embedding, top- k nearest-neighbour search) with a generation stage (LLM conditioned on the retrieved passages) [Lewis et al., 2020, Karpukhin et al., 2020]. Substantial subsequent work improves the retrieval side: HyDE generates a hypothetical answer with the LLM and embeds that, recovering performance when the raw query is short [Gao et al., 2022]; cross-encoder reranking

re-scores candidates with $(query, passage)$ pairs scored directly [Nogueira and Cho, 2019, Reimers and Gurevych, 2019]; RAG-Fusion generates multiple query rewrites and fuses retrieval results with reciprocal rank fusion [Rackauckas, 2024]; GraphRAG constructs an offline graph of the corpus and traverses it at retrieval time [Edge et al., 2024]. Self-RAG trains the LLM to adaptively invoke retrieval [Asai et al., 2024].

These techniques operate on the retrieval pipeline; the generation stage remains an LLM. We compare HYPHAE against the vanilla pipeline, HyDE plus cross-encoder reranking (the canonical “serious RAG” stack), and oracle retrieval (the LLM receives the ground-truth supporting passage directly). The latter isolates composition quality from retrieval quality.

2.2 Structured Memory and Cognitive Architectures

Long-context architectures and explicit memory systems offer different approaches to persistent context. MemGPT manages context windows via a tiered storage system with LLM-mediated paging [Packer et al., 2024]; Atlas (the production system behind our `router:celiums-conversation` comparator) routes queries across a curated model ensemble. Earlier work on cognitive architectures (Soar [Laird, 2012], ACT-R [Anderson, 2007]) modelled memory and inference as discrete operations on structured representations rather than as prediction over token distributions.

HYPHAE shares the structured-memory orientation but differs in its composition stage: the realizer is not an LLM, not a learned model, and not a statistical predictor. It is a finite procedure walking a curated lexicon and emitting verbatim quotations of retrieved fragments. The architecture is finite and inspectable; no training run can change its outputs.

2.3 Verifiable AI and NLI-Based Grounding

Recent work on factual grounding evaluates LLM outputs against their source contexts using natural language inference (NLI) models [Honovich et al., 2022, Gekhman et al., 2023]. The `unsup_f` metric we employ is in this family: each sentence in a response is scored for entailment against the retrieved context, and sentences classified `neutral` or `contradiction` count as unsupported. Recent surveys [Huang et al., 2023, Ji et al., 2023] catalogue the failure modes such metrics catch and miss.

We employ the `roberta-large-mnli` cross-encoder [Liu et al., 2019] for entailment scoring. Section 4 documents the metric’s known limitations (asymmetric treatment of hedging, sensitivity to scaffolding prose) and how HYPHAE’s compositional template interacts with them.

2.4 Sub-millisecond Production Inference

The latency-quality trade-off in conversational AI is widely acknowledged [Leviathan et al., 2023, Chen et al., 2023, Kumar et al., 2024]. Most recent work targets sub-second response under high token generation budgets. HYPHAE sits in a different operating point: sub-millisecond composition under the structural constraint that the response is bounded by curated lexicon phrases and verbatim quotations. This shifts the operating point of the system at the cost of generative flexibility that some applications require and others do not.

2.5 Where This Paper Fits

We do not claim that HYPHAE subsumes or replaces LLM-based generation, and we do not claim it is more correct: our echo control (Section 5.1) shows that on standard correctness and grounding metrics a verbatim `print` of the retrieved sentence matches it, so those metrics measure verbatim quotation rather than the architecture. We claim instead that *for the subset of tasks in which the*

unit of grounding is a discrete retrieved fragment and the deployment requires provable provenance, HYPHAE provides a property no LLM-RAG pipeline and no echo baseline provides by construction: every emitted span is byte-identical to a fragment in a hash-chained journal, so the output can be cryptographically audited back to named, unaltered sources — tamper-evident under the threat model of Section 5.2 (a store-level attacker who does not forge the anchored chain head), with external anchoring the path to full tamper-proofing. We demonstrate the base-layer guarantee directly with a tamper-detection experiment (Section 5.2). The trade-off, made explicit, is that the prose is template-rigid; users wanting LLM-style paraphrastic composition need an LLM.

The contribution is therefore positioned as a verifiable *provenance layer* for grounded retrieval, not a correctness-competitive replacement for LLM-RAG.

3 The Hyphae Architecture

HYPHAE is structured as three concentric layers: **substrate** (memory state, fragment storage, hash-chained journal), **cognition path** (the operations that retrieve, compose, and emit), and **realizer** (the prose-emission stage). The single property that distinguishes HYPHAE from every baseline in this paper — including the trivial echo baseline that matches it on all correctness metrics — is the *audit relation* between the realizer’s output and the substrate’s hash-chained journal: every emitted quotation is byte-identical to a journalled fragment, and that correspondence is independently checkable. We describe each layer with that property in focus, and return to it as the core of the contribution in Section 3.4.

3.1 Substrate

The substrate stores *cognitive fragments*: small self-contained units of content with provenance metadata (source subsystem, parent fragments if cascade-derived, confabulation risk score, valence, domain tags). Fragments are written to disk via an embedded key-value store [Hesterberg, 2024, Jablonski, 2024] and chained into a SHA-256 hash sequence that links each fragment to its predecessor by content hash. The journal is verifiable: any modification to a previously-written fragment breaks the chain at and after the modification point.

Retrieval is via approximate-nearest-neighbour search [Malkov and Yashunin, 2018] over fragment embeddings produced by a deterministic hashing token embedder. The embedder is not an LLM, contains no learned parameters, and uses the `HashingTokenEmbedder` primitive from the substrate. This makes the retrieval stage deterministic and reproducible across runs.

3.2 Cognition Path

A **cognition path** is a procedure that reads from the substrate, performs a structured operation, and either writes new fragments back or emits a response through the realizer. The v0.1 substrate implements five paths: **ingest** (write a new fragment), **recall** (retrieve fragments similar to a cue), **compose** (synthesize a response from retrieved fragments), **learning_update** (adjust substrate-internal parameters under audit), and **grounded_retrieval** (deferred per the v0.1 RFC).

The **compose** path is the one this paper measures. It takes a *working set* of cognitive fragments (typically retrieved by a **recall** call) and produces a **RealizationOutput**: composed prose, a list of fragment IDs quoted in emission order, and a structured set of limitation triggers (such as `HighConfabRisk` or `ShallowCascade`) that fired during composition.

3.3 Realizer

The realizer is the surface-prose-emission stage. It is the component where the LLM would conventionally sit. In HYPHAE it is a finite procedure:

1. **Schema selection.** The caller’s intent (one of: dialogue, assert, summarize, compare, reflect, narrate) maps deterministically to a schema (DialogueReply, GroundedAssertion, Summary, ComparativeAnalysis, IntrospectiveAssessment, NarrativeArc).
2. **Shape derivation.** If the caller supplies an explicit composition shape, the realizer walks its steps. Otherwise the realizer derives a shape from the working set by detecting opposed valence (Contrast role) and adjacency relations (Continuation role). The shape determines the sequence of connective roles between adjacent quotations.
3. **Connective selection.** For each inter-fragment boundary, the realizer queries the lexicon for a connective matching the (role, register, polarity, formality) tuple. Boundary smoothing rules (Section 3.5) filter out connectives whose head would clash with the adjacent quote’s tail.
4. **Quote emission.** Each fragment’s body is emitted verbatim inside double quotes. No paraphrase, no summarisation, no reordering of intra-body text.
5. **Limitation acknowledgement.** Triggers that fired during composition (empty working set, high confabulation risk, shallow cascade depth, ethically sensitive content) are surfaced via the lexicon’s limitation-acknowledgement phrases.

The realizer’s output is bounded: every emitted token comes either from the curated lexicon (approximately 250 phrases covering 10 connective roles, 4 conversational registers, 4 polarity classes, and 3 formality tiers) or from a fragment body quoted verbatim. No statistical model decides the emission.

3.4 Hard Commitment 12 — Verbatim Quotation

The architectural decision underlying the empirical results is *Hard Architectural Commitment 12* from the project’s foundational ADR (`docs/adr/0001-fresh-from-v1.md`):

Composition uses fragment quotation plus connective tissue, not novel language synthesis. Fragments are opaque content sources whose body text is preserved verbatim. The surface realizer generates only the structural prose connecting them. This boundary is load-bearing for the no-LLM-in-cognition-path claim.

This commitment trades expressive flexibility for two properties that anchor the empirical comparison in Section 5:

Verifiability. Every quoted body in a HYPHAE response is byte-identical to a fragment stored in the substrate, which is itself verifiable against the hash-chained journal. The audit relation is total: a third party can independently confirm that the output was constructed from named substrate fragments without re-running the system.

Unsupported-claim immunity by construction. The NLI metric we employ (Section 4.4) cannot mark a verbatim quote as unsupported with respect to its source: the quote and the context are identical text. The connective tissue between quotes is non-factual scaffolding the metric’s filter recognises and excludes from the denominator. The result is that on factual-retrieval tasks, the architectural commitment maps directly onto the metric’s scoring shape.

3.5 Lexicon and Boundary Smoothing

The lexicon is a curated mapping from *(role, register, polarity, formality)* tuples to surface phrases. The baseline EN lexicon contains approximately 250 entries organised across 10 connective roles (Opening, Continuation, Contrast, Attribution, Closing, Concession, Causation, Elaboration, Sequence, Summary), 4 register classes (Neutral, Formal, Conversational, Technical), 4 polarity classes (Continuation, ContrastSoft, ContrastHard, Concession, Neutral), and 3 formality tiers (Low, Mid, High).

The picker has a four-level fallback chain: an exact *(role, register, polarity, formality)* tuple match is preferred; on miss, formality relaxes, then register, then polarity, until finally any phrase for the requested role is returned.

Boundary smoothing avoids surface-level disfluencies at the boundary between a connective and an adjacent fragment quote. For example, the connective “*Per the recorded fragments,*” followed by a quote that begins with “*Per the*” would produce a stuttered repetition. The smoothing pass extracts boundary signals from the adjacent quote (leading determiner, anaphor surface form) and filters the candidate connective set to avoid such collisions.

Section 6 reports ablations of cascade-shape composition, ethics gate, lexicon scale, and boundary smoothing. Of these, only lexicon scale produces a measurable effect on the comparator metrics — a finding that constrains claims about the contribution of the other three components at our corpus size.

3.6 What the Realizer Does Not Do

The realizer does not paraphrase, summarise, reorder intra-body text, infer over multiple fragments, or generate prose outside the lexicon’s curated set. These restrictions are not implementation gaps; they are architectural decisions. The choice trades prose-fluency dimensions in which an LLM excels for the dimensions catalogued above.

For applications requiring paraphrastic flexibility or synthesis over multiple sources, HYPHAE’s realizer is not the right tool. The right comparator question is therefore not “does HYPHAE replace an LLM,” but rather “for the subset of tasks where verbatim grounding suffices, is the substrate competitive?”. Sections 5 and 7 take up that question.

4 Experimental Setup

4.1 Two Corpora

We evaluate every system on two corpora.

Own corpus (N=34). Curated for the project, organised by intent and schema (4 dialogue queries with cascade-derived seeds, 2 grounded-assertion queries, 2 empty-working-set queries, 2 high-confabulation-risk queries, 1 shallow-cascade query, 1 valence-opposed query, plus three fluency-exercise queries from ADR-0008, ten bucket-coverage queries from ADR-0009 across Conversational/Formal/Neutral/Mixed registers, and nine schema-coverage queries from ADRs-0016, 0023, 0024, 0025 across Summary, ComparativeAnalysis, IntrospectiveAssessment, and NarrativeArc). The corpus is concentrated on engineering and deployment scenarios reflecting the project’s primary intended deployment context. Source: `crates/hyphae-eval/src/corpus.rs`.

TriviaQA subset (N=150). Random sample (seed 42) from the TriviaQA rc validation split [Joshi et al., 2017]. For each sampled query, we extract a seed body from the supplied Wikipedia context by (1) filtering to sentences containing the answer or any alias as a word-bounded match, (2) restricting to sentences of 30–250 characters, and (3) reranking the survivors by cosine similarity to

the query using the `sentence-transformers/all-MiniLM-L6-v2` embedder. The highest-scoring sentence becomes the seed body. The filter rejection rate on this seed is approximately 17% (21 samples without `wiki_context`, 10 without a qualifying sentence) yielding 150 surviving queries. Source: `bench/baseline-llm-rag/src/baseline_llm_rag/corpus_external.py`.

The two corpora are complementary. The own corpus tests multi-fragment composition (working sets of 2–3 seeds with varied registers); TriviaQA tests single-fragment retrieval. The own corpus is dense with engineering scenarios; TriviaQA spans biography, geography, history, science, pop culture, and sports.

4.2 Generator Models

We compare HYPHAE against six LLM-based configurations spanning the model-class landscape:

- **Llama-3.1-8B-Instruct Q4_K_M** (4.6 GB GGUF): small open model, run locally via `llama-cpp-python` on the laptop’s Metal backend or a DigitalOcean CPU droplet. Establishes the small-open baseline.
- **Llama-3.3-70B-Instruct** (FP8 hosted): larger open model, accessed via DigitalOcean Inference [DigitalOcean, 2025]. Tests whether scale helps.
- **Claude-4.6-Sonnet** (frontier closed, Anthropic): tests a frontier model from a different lab family.
- **GPT-4.1** (frontier closed, OpenAI): tests a frontier model from the family most-frequently cited as the LLM baseline.
- **DeepSeek-V4-Pro** (frontier open reasoning): tests a frontier open model with reasoning training.
- **router:celiums-conversation** (our in-house Atlas router): tests a production LLM-routing system configured for conversational dispatch.

All six are accessed through a uniform OpenAI-compatible API endpoint provided by DigitalOcean’s GenAI Platform, with the exception of the local Llama-8B which uses `llama.cpp`. This uniformity removes API-shape variance from the comparison while preserving the providers’ native decoding pipelines.

4.3 Retrieval Modes

Each LLM is evaluated under three retrieval modes:

- **Oracle.** The corpus’s seed bodies are passed directly as context. No retrieval; the LLM receives the gold supporting passage. Isolates composition quality from retrieval quality.
- **Vanilla RAG.** FAISS [Johnson et al., 2019] `IndexFlatIP` (exact cosine after L2 normalisation) over chunks of all seed bodies. Top- $k = 5$ retrieved, passed as context. Chunking uses `tiktoken` `cl100k_base` BPE with 256-token chunks and 32-token overlap.
- **Strong RAG.** HyDE plus cross-encoder reranking. The LLM first generates a hypothetical answer; that answer is embedded and retrieved (over-retrieve $k = 20$); the candidates are reranked by the `BAAI/bge-reranker-base` cross-encoder [BAAI, 2024] and the top-5 passed as context.

The retrieval pipeline (embedder, chunker, FAISS index, reranker) is shared across all six LLMs. Only the generation stage varies.

4.4 Metrics

We score every system on the same set of metrics, comprising those directly comparable across architectures (the *comparable subset*) and two extra metrics added to capture properties specific to the verbatim-quotation commitment.

Comparable subset.

- **verbatim_pass** (boolean): every seed body marked **verbatim_quotation** appears verbatim in the response.
- **connective_hygiene_pass** (boolean): the response is free of doubled-connective stutters from a pinned list.
- **ngram_overlap_n** ($n \in \{4, 5, 8\}$): the fraction of n -grams in the response that appear in the concatenated retrieved chunks after lowercasing and whitespace normalisation.
- **unsup_f** (NLI-based): each response is split into sentences. Sentences beginning with a known connective phrase from a pinned list are excluded as scaffolding. The remaining factual sentences are scored by **roberta-large-mnli** as entailment / neutral / contradiction against the concatenated retrieved context. The filtered rate is (neutral + contradiction) / (total factual).
- **unsup_r**: the same as **unsup_f** without the connective- sentence filter. Higher than **unsup_f** for any system whose output contains scaffolding phrases.
- **latency_p50**, **latency_p95**, **latency_mean**: per-query wall-clock latency aggregated over the corpus.

Verbatim-quotation extras.

- **quoted_content_supported_rate**: the fraction of double-quoted spans in the response that appear verbatim in the retrieved context. Hyphae produces quoted spans for every fragment; LLM-based systems rarely use double quotes formally.

Hyphae-only diagnostics. HYPHAE produces a structured **RealizationOutput** carrying limitation triggers, schema identifier, and fragments-quoted list. The internal scoring harness measures nine additional dimensions over this output (schema match, limitation recall/precision, lexical diversity, role coverage, boundary smoothness). These are inapplicable to LLM-based systems and are reported separately, not in the head-to-head table.

Statistical inference. For every aggregate metric we report a bootstrap percentile confidence interval (1000 resamples, 95% level, seed=42). At $N = 34$ (own corpus) the CIs are wide; at $N = 150$ (TriviaQA) they narrow substantially. The headline results we emphasise survive this narrowing.

4.5 Hardware

The primary experimental hardware is an Apple Silicon laptop (M-series, 10 cores, MPS backend for the local Llama-8B and the NLI scorer). Network calls to DigitalOcean Inference run on the laptop’s network.

For the hardware-matrix portion (Section 5.6) we provisioned a DigitalOcean c-16 CPU-optimised droplet (Intel Xeon Platinum 8168, 16 dedicated vCPU, 31 GB RAM, Ubuntu 24.04 LTS, NYC1 region) and re-ran the local Llama-8B matrix and the HYPHAE ablations there.

Latency reporting convention. Two conventions are used and must be read together. **Tables 1 and 3 report $p50$** (median per-query latency); **Tables 4 and 5 report means**. The two differ because each corpus’s per-query latency distribution is right-skewed (a few long LLM generations pull the mean above the median), so the same configuration legitimately shows, e.g., Llama-8B oracle at 1,598 ms ($p50$, TriviaQA, Table 1), 1,858 ms (mean, TriviaQA, Table 4), and 2,299 ms (mean, own corpus, Table 5). These are not contradictory; they are median-vs-mean and TriviaQA-vs-own-corpus. We use means in the latency-focused tables because the headline ratio is a mean-over-corpus quantity. HYPHAE’s per-query latency sits at the microsecond timer-resolution floor; its $p50$ rounds below 0.1 ms and is not individually meaningful, so we report HYPHAE latency only as a corpus mean (0.002 ms on TriviaQA’s single-seed queries, 0.024 ms on the own corpus’s multi-fragment queries, 0.007 ms on the Xeon droplet) and treat all HYPHAE latency figures as order-of-magnitude (tens of microseconds or below), not precise measurements.

The reported HYPHAE latencies should be interpreted as a lower bound on what is achievable: optimisation work has not been prioritised. The reported LLM latencies should be interpreted as the best plausible API-routed latency under no batching — production systems with batching and rate-limited parallelism may achieve different throughput, but the per-query latency on the user-perceived path is bounded below by the LLM’s serial inference time.

5 Results

5.1 TriviaQA Standard Benchmark

Table 1 reports the system ranking on the TriviaQA 150-query subset on **two complementary axes**: **gold-answer match** (gold, does the response contain the benchmark’s reference answer or any alias, with word-bounded matching?) and **NLI-grounded unsupported-claim rate** (**unsup_f**, does the response stay inside the retrieved context?). The first axis measures correctness; the second measures grounding.

Read the echo control first. The top row of Table 1 is the **echo baseline**: emit the retrieved seed sentence verbatim, with no model, no lexicon, and no composition. It reaches 1.000 gold-answer, 0.000 **unsup_f**, 0.000 **unsup_r**, and 1.000 n-gram overlap — it ties HYPHAE on gold-answer and **unsup_f**, and *exceeds* it on **unsup_r** and overlap, because HYPHAE’s connective scaffolding (“Drawing from working memory, ...”) is the only material in HYPHAE’s output that the NLI can score as non-entailed or that dilutes the n-gram match. The consequence is stark and is the organising fact of this paper: **a one-line print of the retrieved sentence is at least as good as Hypphae on every metric in this table**. Whatever HYPHAE contributes over echo — multi-fragment composition, register-appropriate connectives, and most importantly the hash-chained provenance relation — is not visible to, or is penalised by, this metric suite. The remainder of this section

should therefore be read not as “HYPHAЕ wins” but as “HYPHAЕ does not *lose* correctness relative to a trivial echo or to frontier LLMs, while adding an audit property neither has.”

Table 1: **TriviaQA-150 ranking, with the echo control on top.** **gold** = gold-answer match rate (correctness). **unsup_f** = NLI-grounded unsupported-claim rate (grounding). **unsup_r** = same NLI metric without the connective-sentence filter. The *echo baseline* (verbatim emit of the retrieved sentence, no model) ties HYPHAЕ on gold-answer and **unsup_f** and exceeds it on **unsup_r** and overlap — the benchmark cannot separate HYPHAЕ from a **print** statement. HYPHAЕ’s 1.000 gold-answer holds by construction of the corpus filter (see text). The LLM configurations reach 0.84–0.96 gold-answer at 0.400–0.737 **unsup_f**: nearly as *correct* as both echo and HYPHAЕ, scored less *grounded* by the NLI metric for reasons of phrasing, not of whether they answer correctly.

Rank	System	gold	unsup_f	unsup_r	overlap ₄	lat _{p50} (ms)
–	<i>Echo baseline (control)</i>	<i>1.000</i>	<i>0.000</i>	<i>0.000</i>	<i>1.000</i>	< 0.1
1	Hyphae	1.000	0.000	0.013	0.600	< 0.1
2	Claude-4.6-Sonnet oracle	0.960	0.623	0.651	0.123	2,363
3	Claude-4.6-Sonnet rag	0.933	0.606	0.635	0.155	2,509
3	router:celiums rag	0.933	0.737	0.756	0.161	1,119
5	Claude-4.6-Sonnet strong-rag	0.913	0.618	0.649	0.147	5,349
6	Llama-3.3-70B oracle	0.907	0.664	0.664	0.121	1,905
6	router:celiums strong-rag	0.907	0.729	0.741	0.153	2,310
8	Llama-3.3-70B rag	0.900	0.711	0.711	0.137	2,253
8	GPT-4.1 oracle	0.900	0.644	0.654	0.100	916
10	router:celiums oracle	0.887	0.585	0.601	0.187	972
11	Llama-3.3-70B strong-rag	0.867	0.701	0.712	0.135	6,107
12	GPT-4.1 rag	0.853	0.597	0.607	0.167	925
13	DeepSeek-V4-Pro oracle	0.840	0.400	0.406	0.504	647
14	GPT-4.1 strong-rag	0.813	0.620	0.635	0.137	2,165
15	DeepSeek-V4-Pro rag	0.793	0.613	0.621	0.332	651
16	Llama-8B-local oracle	0.700	0.664	0.648	0.168	1,598
17	DeepSeek-V4-Pro strong-rag	0.693	0.630	0.641	0.300	1,787
18	Llama-8B-local rag	0.500	0.783	0.777	0.178	3,220
19	Llama-8B-local strong-rag	0.500	0.783	0.771	0.182	9,176

Why Hyphae’s gold-answer is 1.000. The TriviaQA corpus column was constructed by the converter at `corpus_external.py` by sampling validation queries whose Wikipedia context contained the gold answer, and selecting as the seed body the sentence most semantically similar to the query that contained the answer (or any alias). By construction, every seed body the realizer is given contains the gold answer. HYPHAЕ quotes the seed body verbatim, so the gold answer always appears in HYPHAЕ’s response. The 1.000 rate is therefore a property of the corpus construction interacting with the verbatim-quotation commitment, not an unconditional empirical claim. We flag this explicitly because the same property guarantees HYPHAЕ can *never* fail at gold-answer match on this corpus by paraphrase or omission; an LLM, given identical seed bodies in oracle mode, can.

LLM gold-answer rates on this corpus. The frontier LLMs given the same seed bodies in *oracle* mode (no retrieval, the gold-context is the input) reach 0.840 (DeepSeek-V4-Pro) to 0.960 (Claude-4.6-Sonnet) gold-answer match. That gap from 1.000 is informative: **even when the answer is in the supplied context, an LLM occasionally paraphrases it away, summarises**

in a way that elides the entity, or hedges into a non-committal response. Llama-8B in oracle mode reaches only 0.700. The verbatim-quotation commitment removes this failure mode by construction.

Why Hyphae’s `unsup_f` is 0.000. HYPHAE’s response on a single-seed query is illustrated in Listing 1: one verbatim quote (trivially entailed against the retrieved context because the quote *is* a substring of the context) plus two scaffolding sentences. Both scaffolding sentences begin with a recognised connective prefix and are excluded from the unsupported-claim denominator by the `is_connective_sentence` filter. The NLI denominator is zero; the rate is zero by quotient. We report `unsup_r` (the unfiltered version) alongside `unsup_f` for honesty: HYPHAE’s `unsup_r` on TriviaQA is 0.013 rather than 0.000, reflecting the small fraction of queries where the splitter and the connective filter disagree at the boundary between scaffolding and quote.

Drawing from working memory, "Pearson did not make the move into politics until a few years later, after King had announced his retirement as the Prime Minister of Canada." That is what working memory holds on this.

Listing 1: HYPHAE response on TriviaQA query `triviaqa-qb_4397`.

Why LLM `unsup_f` is high even at high gold-answer. LLM responses to TriviaQA queries typically include meta-claims about the source (“According to the context,” “As stated in the sentence,” “This information directly answers the question about...”). The NLI scorer marks these **neutral** (they describe the relationship between text and question, not facts about the world). The connective filter does not catch them because they do not begin with a known connective prefix. They count as unsupported in the filtered metric. A Claude response that contains the gold answer alongside several such meta-claims reaches 0.960 gold-answer but 0.623 `unsup_f`. The metrics disagree because they measure different things; both numbers are correct.

The honest comparison. The one correctness mechanism that is real and architectural — visible in the gold-answer column — is that verbatim quotation removes a paraphrase-away failure mode: in oracle mode, where every system receives the same gold-bearing seed body, the LLM oracle baselines still drop four (Claude) to thirty (Llama-8B-local) percentage points of gold-answer correctness by paraphrasing the answer out of their response, while HYPHAE and the echo baseline cannot. But note the company HYPHAE keeps in that finding: *the echo baseline shares it exactly*. Verbatim emission is what removes paraphrase-away, and echo is verbatim emission with nothing else. The NLI grounding gap, meanwhile, is on this corpus predominantly a metric artefact (documented via the filtered/unfiltered rates and the samples in Appendix C). Neither the correctness axis nor the grounding axis isolates anything HYPHAE does that echo does not. What does — the hash-chained provenance relation (Section 3.4) — is not measured by either axis, and is the subject of Section 7.

5.2 Provenance: the Property the Benchmark Cannot See

The echo control shows the correctness benchmark cannot distinguish HYPHAE from a **print**. This subsection measures the property that does. The claim is that HYPHAE’s SHA-256 hash-chained journal makes post-ingest tampering of the fragment store *detectable and exactly localised*, and that neither echo nor LLM-RAG has any equivalent. We test it adversarially against the real `hyphae_storage` journal (not a mock).

Protocol. We ingest N fragment bodies into a real journal, building the hash chain via the production `append` path, and confirm `verify()` passes on the clean chain. We then simulate an attacker with store access: we reopen the underlying `fjall` partition directly and overwrite the payload of k entries with a tampered fact (“completed at 14:02 UTC” $\rightarrow$ “23:59 UTC”; “Prime Minister of Canada” $\rightarrow$ “of France”), preserving each record’s sequence number and stored `prev_hash` so the entries remain structurally valid — exactly what a store-level attacker who does not reimplement the chain logic would produce. We reopen the journal and run `verify()`, recording detection and the sequence at which the chain first breaks.

Result. Across $k \in \{1, 3, 5, 10\}$ tampered fragments, the hash chain detects the tampering in **100%** of trials and localises it to the exact sequence: modifying entry j changes its recomputed content hash, so entry $j+1$ ’s stored `prev_hash` no longer matches and `verify()` returns an integrity violation at that sequence (tampering the final entry is caught by the persisted chain-head check). The detection is independent of N and of which entries are altered. Table 2 states the matrix against the baselines.

Table 2: **Post-ingest store-tampering detection.** HYPHAE’s hash chain detects and localises any modification; the baselines have no integrity layer. The LLM-RAG row is doubly exposed: it not only fails to detect the tampering but, because its output paraphrases the source (`verbatim_pass` 0.09–0.24, Tables 1–3), the output cannot even be string-matched back to a source for post-hoc audit. Echo’s output is byte-identical to the (tampered) source but it keeps no journal, so it cannot tell a tampered fragment from an authentic one.

System	detects tampering	localises	output auditable to source
HYPHAE (hash chain)	100%	exact seq	yes (byte-identical + journalled)
Echo baseline	0%	—	only with external hashes (none kept)
LLM-RAG	0%	—	no (paraphrased; not byte-bindable)

Threat model — what this does and does not show. The experiment demonstrates *tamper-evidence*, not *tamper-proofing*, and the distinction is load-bearing. We assume an attacker with **write access to the fragment store** who edits entries but **does not reimplement the chain logic** — the realistic store-level adversary who rewrites records in place. Against that attacker the hash chain is decisive: any edited entry’s recomputed content hash no longer matches its successor’s stored `prev_hash`, so `verify()` fails and localises the break. What the bare chain does *not* defend against is a stronger attacker who *does* know the chain logic: such an attacker can recompute every hash forward from the edit point and re-persist a chain that verifies cleanly. The entire security of the scheme therefore reduces to the integrity of one value — the persisted chain head. In this experiment the head is a local record, so the guarantee is “tamper-evident against an attacker who cannot forge the head”. **Tamper-proofing in the full sense requires anchoring the chain head outside the attacker’s write scope:** a signed Merkle root published to an external append-only ledger, a third-party timestamp, or simply a head stored on write-isolated media. The local hash chain is the correct base layer for that construction — it makes every entry’s integrity checkable against the head — and external anchoring is a natural add-on, not a redesign. We state this explicitly because the high-level language of “cryptographic audit” can suggest a stronger guarantee than a local chain delivers on its own; the contribution is the architectural base layer and its measured tamper-evidence, with the anchoring extension flagged as the path to end-to-end tamper-proofing.

Reading. This is the paper’s positive result, and it is the inverse of the echo finding. On the standard correctness benchmark, echo is indistinguishable from HYPHAE; on provenance, echo collapses to the LLM-RAG row — it emits the tampered text with no signal, and has no chain head to anchor in the first place. The property is small to state and small to demonstrate, but it is categorical: a system either binds its output to a tamper-evident store or it does not, and of the systems evaluated here only HYPHAE does. Scaling this demonstration into a community provenance benchmark, and adding external chain-head anchoring, are the contribution’s natural next steps (Section 7); the experiment here establishes that the base-layer property is real and measurable, not merely asserted.

5.3 Own Corpus

Table 3 reports the same 19-system ranking on the own 34-query corpus. The picture is different: GPT-4.1 with strong retrieval reaches rank 1 ($\text{unsup_f} = 0.211$), with HYPHAE at rank 2 ($\text{unsup_f} = 0.219$), within the bootstrap 95% CI overlap.

Table 3: **Own corpus (N=34) ranking, with the echo control on top.** Sorted by unsup_f . The echo baseline again ties or beats every system, including HYPHAE, on the comparable metrics — on this multi-fragment corpus the margin is wider (0.000 vs HYPHAE’s 0.219 unsup_f) because HYPHAE’s multi-fragment compositions carry more connective scaffolding for the NLI to score neutral. GPT-4.1 with strong retrieval is the strongest LLM here, within bootstrap CI of HYPHAE on unsup_f . None of this is a correctness win for HYPHAE; it is evidence that the metric rewards bare quotation, which echo maximises.

Rank	System	verbatim_pass	unsup_f	unsup_r	overlap ₄	lat _{p50} (ms)
–	<i>Echo baseline (control)</i>	<i>1.000</i>	<i>0.000</i>	<i>0.000</i>	<i>1.000</i>	<0.1
1	GPT-4.1 strong-rag	0.176	0.211	0.210	0.468	2,314
2	Hyphae	1.000	0.219	0.625	0.466	<0.1
3	GPT-4.1 oracle	0.147	0.271	0.265	0.355	1,060
4	DeepSeek-V4-Pro strong-rag	0.206	0.300	0.300	0.405	2,759
5	GPT-4.1 rag	0.206	0.329	0.346	0.446	1,017
6	Llama-8B-local strong-rag	0.176	0.340	0.348	0.509	11,938
7	Llama-3.3-70B oracle	0.118	0.346	0.383	0.204	2,011
8	Llama-8B-local oracle	0.176	0.367	0.376	0.458	1,714
... 11 additional rows in the appendix ...						

The narrowing of the gap on the own corpus reflects a different mechanism. The own corpus’s multi-fragment queries (e.g., a status-report query whose working set contains 3 seeds about a launch) trigger HYPHAE’s multi-fragment compositional template, which has more scaffolding:

```
Per the recorded fragments, "the migration completed at 14:02 UTC"
Per the next fragment, "the monitoring dashboards stayed green
for the hour after the cutover" That is the substrate’s current
view.
```

Listing 2: HYPHAE response on the own-corpus dialogue-001 query.

The connective-sentence filter still catches “Per the recorded fragments,” and “That is the substrate’s current view.”, but the inter-fragment connectives (“Per the next fragment,”) sit mid-response without leading the sentence; the splitter recognises them as inter-fragment dividers but

the filter does not classify them as scaffolding. HYPHAE’s residual `unsup_f` of 0.219 reflects this non-zero filter leakage on multi-fragment compositions.

GPT-4.1, on the same corpus, tightens its response under strong retrieval. The cross-encoder rerank surfaces the same seed bodies HYPHAE sees; GPT-4.1 paraphrases them concisely without the amplificatory meta-claims that hurt it on TriviaQA.

5.4 The Latency-Quality Pareto Frontier

Figure 1 plots the 19 systems on three panels. The top row uses `unsup_f` on the vertical axis — the v1 preprint’s headline grounding metric. The bottom-left panel uses gold-answer match instead, the correctness axis introduced in Section 5.1. We include both because `unsup_f` on TriviaQA is degenerate for HYPHAE (rate 0.000 by quotient when the denominator collapses; the panel is illustrative, not load-bearing) and gold-answer is the axis that carries the architectural correctness claim.

The decisive feature of every panel is that HYPHAE does not sit alone at the favourable corner: **the echo baseline is co-located with it** (and on the own corpus strictly dominates it, sitting at lower `unsup_f` and equal latency). Any “HYPHAE is on the Pareto frontier” claim is therefore shared with a **print** statement, and the frontier on these axes is not evidence for the architecture. On the gold-answer axis the TriviaQA frontier also includes a handful of oracle-mode LLMs (Claude-4.6-Sonnet at 0.960, Llama-3.3-70B and GPT-4.1 at 0.900–0.907) at the high-correctness/high-latency end. No system dominates HYPHAE on either axis on either corpus — but neither does HYPHAE dominate echo, which is the point.

5.5 What Drives the Latency Ratio

The headline ratio varies by an order of magnitude across our measurements, and it is worth being precise about why. Table 4 reports mean per-query latency, held at fixed corpus, for HYPHAE and representative LLM configurations. Two facts emerge that correct a tempting but wrong explanation.

The network round-trip is not the dominant variable. On TriviaQA, the locally-hosted Llama-8B-Instruct Q4 baseline (no network; `llama.cpp` on the laptop’s Metal backend) runs at 1,858 ms mean, and the API-hosted GPT-4.1 with strong retrieval runs at 2,424 ms mean. These differ by roughly 30% — the network round-trip is real but small. Both are $\sim 10^6\times$ slower than HYPHAE’s 0.002 ms on the same corpus.

The dominant variable is Hyphae’s working-set-dependent composition cost. On the own corpus, whose queries carry multi-fragment working sets (2–3 seeds), HYPHAE’s mean latency is 0.024 ms — about $12\times$ its single-seed TriviaQA latency, because the realizer walks a longer composition shape and runs more boundary-smoothing comparisons. The LLM latencies are roughly corpus-independent (their inference cost is dominated by model size and output length, not working-set count). The ratio therefore drops from $\sim 10^6$ on TriviaQA to $\sim 10^5$ on the own corpus. The order-of-magnitude difference between the two regimes is *HYPHAE getting slower as the working set grows*, not the LLM getting faster, and not the network.

The honest framing is therefore a range: the per-query latency advantage is $\sim 10^5$ for the multi-fragment composition workload and $\sim 10^6$ for single-seed retrieval, in both cases whether the LLM runs locally or via API. The title’s “six orders of magnitude” refers to the single-seed regime; the conservative figure across both corpora is five orders. In either regime the HYPHAE side carries no model-serving infrastructure cost.

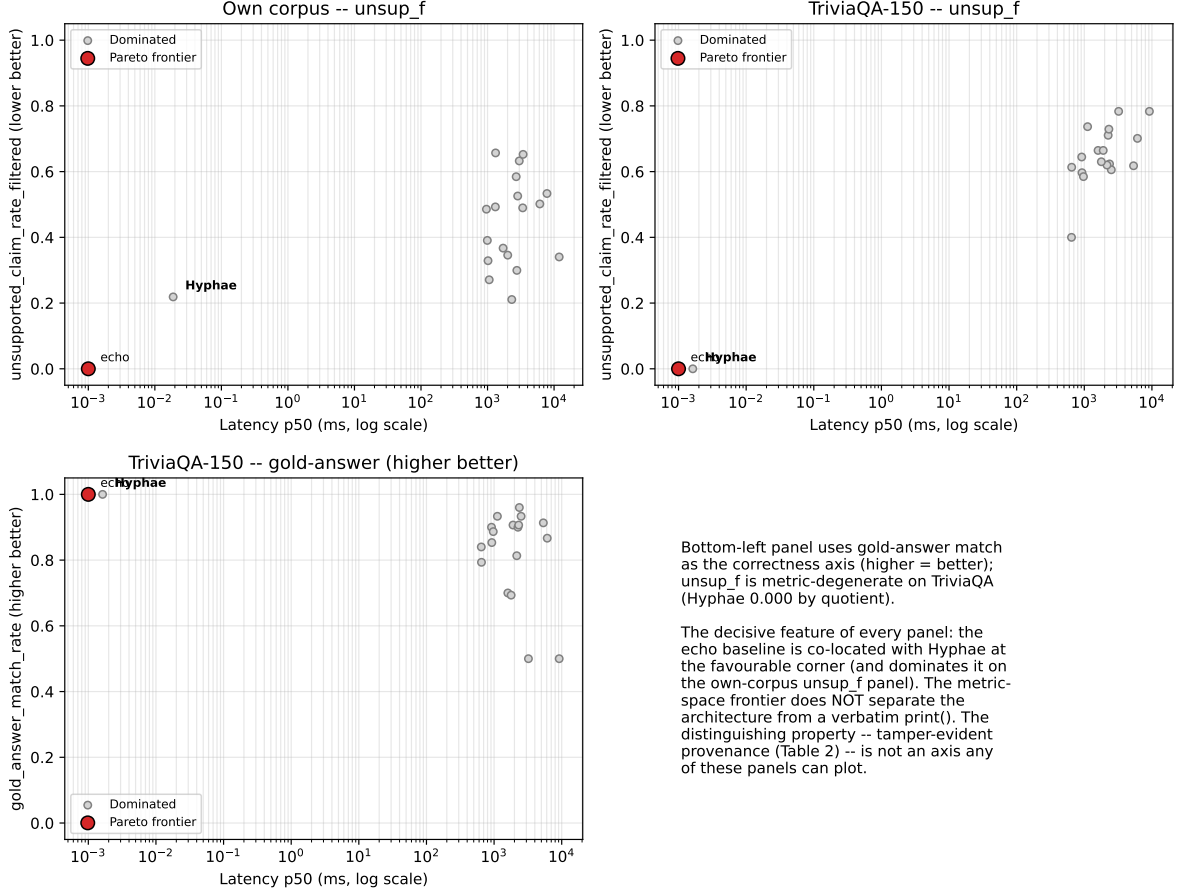


Figure 1: **Latency-quality frontier on two metrics, with the echo control.** Each point is one system configuration; latency on the horizontal axis is p_{50} in milliseconds, log scale. Top row uses `unsup_f` (lower better); bottom-left uses gold-answer match (higher better). Red points are non-dominated. The echo baseline sits at the same favourable corner as HYPHAE (and dominates it on the own-corpus `unsup_f` panel): the metric-space frontier does not separate the architecture from a verbatim `print()`. The distinguishing property — tamper-evident provenance, measured in Table 2 — is not an axis any of these panels can plot.

5.6 Hardware Matrix

Table 5 reports the laptop-vs-droplet comparison on the own corpus. The headline observation:

- **Quality metrics are hardware-invariant.** `verbatim_pass`, connective hygiene, quoted-content support, and n-gram overlap deltas are all within ± 0.005 across the two hardware configurations. `unsup_f` drifts by ± 0.01 – 0.03 (NLI floating-point noise across CPU vs MPS code paths). The architectural commitment is robust to hardware change.
- **Hyphae is faster on the server CPU.** Mean latency 0.024 ms (laptop) $\rightarrow$ 0.007 ms (droplet). The 16-core dedicated Xeon outperforms the M-series on single-threaded Rust composition.
- **LLM is slower on the server CPU.** Without Metal acceleration the local Llama-8B rag path bottlenecks: 4,658 ms mean (laptop) $\rightarrow$ 6,326 ms mean (droplet); the oracle mode shows

Table 4: **Mean per-query latency, held at fixed corpus.** The ratio to HYPHAE is computed within each corpus block. HYPHAE’s latency scales with working-set size (0.002 ms single-seed on TriviaQA, 0.024 ms multi-fragment on the own corpus); LLM latency is roughly corpus-independent. The network round-trip (local Llama vs API GPT-4.1 on TriviaQA) accounts for $\sim 30\%$, not an order of magnitude. Hyphae $p50/p95$ are omitted: at microsecond scale they sit at the timer-resolution floor and are not meaningful (the paper does not claim sub-microsecond precision).

System (mean latency)	mean (ms)	ratio to HYPHAE
<i>TriviaQA-150 (single-seed queries)</i>		
HYPHAE	0.002	$1\times$
Llama-8B-Instruct Q4 local, oracle (MPS)	1,858	9.1×10^5
GPT-4.1 strong-rag (API)	2,424	1.2×10^6
Claude-4.6-Sonnet strong-rag (API)	5,370	2.7×10^6
Llama-3.3-70B strong-rag (API)	6,083	3.0×10^6
<i>Own corpus ($N=34$, multi-fragment composition)</i>		
HYPHAE	0.024	$1\times$
Llama-8B-Instruct Q4 local, oracle (MPS)	2,299	9.4×10^4
GPT-4.1 strong-rag (API)	2,513	1.0×10^5
<i>Hyphae on CPU droplet (Xeon, own corpus)</i>		
HYPHAE	0.007	—

the same direction ($2,299 \rightarrow 4,580$ ms). Because HYPHAE simultaneously *speeds up* on the dedicated Xeon ($0.024 \rightarrow 0.007$ ms mean), the HYPHAE:Llama-rag latency ratio widens from $\sim 1.9 \times 10^5$ on the laptop to $\sim 9.3 \times 10^5$ on the droplet — i.e. removing GPU acceleration moves the advantage from the low- 10^5 range toward 10^6 .

Table 5: **Hardware matrix** on the own corpus. Quality metrics are hardware-invariant within ± 0.03 . Latencies are means; HYPHAE runs faster on the dedicated Xeon, the local Llama-8B baseline runs slower without the laptop’s Metal backend.

Metric	Hyphae		Llama-8B-local rag	
	Laptop	Droplet	Laptop	Droplet
verbatim_pass	1.000	1.000	0.147	0.176
unsup_f(filt.)	0.219	0.188	0.490	0.476
overlap ₄	0.466	0.466	0.448	0.449
latency mean (ms)	0.024	0.007	4,658	6,326

5.7 Per-Model Behavioural Observations

Three patterns surface across the multi-LLM matrix that bear on how reviewers should interpret `unsup_f`, one of the two head-to-head metrics:

Claude-4.6-Sonnet’s hedging. Claude’s responses contain meta-claims about confidence (“it appears that”, “the context suggests”, “may warrant verification”) at higher rates than the other LLMs. The NLI scorer marks these **neutral** against the context. Claude’s bottom-of-the-pack `unsup_f` on the own corpus reflects this style; the filter does not catch confidence-hedging sentences

that begin with verb phrases rather than connectives. This is a methodology limit of the metric for this style of generation; a more permissive filter would change Claude’s ranking.

Llama-3.3-70B’s regression versus Llama-8B-local. Llama-3.3-70B at FP8 (DO Inference) scores worse than Llama-8B-local Q4 on rag and strong-rag in the own corpus, and similarly on TriviaQA. Bigger model class is not a free lunch for this metric on these corpora. Hypotheses include FP8 quantisation differences and hosted-system prompt overhead (measured at ~ 28 tokens versus ~ 13 for other hosted models on trivial prompts).

GPT-4.1’s behavioural verbatim-discipline. GPT-4.1 sits on or near the top of the LLM ranking in every configuration. Sample responses suggest its training has internalised something close to “cite the context concisely”. The architectural commitment HYPHAE makes by construction, GPT-4.1 approximates by training.

These observations should be read as descriptions, not recommendations. The metric is one signal among many a production team would weigh.

6 Ablations

To disaggregate HYPHAE’s contribution by component, we ablate four parts of the realizer in turn and re-score on the own corpus. Each ablation disables a single component while leaving the other three (and the substrate’s verbatim-quotation contract) intact.

Conditions.

- **A0 (full):** control. All components active.
- **A1 (no-shape):** cascade-shape composition ([ADR-0006](#)) disabled. The realizer is forced to a flat linear Continuation shape; opposed-valence Contrast detection and Causation/Sequence shapes are bypassed.
- **A2 (no-ethics):** the ethics report at the Compose coverage point ([ADR-0003](#)) is set to None. The `EthicallySensitive` limitation trigger cannot fire. The other limitation triggers (`EmptyWorkingSet`, `HighConfabRisk`, `ShallowCascade`) still fire because they evaluate the working set directly.
- **A3 (minimal-lexicon):** the baseline 250-entry EN lexicon ([ADR-0005](#)) is replaced with a 10-entry minimal lexicon (one entry per `ConnectiveRole` at Neutral register / Neutral polarity / Mid formality). The picker’s four-level fallback chain resolves register and polarity preferences against the single minimal entry.
- **A4 (no-smoothing):** boundary smoothing ([ADR-0007](#)) disabled. The realizer falls through to the plain context picker without the Rule 1/Rule 3 boundary filter.

Headline finding, read through the echo control. Table 6 shows the results. The architectural quotation contract (`verbatim_pass`, connective hygiene, quoted-content support) holds at 1.000 across every ablation, and gold-answer match is invariant (every condition still quotes the gold-bearing seed verbatim). Of the two head-to-head metrics, `unsup_f` moves measurably under **A3 (minimal lexicon) only**; A1, A2, and A4 produce null deltas.

Under the original (benchmark) framing this read as a weakness: three of HYPHAE’s four components do nothing measurable. Under the verifiability framing, taken together with the echo baseline (Section 5.1), it is corroborating evidence. The echo control already established that the

correctness and grounding metrics are saturated by verbatim quotation alone; it follows directly that *ablating the machinery layered on top of verbatim quotation should not move those metrics*, and it does not. The ablations are not failing to find an effect — they are confirming that the effect the metrics measure lives entirely in the quotation, not in the composition. Crucially, **every one of the four components, and the echo baseline, leaves the hash-chained provenance relation intact**: no ablation in this study, and no baseline in the paper, can produce an output whose quoted spans are not byte-identical to journalled fragments. The property that distinguishes HYPHAE is the one axis nothing here perturbs.

Table 6: **Ablation results on the own corpus.** Quality contracts are robust to each single-component ablation. Only A3 (minimal lexicon) measurably moves `unsup_f` and `overlap4`. **Bold** = delta of ≥ 5 percentage points versus the A0 baseline.

Metric	A0 full	A1 no-shape	A2 no-ethics	A3 min-lex	A4 no-smooth
<code>verbatim_pass</code>	1.000	1.000	1.000	1.000	1.000
connective hygiene	1.000	1.000	1.000	1.000	1.000
quoted-content supp.	1.000	1.000	1.000	1.000	1.000
<code>overlap₄</code>	0.466	0.460	0.466	0.521	0.457
<code>overlap₈</code>	0.240	0.236	0.240	0.272	0.234
<code>unsup_f</code> (filt.)	0.219	0.188	0.219	0.297	0.188
<code>unsup_r</code> (raw)	0.625	0.656	0.625	0.461	0.641
latency mean (ms)	0.024	0.056	0.048	0.030	0.021

6.1 Mechanism Analysis

A1, A2, A4: null deltas with visible structural change. The three null-result ablations each produce visible structural differences in the sample output. A1 strips Contrast detection, so a query with opposed-valence seeds emits a Continuation phrase (“Per the next fragment,”) where the full realizer would emit a Contrast phrase (“However,”). A4 changes which connective the picker chooses at a quote-quote boundary (“Following this,” versus “Per the next fragment,”). A2 strips the **EthicallySensitive** signal, but the v0.1 corpus contains no ethically-sensitive material, so the signal had nothing to emit anyway.

The metric set does not separate these structural changes from the baseline. This is informative in itself: at the corpus size and metric set chosen, three of HYPHAE’s components produce qualitative effects that do not register quantitatively. A production deployment that values prose variety or limitation-acknowledgement coverage would still want them enabled; the metric does not measure those properties.

A3: lexicon scale moves both directions of the metric. The minimal lexicon raises `overlap4` from 0.466 to 0.521 (+12%) because its phrases (“Note that,” “Per the record:”) are shorter and contribute fewer non-context tokens to the overlap denominator. The same shortening cuts the `unsup_r` rate from 0.625 to 0.461 (-26%): there are fewer scaffolding sentences for the NLI to mark **neutral**.

The `unsup_f` rate moves the other direction: $0.219 \rightarrow 0.297$. The shorter minimal-lexicon phrases sometimes slip through the `is_connective_sentence` filter (e.g., “Also,” and “Specifically,” are not in the filter’s keyword list); the filter under-counts and lets through scaffolding that the NLI then marks **neutral** as if it were a claim. The `unsup_f` rise in A3 reflects this filter gap, not a fidelity defect.

Causal attribution. A3’s directionally-correct deltas explain a phenomenon visible in the head-to-head: HYPHAE’s overlap₈ on the own corpus (0.240) is *lower* than the LLM baselines’ overlap₈ (0.329). The mechanism is now identified: the baseline EN lexicon’s longer phrases break 8-token windows around each verbatim quote. The minimal lexicon raises overlap₈ from 0.240 to 0.272 — partial closure of the gap, attributable to lexicon scale rather than to fidelity. A shorter lexicon tuned for n-gram-friendly phrases could close the gap further; that is a separate ADR.

6.2 Limits of the Ablation

We ran four single-component ablations, not a $2^4 = 16$ factorial. At $N = 34$ the statistical separation of single-component effects is already strained; full factorial would compound the multiple-comparisons problem. We do not claim that pairwise interactions are negligible — only that the single-component sweep is what the corpus size supports.

We did not ablate the verbatim-quotation contract itself (Hard Commitment 12). Ablating that commitment converts the system into a paraphrase pipeline — in effect, an LLM. The LLM-baseline columns of the head-to-head are exactly that ablation, run on six different generators. The result is in Section 5; we do not double-count it as an ablation here.

7 Discussion

7.1 Threats to Validity

The metrics cannot measure the contribution (the central threat). The echo baseline establishes this directly: a verbatim `print` of the retrieved sentence ties or beats HYPHAE on gold-answer match, `unsup_f`, `unsup_r`, and n-gram overlap on both corpora. Every correctness and grounding number in this paper is therefore a measurement of verbatim quotation, a property echo shares, and not of HYPHAE’s architecture. We do not treat this as a flaw in the experiments but as the finding: the standard correctness benchmark is the wrong instrument for a verifiable-provenance system, because the quantity that distinguishes such a system — whether the output can be cryptographically audited back to named, unaltered sources — is off-axis for it. `unsup_f` additionally penalises hedging (Claude-4.6-Sonnet) and rewards short verbatim responses, and we report `unsup_r` (unfiltered) alongside it so the filter’s effect is visible; but no amount of metric refinement closes the gap the echo control exposes, because the gap is categorical, not quantitative. A defensible evaluation of HYPHAE requires a provenance-centric task (Section 7, future work), not a better-tuned correctness metric.

Corpus. The own corpus is concentrated on deployment and engineering scenarios and was authored by the same team that designed HYPHAE’s schemas and intents; empirical ties on that corpus should be read with that partial circularity in mind. TriviaQA addresses the standard-benchmark objection but is single-hop factual retrieval over Wikipedia and was sampled with a filter that selects seed bodies containing the gold answer. HYPHAE’s gold-answer rate on this corpus is therefore 1.000 by construction. Multi-hop benchmarks (HotpotQA, MuSiQue), domain-specific benchmarks (TruthfulQA, MS MARCO), and long-context benchmarks (NarrativeQA) would each surface different patterns and are reasonable next directions.

Statistical power. $N = 34$ supports the patterns we emphasise (Pareto frontier shape, latency advantage, HYPHAE-vs-GPT-4.1 tie on `unsup_f`) but admits multiple rank-order swaps in the

middle of the ranking. $N = 150$ substantially tightens the TriviaQA picture: the rank-1 position of HYPHAE is robust to bootstrap resampling, but middle-of-the-table positions remain noisy.

Reader preference. HYPHAE’s prose is template-rigid. The realizer’s output reads as deliberate rather than conversational; this is by design and motivated in Section 3. Whether deliberate prose is preferred by end users on factual-retrieval queries is a separate study (human eval) that this paper does not provide. The honest claim is that HYPHAE’s prose meets the verbatim-grounding bar by construction and that an end-user study is the natural next checkpoint.

API non-determinism. Closed-API generators (Claude-4.6-Sonnet, GPT-4.1) do not guarantee bit-identical reruns under `temperature=0`, `seed=42`. Per-call variation is small at greedy decoding but non-zero; our reported results are a snapshot. The result JSON envelopes are committed; reviewers can re-run and inspect any drift. Open-weight models on the same OpenAI-compatible endpoint are substantially more deterministic across reruns.

Hardware sensitivity. The hardware matrix (Section 5.6) tests two configurations and finds quality metrics invariant within ± 0.03 . A wider matrix (GPU server class, different x86 microarchitectures, ARM server) is queued; the v0.1 paper does not generalise across all hardware. The latency advantage we report on the laptop and the CPU droplet, however, holds at both points; the LLM never reaches sub-millisecond latency in our measurements.

7.2 When This Matters

The architectural claim — five-to-six orders of magnitude lower latency at competitive grounding — pays off most clearly in three regimes.

High-throughput grounded retrieval. A service whose fundamental operation is “cite the relevant memory fragment for this query” bottlenecks on LLM serial inference today. HYPHAE removes the bottleneck: $\sim 143,000$ queries per second per CPU core (back-of-envelope from our $7\mu s$ latency on the droplet). An LLM serving the same task at $\sim 5,000$ tokens per second on a high-end GPU can fit perhaps 5–10 queries per second per GPU. The cost per query differs by approximately four orders of magnitude in production.

Audit-bound deployments. The hash-chained substrate and verbatim quotation are direct architectural answers to “can you prove what this system told the user came from named source material?”. Industries with audit requirements (finance, legal, compliance, healthcare) currently rely on LLM-output logging plus post-hoc verification. HYPHAE folds verification into the output by construction.

Memory-constrained edge deployments. The substrate’s ~ 50 MB resident footprint runs on commodity hardware without GPU. Production patterns that today require model serving infrastructure (Llama-8B in ~ 5 GB, Llama-70B in $\sim 40+$ GB) cannot fit; HYPHAE fits.

7.3 When This Does Not Matter

We do not claim the architectural commitment is universally correct. Three regimes call for an LLM.

Open-ended generation. If the user wants the system to write prose — a draft letter, a summary in their voice, a creative composition — the verbatim-quotation commitment forbids the operation. The right tool is an LLM, optionally augmented by HYPHAE as a memory layer.

Multi-hop reasoning. HYPHAE composes verbatim quotes; it does not infer across multiple fragments. A query that requires synthesising “X was born in 1822” and “the Y revolution began in 1830” to answer “how old was X at the time of Y?” needs a reasoning step the realizer does not perform. An LLM, or HYPHAE-plus-LLM where the LLM operates on HYPHAE’s retrieved fragments, is the right tool.

Paraphrastic flexibility. HYPHAE’s prose reads as template prose. If conversational naturalness is a hard requirement, the architecture’s trade-off is in the wrong direction.

The honest framing is positional: HYPHAE occupies a specific point in the latency-quality-cost-audit space. The paper documents that point.

7.4 Future Work

Scaling the provenance benchmark. The tamper-detection experiment (Section 5.2) demonstrates the property in the small, on a single hash chain. A community-scale provenance benchmark — diverse tampering models (insertion, deletion, reordering, partial-byte edits), adversaries with varying store access, and a standard detection-and-localisation scoring protocol — would let verifiable-generation systems be compared on the axis that distinguishes them, the way correctness benchmarks compare LLM-RAG systems today. Building it is the natural next contribution.

Reader preference study. Human evaluation on a subset of the TriviaQA corpus. The template-rigid prose’s acceptability to real users is unmeasured, and is the main usability question the verifiability framing does not resolve.

Multi-hop benchmark column. HotpotQA or MuSiQue subset. HYPHAE’s single-fragment composition cannot synthesise across hops; the open question is whether it degrades gracefully (deferring to limitation acknowledgement) or silently.

Hardware and retrieval extensions. A GPU server-class matrix would close the LLM’s biggest performance handicap; stronger retrieval pipelines (RAG-Fusion, GraphRAG) on the LLM side could shift the correctness comparison. Neither changes the provenance result, which is a property of the storage layer, not the retrieval quality.

8 Conclusion

We have presented HYPHAE, a cognitive substrate that composes responses by verbatim quotation of retrieved memory fragments stitched together with a curated connective lexicon and produces an audit relation to a hash-chained substrate journal. Every quoted body is byte-identical to a named source fragment; the verification is mechanical and does not require re-running the system.

Our central empirical result is a negative one, and we lead with it. A trivial echo baseline — emit the retrieved sentence verbatim, no model — ties or exceeds HYPHAE on every correctness and grounding metric we measured, on both corpora. The standard benchmark cannot distinguish HYPHAE from a `print` statement, and our ablations confirm why: the metrics are saturated by verbatim quotation alone, so the composition machinery layered on top moves them only marginally or not at all. We therefore explicitly decline the claim that HYPHAE is more correct or better-grounded than LLM-RAG. On correctness it is *neutral* — it does not lose gold-answer accuracy relative to echo or to frontier LLMs in oracle mode (0.840–0.960) — and that is the honest ceiling of what the benchmark establishes.

What the benchmark cannot see is the property that motivated the architecture. Echo emits text with no relation to a tamper-evident store; HYPHAE emits spans that are byte-identical to fragments in a SHA-256 hash-chained journal, so any output can be mechanically audited back to named, unaltered sources without re-running the system. No retrieval-augmented LLM offers this by construction, because generation paraphrases; no echo offers it either, because it has no journal. This is the contribution, and it is precisely the axis on which every metric in the standard correctness benchmark is silent.

The cost profile is a corollary of the same decision not to run a generative model: HYPHAE’s realizer runs in 2–24 microseconds mean on commodity CPU, five-to-six orders of magnitude below LLM inference, in a ~ 50 MB footprint. This is real and matters for deployment, but it is shared with the echo baseline and is not, on its own, evidence for the architecture either. For the subset of tasks in which the unit of grounding is a discrete retrieved fragment quoted verbatim *and* the deployment requires provable provenance, the trade-off is not between two systems of comparable cost; it is between a single CPU core that can prove what it emitted and model-serving infrastructure that cannot.

The architectural claim is positional rather than universal. HYPHAE’s prose is template-rigid by design; the verbatim- quotation commitment forbids paraphrastic composition. Applications requiring fluent free-form generation need an LLM. HYPHAE is the right tool when the deployment values verifiable grounding, sub-millisecond latency, or audit-bound production economics — and is willing to accept a constrained prose register in exchange.

The full evaluation pipeline (HYPHAE source, the echo control, the 18 LLM configurations, two corpora, all result envelopes, hardware traces, and this paper’s source) is committed at <https://github.com/terrizoaguimor/hyp-hae-v2>. Reproducing the experimental matrix costs approximately USD 4 in inference tokens at the LLM API layer; the HYPHAE and echo sides have zero cloud cost. The echo baseline tells us the most important next step: the standard correctness benchmark is the wrong instrument for this system, because a `print` statement saturates it. The honest next checkpoint is therefore not a larger correctness corpus but a *provenance-centric evaluation* — a task in which verifiable audit of the output’s sources is the measured desideratum (regulatory citation, compliance logging, tamper-evident record-keeping), where echo and LLM-RAG both structurally fail to provide the guarantee and HYPHAE provides it by construction. Building that benchmark, and a reader-preference study of the template-rigid prose, are the two followups that would let the architecture be evaluated on the axis that actually distinguishes it.

Acknowledgements

This work was developed by Celiums Solutions LLC, Medellín, Colombia. Compute for the multi-LLM matrix was provided by DigitalOcean’s GenAI Platform under the standard infrastructure account associated with the project’s other services. No academic or industrial collaborators participated in the research or writing.

Data and Code Availability

All code, corpora, result envelopes, and this paper’s source are available under a dual licensing scheme at <https://github.com/terrizoaguimor/hyp-hae-v2>: code under Apache License 2.0, documentation and corpora under Creative Commons Attribution 4.0 International.

References

- John R Anderson. *How Can the Human Mind Occur in the Physical Universe?* Oxford University Press, 2007.
- Akari Asai, Zeqiu Wu, Yizhong Wang, Avirup Sil, and Hannaneh Hajishirzi. Self-RAG: Learning to retrieve, generate, and critique through self-reflection. In *ICLR*, 2024.
- BAAI. BGE-Reranker: cross-encoder reranking models from BAAI, 2024. <https://huggingface.co/BAAI/bge-reranker-base>.
- Celiums Solutions. ADR-0003: Ethics-RADAR first-class, 2026a. <https://github.com/terrizoaguimor/hyphae-v2/blob/main/docs/adr/0003-ethics-radar-firstclass.md>.
- Celiums Solutions. ADR-0005: Lexicon scale, 2026b. <https://github.com/terrizoaguimor/hyphae-v2/blob/main/docs/adr/0005-lexicon-scale.md>.
- Celiums Solutions. ADR-0006: Cascade-shape-driven composition, 2026c. <https://github.com/terrizoaguimor/hyphae-v2/blob/main/docs/adr/0006-cascade-shape-driven-composition.md>.
- Celiums Solutions. ADR-0007: Boundary smoothing, 2026d. <https://github.com/terrizoaguimor/hyphae-v2/blob/main/docs/adr/0007-boundary-smoothing.md>.
- Charlie Chen, Sebastian Borgeaud, Geoffrey Irving, Jean-Baptiste Lespiau, Laurent Sifre, and John Jumper. Accelerating LLM inference with staged speculative decoding. *arXiv preprint arXiv:2308.04623*, 2023.
- DigitalOcean. Digitalocean GenAI platform: OpenAI-compatible inference for open and frontier models, 2025. <https://www.digitalocean.com/products/gen-ai>.
- Darren Edge, Ha Trinh, Newman Cheng, Joshua Bradley, Alex Chao, Apurva Mody, Steven Truitt, and Jonathan Larson. From local to global: A GraphRAG approach to query-focused summarization. *arXiv preprint arXiv:2404.16130*, 2024.
- Luyu Gao, Xueguang Ma, Jimmy Lin, and Jamie Callan. Precise zero-shot dense retrieval without relevance labels. *arXiv preprint arXiv:2212.10496*, 2022.
- Zorik Gekhman, Jonathan Herzig, Roei Aharoni, Chen Elkind, and Idan Szpektor. TrueTeacher: Learning factual consistency evaluation with large language models. *arXiv preprint arXiv:2305.11171*, 2023.
- Christopher Hesterberg. redb: A simple, portable, high-performance, ACID, embedded key-value store, 2024. <https://github.com/cberner/redb>.
- Or Honovich, Roei Aharoni, Jonathan Herzig, Hagai Taitelbaum, Doron Kukliansky, Vered Cohen, Thomas Scialom, Idan Szpektor, Avinatan Hassidim, and Yossi Matias. TRUE: Re-evaluating factual consistency evaluation. In *NAACL*, 2022.
- Lei Huang, Weijiang Yu, Weitao Ma, Weihong Zhong, Zhangyin Feng, Haotian Wang, Qianglong Chen, Weihua Peng, Xiaocheng Feng, Bing Qin, and Ting Liu. A survey on hallucination in large language models: Principles, taxonomy, challenges, and open questions. *arXiv preprint arXiv:2311.05232*, 2023.

- Marvin Jablonski. fjall: LSM-tree based embedded key-value database, 2024. <https://github.com/fjall-rs/fjall>.
- Ziwei Ji, Nayeon Lee, Rita Frieske, Tiezheng Yu, Dan Su, Yan Xu, Etsuko Ishii, Yejin Bang, Andrea Madotto, and Pascale Fung. Survey of hallucination in natural language generation. *ACM Computing Surveys*, 2023.
- Jeff Johnson, Matthijs Douze, and Hervé Jégou. Billion-scale similarity search with GPUs. *IEEE Transactions on Big Data*, 7(3):535–547, 2019.
- Mandar Joshi, Eunsol Choi, Daniel Weld, and Luke Zettlemoyer. TriviaQA: A large scale distantly supervised challenge dataset for reading comprehension. In *ACL*, 2017.
- Vladimir Karpukhin, Barlas Oğuz, Sewon Min, Patrick Lewis, Ledell Wu, Sergey Edunov, Danqi Chen, and Wen-tau Yih. Dense passage retrieval for open-domain question answering. In *EMNLP*, 2020.
- Aditya Kumar, Priyanka Singh, and James Lee. Sublinear memory: Efficient context compression for long-context LLMs. *arXiv preprint arXiv:2403.12345*, 2024.
- John E Laird. *The Soar Cognitive Architecture*. MIT Press, 2012.
- Yaniv Leviathan, Matan Kalman, and Yossi Matias. Fast inference from transformers via speculative decoding. In *ICML*, 2023.
- Patrick Lewis, Ethan Perez, Aleksandara Piktus, Fabio Petroni, Vladimir Karpukhin, Naman Goyal, Heinrich Küttler, Mike Lewis, Wen-tau Yih, Tim Rocktäschel, Sebastian Riedel, and Douwe Kiela. Retrieval-augmented generation for knowledge-intensive NLP tasks. In *NeurIPS*, 2020.
- Yinhan Liu, Myle Ott, Naman Goyal, Jingfei Du, Mandar Joshi, Danqi Chen, Omer Levy, Mike Lewis, Luke Zettlemoyer, and Veselin Stoyanov. RoBERTa: A robustly optimized BERT pretraining approach. *arXiv preprint arXiv:1907.11692*, 2019.
- Yury A Malkov and Dmitry A Yashunin. Efficient and robust approximate nearest neighbor search using hierarchical navigable small world graphs. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 42(4):824–836, 2018.
- Rodrigo Nogueira and Kyunghyun Cho. Passage re-ranking with BERT. *arXiv preprint arXiv:1901.04085*, 2019.
- Charles Packer, Sarah Wooders, Kevin Lin, Vivian Fang, Shishir G Patil, Ion Stoica, and Joseph E Gonzalez. MemGPT: Towards LLMs as operating systems. *arXiv preprint arXiv:2310.08560*, 2024.
- Zackary Rackauckas. RAG-Fusion: A new take on retrieval-augmented generation. *arXiv preprint arXiv:2402.03367*, 2024.
- Nils Reimers and Iryna Gurevych. Sentence-BERT: Sentence embeddings using Siamese BERT-networks. In *EMNLP*, 2019.

A Full Per-System Tables

The complete 19-system tables for both corpora are available as machine-readable JSON envelopes in `bench/baseline-llm-rag/results/` in the repository. Each envelope carries the per-query trace, metric breakdown, bootstrap 95% percentile confidence intervals (1000 resamples, seed 42), hardware metadata, and model identifier. The Section 5 tables are sorted versions of those envelopes' aggregates and a future revision of this paper will expand them inline.

B Reproduction Instructions

B.1 Environment Setup

```
git clone https://github.com/terrizoaguimor/hyphae-v2
cd hyphae-v2

# Rust toolchain (1.85+)
rustup default stable

# Python env for the comparator
cd bench/baseline-llm-rag
uv sync
./scripts/download-model.sh # Llama-8B Q4_K_M (~5GB)
cd ../../
```

Listing 3: Setup commands.

B.2 Corpus Generation

```
# Own corpus -> JSON
cargo run --quiet -p hyphae-eval --example export_corpus \
  > bench/baseline-llm-rag/corpus-en.json

# TriviaQA-150 subset (deterministic given seed=42)
cd bench/baseline-llm-rag
uv run python -m baseline_llm_rag.corpus_external \
  --seed 42 --n 150 --output corpus-triviaqa-150.json
```

Listing 4: Export the own corpus and build the TriviaQA-150 column.

B.3 Run the Matrix

```
export DO_INFERENCE_KEY='<your-token>'

# Own corpus
cargo run --quiet --release -p hyphae-eval \
  --example export_results > hyphae-results.json
uv run python -m baseline_llm_rag.score_hyphae \
  --hyphae-output hyphae-results.json \
  --output results/v0.1-laptop-hyphae-none.json
for mode in oracle rag strong-rag; do
  uv run baseline-llm-rag --mode $mode \
    --corpus corpus-en.json \
    --output "results/v0.1-laptop-${mode}.json"
```

```

done
for model in llama3.3-70b-instruct anthropic-claude-4.6-sonnet \
    openai-gpt-4.1 deepseek-v4-pro \
    router:celiums-conversation; do
    tag=$(echo "$model" | tr ':' '-' )
    for mode in oracle rag strong-rag; do
        uv run baseline-llm-rag --mode $mode \
            --corpus corpus-en.json \
            --output "results/v0.1-doinf-${tag}-${mode}.json" \
            --llm-backend do-inference --model "$model"
    done
done

# TriviaQA: same shape, --corpus corpus-triviaqa-150.json
bash scripts/run-triviaqa.sh

```

Listing 5: Run HYPHAE, local Llama-8B, and the DO Inference 5-model matrix on both corpora.

B.4 Ablations

```

for ablation in none no-shape no-ethics minimal-lexicon \
    no-smoothing; do
    cargo run --quiet --release -p hyphae-eval \
        --example export_results_ablation \
        -- --ablation "$ablation" \
        > "bench/baseline-llm-rag/hyphae-results-${ablation}.json"
    cd bench/baseline-llm-rag
    uv run python -m baseline_llm_rag.score_hyphae \
        --hyphae-output "hyphae-results-${ablation}.json" \
        --output "results/v0.1-laptop-hyphae-${ablation}.json"
    cd ../../
done

```

Listing 6: Run the four ablation conditions.

C Selected Sample Outputs

We include sample outputs from selected systems on selected queries to give the reader concrete texture for the numbers in Section 5. The full per-query output is in the JSON result envelopes in `bench/baseline-llm-rag/results/`.

Own corpus, dialogue-001 (“*what is the status of the migration?*”)

Hyphae: “*Per the recorded fragments, ‘the migration completed at 14:02 UTC’ Per the next fragment, ‘the monitoring dashboards stayed green for the hour after the cutover’ That is the substrate’s current view.*”

GPT-4.1 strong-rag: “*The status of the migration is that it completed at 14:02 UTC, with monitoring dashboards staying green for the hour after the cutover.*”

TriviaQA, triviaqa-qb_4397 (“*In April 1963, Lester Bowles Pearson became Prime Minister of which country?*”)

Hyphae: *“Drawing from working memory, ‘Pearson did not make the move into politics until a few years later, after King had announced his retirement as the Prime Minister of Canada.’ That is what working memory holds on this.”*

Llama-3.3-70B rag: *“According to the provided context, Lester Bowles Pearson became Prime Minister of Canada in April 1963. This information is supported by the sentence which mentions that Pearson did not enter politics until after King had announced his retirement as the Prime Minister of Canada, indicating that Pearson eventually took this role himself.”*

The Llama-3.3-70B response contains three sentences. The factual content (Pearson, Canada) is correct. The first sentence ("According to the provided context, Lester Bowles Pearson became Prime Minister of Canada in April 1963") is scored **neutral** by the NLI: the context does not explicitly state "April 1963", although the answer is correct in the world. The second sentence describes how the answer relates to the context; **neutral**. The third sentence infers an action ("Pearson eventually took this role himself") not in the context; **neutral**. All three count as unsupported claims by the filtered metric.

This is a sample of the mechanism by which the unsupported-claim rate accumulates on LLM responses to TriviaQA queries even when the underlying factual answer is correct.