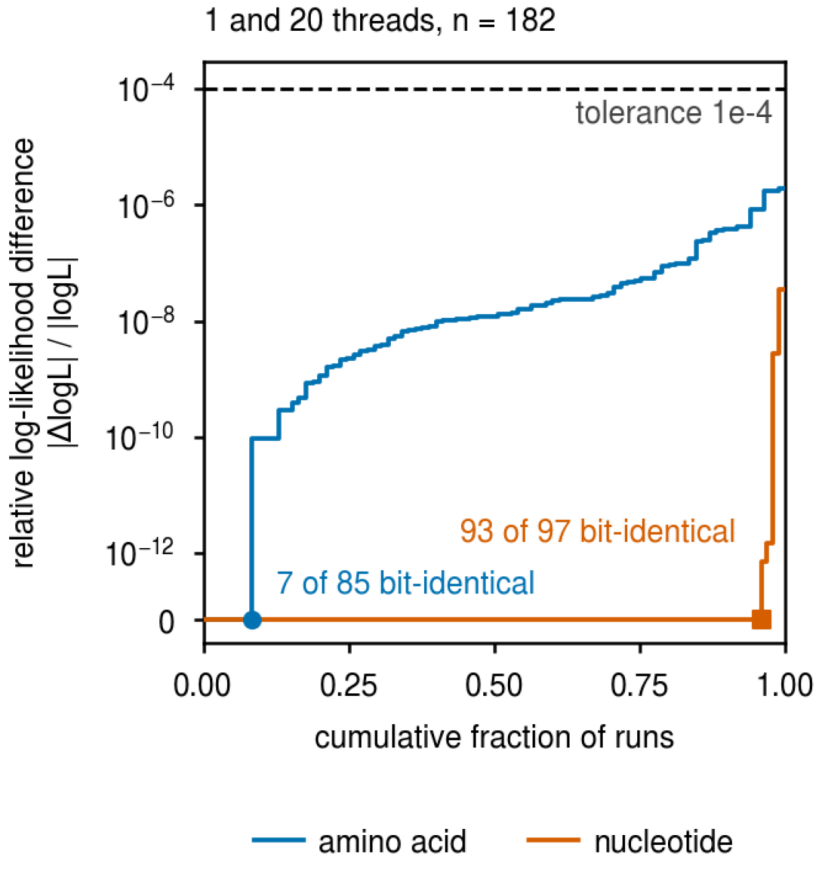
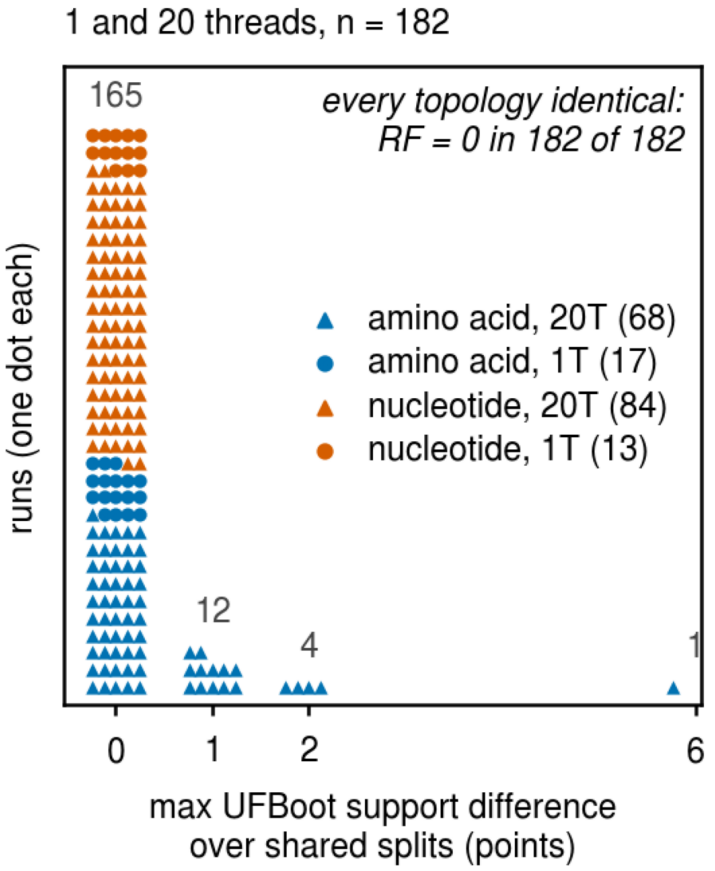
Figure 1

a


1 and 20 threads, n = 182
relative log-likelihood difference
|ΔlogL| / |logL|
10⁻⁴
10⁻⁶
10⁻⁸
10⁻¹⁰
10⁻¹²
0
tolerance 1e-4
93 of 97 bit-identical
7 of 85 bit-identical
0.00
0.25
0.50
0.75
1.00
cumulative fraction of runs
amino acid
nucleotide

b


1 and 20 threads, n = 182
every topology identical:
RF = 0 in 182 of 182
runs (one dot each)
165
12
4
1
amino acid, 20T (68)
amino acid, 1T (17)
nucleotide, 20T (84)
nucleotide, 1T (13)
0
1
2
6
max UFBoot support difference
over shared splits (points)