PYTHON

VIBE CODING

COURSE SLIDES · NON-WSQ

AI Vibe Coding with Python

Course Code: C138

Conducted by Tertiary Infotech Academy Pte Ltd · UEN 201200696W

Version v1.0 · 30 September 2026

© 2026 Tertiary Infotech Academy Pte Ltd. All rights reserved. · www.tertiarycourses.com.sg

COURSE ADMINISTRATION

Welcome & Housekeeping

© 2026 Tertiary Infotech Academy Pte Ltd

About the Trainer



Your Trainer

General Trainer template —
to be completed by the trainer

NAME

TITLE / DESIGNATION

QUALIFICATIONS

AREAS OF EXPERTISE

TRAINING & INDUSTRY EXPERIENCE

CONTACT

© 2026 Tertiary Infotech Academy Pte Ltd

YOUR TRAINER

About the Trainer



Dr. Alfred Ang

Principal Trainer
Tertiary Infotech Academy Pte. Ltd.

ROLE

Principal Trainer, Tertiary Infotech Academy Pte. Ltd.

EXPERTISE

Python application development, AI-assisted (vibe) coding, data analytics and deployment.

DELIVERS

Courses on Python, AI-assisted development, data engineering & software delivery.

FOUNDER

Founder and lead instructor at Tertiary Infotech / Tertiary Courses.

© 2026 Tertiary Infotech Academy Pte Ltd

ICE-BREAKER

Let's Know Each Other

- Your name and organisation / role.
- Your experience with Python and with AI coding assistants (if any).
- What you want to build and deploy after this course.

© 2026 Tertiary Infotech Academy Pte Ltd

HOUSEKEEPING


Ground Rules

1. Set your mobile phone to silent mode.
2. Participate actively — no question is too small.
3. Mutual respect: agree to disagree.
4. One conversation at a time.
5. Be punctual; return from breaks on time.
6. Full attendance — attend both days to get the most from the course.

© 2026 Tertiary Infotech Academy Pte Ltd

COURSE PORTAL

Download Your Course Material

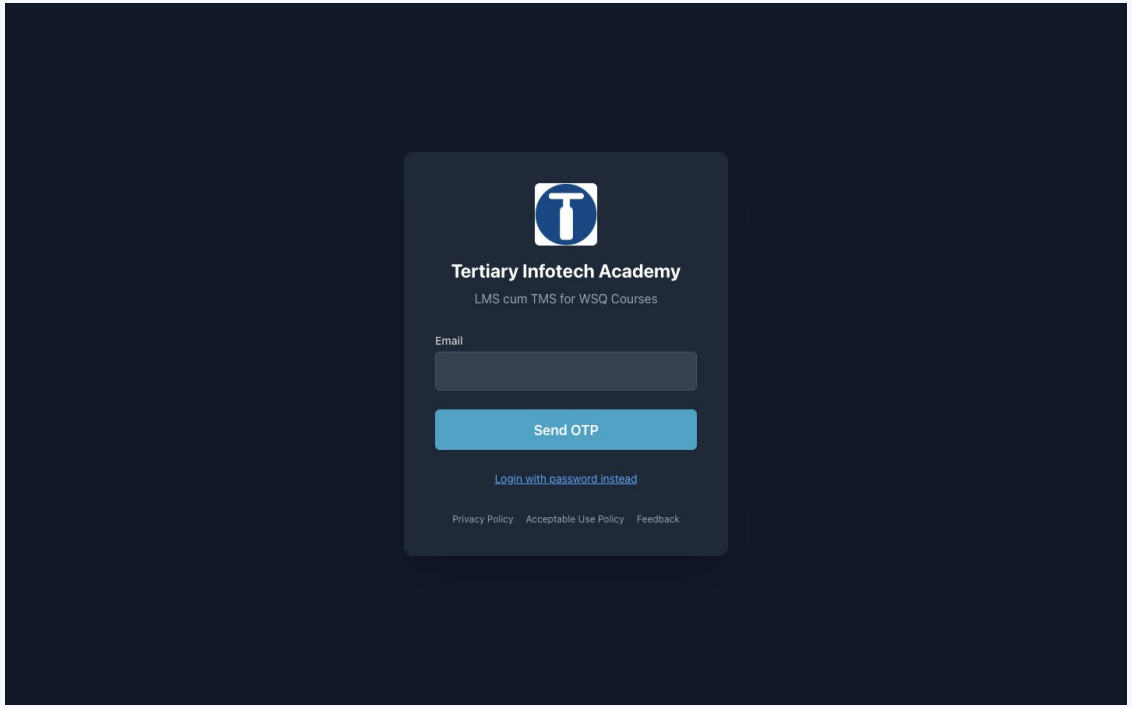

https://lms-tms.tertiaryinfotech.com

- Sign in with the email address you used to register for this course.
- Download the slides and the Learner Guide at the start of the course.
- Keep both open during the labs — the step numbering matches the labs exactly.
- Your course materials remain available here after the course.

© 2026 Tertiary Infotech Academy Pte Ltd

SCHEDULE

Lesson Plan — 2 Days, 7.5 hours/day

Day 1

- Day 1 — Vibe Coding Foundations, Object-Oriented Python & pandas
  - Topic 1: Vibe Coding Foundations (Labs 1–4)
  - Topic 2: Object-Oriented Programming in Python (Labs 5–8)
  - Topic 3: Data Analytics with pandas begins (Labs 9–10)

Day 2 & timing

- Day 2 — pandas, Pydantic & FastAPI, Packaging & Deployment
  - Topic 3: Data Analytics with pandas completes (Labs 11–12)
  - Topic 4: Data Modelling with Pydantic and FastAPI (Labs 13–16)
  - Topic 5: Packaging and Deployment (Labs 17–20)
- Daily timing
  - 9:30am–5:30pm · 30-min lunch

© 2026 Tertiary Infotech Academy Pte Ltd

CORE CONCEPTS

What Vibe Coding Is — and What It Is Not

© 2026 Tertiary Infotech Academy Pte Ltd

OVERVIEW

What is Vibe Coding?

1

AI-assisted, human-owned

You specify, the assistant drafts, you review and own the result.

2

Specification over guesswork

State the goal, constraints, inputs and expected output.

3

Verify, never assume

Generated code that runs is not the same as generated code that is correct.

4

Faster iteration

Refactoring conversationally beats rewriting by hand — with a test to prove it.

© 2026 Tertiary Infotech Academy Pte Ltd

THE METHOD

The Vibe Coding Loop

1 · Specify

- State the goal precisely
- Name the constraints
- Give real inputs and expected output

2 · Generate

- Let the assistant draft
- Read every line before running
- Ask for the shape you want

3 · Verify

- Run it against edge cases
- Test the error paths
- Fix by naming the defect, not 'improve this'

© 2026 Tertiary Infotech Academy Pte Ltd

WHY IT MATTERS

You are accountable for every line you ship.

The assistant drafts; you review, test and own the result. That is the difference between vibe coding and guessing.

© 2026 Tertiary Infotech Academy Pte Ltd

TOOLING

The Toolchain for This Course

Build

- uv
  - Project, interpreter and locked dependencies
  - uv init · uv add · uv run
- pandas 3.0
  - DataFrames, cleaning, groupby, rolling windows
  - Copy-on-Write is the default

Serve & ship

- Pydantic + FastAPI
  - Typed models, validation, HTTP endpoints
  - OpenAPI docs for free
- Streamlit + Docker
  - Analyst UI and a deployable image
  - One image, any machine

© 2026 Tertiary Infotech Academy Pte Ltd

Your Workbench

- uv manages Python, the virtual environment and the lockfile — no venv activation by hand.
- An AI coding assistant (Claude, Copilot or Cursor) drafts code you review.
- SQLite ships with Python — the database needs no server and runs offline.
- Every lab in this course builds one application: CardGuard, a card-transaction fraud screening system.

© 2026 Tertiary Infotech Academy Pte Ltd

01

TOPIC 01

Vibe Coding Foundations

uv Projects · AI Coding Assistants · Prompting Patterns · AI-Assisted Refactoring

© 2026 Tertiary Infotech Academy Pte Ltd

KEY CONCEPTS

Key Concepts — Vibe Coding Foundations

1. Vibe coding is directing an AI assistant to write code you specify, review and own — you remain accountable for correctness.

2. uv manages the interpreter, virtual environment and locked dependencies: uv init, uv add, uv run.

3. Effective prompts state the goal, the constraints, the inputs and the expected output — vague prompts produce plausible but wrong code.

4. Always read and run AI-generated code before trusting it; refactoring conversationally is faster than rewriting by hand.

© 2026 Tertiary Infotech Academy Pte Ltd

WHAT YOU'LL DO

Hands-On Labs — Vibe Coding Foundations

Labs 1–2

- Set Up a Reproducible Python Project with uv
- Write Effective Prompts for an AI Coding Assistant

Labs 3–4

- Review and Correct AI-Generated Code
- Refactor Working Code Conversationally

—

- —

© 2026 Tertiary Infotech Academy Pte Ltd

TOPIC 01 · HANDS-ON

Set Up a Reproducible Python Project with uv

LAB 1

The learner installs uv, creates a project, adds locked dependencies, and runs code through uv so the environment is identical on every machine. This is the foundation every later lab builds on.

You'll build

A uv project with pyproject.toml, uv.lock and a working entry point

Tools & libraries: uv, Python 3.12, pyproject.toml, uv.lock

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 1

Set Up a Reproducible Python Project with uv

1

STEP 1 OF 9

Confirm uv is installed and check the version

```
uv --version
```

WHAT THIS DOES

- Run this in your terminal, from the project folder.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 1

Set Up a Reproducible Python Project with uv

2

STEP 2 OF 9

Create a new project folder and initialise it

```
uv init cardguard
cd cardguard
```

WHAT THIS DOES

- Run this in your terminal, from the project folder.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 1

Set Up a Reproducible Python Project with uv

3

STEP 3 OF 9

Inspect what uv generated — note pyproject.toml is the project manifest

```
ls -a
cat pyproject.toml
```

WHAT THIS DOES

- Inspect what uv generated — note pyproject.toml is the project manifest

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 1

Set Up a Reproducible Python Project with uv

4

STEP 4 OF 9

Pin the Python version so every learner runs the same interpreter

```
uv python pin 3.12
```

WHAT THIS DOES

- Run this in your terminal, from the project folder.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 1

Set Up a Reproducible Python Project with uv

5

STEP 5 OF 9

Add a dependency — uv resolves, installs and writes uv.lock in one step

```
uv add pandas
```

WHAT THIS DOES

- Run this in your terminal, from the project folder.
- uv resolves, installs and records the dependency in uv.lock.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 1

Set Up a Reproducible Python Project with uv

6

STEP 6 OF 9

Open uv.lock and observe the exact pinned versions

```
head -30 uv.lock
```

WHAT THIS DOES

- Open uv.lock and observe the exact pinned versions

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 1

Set Up a Reproducible Python Project with uv

7

STEP 7 OF 9 · CONT. 1/2

Write a first script that proves the dependency is importable

```
# main.py
import pandas as pd

def main() -> None:
    df = pd.DataFrame({"card": ["4111...1111", "5500...0004",
      "4111...1111"],
                       "merchant": ["SG Grocer", "Overseas
          ATM", "SG Grocer"],
                       "amount": [42.90, 800.00, 15.50]})
    print(df)
    print(f"Total screened: ${df['amount'].sum():,.2f}")

if __name__ == "__main__":
```

WHAT THIS DOES

- Read the signature first: what goes in, what comes out.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 1

Set Up a Reproducible Python Project with uv

7

STEP 7 OF 9 · CONT. 2/2

Write a first script that proves the dependency is importable

```
main()
```

WHAT THIS DOES

- Write a first script that proves the dependency is importable

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 1

Set Up a Reproducible Python Project with uv

8

STEP 8 OF 9

Run it through uv — no venv activation needed

```
uv run python main.py
```

WHAT THIS DOES

- Run this in your terminal, from the project folder.
- uv run executes inside the project environment — no venv activation.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 1

Set Up a Reproducible Python Project with uv

9

STEP 9 OF 9

Prove reproducibility: delete the venv and restore it from the lockfile

```
rm -rf .venv
uv sync
uv run python main.py
```

WHAT THIS DOES

- uv run executes inside the project environment — no venv activation.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 1 · VERIFY

Set Up a Reproducible Python Project with uv

✅ Test it

uv run python main.py prints the transaction DataFrame and the screened total. After deleting .venv, uv sync restores it and the script produces identical output.

© 2026 Tertiary Infotech Academy Pte Ltd

TOPIC 01 · HANDS-ON

Write Effective Prompts for an AI Coding Assistant

LAB 2

The learner contrasts a vague prompt with a specified prompt on the same task, then applies the goal-constraints-inputs-output pattern to generate a function that handles real edge cases.

You'll build

Two versions of a transaction risk-scoring function and a written comparison of the prompts that produced them

Tools & libraries: AI coding assistant (Claude / Copilot / Cursor), uv, Python

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 2

Write Effective Prompts for an AI Coding Assistant

1

STEP 1 OF 7

Start from the vague prompt and record exactly what you get back

```
Ask the assistant: write a function to score a transaction
```

WHAT THIS DOES

- Start from the vague prompt and record exactly what you get back

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 2

Write Effective Prompts for an AI Coding Assistant

2

STEP 2 OF 7

Read the generated code critically — list what it assumed. Typical gaps: what counts as high value, whether an overseas merchant matters, what the score range is, what happens for a negative amount.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 2

Write Effective Prompts for an AI Coding Assistant

3

STEP 3 OF 7

Rewrite the prompt using the four-part pattern — goal, constraints, inputs, expected output

```
Ask the assistant: Write a Python function
  score_transaction(amount: float, is_overseas: bool, hour:
  int) -> dict that returns a risk score from 0 to 100 and
  the reasons that contributed to it. Add 40 points when
  the amount exceeds $500, 30 points when the merchant is
  overseas, and 20 points when the hour is between 1am and
  5am. Cap the score at 100. Raise ValueError for a
  negative amount or an hour outside 0-23. Return the score
  and a list of reason strings.
```

WHAT THIS DOES

- Rewrite the prompt using the four-part pattern — goal, constraints, inputs, expected output

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 2

Write Effective Prompts for an AI Coding Assistant

4

STEP 4 OF 7 · CONT. 1/2

Save the improved result and read every line before running it

```
# scoring.py
def score_transaction(amount: float, is_overseas: bool, hour:
  int) -> dict:
    """Return a 0-100 risk score for one transaction, with
      its reasons."""
    if amount < 0:
        raise ValueError("amount must not be negative")
    if not 0 <= hour <= 23:
        raise ValueError("hour must be between 0 and 23")

    HIGH_VALUE = 500.00
    score, reasons = 0, []
```

WHAT THIS DOES

- Read the signature first: what goes in, what comes out.
- The docstring states the contract the function promises.
- Invalid input fails fast and loudly, never silently.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 2

Write Effective Prompts for an AI Coding Assistant

4

STEP 4 OF 7 · CONT. 2/2

Save the improved result and read every line before running it

```
    if amount > HIGH_VALUE:
        score += 40
        reasons.append("high value")
    if is_overseas:
        score += 30
        reasons.append("overseas merchant")
    if 1 <= hour <= 5:
        score += 20
        reasons.append("unusual hour")

    return {"score": min(score, 100), "reasons": reasons}
```

WHAT THIS DOES

- Save the improved result and read every line before running it

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 2

Write Effective Prompts for an AI Coding Assistant

5

STEP 5 OF 7

Test the boundaries the prompt specified — this is where generated code usually fails

```
uv run python -c "
from scoring import score_transaction
print(score_transaction(42.90, False, 14))   # low risk
print(score_transaction(800.00, True, 3))    # every rule
  fires
print(score_transaction(500.00, False, 14))  # exactly on the
  threshold
"
```

WHAT THIS DOES

- The image bundles interpreter, dependencies and code as one artifact.
- Run this in your terminal, from the project folder.
- uv run executes inside the project environment — no venv activation.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 2

Write Effective Prompts for an AI Coding Assistant

6

STEP 6 OF 7

Confirm the error paths actually raise

```
uv run python -c "
from scoring import score_transaction
try:
    score_transaction(-100, False, 14)
except ValueError as e:
    print('correctly raised:', e)
"
```

WHAT THIS DOES

- The image bundles interpreter, dependencies and code as one artifact.
- Run this in your terminal, from the project folder.
- uv run executes inside the project environment — no venv activation.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 2

Write Effective Prompts for an AI Coding Assistant

7

STEP 7 OF 7

Write two sentences in your notes: which prompt produced code you would ship, and why.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 2 · VERIFY

Write Effective Prompts for an AI Coding Assistant

✅ Test it

The specified prompt produces a function that caps the score at 100, fires each rule independently, and raises ValueError on invalid input. The learner can state why the vague prompt was insufficient.

© 2026 Tertiary Infotech Academy Pte Ltd

TOPIC 01 · HANDS-ON

Review and Correct AI-Generated Code

LAB 3

The learner is given a plausible but subtly wrong implementation, finds the defects by testing rather than by reading alone, and corrects them. This lab establishes that the developer, not the assistant, owns correctness.

You'll build

A corrected discount calculator plus a short defect log

Tools & libraries: AI coding assistant, uv, Python

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 3

Review and Correct AI-Generated Code

1

STEP 1 OF 7

Save this generated function exactly as written — it looks reasonable

```
# discount.py
def apply_discount(price, tier):
    if tier == "gold":
        return price * 0.8
    elif tier == "silver":
        return price * 0.9
    elif tier == "bronze":
        return price * 0.95
    return price
```

WHAT THIS DOES

- Read the signature first: what goes in, what comes out.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 3

Review and Correct AI-Generated Code

2

STEP 2 OF 7

Probe it with the values a real order system would send

```
uv run python -c "
from discount import apply_discount
print(apply_discount(100, 'gold'))
print(apply_discount(100, 'GOLD'))
print(apply_discount(100, None))
print(apply_discount(-50, 'gold'))
print(apply_discount(100.555, 'silver'))
"
```

WHAT THIS DOES

- The image bundles interpreter, dependencies and code as one artifact.
- Run this in your terminal, from the project folder.
- uv run executes inside the project environment — no venv activation.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 3

Review and Correct AI-Generated Code

3

STEP 3 OF 7

Record the defects you found: case sensitivity, no validation of price, unrounded currency, silent fallthrough on an unknown tier, and no type hints.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 3

Review and Correct AI-Generated Code

4

STEP 4 OF 7

Ask the assistant to fix the specific defects — name them, do not say 'improve this'

```
Ask the assistant: Fix these defects in apply_discount: (1)
  tier matching must be case-insensitive, (2) raise
  ValueError for a negative price, (3) raise ValueError for
  an unrecognised tier instead of silently returning the
  full price, (4) round the result to 2 decimal places, (5)
  add type hints and a docstring.
```

WHAT THIS DOES

- Invalid input fails fast and loudly, never silently.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 3

Review and Correct AI-Generated Code

5

STEP 5 OF 7

Review the corrected version line by line before accepting it

```
# discount.py
DISCOUNTS = {"gold": 0.20, "silver": 0.10, "bronze": 0.05}

def apply_discount(price: float, tier: str) -> float:
    """Return the price after applying the tier discount."""
    if price < 0:
        raise ValueError("price must not be negative")
    key = (tier or "").strip().lower()
    if key not in DISCOUNTS:
        raise ValueError(f"unknown tier: {tier!r}")
    return round(price * (1 - DISCOUNTS[key]), 2)
```

WHAT THIS DOES

- Read the signature first: what goes in, what comes out.
- The docstring states the contract the function promises.
- Invalid input fails fast and loudly, never silently.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 3

Review and Correct AI-Generated Code

6

STEP 6 OF 7

Re-run every probe that previously failed

```
uv run python -c "
from discount import apply_discount
print(apply_discount(100, 'GOLD'))
print(apply_discount(100.555, 'silver'))
for bad in [(-50, 'gold'), (100, 'platinum'), (100, None)]:
    try:
        apply_discount(*bad)
        print('NOT CAUGHT:', bad)
    except ValueError as e:
        print('correctly raised:', e)
"
```

WHAT THIS DOES

- The image bundles interpreter, dependencies and code as one artifact.
- Run this in your terminal, from the project folder.
- uv run executes inside the project environment — no venv activation.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 3

Review and Correct AI-Generated Code

7

STEP 7 OF 7

Note the lesson: the first version ran without error on the happy path. Running is not the same as correct.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 3 · VERIFY

Review and Correct AI-Generated Code

✅ Test it

All five defects are fixed and demonstrated by tests. The learner can explain why reading alone did not reveal them.

© 2026 Tertiary Infotech Academy Pte Ltd

TOPIC 01 · HANDS-ON

Refactor Working Code Conversationally

LAB 4

The learner takes a working but poorly structured script, establishes a behavioural baseline, refactors it into small testable functions with AI assistance, and proves the output is unchanged.

You'll build

A refactored sales summary script with an unchanged, verified output

Tools & libraries: AI coding assistant, uv, Python

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 4

Refactor Working Code Conversationally

1

STEP 1 OF 7 · CONT. 1/2

Save the working script — it produces correct output but is one long block

```
# sales_report.py
orders = [
    {"id": 1, "region": "North", "amount": 1200.50, "status":
      "paid"},
    {"id": 2, "region": "South", "amount": 890.00, "status":
      "paid"},
    {"id": 3, "region": "North", "amount": 450.25, "status":
      "refunded"},
    {"id": 4, "region": "East",  "amount": 2100.75, "status":
      "paid"},
    {"id": 5, "region": "South", "amount": 310.00, "status":
      "pending"},
]
```

WHAT THIS DOES

- Save the working script — it produces correct output but is one long block

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 4

Refactor Working Code Conversationally

1

STEP 1 OF 7 · CONT. 2/2

Save the working script — it produces correct output but is one long block

```
totals = {}
for o in orders:
    if o["status"] == "paid":
        if o["region"] not in totals:
            totals[o["region"]] = 0
        totals[o["region"]] += o["amount"]
for r in sorted(totals):
    print(f"{r}: ${totals[r]:,.2f}")
print(f"TOTAL: ${sum(totals.values()):,.2f}")
```

WHAT THIS DOES

- Save the working script — it produces correct output but is one long block

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 4

Refactor Working Code Conversationally

2

STEP 2 OF 7

Capture the baseline output to a file — this is the contract the refactor must preserve

```
uv run python sales_report.py > baseline.txt
cat baseline.txt
```

WHAT THIS DOES

- Run this in your terminal, from the project folder.
- uv run executes inside the project environment — no venv activation.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 4

Refactor Working Code Conversationally

3

STEP 3 OF 7

Ask for a structural refactor and state explicitly that behaviour must not change

```
Ask the assistant: Refactor sales_report.py into three
  functions — filter_paid(orders), total_by_region(orders)
  and format_report(totals) — plus a main() guarded by if
  __name__ == '__main__'. Add type hints. The printed
  output must be byte-for-byte identical to the current
  version.
```

WHAT THIS DOES

- Ask for a structural refactor and state explicitly that behaviour must not change

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 4

Refactor Working Code Conversationally

4

STEP 4 OF 7 · CONT. 1/4

Save the refactored version

```
# sales_report.py
from typing import Iterable

Order = dict[str, object]

ORDERS: list[Order] = [
    {"id": 1, "region": "North", "amount": 1200.50, "status":
      "paid"},
    {"id": 2, "region": "South", "amount": 890.00, "status":
      "paid"},
    {"id": 3, "region": "North", "amount": 450.25, "status":
      "refunded"},
    {"id": 4, "region": "East",  "amount": 2100.75, "status":
```

WHAT THIS DOES

- The image bundles interpreter, dependencies and code as one artifact.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 4

Refactor Working Code Conversationally

4

STEP 4 OF 7 · CONT. 2/4

Save the refactored version

```
      "paid"},
    {"id": 5, "region": "South", "amount": 310.00, "status":
      "pending"},
]

def filter_paid(orders: Iterable[Order]) -> list[Order]:
    """Return only the orders with status 'paid'."""
    return [o for o in orders if o["status"] == "paid"]

def total_by_region(orders: Iterable[Order]) -> dict[str,
  float]:
    """Sum order amounts grouped by region."""
    totals: dict[str, float] = {}
```

WHAT THIS DOES

- Read the signature first: what goes in, what comes out.
- The docstring states the contract the function promises.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 4

Refactor Working Code Conversationally

4

STEP 4 OF 7 · CONT. 3/4

Save the refactored version

```
    for o in orders:
        region = str(o["region"])
        totals[region] = totals.get(region, 0.0) +
          float(o["amount"])
    return totals

def format_report(totals: dict[str, float]) -> str:
    """Render the per-region totals and the grand total."""
    lines = [f"{r}: ${totals[r]:,.2f}" for r in
      sorted(totals)]
    lines.append(f"TOTAL: ${sum(totals.values()):,.2f}")
    return "\n".join(lines)
```

WHAT THIS DOES

- Read the signature first: what goes in, what comes out.
- The docstring states the contract the function promises.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 4

Refactor Working Code Conversationally

4

STEP 4 OF 7 · CONT. 4/4

Save the refactored version

```
def main() -> None:
    print(format_report(total_by_region(filter_paid(ORDERS))))

if __name__ == "__main__":
    main()
```

WHAT THIS DOES

- Read the signature first: what goes in, what comes out.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 4

Refactor Working Code Conversationally

5

STEP 5 OF 7

Prove the behaviour is unchanged by diffing against the baseline

```
uv run python sales_report.py > after.txt
diff baseline.txt after.txt && echo 'IDENTICAL — refactor is
  safe'
```

WHAT THIS DOES

- Run this in your terminal, from the project folder.
- uv run executes inside the project environment — no venv activation.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 4

Refactor Working Code Conversationally

6

STEP 6 OF 7

Now that the logic is in functions, test one piece in isolation — impossible before the refactor

```
uv run python -c "
from sales_report import total_by_region
rows = [{'region': 'North', 'amount': 100.0, 'status':
  'paid'},
        {'region': 'North', 'amount': 50.0,  'status':
          'paid'}]
assert total_by_region(rows) == {'North': 150.0}
print('unit test passed')
"
```

WHAT THIS DOES

- The test drives the API exactly as a real client would.
- Run this in your terminal, from the project folder.
- uv run executes inside the project environment — no venv activation.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 4

Refactor Working Code Conversationally

7

STEP 7 OF 7

Note the sequence that makes refactoring safe: baseline first, refactor second, diff third.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 4 · VERIFY

Refactor Working Code Conversationally

✅ Test it

diff reports no difference between baseline.txt and after.txt, and total_by_region can be unit-tested independently.

© 2026 Tertiary Infotech Academy Pte Ltd

TOPIC RECAP

Recap — Vibe Coding Foundations

- You can now: Create and run a Python project using uv
- You can now: Apply prompting patterns that produce correct, reviewable code
- You can now: Identify and fix defects in code produced by an AI assistant
- You can now: Use an AI assistant to restructure code without changing its behaviour

© 2026 Tertiary Infotech Academy Pte Ltd

02

TOPIC 02

Object-Oriented Programming in Python

Classes · Encapsulation · Inheritance · Composition · Dunder Methods

© 2026 Tertiary Infotech Academy Pte Ltd

KEY CONCEPTS

Key Concepts — Object-Oriented Programming in Python

1. A class bundles data (attributes) with the behaviour that operates on it (methods); an object is one instance of it.

2. Encapsulation hides internal state behind methods and properties so callers depend on behaviour, not layout.

3. Inheritance models 'is-a' and shares behaviour; composition models 'has-a' and is usually the more flexible default.

4. Dunder methods (__init__, __repr__, __eq__) integrate your classes with Python's built-in operators and printing.

© 2026 Tertiary Infotech Academy Pte Ltd

WHAT YOU'LL DO

Hands-On Labs — Object-Oriented Programming in Python

Labs 5–6

- Model a Domain with Classes and Dunder Methods
- Encapsulate State with Properties and Validation

Labs 7–8

- Build a Rule Hierarchy with Inheritance and Polymorphism
- Compose Rules into an Engine

—

- —

© 2026 Tertiary Infotech Academy Pte Ltd

TOPIC 02 · HANDS-ON

Model a Domain with Classes and Dunder Methods

LAB 5

The learner replaces loose dictionaries with a Transaction class, adds __init__, __repr__ and __eq__, and sees why a class is easier to reason about than a dict once behaviour is attached to the data.

You'll build

A Transaction class with construction, printing, equality and derived properties

Tools & libraries: uv, Python 3.12, dataclasses, sqlite3

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 5

Model a Domain with Classes and Dunder Methods

1

STEP 1 OF 7

Start the project and generate the database

```
uv init cardguard
cd cardguard
uv add pandas
cp ../mockdata.py .
uv run python mockdata.py
```

WHAT THIS DOES

- Run this in your terminal, from the project folder.
- uv resolves, installs and records the dependency in uv.lock.
- uv run executes inside the project environment — no venv activation.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 5

Model a Domain with Classes and Dunder Methods

2

STEP 2 OF 7

Look at the raw shape of the data you are about to model

```
uv run python -c "
import sqlite3
con = sqlite3.connect('cardguard.db')
row = con.execute('SELECT * FROM transactions LIMIT
  1').fetchone()
print(row)
"
```

WHAT THIS DOES

- Run this in your terminal, from the project folder.
- uv run executes inside the project environment — no venv activation.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 5

Model a Domain with Classes and Dunder Methods

3

STEP 3 OF 7 · CONT. 1/3

Write the Transaction class — data and the behaviour that belongs with it

```
# models.py
from dataclasses import dataclass
from datetime import datetime

@dataclass
class Transaction:
    """One card transaction presented for screening."""
    id: int
    card_ref: str
    ts: datetime
    amount: float
    merchant_category: str
    city: str
```

WHAT THIS DOES

- The image bundles interpreter, dependencies and code as one artifact.
- The docstring states the contract the function promises.
- The class bundles data with the behaviour that acts on it.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 5

Model a Domain with Classes and Dunder Methods

3

STEP 3 OF 7 · CONT. 2/3

Write the Transaction class — data and the behaviour that belongs with it

```
    lat: float
    lon: float

    @property
    def hour(self) -> int:
        """Hour of day, 0-23 — used by the unusual-hour
          rule."""
        return self.ts.hour

    @property
    def is_high_risk_category(self) -> bool:
        return self.merchant_category in {"crypto_exchange",
          "gift_cards", "jewellery"}
```

WHAT THIS DOES

- Read the signature first: what goes in, what comes out.
- The docstring states the contract the function promises.
- A property exposes state read-only — callers cannot assign to it.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 5

Model a Domain with Classes and Dunder Methods

3

STEP 3 OF 7 · CONT. 3/3

Write the Transaction class — data and the behaviour that belongs with it

```
    def __repr__(self) -> str:
        return (f"Transaction(id={self.id},
          card={self.card_ref}, "
                f"${self.amount:,.2f},
          {self.merchant_category}, {self.city})")
```

WHAT THIS DOES

- Read the signature first: what goes in, what comes out.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 5

Model a Domain with Classes and Dunder Methods

4

STEP 4 OF 7

Add a constructor that builds a Transaction from a database row

```
    @classmethod
    def from_row(cls, row: tuple) -> "Transaction":
        """Build a Transaction from a sqlite row tuple."""
        return cls(id=row[0], card_ref=row[1],
          ts=datetime.fromisoformat(row[2]),
                   amount=row[3], merchant_category=row[4],
          city=row[5],
                   lat=row[6], lon=row[7])
```

WHAT THIS DOES

- Read the signature first: what goes in, what comes out.
- The docstring states the contract the function promises.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 5

Model a Domain with Classes and Dunder Methods

5

STEP 5 OF 7

Load real rows through the class and print them

```
uv run python -c "
import sqlite3
from models import Transaction
con = sqlite3.connect('cardguard.db')
rows = con.execute('SELECT * FROM transactions LIMIT
  5').fetchall()
for r in rows:
    t = Transaction.from_row(r)
    print(t, '| hour', t.hour, '| high risk',
      t.is_high_risk_category)
"
```

WHAT THIS DOES

- The image bundles interpreter, dependencies and code as one artifact.
- Run this in your terminal, from the project folder.
- uv run executes inside the project environment — no venv activation.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 5

Model a Domain with Classes and Dunder Methods

6

STEP 6 OF 7

Verify @dataclass gave you equality for free — dicts compare by content, objects normally by identity

```
uv run python -c "
from datetime import datetime
from models import Transaction
a = Transaction(1, 'CH0001', datetime(2026,4,1,9), 50.0,
  'grocery', 'Singapore', 1.35, 103.8)
b = Transaction(1, 'CH0001', datetime(2026,4,1,9), 50.0,
  'grocery', 'Singapore', 1.35, 103.8)
print('equal:', a == b)
print('same object:', a is b)
"
```

WHAT THIS DOES

- The image bundles interpreter, dependencies and code as one artifact.
- Run this in your terminal, from the project folder.
- uv run executes inside the project environment — no venv activation.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 5

Model a Domain with Classes and Dunder Methods

7

STEP 7 OF 7

Note the gain: hour and is_high_risk_category live WITH the data. With dicts, that logic would be scattered across every caller.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 5 · VERIFY

Model a Domain with Classes and Dunder Methods

✅ Test it

Transaction.from_row builds objects from the database, __repr__ prints readably, __eq__ compares by value, and the derived properties return correct results.

© 2026 Tertiary Infotech Academy Pte Ltd

TOPIC 02 · HANDS-ON

Encapsulate State with Properties and Validation

LAB 6

The learner builds a Cardholder class whose running spend baseline cannot be corrupted from outside, using private attributes, a read-only property and validation in the setter.

You'll build

A Cardholder class with a protected baseline and a validated update method

Tools & libraries: uv, Python 3.12

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 6

Encapsulate State with Properties and Validation

1

STEP 1 OF 7 · CONT. 1/2

Write the class with state deliberately kept private

```
# cardholder.py
class Cardholder:
    """A card account with a running spend baseline used for
      anomaly scoring."""

    def __init__(self, card_ref: str, name: str, home_city:
      str, typical_amount: float):
        if typical_amount <= 0:
            raise ValueError("typical_amount must be
          positive")
        self.card_ref = card_ref
        self.name = name
        self.home_city = home_city
```

WHAT THIS DOES

- Read the signature first: what goes in, what comes out.
- The docstring states the contract the function promises.
- Invalid input fails fast and loudly, never silently.
- The class bundles data with the behaviour that acts on it.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 6

Encapsulate State with Properties and Validation

1

STEP 1 OF 7 · CONT. 2/2

Write the class with state deliberately kept private

```
        self._typical_amount = typical_amount   # leading _ =
          internal
        self._observed_count = 0

    @property
    def typical_amount(self) -> float:
        """Read-only view of the baseline — callers cannot
          assign to it."""
        return round(self._typical_amount, 2)

    @property
    def observed_count(self) -> int:
        return self._observed_count
```

WHAT THIS DOES

- Read the signature first: what goes in, what comes out.
- The docstring states the contract the function promises.
- A property exposes state read-only — callers cannot assign to it.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 6

Encapsulate State with Properties and Validation

2

STEP 2 OF 7 · CONT. 1/2

Add the only sanctioned way to move the baseline

```
    def observe(self, amount: float) -> None:
        """Fold one new transaction into the running
          baseline."""
        if amount < 0:
            raise ValueError("amount must not be negative")
        self._observed_count += 1
        weight = 1 / min(self._observed_count, 30)   #
          rolling, recency-weighted
        self._typical_amount = (1 - weight) *
          self._typical_amount + weight * amount

    def deviation_factor(self, amount: float) -> float:
        """How many times the baseline this amount
```

WHAT THIS DOES

- split-apply-combine: group the rows, then aggregate each group.
- Read the signature first: what goes in, what comes out.
- The docstring states the contract the function promises.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 6

Encapsulate State with Properties and Validation

2

STEP 2 OF 7 · CONT. 2/2

Add the only sanctioned way to move the baseline

```
        represents."""
    return round(amount / self._typical_amount, 2)
```

WHAT THIS DOES

- The docstring states the contract the function promises.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 6

Encapsulate State with Properties and Validation

3

STEP 3 OF 7

Prove the baseline cannot be overwritten from outside

```
uv run python -c "
from cardholder import Cardholder
ch = Cardholder('CH0001', 'Aisha Tan', 'Singapore', 120.0)
try:
    ch.typical_amount = 999999
except AttributeError as e:
    print('blocked:', e)
"
```

WHAT THIS DOES

- The image bundles interpreter, dependencies and code as one artifact.
- Run this in your terminal, from the project folder.
- uv run executes inside the project environment — no venv activation.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 6

Encapsulate State with Properties and Validation

4

STEP 4 OF 7

Drive the baseline the sanctioned way and watch it move

```
uv run python -c "
from cardholder import Cardholder
ch = Cardholder('CH0001', 'Aisha Tan', 'Singapore', 120.0)
for amt in [110, 130, 125, 118, 122]:
    ch.observe(amt)
print('baseline', ch.typical_amount, 'after',
  ch.observed_count, 'observations')
print('a $2,400 charge is', ch.deviation_factor(2400), 'x
  baseline')
"
```

WHAT THIS DOES

- The image bundles interpreter, dependencies and code as one artifact.
- Run this in your terminal, from the project folder.
- uv run executes inside the project environment — no venv activation.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 6

Encapsulate State with Properties and Validation

5

STEP 5 OF 7

Confirm validation rejects bad input at both entry points

```
uv run python -c "
from cardholder import Cardholder
for bad in [lambda: Cardholder('C','n','SG',0), lambda:
  Cardholder('C','n','SG',120).observe(-5)]:
    try:
        bad(); print('NOT CAUGHT')
    except ValueError as e:
        print('correctly raised:', e)
"
```

WHAT THIS DOES

- The image bundles interpreter, dependencies and code as one artifact.
- Run this in your terminal, from the project folder.
- uv run executes inside the project environment — no venv activation.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 6

Encapsulate State with Properties and Validation

6

STEP 6 OF 7 · CONT. 1/2

Load the real cardholders and rank them by baseline

```
uv run python -c "
import sqlite3
from cardholder import Cardholder
con = sqlite3.connect('cardguard.db')
rows = con.execute('SELECT
  card_ref,name,home_city,typical_amount FROM
  cardholders').fetchall()
chs = [Cardholder(*r) for r in rows]
top = sorted(chs, key=lambda c: c.typical_amount,
  reverse=True)[:5]
for c in top:
    print(f'{c.card_ref} {c.name:<16} baseline
      ${c.typical_amount:,.2f}')
```

WHAT THIS DOES

- The image bundles interpreter, dependencies and code as one artifact.
- Run this in your terminal, from the project folder.
- uv run executes inside the project environment — no venv activation.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 6

Encapsulate State with Properties and Validation

6

STEP 6 OF 7 · CONT. 2/2

Load the real cardholders and rank them by baseline

```
"
```

WHAT THIS DOES

- Load the real cardholders and rank them by baseline

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 6

Encapsulate State with Properties and Validation

7

STEP 7 OF 7

Note why this matters for fraud: if any caller could assign typical_amount directly, an attacker-controlled input path could raise the baseline until nothing looks anomalous.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 6 · VERIFY

Encapsulate State with Properties and Validation

✅ Test it

Assigning to typical_amount raises AttributeError; observe() updates the baseline; both constructors and observe() reject invalid values; the 5 highest baselines print from the database.

© 2026 Tertiary Infotech Academy Pte Ltd

TOPIC 02 · HANDS-ON

Build a Rule Hierarchy with Inheritance and Polymorphism

LAB 7

The learner defines an abstract FraudRule base class and implements four concrete rules. Each rule scores a transaction differently but presents an identical interface, so the caller never needs to know which rule it holds.

You'll build

An abstract FraudRule plus AmountDeviationRule, UnusualHourRule, HighRiskCategoryRule and VelocityRule

Tools & libraries: uv, Python 3.12, abc

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 7

Build a Rule Hierarchy with Inheritance and Polymorphism

1

STEP 1 OF 7 · CONT. 1/3

Define the contract every rule must satisfy

```
# rules.py
from abc import ABC, abstractmethod
from dataclasses import dataclass
from models import Transaction
from cardholder import Cardholder

@dataclass
class RuleResult:
    """One rule's verdict on one transaction."""
    rule_name: str
    score: float          # 0.0 (clean) .. 1.0 (certain)
    reason: str
```

WHAT THIS DOES

- The image bundles interpreter, dependencies and code as one artifact.
- The docstring states the contract the function promises.
- The class bundles data with the behaviour that acts on it.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 7

Build a Rule Hierarchy with Inheritance and Polymorphism

1

STEP 1 OF 7 · CONT. 2/3

Define the contract every rule must satisfy

```
class FraudRule(ABC):
    """Base class: every rule scores a transaction from 0.0
      to 1.0."""

    weight: float = 1.0

    @property
    def name(self) -> str:
        return self.__class__.__name__

    @abstractmethod
    def score(self, txn: Transaction, holder: Cardholder,
              history: list[Transaction]) -> RuleResult:
```

WHAT THIS DOES

- Read the signature first: what goes in, what comes out.
- The docstring states the contract the function promises.
- The class bundles data with the behaviour that acts on it.
- A property exposes state read-only — callers cannot assign to it.
- Subclasses MUST implement this — the contract is enforced.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 7

Build a Rule Hierarchy with Inheritance and Polymorphism

1

STEP 1 OF 7 · CONT. 3/3

Define the contract every rule must satisfy

```
    """Return this rule's verdict. Must be implemented by
      every subclass."""
```

WHAT THIS DOES

- The docstring states the contract the function promises.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 7

Build a Rule Hierarchy with Inheritance and Polymorphism

2

STEP 2 OF 7

Prove the abstract class cannot be instantiated — the contract is enforced

```
uv run python -c "
from rules import FraudRule
try:
    FraudRule()
except TypeError as e:
    print('correctly blocked:', e)
"
```

WHAT THIS DOES

- The image bundles interpreter, dependencies and code as one artifact.
- Run this in your terminal, from the project folder.
- uv run executes inside the project environment — no venv activation.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 7

Build a Rule Hierarchy with Inheritance and Polymorphism

3

STEP 3 OF 7 · CONT. 1/2

Implement the amount-deviation rule

```
class AmountDeviationRule(FraudRule):
    """Flags spend far above this cardholder's own
      baseline."""
    weight = 1.2

    def __init__(self, alert_factor: float = 8.0):
        self.alert_factor = alert_factor

    def score(self, txn, holder, history):
        factor = holder.deviation_factor(txn.amount)
        s = min(factor / self.alert_factor, 1.0) if factor >
          1 else 0.0
        return RuleResult(self.name, round(s, 3),
```

WHAT THIS DOES

- Read the signature first: what goes in, what comes out.
- The docstring states the contract the function promises.
- The class bundles data with the behaviour that acts on it.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 7

Build a Rule Hierarchy with Inheritance and Polymorphism

3

STEP 3 OF 7 · CONT. 2/2

Implement the amount-deviation rule

```
                    f"${txn.amount:,.2f} is {factor}x
        the ${holder.typical_amount:,.2f} baseline")
```

WHAT THIS DOES

- Implement the amount-deviation rule

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 7

Build a Rule Hierarchy with Inheritance and Polymorphism

4

STEP 4 OF 7 · CONT. 1/2

Implement the unusual-hour and high-risk-category rules

```
class UnusualHourRule(FraudRule):
    """Flags activity outside the cardholder's normal waking
      window."""
    weight = 0.6

    def score(self, txn, holder, history):
        s = 0.8 if txn.hour in {0, 1, 2, 3, 4, 5} else 0.0
        return RuleResult(self.name, s, f"transaction at
          {txn.hour:02d}:00")

class HighRiskCategoryRule(FraudRule):
    """Flags merchant categories with elevated chargeback
      rates."""
```

WHAT THIS DOES

- Read the signature first: what goes in, what comes out.
- The docstring states the contract the function promises.
- The class bundles data with the behaviour that acts on it.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 7

Build a Rule Hierarchy with Inheritance and Polymorphism

4

STEP 4 OF 7 · CONT. 2/2

Implement the unusual-hour and high-risk-category rules

```
    weight = 0.8

    RISK = {"crypto_exchange": 0.9, "gift_cards": 0.8,
            "jewellery": 0.6, "online_gaming": 0.5}

    def score(self, txn, holder, history):
        s = self.RISK.get(txn.merchant_category, 0.0)
        return RuleResult(self.name, s, f"category
          {txn.merchant_category}")
```

WHAT THIS DOES

- Read the signature first: what goes in, what comes out.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 7

Build a Rule Hierarchy with Inheritance and Polymorphism

5

STEP 5 OF 7 · CONT. 1/2

Implement the velocity rule — it needs history, which the shared interface already provides

```
from datetime import timedelta

class VelocityRule(FraudRule):
    """Flags many transactions inside a short window."""
    weight = 1.5

    def __init__(self, window_minutes: int = 10, threshold:
      int = 4):
        self.window = timedelta(minutes=window_minutes)
        self.threshold = threshold

    def score(self, txn, holder, history):
        recent = [h for h in history
```

WHAT THIS DOES

- The image bundles interpreter, dependencies and code as one artifact.
- Read the signature first: what goes in, what comes out.
- The docstring states the contract the function promises.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 7

Build a Rule Hierarchy with Inheritance and Polymorphism

5

STEP 5 OF 7 · CONT. 2/2

Implement the velocity rule — it needs history, which the shared interface already provides

```
            if 0 <= (txn.ts - h.ts).total_seconds() <=
  self.window.total_seconds()]
n = len(recent) + 1
s = min((n - 1) / self.threshold, 1.0) if n > 1 else
  0.0
return RuleResult(self.name, round(s, 3),
                  f"{n} transactions in
  {self.window.seconds // 60} minutes")
```

WHAT THIS DOES

- Implement the velocity rule — it needs history, which the shared interface already provides

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 7

Build a Rule Hierarchy with Inheritance and Polymorphism

6

STEP 6 OF 7 · CONT. 1/2

Call every rule through the SAME interface — this is polymorphism doing real work

```
uv run python -c "
import sqlite3
from models import Transaction
from cardholder import Cardholder
from rules import AmountDeviationRule, UnusualHourRule,
  HighRiskCategoryRule, VelocityRule
con = sqlite3.connect('cardguard.db')
row = con.execute('SELECT * FROM transactions WHERE
  is_known_fraud=1 ORDER BY amount DESC LIMIT 1').fetchone()
txn = Transaction.from_row(row)
chr_ = con.execute('SELECT
  card_ref,name,home_city,typical_amount FROM cardholders
  WHERE card_ref=?', (txn.card_ref,)).fetchone()
```

WHAT THIS DOES

- The image bundles interpreter, dependencies and code as one artifact.
- Run this in your terminal, from the project folder.
- uv run executes inside the project environment — no venv activation.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 7

Build a Rule Hierarchy with Inheritance and Polymorphism

6

STEP 6 OF 7 · CONT. 2/2

Call every rule through the SAME interface — this is polymorphism doing real work

```
holder = Cardholder(*chr_)
rules = [AmountDeviationRule(), UnusualHourRule(),
  HighRiskCategoryRule(), VelocityRule()]
print(txn)
for r in rules:
    res = r.score(txn, holder, [])
    print(f'  {res.rule_name:<24} {res.score:>5}
      {res.reason}')
"
```

WHAT THIS DOES

- Call every rule through the SAME interface — this is polymorphism doing real work

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 7

Build a Rule Hierarchy with Inheritance and Polymorphism

7

STEP 7 OF 7

Note what inheritance bought: adding a fifth rule requires no change to any caller.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 7 · VERIFY

Build a Rule Hierarchy with Inheritance and Polymorphism

✅ Test it

FraudRule cannot be instantiated; all four rules implement score() and return a RuleResult; a known-fraud transaction produces non-zero scores from the relevant rules.

© 2026 Tertiary Infotech Academy Pte Ltd

TOPIC 02 · HANDS-ON

Compose Rules into an Engine

LAB 8

The learner builds a RuleEngine that HAS-A list of rules rather than inheriting from any of them, producing a weighted composite score with a full explanation of every contributing rule.

You'll build

A RuleEngine returning a ScreeningResult with a composite score and per-rule reasons

Tools & libraries: uv, Python 3.12

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 8

Compose Rules into an Engine

1

STEP 1 OF 7 · CONT. 1/2

Write the engine — note it inherits from nothing; it composes

```
# engine.py
from dataclasses import dataclass, field
from models import Transaction
from cardholder import Cardholder
from rules import FraudRule, RuleResult

@dataclass
class ScreeningResult:
    """The engine's decision, with every reason that produced
      it."""
    txn_id: int
    card_ref: str
    composite_score: float
```

WHAT THIS DOES

- The image bundles interpreter, dependencies and code as one artifact.
- The docstring states the contract the function promises.
- The class bundles data with the behaviour that acts on it.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 8

Compose Rules into an Engine

1

STEP 1 OF 7 · CONT. 2/2

Write the engine — note it inherits from nothing; it composes

```
    flagged: bool
    results: list[RuleResult] = field(default_factory=list)

    def explain(self) -> str:
        head = (f"Transaction {self.txn_id}
          ({self.card_ref}): "
                f"score {self.composite_score} "
                f"{'FLAGGED' if self.flagged else 'clean'}")
        lines = [f"    - {r.rule_name} {r.score} ::
          {r.reason}"
                 for r in self.results if r.score > 0]
        return "\n".join([head, *lines])
```

WHAT THIS DOES

- Read the signature first: what goes in, what comes out.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 8

Compose Rules into an Engine

2

STEP 2 OF 7 · CONT. 1/2

Add the engine itself

```
class RuleEngine:
    """Composes independent rules into one weighted
      decision."""

    def __init__(self, rules: list[FraudRule], threshold:
      float = 0.55):
        if not rules:
            raise ValueError("at least one rule is required")
        self.rules = rules
        self.threshold = threshold

    def screen(self, txn: Transaction, holder: Cardholder,
               history: list[Transaction]) -> ScreeningResult:
```

WHAT THIS DOES

- Read the signature first: what goes in, what comes out.
- The docstring states the contract the function promises.
- Invalid input fails fast and loudly, never silently.
- The class bundles data with the behaviour that acts on it.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 8

Compose Rules into an Engine

2

STEP 2 OF 7 · CONT. 2/2

Add the engine itself

```
        results = [r.score(txn, holder, history) for r in
          self.rules]
        total_weight = sum(r.weight for r in self.rules)
        composite = sum(res.score * rule.weight
                        for res, rule in zip(results,
          self.rules)) / total_weight
        composite = round(composite, 3)
        return ScreeningResult(txn.id, txn.card_ref,
          composite,
                               composite >= self.threshold,
          results)
```

WHAT THIS DOES

- Add the engine itself

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 8

Compose Rules into an Engine

3

STEP 3 OF 7 · CONT. 1/2

Screen a known-fraud transaction and read the explanation

```
uv run python -c "
import sqlite3
from models import Transaction
from cardholder import Cardholder
from rules import AmountDeviationRule, UnusualHourRule,
  HighRiskCategoryRule, VelocityRule
from engine import RuleEngine
con = sqlite3.connect('cardguard.db')
row = con.execute('SELECT * FROM transactions WHERE
  is_known_fraud=1 ORDER BY amount DESC LIMIT 1').fetchone()
txn = Transaction.from_row(row)
holder = Cardholder(*con.execute('SELECT
  card_ref,name,home_city,typical_amount FROM cardholders
```

WHAT THIS DOES

- The image bundles interpreter, dependencies and code as one artifact.
- Run this in your terminal, from the project folder.
- uv run executes inside the project environment — no venv activation.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 8

Compose Rules into an Engine

3

STEP 3 OF 7 · CONT. 2/2

Screen a known-fraud transaction and read the explanation

```
  WHERE card_ref=?',(txn.card_ref,)).fetchone())
eng = RuleEngine([AmountDeviationRule(), UnusualHourRule(),
  HighRiskCategoryRule(), VelocityRule()])
print(eng.screen(txn, holder, []).explain())
"
```

WHAT THIS DOES

- Screen a known-fraud transaction and read the explanation

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 8

Compose Rules into an Engine

4

STEP 4 OF 7 · CONT. 1/2

Screen a normal transaction and confirm it stays clean

```
uv run python -c "
import sqlite3
from models import Transaction
from cardholder import Cardholder
from rules import AmountDeviationRule, UnusualHourRule,
  HighRiskCategoryRule, VelocityRule
from engine import RuleEngine
con = sqlite3.connect('cardguard.db')
row = con.execute("SELECT * FROM transactions WHERE
  is_known_fraud=0 AND merchant_category='grocery' LIMIT
  1").fetchone()
txn = Transaction.from_row(row)
holder = Cardholder(*con.execute('SELECT
```

WHAT THIS DOES

- The image bundles interpreter, dependencies and code as one artifact.
- Run this in your terminal, from the project folder.
- uv run executes inside the project environment — no venv activation.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 8

Compose Rules into an Engine

4

STEP 4 OF 7 · CONT. 2/2

Screen a normal transaction and confirm it stays clean

```
  card_ref,name,home_city,typical_amount FROM cardholders
  WHERE card_ref=?',(txn.card_ref,)).fetchone())
eng = RuleEngine([AmountDeviationRule(), UnusualHourRule(),
  HighRiskCategoryRule(), VelocityRule()])
print(eng.screen(txn, holder, []).explain())
"
```

WHAT THIS DOES

- Screen a normal transaction and confirm it stays clean

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 8

Compose Rules into an Engine

5

STEP 5 OF 7

Reconfigure the engine WITHOUT touching any rule class — composition in action

```
uv run python -c "
from rules import AmountDeviationRule, HighRiskCategoryRule
from engine import RuleEngine
strict = RuleEngine([AmountDeviationRule(alert_factor=4.0),
  HighRiskCategoryRule()], threshold=0.35)
print('rules:', [r.name for r in strict.rules], 'threshold:',
  strict.threshold)
"
```

WHAT THIS DOES

- The image bundles interpreter, dependencies and code as one artifact.
- Run this in your terminal, from the project folder.
- uv run executes inside the project environment — no venv activation.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 8

Compose Rules into an Engine

6

STEP 6 OF 7

Ask your AI assistant to add a fifth rule and confirm the engine needs no edit

```
Ask the assistant: Add a RoundAmountRule to rules.py that
  subclasses FraudRule with weight 0.4 and returns score
  0.5 when the transaction amount is an exact multiple of
  100, since round-number testing charges are a common
  card-testing signal. Do not modify RuleEngine.
```

WHAT THIS DOES

- Ask your AI assistant to add a fifth rule and confirm the engine needs no edit

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 8

Compose Rules into an Engine

7

STEP 7 OF 7

Note the design principle: inheritance shares WHAT rules are; composition decides WHICH rules run.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 8 · VERIFY

Compose Rules into an Engine

✅ Test it

The engine flags the known-fraud transaction with a readable explanation, leaves a grocery transaction clean, and can be reconfigured with different rules and thresholds without editing any rule class.

© 2026 Tertiary Infotech Academy Pte Ltd

TOPIC RECAP

Recap — Object-Oriented Programming in Python

- You can now: Define classes that bundle data with behaviour
- You can now: Protect object state behind a controlled interface
- You can now: Share behaviour through a base class and override it per rule
- You can now: Use composition to assemble behaviour from independent parts

© 2026 Tertiary Infotech Academy Pte Ltd

03

TOPIC 03

Data Analytics with pandas

DataFrames · Cleaning · Transformation · GroupBy · Aggregation · Reporting

© 2026 Tertiary Infotech Academy Pte Ltd

KEY CONCEPTS

Key Concepts — Data Analytics with pandas

1. A DataFrame is a labelled 2-D table; a Series is one column. Most analytics is selecting, filtering and reshaping these.

2. Real data is dirty: missing values, wrong dtypes and duplicates must be handled explicitly before analysis.

3. split-apply-combine (groupby then aggregate) answers most business questions about a dataset.

4. An analytics pipeline should be a set of small, testable functions — not one long script.

© 2026 Tertiary Infotech Academy Pte Ltd

WHAT YOU'LL DO

Hands-On Labs — Data Analytics with pandas

Labs 9–10

- Load and Explore Transactions with pandas
- Handle Errors with Exceptions

Labs 11–12

- Build Per-Cardholder Baselines with GroupBy
- Detect Velocity Bursts with Rolling Time Windows

—

- —

© 2026 Tertiary Infotech Academy Pte Ltd

TOPIC 03 · HANDS-ON

Load and Explore Transactions with pandas

LAB 9

The learner loads the transaction table into pandas, inspects dtypes and null counts, and produces a first profile of spending — the step every analytics task starts with.

You'll build

A loaded, correctly-typed transactions DataFrame plus a spend profile by category

Tools & libraries: uv, pandas 3.0, sqlite3

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 9

Load and Explore Transactions with pandas

1

STEP 1 OF 7

Add pandas and load the table

```
uv add pandas
uv run python -c "
import sqlite3, pandas as pd
con = sqlite3.connect('cardguard.db')
df = pd.read_sql_query('SELECT * FROM transactions', con)
print(df.shape)
print(df.head())
"
```

WHAT THIS DOES

- Run this in your terminal, from the project folder.
- uv resolves, installs and records the dependency in uv.lock.
- uv run executes inside the project environment — no venv activation.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 9

Load and Explore Transactions with pandas

2

STEP 2 OF 7

Inspect dtypes — note ts arrived as text, not datetime

```
uv run python -c "
import sqlite3, pandas as pd
con = sqlite3.connect('cardguard.db')
df = pd.read_sql_query('SELECT * FROM transactions', con)
print(df.dtypes)
print(df.isna().sum())
"
```

WHAT THIS DOES

- Run this in your terminal, from the project folder.
- uv run executes inside the project environment — no venv activation.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 9

Load and Explore Transactions with pandas

3

STEP 3 OF 7 · CONT. 1/2

Write a loader that fixes the types once, so no downstream code has to

```
# analytics.py
import sqlite3
import pandas as pd

def load_transactions(db_path: str = "cardguard.db") ->
  pd.DataFrame:
    """Load transactions with correct dtypes."""
    con = sqlite3.connect(db_path)
    try:
        df = pd.read_sql_query("SELECT * FROM transactions",
          con)
    finally:
        con.close()          # always closes, even if the
```

WHAT THIS DOES

- Read the signature first: what goes in, what comes out.
- The docstring states the contract the function promises.
- try/except handles the failure; finally always cleans up.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 9

Load and Explore Transactions with pandas

STEP 3 OF 7 · CONT. 2/2

3

Write a loader that fixes the types once, so no downstream code has to

```
      query raises
df["ts"] = pd.to_datetime(df["ts"])
df["merchant_category"] =
  df["merchant_category"].astype("category")
df["hour"] = df["ts"].dt.hour
df["date"] = df["ts"].dt.date
return df
```

WHAT THIS DOES

- Write a loader that fixes the types once, so no downstream code has to

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 9

Load and Explore Transactions with pandas

4

STEP 4 OF 7

Profile spend by merchant category — split-apply-combine

```
uv run python -c "
from analytics import load_transactions
df = load_transactions()
profile = (df.groupby('merchant_category',
  observed=True)['amount']
             .agg(['count', 'sum', 'mean', 'max']).round(2)
             .sort_values('sum', ascending=False))
print(profile)
"
```

WHAT THIS DOES

- split-apply-combine: group the rows, then aggregate each group.
- Run this in your terminal, from the project folder.
- uv run executes inside the project environment — no venv activation.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 9

Load and Explore Transactions with pandas

5

STEP 5 OF 7

Answer a real business question: which hours carry the most spend?

```
uv run python -c "
from analytics import load_transactions
df = load_transactions()
by_hour =
  df.groupby('hour')['amount'].agg(['count','sum']).round(2)
print(by_hour.tail(8))
print('\novernight share:',
  round(100*df[df.hour<6]['amount'].sum()/df['amount'].sum(
  ),2), '%')
"
```

WHAT THIS DOES

- split-apply-combine: group the rows, then aggregate each group.
- Run this in your terminal, from the project folder.
- uv run executes inside the project environment — no venv activation.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 9

Load and Explore Transactions with pandas

6

STEP 6 OF 7

See the pandas 3.0 Copy-on-Write behaviour that AI assistants get wrong

```
uv run python -c "
import pandas as pd
df = pd.DataFrame({'a':[1,2,3],'b':[10,20,30]})
# The pandas 1.x idiom an assistant will often generate:
df[df.a > 1]['b'] = 0
print(df)   # unchanged under Copy-on-Write — the write went
  to a temporary
# The correct form:
df.loc[df.a > 1, 'b'] = 0
print(df)
"
```

WHAT THIS DOES

- Run this in your terminal, from the project folder.
- uv run executes inside the project environment — no venv activation.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 9

Load and Explore Transactions with pandas

7

STEP 7 OF 7

Note the lesson: verify generated pandas against your installed version, not against a tutorial.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 9 · VERIFY

Load and Explore Transactions with pandas

✅ Test it

load_transactions returns 10,851 rows with ts as datetime64; the category profile and hourly breakdown print; the learner can state why chained assignment silently fails.

© 2026 Tertiary Infotech Academy Pte Ltd

TOPIC 03 · HANDS-ON

Handle Errors with Exceptions

LAB 10

The learner makes the loader robust: catching the specific failures that actually occur, defining a custom exception hierarchy for the domain, and guaranteeing cleanup with finally. A screening service that crashes on one bad row fails open — this lab prevents that.

You'll build

A domain exception hierarchy plus a validated, fail-safe loader

Tools & libraries: uv, pandas, sqlite3, Python exceptions

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 10

Handle Errors with Exceptions

1

STEP 1 OF 7 · CONT. 1/2

Define exceptions that describe the DOMAIN, not the plumbing

```
# errors.py
class CardGuardError(Exception):
    """Base class for every CardGuard failure — callers can
      catch this one type."""

class DataSourceError(CardGuardError):
    """The transaction store could not be read."""

class ValidationError(CardGuardError):
    """A transaction failed validation before scoring."""
    def __init__(self, field: str, value, message: str):
        self.field, self.value = field, value
        super().__init__(f"{field}={value!r}: {message}")
```

WHAT THIS DOES

- Read the signature first: what goes in, what comes out.
- The docstring states the contract the function promises.
- The class bundles data with the behaviour that acts on it.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 10

Handle Errors with Exceptions

1

STEP 1 OF 7 · CONT. 2/2

Define exceptions that describe the DOMAIN, not the plumbing

```
class RuleExecutionError(CardGuardError):
    """A scoring rule raised while screening a transaction."""
```

WHAT THIS DOES

- The docstring states the contract the function promises.
- The class bundles data with the behaviour that acts on it.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 10

Handle Errors with Exceptions

2

STEP 2 OF 7 · CONT. 1/3

Catch the SPECIFIC errors that happen, and translate them to domain errors

```
# analytics.py (updated)
import sqlite3
from pathlib import Path
import pandas as pd
from errors import DataSourceError

def load_transactions(db_path: str = "cardguard.db") ->
  pd.DataFrame:
    """Load transactions, raising DataSourceError on any read
      failure."""
    if not Path(db_path).exists():
        raise DataSourceError(f"database not found:
          {db_path}")
```

WHAT THIS DOES

- The image bundles interpreter, dependencies and code as one artifact.
- Read the signature first: what goes in, what comes out.
- The docstring states the contract the function promises.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 10

Handle Errors with Exceptions

2

STEP 2 OF 7 · CONT. 2/3

Catch the SPECIFIC errors that happen, and translate them to domain errors

```
con = None
try:
    con = sqlite3.connect(db_path)
    df = pd.read_sql_query("SELECT * FROM transactions",
      con)
except sqlite3.DatabaseError as exc:
    raise DataSourceError(f"could not read {db_path}:
      {exc}") from exc
else:
    df["ts"] = pd.to_datetime(df["ts"])
    df["hour"] = df["ts"].dt.hour
    return df
finally:
```

WHAT THIS DOES

- Invalid input fails fast and loudly, never silently.
- try/except handles the failure; finally always cleans up.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 10

Handle Errors with Exceptions

STEP 2 OF 7 · CONT. 3/3

2

Catch the SPECIFIC errors that happen, and translate them to domain errors

```
        if con is not None:
            con.close()      # runs on success AND on failure
```

WHAT THIS DOES

- Catch the SPECIFIC errors that happen, and translate them to domain errors

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 10

Handle Errors with Exceptions

3

STEP 3 OF 7

Prove each failure path raises the right domain error

```
uv run python -c "
from analytics import load_transactions
from errors import DataSourceError
try:
    load_transactions('no_such.db')
except DataSourceError as e:
    print('missing file ->', e)
open('corrupt.db','wb').write(b'not a database at all')
try:
    load_transactions('corrupt.db')
except DataSourceError as e:
    print('corrupt file ->', type(e).__name__)
"
```

WHAT THIS DOES

- The image bundles interpreter, dependencies and code as one artifact.
- Run this in your terminal, from the project folder.
- uv run executes inside the project environment — no venv activation.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 10

Handle Errors with Exceptions

4

STEP 4 OF 7 · CONT. 1/3

Validate a transaction and raise ValidationError carrying the offending field

```
# validate.py
from errors import ValidationError

VALID_CATEGORIES =
  {"grocery","fuel","restaurant","electronics",
  "online_gaming",

          "jewellery","crypto_exchange",
          "gift_cards","pharmacy","transport"}

def validate_txn(record: dict) -> dict:
    """Raise ValidationError on the first problem found."""
    amount = record.get("amount")
```

WHAT THIS DOES

- The image bundles interpreter, dependencies and code as one artifact.
- Read the signature first: what goes in, what comes out.
- The docstring states the contract the function promises.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 10

Handle Errors with Exceptions

4

STEP 4 OF 7 · CONT. 2/3

Validate a transaction and raise ValidationError carrying the offending field

```
    if amount is None:
        raise ValidationError("amount", amount, "is required")
    if not isinstance(amount, (int, float)):
        raise ValidationError("amount", amount, "must be
          numeric")
    if amount <= 0:
        raise ValidationError("amount", amount, "must be
          positive")
    if amount > 1_000_000:
        raise ValidationError("amount", amount, "exceeds the
          maximum single charge")
    cat = record.get("merchant_category")
    if cat not in VALID_CATEGORIES:
```

WHAT THIS DOES

- Invalid input fails fast and loudly, never silently.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 10

Handle Errors with Exceptions

4

STEP 4 OF 7 · CONT. 3/3

Validate a transaction and raise ValidationError carrying the offending field

```
        raise ValidationError("merchant_category", cat, "is
          not a known category")
    return record
```

WHAT THIS DOES

- Invalid input fails fast and loudly, never silently.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 10

Handle Errors with Exceptions

5

STEP 5 OF 7 · CONT. 1/2

Run a batch where some records are bad — the batch must NOT die on the first failure

```
uv run python -c "
from validate import validate_txn
from errors import ValidationError
batch = [
  {'amount': 120.0, 'merchant_category': 'grocery'},
  {'amount': -5.0,  'merchant_category': 'fuel'},
  {'amount': 'abc', 'merchant_category': 'grocery'},
  {'amount': 90.0,  'merchant_category': 'casino'},
  {'amount': 45.0,  'merchant_category': 'transport'},
]
ok, rejected = [], []
for i, rec in enumerate(batch):
    try:
```

WHAT THIS DOES

- The image bundles interpreter, dependencies and code as one artifact.
- Run this in your terminal, from the project folder.
- uv run executes inside the project environment — no venv activation.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 10

Handle Errors with Exceptions

5

STEP 5 OF 7 · CONT. 2/2

Run a batch where some records are bad — the batch must NOT die on the first failure

```
        ok.append(validate_txn(rec))
    except ValidationError as e:
        rejected.append((i, str(e)))
print(f'accepted {len(ok)}, rejected {len(rejected)}')
for i, msg in rejected:
    print(f'  row {i}: {msg}')
"
```

WHAT THIS DOES

- Run a batch where some records are bad — the batch must NOT die on the first failure

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 10

Handle Errors with Exceptions

6

STEP 6 OF 7 · CONT. 1/2

Contrast with the anti-pattern — a bare except hides the bug you needed to see

```
uv run python -c "
# ANTI-PATTERN: never do this
try:
    result = 1 / 0
except:                # catches everything, including typos
  and KeyboardInterrupt
    result = 0
print('silently wrong:', result)

# Correct: name the exception you expect and can handle
try:
    result = 1 / 0
except ZeroDivisionError as e:
```

WHAT THIS DOES

- Run this in your terminal, from the project folder.
- uv run executes inside the project environment — no venv activation.
- try/except handles the failure; finally always cleans up.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 10

Handle Errors with Exceptions

STEP 6 OF 7 · CONT. 2/2

6

Contrast with the anti-pattern — a bare except hides the bug you needed to see

```
    print('handled explicitly:', e)
"
```

WHAT THIS DOES

- Contrast with the anti-pattern — a bare except hides the bug you needed to see

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 10

Handle Errors with Exceptions

7

STEP 7 OF 7

Ask your assistant to add a rule-level guard so one broken rule cannot stop a screen

```
Ask the assistant: In RuleEngine.screen, wrap each rule call
  in try/except so that if one rule raises, the engine
  records a RuleExecutionError message on the result and
  continues scoring with the remaining rules. Never use a
  bare except.
```

WHAT THIS DOES

- Ask your assistant to add a rule-level guard so one broken rule cannot stop a screen

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 10 · VERIFY

Handle Errors with Exceptions

✅ Test it

Missing and corrupt databases raise DataSourceError; the 5-record batch accepts 2 and rejects 3 with field-level messages; the learner can explain why bare except is unsafe.

© 2026 Tertiary Infotech Academy Pte Ltd

TOPIC 03 · HANDS-ON

Build Per-Cardholder Baselines with GroupBy

LAB 11

The learner computes each cardholder's own spending baseline and deviation for every transaction — the statistical foundation the AmountDeviationRule needs, done for 40 cardholders at once instead of one at a time.

You'll build

A per-cardholder baseline table and a deviation column on every transaction

Tools & libraries: uv, pandas 3.0

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 11

Build Per-Cardholder Baselines with GroupBy

1

STEP 1 OF 6

Compute one baseline per cardholder

```
uv run python -c "
from analytics import load_transactions
df = load_transactions()
base =
  df.groupby('card_ref')['amount'].agg(['count','mean',
  'median','std']).round(2)
print(base.head())
print('cardholders:', len(base))
"
```

WHAT THIS DOES

- split-apply-combine: group the rows, then aggregate each group.
- Run this in your terminal, from the project folder.
- uv run executes inside the project environment — no venv activation.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 11

Build Per-Cardholder Baselines with GroupBy

2

STEP 2 OF 6

Join each transaction to its cardholder baseline with transform — same shape as the original

```
# analytics.py (add)
def add_deviation(df):
    """Attach each transaction's deviation from its own
      cardholder baseline."""
    df = df.copy()
    df["baseline"] =
      df.groupby("card_ref")["amount"].transform("median")
    df["dev_factor"] = (df["amount"] /
      df["baseline"]).round(2)
    return df
```

WHAT THIS DOES

- split-apply-combine: group the rows, then aggregate each group.
- Read the signature first: what goes in, what comes out.
- The docstring states the contract the function promises.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 11

Build Per-Cardholder Baselines with GroupBy

3

STEP 3 OF 6

Find the biggest deviations and check them against the seeded fraud flag

```
uv run python -c "
from analytics import load_transactions, add_deviation
df = add_deviation(load_transactions())
top = df.nlargest(10,
  'dev_factor')[['id','card_ref','amount','baseline',
  'dev_factor','merchant_category','is_known_fraud']]
print(top.to_string(index=False))
print('\nof the top 10 deviations,',
  int(top.is_known_fraud.sum()), 'are seeded fraud')
"
```

WHAT THIS DOES

- The image bundles interpreter, dependencies and code as one artifact.
- Run this in your terminal, from the project folder.
- uv run executes inside the project environment — no venv activation.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 11

Build Per-Cardholder Baselines with GroupBy

4

STEP 4 OF 6

Measure how well deviation alone separates fraud from normal

```
uv run python -c "
from analytics import load_transactions, add_deviation
df = add_deviation(load_transactions())
print(df.groupby('is_known_fraud')['dev_factor'].describe(
  ).round(2)[['count','mean','50%','max']])
"
```

WHAT THIS DOES

- The image bundles interpreter, dependencies and code as one artifact.
- Run this in your terminal, from the project folder.
- uv run executes inside the project environment — no venv activation.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 11

Build Per-Cardholder Baselines with GroupBy

5

STEP 5 OF 6

Use median not mean for the baseline — prove why with an outlier

```
uv run python -c "
import pandas as pd
s = pd.Series([100,110,95,105,20000])
print('mean  ', round(s.mean(),2), '<- dragged up by the
  fraud itself')
print('median', round(s.median(),2), '<- robust to the
  outlier')
"
```

WHAT THIS DOES

- Run this in your terminal, from the project folder.
- uv run executes inside the project environment — no venv activation.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 11

Build Per-Cardholder Baselines with GroupBy

6

STEP 6 OF 6

Note the analytics lesson: the statistic you choose changes what you can detect.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 11 · VERIFY

Build Per-Cardholder Baselines with GroupBy

✅ Test it

Baselines compute for all 40 cardholders; dev_factor is attached to every row; the top deviations are dominated by seeded fraud; the learner can justify median over mean.

© 2026 Tertiary Infotech Academy Pte Ltd

TOPIC 03 · HANDS-ON

Detect Velocity Bursts with Rolling Time Windows

LAB 12

The learner sorts transactions per cardholder and counts how many occur inside a rolling 10-minute window — the history the VelocityRule needs, which cannot be computed one transaction at a time.

You'll build

A txn_count_10min column plus the burst transactions it exposes

Tools & libraries: uv, pandas 3.0, rolling windows

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 12

Detect Velocity Bursts with Rolling Time Windows

1

STEP 1 OF 7

Sort by cardholder and time — order is a precondition for any window function

```
# analytics.py (add)
def add_velocity(df, window: str = "10min"):
    """Count transactions per cardholder inside a rolling
      time window."""
    df = df.sort_values(["card_ref", "ts"]).copy()
    counts = (df.set_index("ts")
                .groupby("card_ref")["amount"]
                .rolling(window).count()
                .reset_index(name="txn_count_10min"))
    df = df.merge(counts, on=["card_ref", "ts"], how="left")
    return df
```

WHAT THIS DOES

- split-apply-combine: group the rows, then aggregate each group.
- Read the signature first: what goes in, what comes out.
- The docstring states the contract the function promises.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 12

Detect Velocity Bursts with Rolling Time Windows

2

STEP 2 OF 7

Find the bursts

```
uv run python -c "
from analytics import load_transactions, add_velocity
df = add_velocity(load_transactions())
bursts = df[df.txn_count_10min >= 4]
print('burst transactions:', len(bursts))
print(bursts[['card_ref','ts','amount','merchant_category',
  'txn_count_10min','is_known_fraud']].head(12).to_string(
  index=False))
"
```

WHAT THIS DOES

- The image bundles interpreter, dependencies and code as one artifact.
- Run this in your terminal, from the project folder.
- uv run executes inside the project environment — no venv activation.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 12

Detect Velocity Bursts with Rolling Time Windows

3

STEP 3 OF 7

Check the hit rate of velocity as a signal on its own

```
uv run python -c "
from analytics import load_transactions, add_velocity
df = add_velocity(load_transactions())
b = df[df.txn_count_10min >= 4]
print(f'{int(b.is_known_fraud.sum())} of {len(b)} burst
  transactions are seeded fraud')
print('precision:', round(100*b.is_known_fraud.mean(),1), '%')
"
```

WHAT THIS DOES

- The image bundles interpreter, dependencies and code as one artifact.
- Run this in your terminal, from the project folder.
- uv run executes inside the project environment — no venv activation.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 12

Detect Velocity Bursts with Rolling Time Windows

4

STEP 4 OF 7

Inspect one full burst to see the pattern a fraudster leaves

```
uv run python -c "
from analytics import load_transactions, add_velocity
df = add_velocity(load_transactions())
card = df[df.txn_count_10min >= 5].card_ref.iloc[0]
win = df[df.card_ref == card].nlargest(8,
  'txn_count_10min')[['ts','amount','merchant_category',
  'txn_count_10min']]
print(f'card {card}');
  print(win.sort_values('ts').to_string(index=False))
"
```

WHAT THIS DOES

- The image bundles interpreter, dependencies and code as one artifact.
- Run this in your terminal, from the project folder.
- uv run executes inside the project environment — no venv activation.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 12

Detect Velocity Bursts with Rolling Time Windows

5

STEP 5 OF 7 · CONT. 1/2

Compute the geographic-impossibility signal the engine is still missing

```
# analytics.py (add)
import numpy as np

def add_geo_velocity(df):
    """Implied travel speed (km/h) between consecutive
      transactions."""
    df = df.sort_values(["card_ref", "ts"]).copy()
    g = df.groupby("card_ref")
    lat1, lon1 = np.radians(g["lat"].shift()),
      np.radians(g["lon"].shift())
    lat2, lon2 = np.radians(df["lat"]), np.radians(df["lon"])
    dlat, dlon = lat2 - lat1, lon2 - lon1
    a = np.sin(dlat/2)**2 +
```

WHAT THIS DOES

- split-apply-combine: group the rows, then aggregate each group.
- Read the signature first: what goes in, what comes out.
- The docstring states the contract the function promises.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 12

Detect Velocity Bursts with Rolling Time Windows

5

STEP 5 OF 7 · CONT. 2/2

Compute the geographic-impossibility signal the engine is still missing

```
  np.cos(lat1)*np.cos(lat2)*np.sin(dlon/2)**2
km = 6371 * 2 * np.arcsin(np.sqrt(a))
hours = g["ts"].diff().dt.total_seconds() / 3600
df["implied_kmh"] = (km / hours.replace(0,
  np.nan)).round(1)
return df
```

WHAT THIS DOES

- Compute the geographic-impossibility signal the engine is still missing

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 12

Detect Velocity Bursts with Rolling Time Windows

6

STEP 6 OF 7

Find the physically impossible journeys

```
uv run python -c "
from analytics import load_transactions, add_geo_velocity
df = add_geo_velocity(load_transactions())
imp = df[df.implied_kmh > 1000]
print('impossible journeys:', len(imp))
print(imp[['card_ref','ts','city','amount','implied_kmh',
  'is_known_fraud']].to_string(index=False))
"
```

WHAT THIS DOES

- The image bundles interpreter, dependencies and code as one artifact.
- Run this in your terminal, from the project folder.
- uv run executes inside the project environment — no venv activation.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 12

Detect Velocity Bursts with Rolling Time Windows

7

STEP 7 OF 7

Note: velocity and geography are only visible ACROSS rows. Row-at-a-time scoring cannot see them.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 12 · VERIFY

Detect Velocity Bursts with Rolling Time Windows

✅ Test it

Velocity bursts and impossible journeys are both detected, dominated by seeded fraud, and the learner can explain why these signals require sorted per-group windows.

© 2026 Tertiary Infotech Academy Pte Ltd

TOPIC RECAP

Recap — Data Analytics with pandas

- You can now: Read SQL into a DataFrame and profile it
- You can now: Use try/except/else/finally and raise meaningful custom exceptions
- You can now: Compute per-group statistics with split-apply-combine
- You can now: Analyse ordered time-series data per group

© 2026 Tertiary Infotech Academy Pte Ltd

04

TOPIC 04

Data Modelling with Pydantic and FastAPI

Typed Models · Validation · Endpoints · Request/Response Schemas · Auto Docs

© 2026 Tertiary Infotech Academy Pte Ltd

KEY CONCEPTS

Key Concepts — Data Modelling with Pydantic and FastAPI

1. Pydantic models declare the shape of data with Python type hints and validate it at runtime, failing fast on bad input.

2. FastAPI turns typed Python functions into HTTP endpoints, deriving validation and OpenAPI docs from the annotations.

3. Separate request models from response models so the API contract is explicit and safe to change.

4. The analytics layer stays plain Python; FastAPI is a thin transport layer over it.

© 2026 Tertiary Infotech Academy Pte Ltd

WHAT YOU'LL DO

Hands-On Labs — Data Modelling with Pydantic and FastAPI

Labs 13–14

- Replace Hand-Written Validation with Pydantic Models
- Expose the Screening Engine as a FastAPI Endpoint

Labs 15–16

- Persist Screening Decisions to SQLite
- Test the API with pytest and httpx

—

- —

© 2026 Tertiary Infotech Academy Pte Ltd

TOPIC 04 · HANDS-ON

Replace Hand-Written Validation with Pydantic Models

LAB 13

The learner replaces the manual validate_txn() from Topic 3 with a Pydantic model, getting type coercion, field constraints and structured error reporting for free — far less code, far better errors.

You'll build

TransactionIn and ScreeningOut Pydantic models with field constraints

Tools & libraries: uv, Pydantic v2

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 13

Replace Hand-Written Validation with Pydantic Models

1

STEP 1 OF 8

Add Pydantic to the project

```
uv add pydantic
```

WHAT THIS DOES

- Pydantic validates the data at runtime from the type hints.
- Run this in your terminal, from the project folder.
- uv resolves, installs and records the dependency in uv.lock.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 13

Replace Hand-Written Validation with Pydantic Models

2

STEP 2 OF 8 · CONT. 1/3

Declare the model — the constraints ARE the validation

```
# schemas.py
from datetime import datetime
from typing import Literal
from pydantic import BaseModel, Field, field_validator

CATEGORIES =
  Literal["grocery","fuel","restaurant","electronics",
  "online_gaming",

          "jewellery","crypto_exchange",
          "gift_cards","pharmacy","transport"]

class TransactionIn(BaseModel):
```

WHAT THIS DOES

- The image bundles interpreter, dependencies and code as one artifact.
- The class bundles data with the behaviour that acts on it.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 13

Replace Hand-Written Validation with Pydantic Models

2

STEP 2 OF 8 · CONT. 2/3

Declare the model — the constraints ARE the validation

```
    """One transaction submitted for screening."""
    card_ref: str = Field(pattern=r"^CH\d{4}$",
      description="Cardholder reference")
    ts: datetime
    amount: float = Field(gt=0, le=1_000_000,
      description="Charge amount in SGD")
    merchant_category: CATEGORIES
    city: str = Field(min_length=2, max_length=64)
    lat: float = Field(ge=-90, le=90)
    lon: float = Field(ge=-180, le=180)

    @field_validator("city")
    @classmethod
```

WHAT THIS DOES

- The docstring states the contract the function promises.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 13

Replace Hand-Written Validation with Pydantic Models

2

STEP 2 OF 8 · CONT. 3/3

Declare the model — the constraints ARE the validation

```
    def title_case_city(cls, v: str) -> str:
        return v.strip().title()
```

WHAT THIS DOES

- Read the signature first: what goes in, what comes out.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 13

Replace Hand-Written Validation with Pydantic Models

3

STEP 3 OF 8

Compare against Topic 3 — one model replaces the whole hand-written validator

```
uv run python -c "
from schemas import TransactionIn
good = TransactionIn(card_ref='CH0001',
  ts='2026-04-15T02:14:00', amount=4820.50,
                    merchant_category='jewellery',
          city='singapore', lat=1.3521, lon=103.8198)
print(good)
print('city normalised to:', good.city)
print('ts coerced to:', type(good.ts).__name__)
"
```

WHAT THIS DOES

- The image bundles interpreter, dependencies and code as one artifact.
- Run this in your terminal, from the project folder.
- uv run executes inside the project environment — no venv activation.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 13

Replace Hand-Written Validation with Pydantic Models

4

STEP 4 OF 8

Read a validation failure — Pydantic reports EVERY problem, not just the first

```
uv run python -c "
from pydantic import ValidationError
from schemas import TransactionIn
try:
    TransactionIn(card_ref='BAD', ts='not-a-date', amount=-5,
                  merchant_category='casino', city='X',
          lat=999, lon=0)
except ValidationError as e:
    for err in e.errors():
        print(f\"  {'.'.join(str(x) for x in err['loc']):<20}
          {err['msg']}\")
"
```

WHAT THIS DOES

- The image bundles interpreter, dependencies and code as one artifact.
- Run this in your terminal, from the project folder.
- uv run executes inside the project environment — no venv activation.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 13

Replace Hand-Written Validation with Pydantic Models

5

STEP 5 OF 8 · CONT. 1/2

Define the response model separately — request and response are different contracts

```
# schemas.py (add)
class RuleHit(BaseModel):
    rule_name: str
    score: float = Field(ge=0, le=1)
    reason: str

class ScreeningOut(BaseModel):
    """What the screening service returns."""
    card_ref: str
    composite_score: float = Field(ge=0, le=1)
    flagged: bool
    decision: Literal["approve", "review", "decline"]
    hits: list[RuleHit] = []
```

WHAT THIS DOES

- Pydantic validates the data at runtime from the type hints.
- The docstring states the contract the function promises.
- The class bundles data with the behaviour that acts on it.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 13

Replace Hand-Written Validation with Pydantic Models

5

STEP 5 OF 8 · CONT. 2/2

Define the response model separately — request and response are different contracts

```
    errors: list[str] = []
```

WHAT THIS DOES

- Define the response model separately — request and response are different contracts

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 13

Replace Hand-Written Validation with Pydantic Models

6

STEP 6 OF 8

Serialise to JSON — the wire format comes free

```
uv run python -c "
from schemas import ScreeningOut, RuleHit
out = ScreeningOut(card_ref='CH0023', composite_score=0.933,
  flagged=True, decision='decline',

          hits=[RuleHit(
          rule_name='AmountDeviationRule',
          score=1.0, reason='26.89x baseline'),
                        RuleHit(rule_name='UnusualHourRule',
          score=0.8, reason='02:00')])
print(out.model_dump_json(indent=2))
"
```

WHAT THIS DOES

- The image bundles interpreter, dependencies and code as one artifact.
- Run this in your terminal, from the project folder.
- uv run executes inside the project environment — no venv activation.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 13

Replace Hand-Written Validation with Pydantic Models

7

STEP 7 OF 8 · CONT. 1/2

Load real database rows THROUGH the model to catch any dirty data

```
uv run python -c "
import sqlite3
from pydantic import ValidationError
from schemas import TransactionIn
con = sqlite3.connect('cardguard.db')
con.row_factory = sqlite3.Row
ok = bad = 0
for r in con.execute('SELECT * FROM transactions LIMIT 500'):
    try:
        TransactionIn(**{k: r[k] for k in
          ('card_ref','ts','amount',
          'merchant_category','city','lat','lon')})
        ok += 1
```

WHAT THIS DOES

- The image bundles interpreter, dependencies and code as one artifact.
- Run this in your terminal, from the project folder.
- uv run executes inside the project environment — no venv activation.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 13

Replace Hand-Written Validation with Pydantic Models

7

STEP 7 OF 8 · CONT. 2/2

Load real database rows THROUGH the model to catch any dirty data

```
    except ValidationError:
        bad += 1
print(f'validated {ok}, rejected {bad}')
"
```

WHAT THIS DOES

- Load real database rows THROUGH the model to catch any dirty data

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 13

Replace Hand-Written Validation with Pydantic Models

8

STEP 8 OF 8

Note the trade: hand-written validation is explicit but verbose; Pydantic is declarative and reports all errors at once.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 13 · VERIFY

Replace Hand-Written Validation with Pydantic Models

✅ Test it

Valid input constructs and normalises; invalid input reports every field error; ScreeningOut serialises to JSON; 500 real rows validate cleanly.

© 2026 Tertiary Infotech Academy Pte Ltd

TOPIC 04 · HANDS-ON

Expose the Screening Engine as a FastAPI Endpoint

LAB 14

The learner wraps the Topic 2 RuleEngine in a FastAPI POST endpoint. The engine is not modified at all — FastAPI is a thin transport layer over logic that already works.

You'll build

A running API with POST /screen, GET /health and automatic OpenAPI docs

Tools & libraries: uv, FastAPI, uvicorn, Pydantic

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 14

Expose the Screening Engine as a FastAPI Endpoint

1

STEP 1 OF 8

Add the web dependencies

```
uv add fastapi uvicorn[standard] httpx
```

WHAT THIS DOES

- Run this in your terminal, from the project folder.
- uv resolves, installs and records the dependency in uv.lock.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 14

Expose the Screening Engine as a FastAPI Endpoint

2

STEP 2 OF 8 · CONT. 1/5

Write the application — note how little code the endpoint needs

```
# main.py
import sqlite3
from fastapi import FastAPI, HTTPException
from schemas import TransactionIn, ScreeningOut, RuleHit
from models import Transaction
from cardholder import Cardholder
from rules import AmountDeviationRule, UnusualHourRule,
  HighRiskCategoryRule, VelocityRule
from engine import RuleEngine

app = FastAPI(title="CardGuard Screening API",
  version="1.0.0")
```

WHAT THIS DOES

- The image bundles interpreter, dependencies and code as one artifact.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 14

Expose the Screening Engine as a FastAPI Endpoint

2

STEP 2 OF 8 · CONT. 2/5

Write the application — note how little code the endpoint needs

```
ENGINE = RuleEngine([AmountDeviationRule(), UnusualHourRule(),
                     HighRiskCategoryRule(), VelocityRule()])

def get_holder(card_ref: str) -> Cardholder:
    con = sqlite3.connect("cardguard.db")
    try:
        row = con.execute("SELECT
          card_ref,name,home_city,typical_amount "
                          "FROM cardholders WHERE
          card_ref=?", (card_ref,)).fetchone()
    finally:
        con.close()
    if row is None:
```

WHAT THIS DOES

- Read the signature first: what goes in, what comes out.
- try/except handles the failure; finally always cleans up.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 14

Expose the Screening Engine as a FastAPI Endpoint

2

STEP 2 OF 8 · CONT. 3/5

Write the application — note how little code the endpoint needs

```
        raise HTTPException(status_code=404, detail=f"unknown
          card_ref {card_ref}")
    return Cardholder(*row)

def decide(score: float) -> str:
    if score >= 0.80: return "decline"
    if score >= 0.55: return "review"
    return "approve"

@app.get("/health")
def health() -> dict:
    return {"status": "ok"}
```

WHAT THIS DOES

- FastAPI turns this typed function into an HTTP endpoint.
- Read the signature first: what goes in, what comes out.
- Invalid input fails fast and loudly, never silently.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 14

Expose the Screening Engine as a FastAPI Endpoint

2

STEP 2 OF 8 · CONT. 4/5

Write the application — note how little code the endpoint needs

```
@app.post("/screen", response_model=ScreeningOut)
def screen(txn_in: TransactionIn) -> ScreeningOut:
    """Score one transaction and return the decision with
      reasons."""
    holder = get_holder(txn_in.card_ref)
    txn = Transaction(id=0, card_ref=txn_in.card_ref,
      ts=txn_in.ts,
                      amount=txn_in.amount,
          merchant_category=txn_in.merchant_category,
                      city=txn_in.city, lat=txn_in.lat,
          lon=txn_in.lon)
    result = ENGINE.screen(txn, holder, [])
    return ScreeningOut(card_ref=result.card_ref,
```

WHAT THIS DOES

- FastAPI turns this typed function into an HTTP endpoint.
- Read the signature first: what goes in, what comes out.
- The docstring states the contract the function promises.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 14

Expose the Screening Engine as a FastAPI Endpoint

2

STEP 2 OF 8 · CONT. 5/5

Write the application — note how little code the endpoint needs

```
            composite_score=result.composite_score,
                        flagged=result.flagged,

            decision=decide(result.composite_score),
                        hits=[RuleHit(rule_name=r.rule_name,
            score=r.score, reason=r.reason)
                              for r in result.results if
            r.score > 0],
                        errors=result.errors)
```

WHAT THIS DOES

- Write the application — note how little code the endpoint needs

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 14

Expose the Screening Engine as a FastAPI Endpoint

3

STEP 3 OF 8

Start the server

```
uv run uvicorn main:app --reload --port 8000
```

WHAT THIS DOES

- Run this in your terminal, from the project folder.
- uv run executes inside the project environment — no venv activation.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 14

Expose the Screening Engine as a FastAPI Endpoint

4

STEP 4 OF 8

Open the auto-generated interactive docs — you wrote no OpenAPI spec

```
open http://127.0.0.1:8000/docs
```

WHAT THIS DOES

- Run this in your terminal, from the project folder.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 14

Expose the Screening Engine as a FastAPI Endpoint

5

STEP 5 OF 8

Screen a clearly fraudulent transaction

```
curl -s -X POST http://127.0.0.1:8000/screen -H
  "Content-Type: application/json" -d
  '{"card_ref":"CH0023","ts":"2026-04-15T02:14:00",
  "amount":5128.33,"merchant_category":"jewellery",
  "city":"Singapore","lat":1.3521,"lon":103.8198}' |
  python3 -m json.tool
```

WHAT THIS DOES

- Run this in your terminal, from the project folder.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 14

Expose the Screening Engine as a FastAPI Endpoint

6

STEP 6 OF 8

Screen a normal grocery run and compare the decision

```
curl -s -X POST http://127.0.0.1:8000/screen -H
  "Content-Type: application/json" -d
  '{"card_ref":"CH0001","ts":"2026-04-15T10:30:00",
  "amount":86.40,"merchant_category":"grocery",
  "city":"Singapore","lat":1.3521,"lon":103.8198}' |
  python3 -m json.tool
```

WHAT THIS DOES

- Run this in your terminal, from the project folder.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 14

Expose the Screening Engine as a FastAPI Endpoint

7

STEP 7 OF 8

Send invalid input — FastAPI rejects it with 422 before your code runs

```
curl -s -X POST http://127.0.0.1:8000/screen -H
  "Content-Type: application/json" -d
  '{"card_ref":"NOPE","ts":"2026-04-15T10:30:00",
  "amount":-5,"merchant_category":"casino","city":"S",
  "lat":1.35,"lon":103.8}' | python3 -m json.tool
```

WHAT THIS DOES

- Run this in your terminal, from the project folder.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 14

Expose the Screening Engine as a FastAPI Endpoint

8

STEP 8 OF 8

Send an unknown card and confirm the 404 path

```
curl -s -i -X POST http://127.0.0.1:8000/screen -H
  "Content-Type: application/json" -d
  '{"card_ref":"CH9999","ts":"2026-04-15T10:30:00",
  "amount":50,"merchant_category":"grocery",
  "city":"Singapore","lat":1.35,"lon":103.8}' | head -1
```

WHAT THIS DOES

- Run this in your terminal, from the project folder.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 14 · VERIFY

Expose the Screening Engine as a FastAPI Endpoint

✅ Test it

GET /health returns ok; the fraud transaction returns decline with reasons; the grocery transaction returns approve; bad input returns 422; an unknown card returns 404.

© 2026 Tertiary Infotech Academy Pte Ltd

TOPIC 04 · HANDS-ON

Persist Screening Decisions to SQLite

LAB 15

The learner adds a repository layer that records every screening decision, so the service builds an audit trail — a regulatory requirement for real fraud systems, and the data the Topic 5 dashboard reads.

You'll build

A screenings table plus a repository module with save and query functions

Tools & libraries: uv, sqlite3, FastAPI

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 15

Persist Screening Decisions to SQLite

1

STEP 1 OF 7 · CONT. 1/3

Create the audit table

```
# repository.py
import sqlite3
import json
from contextlib import contextmanager
from pathlib import Path

DB = "cardguard.db"

@contextmanager
def connect(db_path: str = DB):
    """Connection that always commits or rolls back, and
      always closes."""
    con = sqlite3.connect(db_path)
```

WHAT THIS DOES

- The image bundles interpreter, dependencies and code as one artifact.
- Read the signature first: what goes in, what comes out.
- The docstring states the contract the function promises.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 15

Persist Screening Decisions to SQLite

1

STEP 1 OF 7 · CONT. 2/3

Create the audit table

```
    con.row_factory = sqlite3.Row
    try:
        yield con
        con.commit()
    except Exception:
        con.rollback()
        raise
    finally:
        con.close()

def init_schema(db_path: str = DB) -> None:
    with connect(db_path) as con:
        con.execute("""
```

WHAT THIS DOES

- Read the signature first: what goes in, what comes out.
- The docstring states the contract the function promises.
- try/except handles the failure; finally always cleans up.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 15

Persist Screening Decisions to SQLite

1

STEP 1 OF 7 · CONT. 3/3

Create the audit table

```
        CREATE TABLE IF NOT EXISTS screenings (
            id INTEGER PRIMARY KEY AUTOINCREMENT,
            card_ref TEXT NOT NULL,
            ts TEXT NOT NULL,
            amount REAL NOT NULL,
            merchant_category TEXT NOT NULL,
            composite_score REAL NOT NULL,
            decision TEXT NOT NULL,
            hits_json TEXT NOT NULL,
            screened_at TEXT NOT NULL DEFAULT
      (datetime('now')))""")
    con.execute("CREATE INDEX IF NOT EXISTS idx_scr_card
      ON screenings(card_ref)")
```

WHAT THIS DOES

- The docstring states the contract the function promises.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 15

Persist Screening Decisions to SQLite

2

STEP 2 OF 7 · CONT. 1/3

Add save and query functions — parameterised, never string-formatted

```
# repository.py (add)
def save_screening(txn_in, result, db_path: str = DB) -> int:
    """Record one decision; returns the new row id."""
    with connect(db_path) as con:
        cur = con.execute(
            "INSERT INTO screenings (card_ref, ts, amount,
          merchant_category,"
            " composite_score, decision, hits_json) VALUES
          (?,?,?,?,?,?,?)",
            (txn_in.card_ref, txn_in.ts.isoformat(),
          txn_in.amount,
             txn_in.merchant_category,
          result.composite_score, result.decision,
```

WHAT THIS DOES

- Read the signature first: what goes in, what comes out.
- The docstring states the contract the function promises.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 15

Persist Screening Decisions to SQLite

2

STEP 2 OF 7 · CONT. 2/3

Add save and query functions — parameterised, never string-formatted

```
            json.dumps([h.model_dump() for h in
          result.hits])))
        return cur.lastrowid

def recent_screenings(limit: int = 20, db_path: str = DB) ->
  list[dict]:
    with connect(db_path) as con:
        rows = con.execute(
            "SELECT * FROM screenings ORDER BY id DESC LIMIT
          ?", (limit,)).fetchall()
    return [dict(r) for r in rows]

def decision_counts(db_path: str = DB) -> dict[str, int]:
```

WHAT THIS DOES

- Read the signature first: what goes in, what comes out.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 15

Persist Screening Decisions to SQLite

2

STEP 2 OF 7 · CONT. 3/3

Add save and query functions — parameterised, never string-formatted

```
    with connect(db_path) as con:
        rows = con.execute(
            "SELECT decision, COUNT(*) n FROM screenings
          GROUP BY decision").fetchall()
    return {r["decision"]: r["n"] for r in rows}
```

WHAT THIS DOES

- Add save and query functions — parameterised, never string-formatted

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 15

Persist Screening Decisions to SQLite

3

STEP 3 OF 7

Show why parameterised queries matter — the injection an f-string would allow

```
uv run python -c "
card = \"CH0001'; DROP TABLE screenings; --\"
print('UNSAFE would build:')
print(f\"  SELECT * FROM screenings WHERE card_ref =
  '{card}'\")
print('SAFE passes the value separately: con.execute(sql,
  (card,))')
"
```

WHAT THIS DOES

- Run this in your terminal, from the project folder.
- uv run executes inside the project environment — no venv activation.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 15

Persist Screening Decisions to SQLite

4

STEP 4 OF 7 · CONT. 1/2

Wire persistence into the endpoint

```
# main.py (add)
from repository import init_schema, save_screening,
  recent_screenings, decision_counts

@app.on_event("startup")
def _startup() -> None:
    init_schema()

# inside screen(), just before returning:
#     save_screening(txn_in, out)

@app.get("/screenings")
def list_screenings(limit: int = 20) -> list[dict]:
```

WHAT THIS DOES

- FastAPI turns this typed function into an HTTP endpoint.
- Read the signature first: what goes in, what comes out.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 15

Persist Screening Decisions to SQLite

4

STEP 4 OF 7 · CONT. 2/2

Wire persistence into the endpoint

```
    """Recent decisions, newest first — the audit trail."""
    return recent_screenings(limit)

@app.get("/stats")
def stats() -> dict:
    """Decision counts for the dashboard."""
    return decision_counts()
```

WHAT THIS DOES

- FastAPI turns this typed function into an HTTP endpoint.
- Read the signature first: what goes in, what comes out.
- The docstring states the contract the function promises.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 15

Persist Screening Decisions to SQLite

5

STEP 5 OF 7

Restart and post several transactions to build history

```
for amt in 86.40 5128.33 240.00 3900.00; do
  curl -s -X POST http://127.0.0.1:8000/screen -H
    "Content-Type: application/json" \
    -d
      "{\"card_ref\":\"CH0001\",
      \"ts\":\"2026-04-15T02:30:00\",\"amount\":$amt,
      \"merchant_category\":\"electronics\",
      \"city\":\"Singapore\",\"lat\":1.3521,
      \"lon\":103.8198}" > /dev/null
done
curl -s http://127.0.0.1:8000/stats | python3 -m json.tool
```

WHAT THIS DOES

- Restart and post several transactions to build history

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 15

Persist Screening Decisions to SQLite

6

STEP 6 OF 7

Read the audit trail back

```
curl -s 'http://127.0.0.1:8000/screenings?limit=5' | python3
  -m json.tool
```

WHAT THIS DOES

- Run this in your terminal, from the project folder.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 15

Persist Screening Decisions to SQLite

7

STEP 7 OF 7 · CONT. 1/2

Verify rollback works — a failed write must leave no partial row

```
uv run python -c "
import repository as repo
repo.init_schema()
before = len(repo.recent_screenings(1000))
try:
    with repo.connect() as con:
        con.execute('INSERT INTO screenings
          (card_ref,ts,amount,merchant_category,
          composite_score,decision,hits_json)
          VALUES (?,?,?,?,?,?,?)',

          ('CH0001','2026-04-15T10:00:00',50.0,
          'grocery',0.1,'approve','[]'))
```

WHAT THIS DOES

- Run this in your terminal, from the project folder.
- uv run executes inside the project environment — no venv activation.
- try/except handles the failure; finally always cleans up.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 15

Persist Screening Decisions to SQLite

7

STEP 7 OF 7 · CONT. 2/2

Verify rollback works — a failed write must leave no partial row

```
        raise RuntimeError('simulated failure after insert')
except RuntimeError as e:
    print('caught:', e)
after = len(repo.recent_screenings(1000))
print(f'rows before {before}, after {after} -> rolled back:
  {before == after}')
"
```

WHAT THIS DOES

- Invalid input fails fast and loudly, never silently.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 15 · VERIFY

Persist Screening Decisions to SQLite

✅ Test it

Screenings persist and are queryable via /screenings and /stats; the injection demo shows why parameters are used; the rollback test proves the row count is unchanged after a mid-transaction failure.

© 2026 Tertiary Infotech Academy Pte Ltd

TOPIC 04 · HANDS-ON

Test the API with pytest and httpx

LAB 16

The learner writes a test suite covering the happy path, validation failures and persistence — so that later refactoring and deployment changes are provably safe.

You'll build

A passing pytest suite against the screening API

Tools & libraries: uv, pytest, FastAPI TestClient

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 16

Test the API with pytest and httpx

1

STEP 1 OF 7

Add the test dependencies

```
uv add --dev pytest httpx
```

WHAT THIS DOES

- The test drives the API exactly as a real client would.
- Run this in your terminal, from the project folder.
- uv resolves, installs and records the dependency in uv.lock.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 16

Test the API with pytest and httpx

2

STEP 2 OF 7 · CONT. 1/3

Write tests for the decision paths

```
# test_api.py
import pytest
from fastapi.testclient import TestClient
from main import app

client = TestClient(app)

def post(**overrides):
    body = {"card_ref": "CH0001", "ts":
      "2026-04-15T10:30:00", "amount": 86.40,
           "merchant_category": "grocery", "city":
         "Singapore",
           "lat": 1.3521, "lon": 103.8198}
```

WHAT THIS DOES

- The image bundles interpreter, dependencies and code as one artifact.
- Read the signature first: what goes in, what comes out.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 16

Test the API with pytest and httpx

2

STEP 2 OF 7 · CONT. 2/3

Write tests for the decision paths

```
    body.update(overrides)
    return client.post("/screen", json=body)

def test_health():
    assert client.get("/health").json() == {"status": "ok"}

def test_normal_transaction_is_approved():
    r = post()
    assert r.status_code == 200
    assert r.json()["decision"] == "approve"

def test_large_offhours_transaction_is_escalated():
    r = post(amount=5128.33, merchant_category="jewellery",
```

WHAT THIS DOES

- The test drives the API exactly as a real client would.
- Read the signature first: what goes in, what comes out.
- The assertion is the test — it must fail before you trust it.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 16

Test the API with pytest and httpx

2

STEP 2 OF 7 · CONT. 3/3

Write tests for the decision paths

```
      ts="2026-04-15T02:14:00")
    body = r.json()
    assert body["decision"] in {"review", "decline"}
    assert body["hits"], "an escalated decision must carry
      its reasons"
```

WHAT THIS DOES

- The test drives the API exactly as a real client would.
- The assertion is the test — it must fail before you trust it.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 16

Test the API with pytest and httpx

3

STEP 3 OF 7 · CONT. 1/2

Add tests for the failure paths

```
# test_api.py (add)
@pytest.mark.parametrize("bad", [
    {"amount": -5},
    {"amount": 0},
    {"card_ref": "NOPE"},
    {"merchant_category": "casino"},
    {"lat": 999},
])
def test_invalid_input_is_rejected(bad):
    assert post(**bad).status_code == 422

def test_unknown_card_returns_404():
    assert post(card_ref="CH9999").status_code == 404
```

WHAT THIS DOES

- The test drives the API exactly as a real client would.
- Read the signature first: what goes in, what comes out.
- The assertion is the test — it must fail before you trust it.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 16

Test the API with pytest and httpx

3

STEP 3 OF 7 · CONT. 2/2

Add tests for the failure paths

```
def test_screening_is_persisted():
    before = len(client.get("/screenings?limit=1000").json())
    post()
    after = len(client.get("/screenings?limit=1000").json())
    assert after == before + 1
```

WHAT THIS DOES

- The test drives the API exactly as a real client would.
- Read the signature first: what goes in, what comes out.
- The assertion is the test — it must fail before you trust it.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 16

Test the API with pytest and httpx

4

STEP 4 OF 7

Run the suite

```
uv run pytest -v
```

WHAT THIS DOES

- The test drives the API exactly as a real client would.
- Run this in your terminal, from the project folder.
- uv run executes inside the project environment — no venv activation.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 16

Test the API with pytest and httpx

5

STEP 5 OF 7

Check what the tests actually cover

```
uv add --dev pytest-cov
uv run pytest --cov=. --cov-report=term-missing
```

WHAT THIS DOES

- The test drives the API exactly as a real client would.
- Run this in your terminal, from the project folder.
- uv resolves, installs and records the dependency in uv.lock.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 16

Test the API with pytest and httpx

6

STEP 6 OF 7

Ask your assistant to write a test for a gap — then verify it FAILS first

```
Ask the assistant: Write a pytest test asserting that POST
  /screen with amount exactly 1000000 succeeds but 1000001
  returns 422, matching the Field(le=1_000_000) constraint
  in TransactionIn.
```

WHAT THIS DOES

- The test drives the API exactly as a real client would.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 16

Test the API with pytest and httpx

7

STEP 7 OF 7

Note the discipline: a test you have never seen fail is a test you cannot trust.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 16 · VERIFY

Test the API with pytest and httpx

✅ Test it

All tests pass; invalid inputs are parameterised and rejected with 422; the persistence test proves a row is written per screening.

© 2026 Tertiary Infotech Academy Pte Ltd

TOPIC RECAP

Recap — Data Modelling with Pydantic and FastAPI

- You can now: Declare data shape with type hints and validate at runtime
- You can now: Turn typed Python functions into HTTP endpoints
- You can now: Write application state to a database from the API layer
- You can now: Write automated tests for a FastAPI application

© 2026 Tertiary Infotech Academy Pte Ltd

05

TOPIC 05

Packaging and Deployment

uv Lockfiles · Configuration · Containers · Deploying a Service

© 2026 Tertiary Infotech Academy Pte Ltd

KEY CONCEPTS

Key Concepts — Packaging and Deployment

1. uv.lock pins exact versions so the application installs identically in development and production.

2. Configuration belongs in environment variables, never hard-coded — secrets must never be committed.

3. A container image bundles the interpreter, dependencies and application code into one deployable artifact.

4. A deployment is not done until the running service has been verified with a real request against a health endpoint.

© 2026 Tertiary Infotech Academy Pte Ltd

WHAT YOU'LL DO

Hands-On Labs — Packaging and Deployment

Labs 17–18

- Build a Fraud Analyst Dashboard with Streamlit
- Externalise Configuration and Protect Secrets

Labs 19–20

- Lock Dependencies and Containerise the API
- Deploy the Full Stack with Docker Compose

—

- —

© 2026 Tertiary Infotech Academy Pte Ltd

TOPIC 05 · HANDS-ON

Build a Fraud Analyst Dashboard with Streamlit

LAB 17

The learner builds the third tier: a Streamlit dashboard a fraud analyst actually uses — review queue, screening form and trend charts — calling the FastAPI service rather than reaching into the database.

You'll build

A running Streamlit dashboard with live screening, a review queue and charts

Tools & libraries: uv, Streamlit, FastAPI, httpx, pandas

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 17

Build a Fraud Analyst Dashboard with Streamlit

1

STEP 1 OF 8

Add Streamlit

```
uv add streamlit httpx
```

WHAT THIS DOES

- Streamlit renders each widget top-to-bottom and re-runs the script on every interaction.
- Run this in your terminal, from the project folder.
- uv resolves, installs and records the dependency in uv.lock.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 17

Build a Fraud Analyst Dashboard with Streamlit

2

STEP 2 OF 8 · CONT. 1/5

Build the dashboard shell and the live screening form

```
# app.py
import httpx
import pandas as pd
import streamlit as st

API = st.secrets.get("api_url", "http://127.0.0.1:8000")

st.set_page_config(page_title="CardGuard",
  page_icon="\U0001F6E1", layout="wide")
st.title("CardGuard — Fraud Screening Console")

with st.sidebar:
    st.header("Screen a transaction")
```

WHAT THIS DOES

- Streamlit renders each widget top-to-bottom and re-runs the script on every interaction.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 17

Build a Fraud Analyst Dashboard with Streamlit

2

STEP 2 OF 8 · CONT. 2/5

Build the dashboard shell and the live screening form

```
card_ref = st.text_input("Card reference", "CH0001")
amount = st.number_input("Amount (SGD)", min_value=0.01,
  value=86.40, step=10.0)
category = st.selectbox("Merchant category",

      ["grocery","fuel","restaurant",
      "electronics","online_gaming",

      "jewellery","crypto_exchange",
      "gift_cards","pharmacy","transport"])
hour = st.slider("Hour of day", 0, 23, 10)
submitted = st.button("Screen", type="primary")
```

WHAT THIS DOES

- Streamlit renders each widget top-to-bottom and re-runs the script on every interaction.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 17

Build a Fraud Analyst Dashboard with Streamlit

2

STEP 2 OF 8 · CONT. 3/5

Build the dashboard shell and the live screening form

```
if submitted:
    payload = {"card_ref": card_ref, "ts":
      f"2026-04-15T{hour:02d}:30:00",
               "amount": float(amount), "merchant_category":
          category,
               "city": "Singapore", "lat": 1.3521, "lon":
          103.8198}
    try:
        r = httpx.post(f"{API}/screen", json=payload,
          timeout=10)
        r.raise_for_status()
        out = r.json()
    except httpx.HTTPStatusError as exc:
```

WHAT THIS DOES

- try/except handles the failure; finally always cleans up.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 17

Build a Fraud Analyst Dashboard with Streamlit

2

STEP 2 OF 8 · CONT. 4/5

Build the dashboard shell and the live screening form

```
        st.error(f"API rejected the request
          ({exc.response.status_code}): {exc.response.text}")
    except httpx.RequestError:
        st.error("Cannot reach the screening API. Is it
          running on port 8000?")
    else:
        colour = {"approve": "green", "review": "orange",
          "decline": "red"}[out["decision"]]
        st.markdown(f"### Decision:
          :{colour}[{out['decision'].upper()}]")
        st.metric("Composite score", out["composite_score"])
        if out["hits"]:
            st.dataframe(pd.DataFrame(out["hits"]),
```

WHAT THIS DOES

- Streamlit renders each widget top-to-bottom and re-runs the script on every interaction.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 17

Build a Fraud Analyst Dashboard with Streamlit

2

STEP 2 OF 8 · CONT. 5/5

Build the dashboard shell and the live screening form

```
        width="stretch")
    else:
        st.info("No rule fired on this transaction.")
```

WHAT THIS DOES

- Streamlit renders each widget top-to-bottom and re-runs the script on every interaction.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 17

Build a Fraud Analyst Dashboard with Streamlit

3

STEP 3 OF 8 · CONT. 1/3

Add the review queue and trend charts

```
# app.py (add)
st.divider()
left, right = st.columns([2, 1])

try:
    rows = httpx.get(f"{API}/screenings", params={"limit":
      200}, timeout=10).json()
    stats = httpx.get(f"{API}/stats", timeout=10).json()
except httpx.RequestError:
    st.warning("API unavailable — showing no history.")
    rows, stats = [], {}

with left:
```

WHAT THIS DOES

- Streamlit renders each widget top-to-bottom and re-runs the script on every interaction.
- try/except handles the failure; finally always cleans up.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 17

Build a Fraud Analyst Dashboard with Streamlit

3

STEP 3 OF 8 · CONT. 2/3

Add the review queue and trend charts

```
st.subheader("Recent screenings")
if rows:
    df = pd.DataFrame(rows)
    df["screened_at"] = pd.to_datetime(df["screened_at"])
    st.dataframe(

      df[["card_ref","amount",
      "merchant_category","composite_score",
      "decision","screened_at"]],
        width="stretch", height=340)
else:
    st.info("No screenings yet — submit one from the
      sidebar.")
```

WHAT THIS DOES

- Streamlit renders each widget top-to-bottom and re-runs the script on every interaction.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 17

Build a Fraud Analyst Dashboard with Streamlit

3

STEP 3 OF 8 · CONT. 3/3

Add the review queue and trend charts

```
with right:
    st.subheader("Decisions")
    if stats:
        st.bar_chart(pd.Series(stats, name="count"))
        total = sum(stats.values())
        flagged = stats.get("review", 0) +
          stats.get("decline", 0)
        st.metric("Flag rate", f"{100 * flagged /
          total:.1f}%" if total else "—")
```

WHAT THIS DOES

- Streamlit renders each widget top-to-bottom and re-runs the script on every interaction.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 17

Build a Fraud Analyst Dashboard with Streamlit

4

STEP 4 OF 8

Run both tiers — API in one terminal, UI in another

```
# terminal 1
uv run uvicorn main:app --reload --port 8000

# terminal 2
uv run streamlit run app.py
```

WHAT THIS DOES

- Streamlit renders each widget top-to-bottom and re-runs the script on every interaction.
- uv run executes inside the project environment — no venv activation.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 17

Build a Fraud Analyst Dashboard with Streamlit

5

STEP 5 OF 8

Screen a normal transaction in the UI and watch it land in the queue

```
open http://localhost:8501
```

WHAT THIS DOES

- Run this in your terminal, from the project folder.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 17

Build a Fraud Analyst Dashboard with Streamlit

6

STEP 6 OF 8

Screen a $5,000 jewellery charge at 02:00 and confirm it turns red

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 17

Build a Fraud Analyst Dashboard with Streamlit

7

STEP 7 OF 8

Stop the API and confirm the UI degrades gracefully instead of crashing

```
# stop uvicorn (Ctrl-C), then click Screen in the UI
```

WHAT THIS DOES

- Stop the API and confirm the UI degrades gracefully instead of crashing

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 17

Build a Fraud Analyst Dashboard with Streamlit

8

STEP 8 OF 8

Note the architecture: the UI never touches SQLite. Swapping the database would not change app.py at all.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 17 · VERIFY

Build a Fraud Analyst Dashboard with Streamlit

✅ Test it

The dashboard screens transactions live, colour-codes decisions, lists the review queue and charts decision counts; with the API stopped it shows a clear error rather than a traceback.

© 2026 Tertiary Infotech Academy Pte Ltd

TOPIC 05 · HANDS-ON

Externalise Configuration and Protect Secrets

LAB 18

The learner replaces every hard-coded value with typed settings loaded from the environment, and ensures secrets can never be committed — the change that makes the same image runnable in dev and production.

You'll build

A typed Settings object, a .env file and a .gitignore that excludes it

Tools & libraries: uv, pydantic-settings, python-dotenv

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 18

Externalise Configuration and Protect Secrets

1

STEP 1 OF 9

Find every hard-coded value in the project

```
grep -rn '127.0.0.1\|8000\|cardguard.db\|0.55\|0.80'
  --include='*.py' . | grep -v '.venv'
```

WHAT THIS DOES

- Run this in your terminal, from the project folder.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 18

Externalise Configuration and Protect Secrets

2

STEP 2 OF 9

Add typed settings

```
uv add pydantic-settings
```

WHAT THIS DOES

- Pydantic validates the data at runtime from the type hints.
- Run this in your terminal, from the project folder.
- uv resolves, installs and records the dependency in uv.lock.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 18

Externalise Configuration and Protect Secrets

3

STEP 3 OF 9 · CONT. 1/2

Declare configuration as a validated model

```
# config.py
from pydantic_settings import BaseSettings, SettingsConfigDict

class Settings(BaseSettings):
    """All runtime configuration, validated at startup."""
    model_config = SettingsConfigDict(env_file=".env",
      env_prefix="CARDGUARD_")

    db_path: str = "cardguard.db"
    api_url: str = "http://127.0.0.1:8000"
    review_threshold: float = 0.55
    decline_threshold: float = 0.80
    velocity_window_minutes: int = 10
```

WHAT THIS DOES

- The image bundles interpreter, dependencies and code as one artifact.
- The docstring states the contract the function promises.
- The class bundles data with the behaviour that acts on it.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 18

Externalise Configuration and Protect Secrets

3

STEP 3 OF 9 · CONT. 2/2

Declare configuration as a validated model

```
    log_level: str = "INFO"

settings = Settings()
```

WHAT THIS DOES

- Declare configuration as a validated model

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 18

Externalise Configuration and Protect Secrets

4

STEP 4 OF 9

Create .env for local development and EXCLUDE it from git immediately

```
# .env
CARDGUARD_DB_PATH=cardguard.db
CARDGUARD_REVIEW_THRESHOLD=0.55
CARDGUARD_DECLINE_THRESHOLD=0.80
CARDGUARD_LOG_LEVEL=DEBUG
```

WHAT THIS DOES

- Create .env for local development and EXCLUDE it from git immediately

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 18

Externalise Configuration and Protect Secrets

5

STEP 5 OF 9

Add the gitignore entries BEFORE the first commit

```
# .gitignore
.env
.env.*
!.env.example
.venv/
__pycache__/
*.db
.pytest_cache/
```

WHAT THIS DOES

- Add the gitignore entries BEFORE the first commit

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 18

Externalise Configuration and Protect Secrets

6

STEP 6 OF 9

Commit a .env.example instead, so a new joiner knows what to set

```
# .env.example — safe to commit, contains no real values
CARDGUARD_DB_PATH=cardguard.db
CARDGUARD_REVIEW_THRESHOLD=0.55
CARDGUARD_DECLINE_THRESHOLD=0.80
CARDGUARD_LOG_LEVEL=INFO
```

WHAT THIS DOES

- Commit a .env.example instead, so a new joiner knows what to set

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 18

Externalise Configuration and Protect Secrets

7

STEP 7 OF 9

Replace the hard-coded thresholds with settings

```
# main.py (replace decide())
from config import settings

def decide(score: float) -> str:
    if score >= settings.decline_threshold: return "decline"
    if score >= settings.review_threshold:  return "review"
    return "approve"
```

WHAT THIS DOES

- The image bundles interpreter, dependencies and code as one artifact.
- Read the signature first: what goes in, what comes out.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 18

Externalise Configuration and Protect Secrets

8

STEP 8 OF 9

Prove configuration is live — override without editing any code

```
uv run python -c "
from config import settings
print('default review threshold:', settings.review_threshold)
"
CARDGUARD_REVIEW_THRESHOLD=0.30 uv run python -c "
from config import settings
print('overridden by environment:', settings.review_threshold)
"
```

WHAT THIS DOES

- The image bundles interpreter, dependencies and code as one artifact.
- Run this in your terminal, from the project folder.
- uv run executes inside the project environment — no venv activation.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 18

Externalise Configuration and Protect Secrets

9

STEP 9 OF 9

Confirm .env is genuinely ignored

```
git check-ignore -v .env && echo 'SAFE: .env will not be
  committed'
```

WHAT THIS DOES

- Run this in your terminal, from the project folder.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 18 · VERIFY

Externalise Configuration and Protect Secrets

✅ Test it

Settings load from .env; an environment variable overrides them without a code change; git check-ignore confirms .env is excluded; .env.example is committed in its place.

© 2026 Tertiary Infotech Academy Pte Ltd

TOPIC 05 · HANDS-ON

Lock Dependencies and Containerise the API

LAB 19

The learner writes a multi-stage Dockerfile that installs from uv.lock, runs as a non-root user, and produces an image that behaves identically on any machine.

You'll build

A built Docker image running the screening API with a health check

Tools & libraries: uv, Docker, uvicorn

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 19

Lock Dependencies and Containerise the API

1

STEP 1 OF 9

Confirm the lockfile is current and committed

```
uv lock --check
git add uv.lock pyproject.toml
```

WHAT THIS DOES

- Run this in your terminal, from the project folder.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 19

Lock Dependencies and Containerise the API

2

STEP 2 OF 9 · CONT. 1/2

Write the Dockerfile — multi-stage keeps the final image small

```
# Dockerfile
FROM ghcr.io/astral-sh/uv:python3.12-bookworm-slim AS builder
WORKDIR /app
ENV UV_COMPILE_BYTECODE=1 UV_LINK_MODE=copy

# Install dependencies first so this layer caches across code
  changes
COPY pyproject.toml uv.lock ./
RUN uv sync --frozen --no-install-project --no-dev

COPY . .
RUN uv sync --frozen --no-dev
```

WHAT THIS DOES

- The image bundles interpreter, dependencies and code as one artifact.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 19

Lock Dependencies and Containerise the API

2

STEP 2 OF 9 · CONT. 2/2

Write the Dockerfile — multi-stage keeps the final image small

```
FROM python:3.12-slim-bookworm AS runtime
RUN useradd --create-home --uid 1000 appuser
WORKDIR /app
COPY --from=builder --chown=appuser:appuser /app /app
ENV PATH="/app/.venv/bin:$PATH" PYTHONUNBUFFERED=1
USER appuser
EXPOSE 8000
HEALTHCHECK --interval=30s --timeout=3s --retries=3 \\
  CMD python -c "import httpx,sys; sys.exit(0 if
    httpx.get(
    'http://127.0.0.1:8000/health').status_code==200 else 1)"
CMD ["uvicorn", "main:app", "--host", "0.0.0.0", "--port",
  "8000"]
```

WHAT THIS DOES

- The image bundles interpreter, dependencies and code as one artifact.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 19

Lock Dependencies and Containerise the API

3

STEP 3 OF 9

Exclude everything the image does not need

```
# .dockerignore
.venv/
.git/
.env
*.db
__pycache__/
.pytest_cache/
tests/
*.md
```

WHAT THIS DOES

- Exclude everything the image does not need

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 19

Lock Dependencies and Containerise the API

4

STEP 4 OF 9

Build the image

```
docker build -t cardguard-api:1.0 .
```

WHAT THIS DOES

- The image bundles interpreter, dependencies and code as one artifact.
- Run this in your terminal, from the project folder.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 19

Lock Dependencies and Containerise the API

5

STEP 5 OF 9

Check the size — multi-stage should keep it well under 300MB

```
docker images cardguard-api:1.0
```

WHAT THIS DOES

- The image bundles interpreter, dependencies and code as one artifact.
- Run this in your terminal, from the project folder.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 19

Lock Dependencies and Containerise the API

6

STEP 6 OF 9

Run it, passing configuration as environment variables

```
docker run -d --name cardguard \
  -p 8000:8000 \
  -e CARDGUARD_REVIEW_THRESHOLD=0.55 \
  -e CARDGUARD_LOG_LEVEL=INFO \
  -v "$(pwd)/cardguard.db:/app/cardguard.db" \
  cardguard-api:1.0
```

WHAT THIS DOES

- The image bundles interpreter, dependencies and code as one artifact.
- Run this in your terminal, from the project folder.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 19

Lock Dependencies and Containerise the API

7

STEP 7 OF 9

Verify the container is healthy and answering

```
docker ps --filter name=cardguard --format 'table
  {{.Names}}\t{{.Status}}'
curl -s http://127.0.0.1:8000/health
```

WHAT THIS DOES

- The image bundles interpreter, dependencies and code as one artifact.
- Run this in your terminal, from the project folder.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 19

Lock Dependencies and Containerise the API

8

STEP 8 OF 9

Screen a transaction against the CONTAINER, not your laptop's Python

```
curl -s -X POST http://127.0.0.1:8000/screen -H
  "Content-Type: application/json" -d
  '{"card_ref":"CH0023","ts":"2026-04-15T02:14:00",
  "amount":5128.33,"merchant_category":"jewellery",
  "city":"Singapore","lat":1.3521,"lon":103.8198}' |
  python3 -m json.tool
```

WHAT THIS DOES

- Run this in your terminal, from the project folder.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 19

Lock Dependencies and Containerise the API

9

STEP 9 OF 9

Read the logs and confirm it runs as a non-root user

```
docker logs cardguard --tail 20
docker exec cardguard whoami
```

WHAT THIS DOES

- The image bundles interpreter, dependencies and code as one artifact.
- Run this in your terminal, from the project folder.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 19 · VERIFY

Lock Dependencies and Containerise the API

✅ Test it

The image builds, runs as appuser, reports healthy, and returns a decline decision for the fraud transaction posted to the container.

© 2026 Tertiary Infotech Academy Pte Ltd

TOPIC 05 · HANDS-ON

Deploy the Full Stack with Docker Compose

LAB 20

The learner composes the API and the Streamlit UI into one stack with a shared volume and dependency ordering, then verifies the deployment end to end — the final integration of everything built in Topics 1-5.

You'll build

A running two-service stack verified with a real screening through the UI

Tools & libraries: Docker Compose, FastAPI, Streamlit, SQLite

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 20

Deploy the Full Stack with Docker Compose

1

STEP 1 OF 10

Write a Dockerfile for the UI tier

```
# Dockerfile.ui
FROM ghcr.io/astral-sh/uv:python3.12-bookworm-slim
WORKDIR /app
ENV UV_COMPILE_BYTECODE=1 UV_LINK_MODE=copy
COPY pyproject.toml uv.lock ./
RUN uv sync --frozen --no-dev
COPY . .
ENV PATH="/app/.venv/bin:$PATH"
EXPOSE 8501
CMD ["streamlit", "run", "app.py",
  "--server.address=0.0.0.0", "--server.port=8501"]
```

WHAT THIS DOES

- The image bundles interpreter, dependencies and code as one artifact.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 20

Deploy the Full Stack with Docker Compose

2

STEP 2 OF 10 · CONT. 1/3

Compose the stack

```
# compose.yaml
services:
  api:
    build: .
    ports: ["8000:8000"]
    environment:
      CARDGUARD_DB_PATH: /data/cardguard.db
      CARDGUARD_REVIEW_THRESHOLD: "0.55"
      CARDGUARD_DECLINE_THRESHOLD: "0.80"
    volumes: ["cardguard-data:/data"]
    healthcheck:
      test: ["CMD", "python", "-c", "import httpx,sys;
        sys.exit(0 if
```

WHAT THIS DOES

- The image bundles interpreter, dependencies and code as one artifact.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 20

Deploy the Full Stack with Docker Compose

2

STEP 2 OF 10 · CONT. 2/3

Compose the stack

```
        httpx.get(
        'http://127.0.0.1:8000/health').status_code==2
        00 else 1)"]
      interval: 10s
      timeout: 3s
      retries: 5

  ui:
    build:
      context: .
      dockerfile: Dockerfile.ui
    ports: ["8501:8501"]
    environment:
```

WHAT THIS DOES

- The image bundles interpreter, dependencies and code as one artifact.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 20

Deploy the Full Stack with Docker Compose

2

STEP 2 OF 10 · CONT. 3/3

Compose the stack

```
      CARDGUARD_API_URL: http://api:8000
    depends_on:
      api:
        condition: service_healthy

volumes:
  cardguard-data:
```

WHAT THIS DOES

- Compose the stack

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 20

Deploy the Full Stack with Docker Compose

3

STEP 3 OF 10

Point the UI at the service name — inside the network it is not localhost

```
# app.py (replace the API constant)
import os
API = os.getenv("CARDGUARD_API_URL", "http://127.0.0.1:8000")
```

WHAT THIS DOES

- Point the UI at the service name — inside the network it is not localhost

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 20

Deploy the Full Stack with Docker Compose

4

STEP 4 OF 10

Bring the stack up

```
docker compose up --build -d
```

WHAT THIS DOES

- The image bundles interpreter, dependencies and code as one artifact.
- Run this in your terminal, from the project folder.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 20

Deploy the Full Stack with Docker Compose

5

STEP 5 OF 10

Confirm the UI waited for the API to become healthy

```
docker compose ps
docker compose logs api --tail 5
```

WHAT THIS DOES

- The image bundles interpreter, dependencies and code as one artifact.
- Run this in your terminal, from the project folder.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 20

Deploy the Full Stack with Docker Compose

6

STEP 6 OF 10

Seed the database inside the running container

```
docker compose exec api python mockdata.py
docker compose exec api ls -la /data
```

WHAT THIS DOES

- The image bundles interpreter, dependencies and code as one artifact.
- Run this in your terminal, from the project folder.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 20

Deploy the Full Stack with Docker Compose

7

STEP 7 OF 10

Verify end to end through the browser — screen a fraudulent charge in the UI

```
open http://localhost:8501
```

WHAT THIS DOES

- Run this in your terminal, from the project folder.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 20

Deploy the Full Stack with Docker Compose

8

STEP 8 OF 10

Verify the API tier independently

```
curl -s http://127.0.0.1:8000/health
curl -s http://127.0.0.1:8000/stats | python3 -m json.tool
```

WHAT THIS DOES

- Run this in your terminal, from the project folder.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 20

Deploy the Full Stack with Docker Compose

9

STEP 9 OF 10

Confirm data survives a restart — this is what the volume is for

```
docker compose restart api
sleep 5
curl -s http://127.0.0.1:8000/stats | python3 -m json.tool
```

WHAT THIS DOES

- The image bundles interpreter, dependencies and code as one artifact.
- Run this in your terminal, from the project folder.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 20

Deploy the Full Stack with Docker Compose

10

STEP 10 OF 10

Tear down, keeping the data volume

```
docker compose down
docker volume ls | grep cardguard
```

WHAT THIS DOES

- The image bundles interpreter, dependencies and code as one artifact.
- Run this in your terminal, from the project folder.

© 2026 Tertiary Infotech Academy Pte Ltd

LAB 20 · VERIFY

Deploy the Full Stack with Docker Compose

✅ Test it

Both services start, the UI waits for the API health check, a screening submitted in the browser is stored and visible via /stats, and the data survives a container restart.

© 2026 Tertiary Infotech Academy Pte Ltd

TOPIC RECAP

Recap — Packaging and Deployment

- You can now: Create a data application UI that consumes the API
- You can now: Move settings out of code into the environment
- You can now: Package the application into a reproducible image
- You can now: Run and verify a multi-service application

© 2026 Tertiary Infotech Academy Pte Ltd

WRAP-UP

Course Summary & Next Steps

© 2026 Tertiary Infotech Academy Pte Ltd

NEXT STEPS

Where to Go Next

- Rebuild CardGuard from scratch on your own machine, using your AI assistant for every step.
- Add a new fraud rule and a matching pytest test, then redeploy the container.
- Swap SQLite for PostgreSQL — the repository layer is the only module that should change.
- Publish your image to a registry and deploy it to a cloud host.
- Practise the four-part prompt pattern on your own work: goal, constraints, inputs, expected output.

© 2026 Tertiary Infotech Academy Pte Ltd

TEST YOURSELF

Keep Practising

- Re-run every lab from a clean folder — uv sync restores the exact environment from uv.lock.
- Read the Learner Guide alongside your own code; the step numbering matches the labs exactly.
- Practise the four-part prompt pattern: goal, constraints, inputs, expected output.
- Tertiary Infotech practice exams: https://exams.tertiaryinfotech.com/

© 2026 Tertiary Infotech Academy Pte Ltd

BEFORE YOU LEAVE

Course Feedback

1. Complete the short course feedback form on the LMS
2. Tell us which labs and prompts helped most
3. Tell us what we should improve
4. Save your prompts, code and test results for reference
5. Your certificate of completion will be emailed to you after the course

© 2026 Tertiary Infotech Academy Pte Ltd

KEEP BUILDING

Thank You!

You can now build, test and deploy a real Python application with AI assistance.

© 2026 Tertiary Infotech Academy Pte Ltd