

AI Vibe Coding for Full Stack Web Development

C1800

v12.0 · 14 September 2026



Course identity and format

Course

2 days · 15 instructional hours · 9:30am – 5:30pm

Topics

Five topics, each with two hands-on labs

Labs

Ten standalone React and Express labs

Evidence

Commit source, tests and UI/API evidence per lab

Trainer profiles

Trainer template

Name · role · qualifications · experience

Dr Alfred Ang

Course developer and Tertiary Infotech trainer

Evidence

Use signed-in LMS course material

Support

enquiry@tertiaryinfotech.com

The build-and-review loop

1 · Specify

Write a contract with inputs, output and acceptance test

2 · Generate

Ask AI for a bounded unit with explicit constraints

3 · Inspect

Read diff, run tests and review architecture

4 · Release

Verify live behavior, data, security and rollback

Designing Full Stack Web Applications with AI Vibe Coding

Course outcome

Designing Full Stack Web Applications with AI Vibe Coding



Labs 1–2 · practical evidence

Requirement to acceptance contract

Input / system boundary

Requirement to acceptance contract

Output / artifact

Given a user can create a task; When POST /api/tasks succeeds; Then the list shows the returned id

Requirement to acceptance contract — implementation

```
Given a user can create a task; When POST /api/tasks succeeds;  
Then the list shows the returned id
```

Human review: check ownership, type and failure path before accepting AI output.

Requirement to acceptance contract — verification

Observable pass condition

POST returns 201 with id and title

Requirement to acceptance contract — review gate

Failure or human decision

Reject a prompt that omits the observable acceptance check

Capability map

Input / system boundary

Capability map

Output / artifact

UI:React -> API:Express -> Store:SQLite ->
log:requestId

Capability map — implementation

```
UI:React -> API:Express -> Store:SQLite -> log:requestId
```

Human review: check ownership, type and failure path before accepting AI output.

Capability map — verification

Observable pass condition

A task appears after reload, not only in component state

Capability map — review gate

Failure or human decision

A mock-only UI is not a full-stack delivery

Data boundary

Input / system boundary

Data boundary

Output / artifact

```
type Task = { id:string; title:string;  
done:boolean; ownerId:string }
```

Data boundary — implementation

```
type Task = { id:string; title:string; done:boolean;  
ownerId:string }
```

Human review: check ownership, type and failure path before accepting AI output.

Data boundary — verification

Observable pass condition

JSON response includes only public fields

Data boundary — review gate

Failure or human decision

Never send passwordHash in API output

API resource design

Input / system boundary

API resource design

Output / artifact

GET /api/tasks; POST /api/tasks; PATCH /api/tasks/:id

API resource design — implementation

```
GET /api/tasks; POST /api/tasks; PATCH /api/tasks/:id
```

Human review: check ownership, type and failure path before accepting AI output.

API resource design — verification

Observable pass condition

GET is safe; POST creates; PATCH changes one resource

API resource design — review gate

Failure or human decision

Avoid action URLs such as /doTaskChange

AI prompt as specification

Input / system boundary

AI prompt as specification

Output / artifact

Generate an Express route for POST /api/tasks with validation, status codes and one test

AI prompt as specification — implementation

```
Generate an Express route for POST /api/tasks with validation,  
status codes and one test
```

Human review: check ownership, type and failure path before accepting AI output.

AI prompt as specification — verification

Observable pass condition

Review diff against contract before accepting

AI prompt as specification — review gate

Failure or human decision

Regenerate only the failing unit, not the whole project

Human architectural decision

Input / system boundary

Human architectural decision

Output / artifact

Choose modular monolith for one classroom app and one deploy target

Human architectural decision — implementation

```
Choose modular monolith for one classroom app and one deploy target
```

Human review: check ownership, type and failure path before accepting AI output.

Human architectural decision — verification

Observable pass condition

UI and API have explicit interface and ownership

Human architectural decision — review gate

Failure or human decision

Microservices add latency and operations burden here

Risk register

Input / system boundary

Risk register

Output / artifact

R1 duplicate writes; R2 exposed token; R3 stale cache

Risk register — implementation

```
R1 duplicate writes; R2 exposed token; R3 stale cache
```

Human review: check ownership, type and failure path before accepting AI output.

Risk register — verification

Observable pass condition

Each risk has mitigation and an observable test

Risk register — review gate

Failure or human decision

A polished demo without risk checks is incomplete

Repository boundary

Input / system boundary

Repository boundary

Output / artifact

src/ UI; server/ routes; data/ fixtures; tests/
assertions

Repository boundary — implementation

```
src/ UI; server/ routes; data/ fixtures; tests/ assertions
```

Human review: check ownership, type and failure path before accepting AI output.

Repository boundary — verification

Observable pass condition

npm scripts start UI and API predictably

Repository boundary — review gate

Failure or human decision

Do not commit .env or node_modules

Traceability matrix

Input / system boundary

Traceability matrix

Output / artifact

LO1 -> Lab 1 -> interface wireframe -> PP
task 1

Traceability matrix — implementation

```
L01 -> Lab 1 -> interface wireframe -> PP task 1
```

Human review: check ownership, type and failure path before accepting AI output.

Traceability matrix — verification

Observable pass condition

Every assessed ability names a practiced lab

Traceability matrix — review gate

Failure or human decision

Orphan assessment task fails release

Baseline performance budget

Input / system boundary

Baseline performance budget

Output / artifact

p95 API < 300 ms locally; initial JS < 250 kB
gzip

Baseline performance budget — implementation

```
p95 API < 300 ms locally; initial JS < 250 kB gzip
```

Human review: check ownership, type and failure path before accepting AI output.

Baseline performance budget — verification

Observable pass condition

Record measured local p95 and bundle output

Baseline performance budget — review gate

Failure or human decision

Budget is a design check, not a production SLA

Topic 1 practice evidence

Lab acceptance

Commit source, run the test, capture UI and API evidence, then explain one rejected AI suggestion.

Building Dynamic and Responsive User Interfaces

Course outcome

Building Dynamic and Responsive User Interfaces



Labs 3–4 · practical evidence

React root and rendering

Input / system boundary

React root and rendering

Output / artifact

```
createRoot(document.getElementById("root")).  
render(<App />)
```

React root and rendering — implementation

```
createRoot(document.getElementById("root")).render(<App />)
```

Human review: check ownership, type and failure path before accepting AI output.

React root and rendering — verification

Observable pass condition

App mounts once and no console error appears

React root and rendering — review gate

Failure or human decision

Missing #root produces a blank page

Semantic component tree

Input / system boundary

Semantic component tree

Output / artifact

```
<main><h1>Tasks</h1><TaskList /></main>
```

Semantic component tree — implementation

```
<main><h1>Tasks</h1><TaskList /></main>
```

Human review: check ownership, type and failure path before accepting AI output.

Semantic component tree — verification

Observable pass condition

Heading and list appear in accessibility tree

Semantic component tree — review gate

Failure or human decision

Div-only controls hurt keyboard and screen reader use

Responsive grid

Input / system boundary

Responsive grid

Output / artifact

```
display:grid; grid-template-  
columns:repeat(auto-fit,minmax(16rem,1fr))
```

Responsive grid — implementation

```
display:grid; grid-template-columns:repeat(auto-  
fit,minmax(16rem,1fr))
```

Human review: check ownership, type and failure path before accepting AI output.

Responsive grid — verification

Observable pass condition

Cards wrap at 375 px without horizontal scroll

Responsive grid — review gate

Failure or human decision

Fixed 400 px cards overflow mobile viewports

Accessible button state

Input / system boundary

Accessible button state

Output / artifact

```
<button disabled={saving} aria-busy={saving}  
>Save</button>
```

Accessible button state — implementation

```
<button disabled={saving} aria-busy={saving}>Save</button>
```

Human review: check ownership, type and failure path before accepting AI output.

Accessible button state — verification

Observable pass condition

Button blocks duplicate submit while saving

Accessible button state — review gate

Failure or human decision

A CSS-only disabled look still allows clicks

List key stability

Input / system boundary

List key stability

Output / artifact

```
tasks.map(task => <TaskCard key={task.id}  
task={task} />)
```

List key stability — implementation

```
tasks.map(task => <TaskCard key={task.id} task={task} />)
```

Human review: check ownership, type and failure path before accepting AI output.

List key stability — verification

Observable pass condition

Reorder preserves each card identity

List key stability — review gate

Failure or human decision

Array index keys can attach state to wrong row

Derived view state

Input / system boundary

Derived view state

Output / artifact

```
const visible = tasks.filter(t => !hideDone || !  
t.done)
```

Derived view state — implementation

```
const visible = tasks.filter(t => !hideDone || !t.done)
```

Human review: check ownership, type and failure path before accepting AI output.

Derived view state — verification

Observable pass condition

Toggle filter changes view without mutating source

Derived view state — review gate

Failure or human decision

Copying derived data into state creates drift

CSS token system

Input / system boundary

CSS token system

Output / artifact

```
:root{--space-2:.5rem;--brand:#1763a6}
```

CSS token system — implementation

```
:root{--space-2:.5rem;--brand:#1763a6}
```

Human review: check ownership, type and failure path before accepting AI output.

CSS token system — verification

Observable pass condition

Spacing and focus ring remain consistent

CSS token system — review gate

Failure or human decision

Hardcoded colors spread design inconsistency

Loading and empty states

Input / system boundary

Loading and empty states

Output / artifact

```
if (loading) return <p role="status">Loading...
</p>
```

Loading and empty states — implementation

```
if (loading) return <p role="status">Loading...</p>
```

Human review: check ownership, type and failure path before accepting AI output.

Loading and empty states — verification

Observable pass condition

Empty data shows a useful empty state

Loading and empty states — review gate

Failure or human decision

Spinner forever hides API failure

Error boundary decision

Input / system boundary

Error boundary decision

Output / artifact

```
<ErrorBoundary fallback={<Recovery />}  
>...</ErrorBoundary>
```

Error boundary decision — implementation

```
<ErrorBoundary fallback={<Recovery />}>...</ErrorBoundary>
```

Human review: check ownership, type and failure path before accepting AI output.

Error boundary decision — verification

Observable pass condition

Render exception shows recovery UI

Error boundary decision — review gate

Failure or human decision

Boundary does not catch asynchronous fetch errors

Visual regression evidence

Input / system boundary

Visual regression evidence

Output / artifact

Capture desktop 1280 px and mobile 375 px screenshots

Visual regression evidence — implementation

Capture desktop 1280 px and mobile 375 px screenshots

Human review: check ownership, type and failure path before accepting AI output.

Visual regression evidence — verification

Observable pass condition

No clipping or unreadable controls in both

Visual regression evidence — review gate

Failure or human decision

Do not trust a desktop-only screenshot

Topic 2 practice evidence

Lab acceptance

Commit source, run the test, capture UI and API evidence, then explain one rejected AI suggestion.

Creating Interactive Controls and Application Features

Course outcome

Creating Interactive Controls and Application Features



Labs 5–6 · practical evidence

Controlled input

Input / system boundary

Controlled input

Output / artifact

```
<input value={title}  
onChange={e=>setTitle(e.target.value)} />
```

Controlled input — implementation

```
<input value={title} onChange={e=>setTitle(e.target.value)} />
```

Human review: check ownership, type and failure path before accepting AI output.

Controlled input — verification

Observable pass condition

Typed text remains source-of-truth state

Controlled input — review gate

Failure or human decision

Uncontrolled and controlled modes must not flip

Form validation

Input / system boundary

Form validation

Output / artifact

```
if (!title.trim()) return setError("Title is required")
```

Form validation — implementation

```
if (!title.trim()) return setError("Title is required")
```

Human review: check ownership, type and failure path before accepting AI output.

Form validation — verification

Observable pass condition

Empty title blocks POST and announces error

Form validation — review gate

Failure or human decision

Client validation does not replace server validation

Submit lifecycle

Input / system boundary

Submit lifecycle

Output / artifact

```
setSaving(true); try{await  
createTask(payload)}finally{setSaving(false)}
```

Submit lifecycle — implementation

```
setSaving(true); try{await createTask(payload)}  
finally{setSaving(false)}
```

Human review: check ownership, type and failure path before accepting AI output.

Submit lifecycle — verification

Observable pass condition

One click produces one request and returns to idle

Submit lifecycle — review gate

Failure or human decision

Missing finally leaves button disabled

Optimistic update

Input / system boundary

Optimistic update

Output / artifact

setTasks(old=>[draft,...old]); rollback on request failure

Optimistic update — implementation

```
setTasks(old=>[draft,...old]); rollback on request failure
```

Human review: check ownership, type and failure path before accepting AI output.

Optimistic update — verification

Observable pass condition

Failed request removes optimistic draft

Optimistic update — review gate

Failure or human decision

Temporary id must be replaced with server id

Event propagation

Input / system boundary

Event propagation

Output / artifact

```
<button  
onClick={e=>{e.stopPropagation();remove(id)}  

```

Event propagation — implementation

```
<button  
onClick={e=>{e.stopPropagation(); remove(id)}}>Delete</button>
```

Human review: check ownership, type and failure path before accepting AI output.

Event propagation — verification

Observable pass condition

Delete does not also open card

Event propagation — review gate

Failure or human decision

Unnecessary stopPropagation can break parent semantics

Debounced search

Input / system boundary

Debounced search

Output / artifact

```
useEffect(()=>{const  
t=setTimeout(()=>setQuery(value),250);return(  
)=>clearTimeout(t)},[value])
```

Debounced search — implementation

```
useEffect(() => {const  
  t = setTimeout(() => setQuery(value), 250); return () => clearTimeout(t)}  
  , [value])
```

Human review: check ownership, type and failure path before accepting AI output.

Debounced search — verification

Observable pass condition

Rapid typing makes fewer queries

Debounced search — review gate

Failure or human decision

Clear timer on value change and unmount

URL state

Input / system boundary

URL state

Output / artifact

```
const params = new  
URLSearchParams(location.search)
```

URL state — implementation

```
const params = new URLSearchParams(location.search)
```

Human review: check ownership, type and failure path before accepting AI output.

URL state — verification

Observable pass condition

Refresh preserves filter query

URL state — review gate

Failure or human decision

State only in memory loses shareable context

Keyboard interaction

Input / system boundary

Keyboard interaction

Output / artifact

```
<form onSubmit={handleSubmit}>...</form>
```

Keyboard interaction — implementation

```
<form onSubmit={handleSubmit}>...</form>
```

Human review: check ownership, type and failure path before accepting AI output.

Keyboard interaction — verification

Observable pass condition

Enter submits once; Escape behavior is defined

Keyboard interaction — review gate

Failure or human decision

Clickable div lacks native keyboard behavior

Computed counts

Input / system boundary

Computed counts

Output / artifact

```
const openCount=tasks.filter(t=>!  
t.done).length
```

Computed counts — implementation

```
const openCount=tasks.filter(t=>!t.done).length
```

Human review: check ownership, type and failure path before accepting AI output.

Computed counts — verification

Observable pass condition

Badge matches list after edit and deletion

Computed counts — review gate

Failure or human decision

Do not independently increment an unsynced counter

Async race control

Input / system boundary

Async race control

Output / artifact

```
const ac=new AbortController(); fetch(url,  
{signal:ac.signal})
```

Async race control — implementation

```
const ac=new AbortController(); fetch(url,{signal:ac.signal})
```

Human review: check ownership, type and failure path before accepting AI output.

Async race control — verification

Observable pass condition

Old query cannot overwrite latest response

Async race control — review gate

Failure or human decision

Handle `AbortError` separately from server failures

Topic 3 practice evidence

Lab acceptance

Commit source, run the test, capture UI and API evidence, then explain one rejected AI suggestion.

Developing Reusable Components and Full Stack Architecture

Course outcome

Developing Reusable Components and Full Stack Architecture



Labs 7–8 · practical evidence

Prop contract

Input / system boundary

Prop contract

Output / artifact

```
function TaskCard({task,onToggle}){return  
<button  
  onClick={()=>onToggle(task.id)}>...</button>}
```

Prop contract — implementation

```
function TaskCard({task,onToggle}){return <button  
onClick={()=>onToggle(task.id)}>...</button>}
```

Human review: check ownership, type and failure path before accepting AI output.

Prop contract — verification

Observable pass condition

Parent owns collection; child emits intent

Prop contract — review gate

Failure or human decision

Child mutation of props obscures state ownership

Composition over duplication

Input / system boundary

Composition over duplication

Output / artifact

```
<Panel title="Open tasks"><TaskList  
tasks={open}/></Panel>
```

Composition over duplication — implementation

```
<Panel title="Open tasks"><TaskList tasks={open}/></Panel>
```

Human review: check ownership, type and failure path before accepting AI output.

Composition over duplication — verification

Observable pass condition

Same Panel serves multiple views

Composition over duplication — review gate

Failure or human decision

Copy-paste markup diverges on fixes

Custom hook boundary

Input / system boundary

Custom hook boundary

Output / artifact

```
function useTasks(){const
[tasks,setTasks]=useState([]);return
{tasks,setTasks}}
```

Custom hook boundary — implementation

```
function useTasks(){const [tasks,setTasks]=useState([]);return {tasks,setTasks}}
```

Human review: check ownership, type and failure path before accepting AI output.

Custom hook boundary — verification

Observable pass condition

Hook isolates data lifecycle, not all application logic

Custom hook boundary — review gate

Failure or human decision

A giant hook is another monolith

Express route layering

Input / system boundary

Express route layering

Output / artifact

```
router.post("/tasks",validate,controller.create)
```

Express route layering — implementation

```
router.post("/tasks", validate, controller.create)
```

Human review: check ownership, type and failure path before accepting AI output.

Express route layering — verification

Observable pass condition

Validation runs before persistence

Express route layering — review gate

Failure or human decision

Do not put SQL and auth checks in JSX

HTTP status semantics

Input / system boundary

HTTP status semantics

Output / artifact

```
res.status(201).json(task);  
res.status(400).json({error:"INVALID_TITLE"})
```

HTTP status semantics — implementation

```
res.status(201).json(task);  
res.status(400).json({error: "INVALID_TITLE"})
```

Human review: check ownership, type and failure path before accepting AI output.

HTTP status semantics — verification

Observable pass condition

Client distinguishes success, validation and server error

HTTP status semantics — review gate

Failure or human decision

Always-200 hides failures from monitoring

SQLite data model

Input / system boundary

SQLite data model

Output / artifact

```
CREATE TABLE tasks(id TEXT PRIMARY  
KEY,owner_id TEXT NOT NULL,title TEXT  
NOT NULL,done INTEGER NOT NULL  
DEFAULT 0)
```

SQLite data model — implementation

```
CREATE TABLE tasks(id TEXT PRIMARY KEY,owner_id TEXT NOT  
NULL,title TEXT NOT NULL,done INTEGER NOT NULL DEFAULT 0)
```

Human review: check ownership, type and failure path before accepting AI output.

SQLite data model — verification

Observable pass condition

Restart retains created tasks

SQLite data model — review gate

Failure or human decision

A JSON fixture is seed data, not persistence

Parameterised query

Input / system boundary

Parameterised query

Output / artifact

```
db.prepare("SELECT * FROM tasks WHERE  
owner_id = ?").all(userId)
```

Parameterised query — implementation

```
db.prepare("SELECT * FROM tasks WHERE owner_id = ?").all(userId)
```

Human review: check ownership, type and failure path before accepting AI output.

Parameterised query — verification

Observable pass condition

Injection string is treated as data

Parameterised query — review gate

Failure or human decision

String concatenation in SQL is unsafe

API contract test

Input / system boundary

API contract test

Output / artifact

```
expect(response.status).toBe(201);  
expect(response.body.id).toBeTruthy()
```

API contract test — implementation

```
expect(response.status).toBe(201);  
expect(response.body.id).toBeTruthy()
```

Human review: check ownership, type and failure path before accepting AI output.

API contract test — verification

Observable pass condition

Test fails if response shape drifts

API contract test — review gate

Failure or human decision

Screenshot cannot prove API contract

Session boundary

Input / system boundary

Session boundary

Output / artifact

Cookie: HttpOnly; Secure; SameSite=Lax

Session boundary — implementation

```
Cookie: HttpOnly; Secure; SameSite=Lax
```

Human review: check ownership, type and failure path before accepting AI output.

Session boundary — verification

Observable pass condition

Browser sends session only in intended flow

Session boundary — review gate

Failure or human decision

Never store long-lived auth secret in localStorage

Access control at query

Input / system boundary

Access control at query

Output / artifact

```
SELECT * FROM tasks WHERE id=? AND  
owner_id=?
```

Access control at query — implementation

```
SELECT * FROM tasks WHERE id=? AND owner_id=?
```

Human review: check ownership, type and failure path before accepting AI output.

Access control at query — verification

Observable pass condition

User B receives 404 for User A task

Access control at query — review gate

Failure or human decision

A hidden UI button is not authorization

Topic 4 practice evidence

Lab acceptance

Commit source, run the test, capture UI and API evidence, then explain one rejected AI suggestion.

Building Forms, Managing Data and Producing Documentation

Course outcome

Building Forms, Managing Data and Producing Documentation



Labs 9–10 · practical evidence

Form schema

Input / system boundary

Form schema

Output / artifact

```
const schema={title:
{required:true,max:120},dueDate:
{optional:true}}
```

Form schema — implementation

```
const schema={title:{required:true,max:120},dueDate:
{optional:true}}
```

Human review: check ownership, type and failure path before accepting AI output.

Form schema — verification

Observable pass condition

UI and API enforce matching constraints

Form schema — review gate

Failure or human decision

Server remains authoritative

Response validation

Input / system boundary

Response validation

Output / artifact

```
if(!Array.isArray(data.tasks)) throw new  
Error("Bad API shape")
```

Response validation — implementation

```
if(!Array.isArray(data.tasks)) throw new Error("Bad API shape")
```

Human review: check ownership, type and failure path before accepting AI output.

Response validation — verification

Observable pass condition

Malformed response reaches error state

Response validation — review gate

Failure or human decision

AI-generated fetch code often assumes shape

Pagination contract

Input / system boundary

Pagination contract

Output / artifact

GET /api/tasks?cursor=abc&limit=20

Pagination contract — implementation

```
GET /api/tasks?cursor=abc&limit=20
```

Human review: check ownership, type and failure path before accepting AI output.

Pagination contract — verification

Observable pass condition

Next cursor returns non-overlapping rows

Pagination contract — review gate

Failure or human decision

Offset pagination can skip moving records

Data migration

Input / system boundary

Data migration

Output / artifact

```
ALTER TABLE tasks ADD COLUMN due_date  
TEXT
```

Data migration — implementation

```
ALTER TABLE tasks ADD COLUMN due_date TEXT
```

Human review: check ownership, type and failure path before accepting AI output.

Data migration — verification

Observable pass condition

Old rows remain readable after migration

Data migration — review gate

Failure or human decision

Never reset production data to seed fixtures

Documentation as interface

Input / system boundary

Documentation as interface

Output / artifact

README: prerequisites, scripts, env.example, routes, tests

Documentation as interface — implementation

```
README: prerequisites, scripts, env.example, routes, tests
```

Human review: check ownership, type and failure path before accepting AI output.

Documentation as interface — verification

Observable pass condition

New learner can start from a fresh clone

Documentation as interface — review gate

Failure or human decision

Local-only setup knowledge is not portable

Threat model

Input / system boundary

Threat model

Output / artifact

Actor -> API -> database; trust boundary at request input

Threat model — implementation

```
Actor -> API -> database; trust boundary at request input
```

Human review: check ownership, type and failure path before accepting AI output.

Threat model — verification

Observable pass condition

Untrusted input is validated before storage

Threat model — review gate

Failure or human decision

Prompt-generated code is untrusted until reviewed

Test pyramid

Input / system boundary

Test pyramid

Output / artifact

Unit: validator; integration: route/db; E2E:
create/edit task

Test pyramid — implementation

```
Unit: validator; integration: route/db; E2E: create/edit task
```

Human review: check ownership, type and failure path before accepting AI output.

Test pyramid — verification

Observable pass condition

Each layer catches a distinct failure

Test pyramid — review gate

Failure or human decision

E2E-only testing is slow and opaque

Observability correlation

Input / system boundary

Observability correlation

Output / artifact

```
console.info({requestId,route,status,durationMs})
```

Observability correlation — implementation

```
console.info({requestId, route, status, durationMs})
```

Human review: check ownership, type and failure path before accepting AI output.

Observability correlation — verification

Observable pass condition

One failed UI call links to one server log

Observability correlation — review gate

Failure or human decision

Do not log secrets or full personal records

Deployment configuration

Input / system boundary

Deployment configuration

Output / artifact

DATABASE_URL and SESSION_SECRET
from environment

Deployment configuration — implementation

```
DATABASE_URL and SESSION_SECRET from environment
```

Human review: check ownership, type and failure path before accepting AI output.

Deployment configuration — verification

Observable pass condition

Startup fails clearly when required config absent

Deployment configuration — review gate

Failure or human decision

Do not bake local .env into image

Release verification

Input / system boundary

Release verification

Output / artifact

Build -> tests -> deploy -> smoke POST/GET
-> rollback plan

Release verification — implementation

```
Build -> tests -> deploy -> smoke POST/GET -> rollback plan
```

Human review: check ownership, type and failure path before accepting AI output.

Release verification — verification

Observable pass condition

Live route matches deployed commit and retains data

Release verification — review gate

Failure or human decision


Successful push alone does not prove deployment

Topic 5 practice evidence

Lab acceptance

Commit source, run the test, capture UI and API evidence, then explain one rejected AI suggestion.

Editable performance review chart

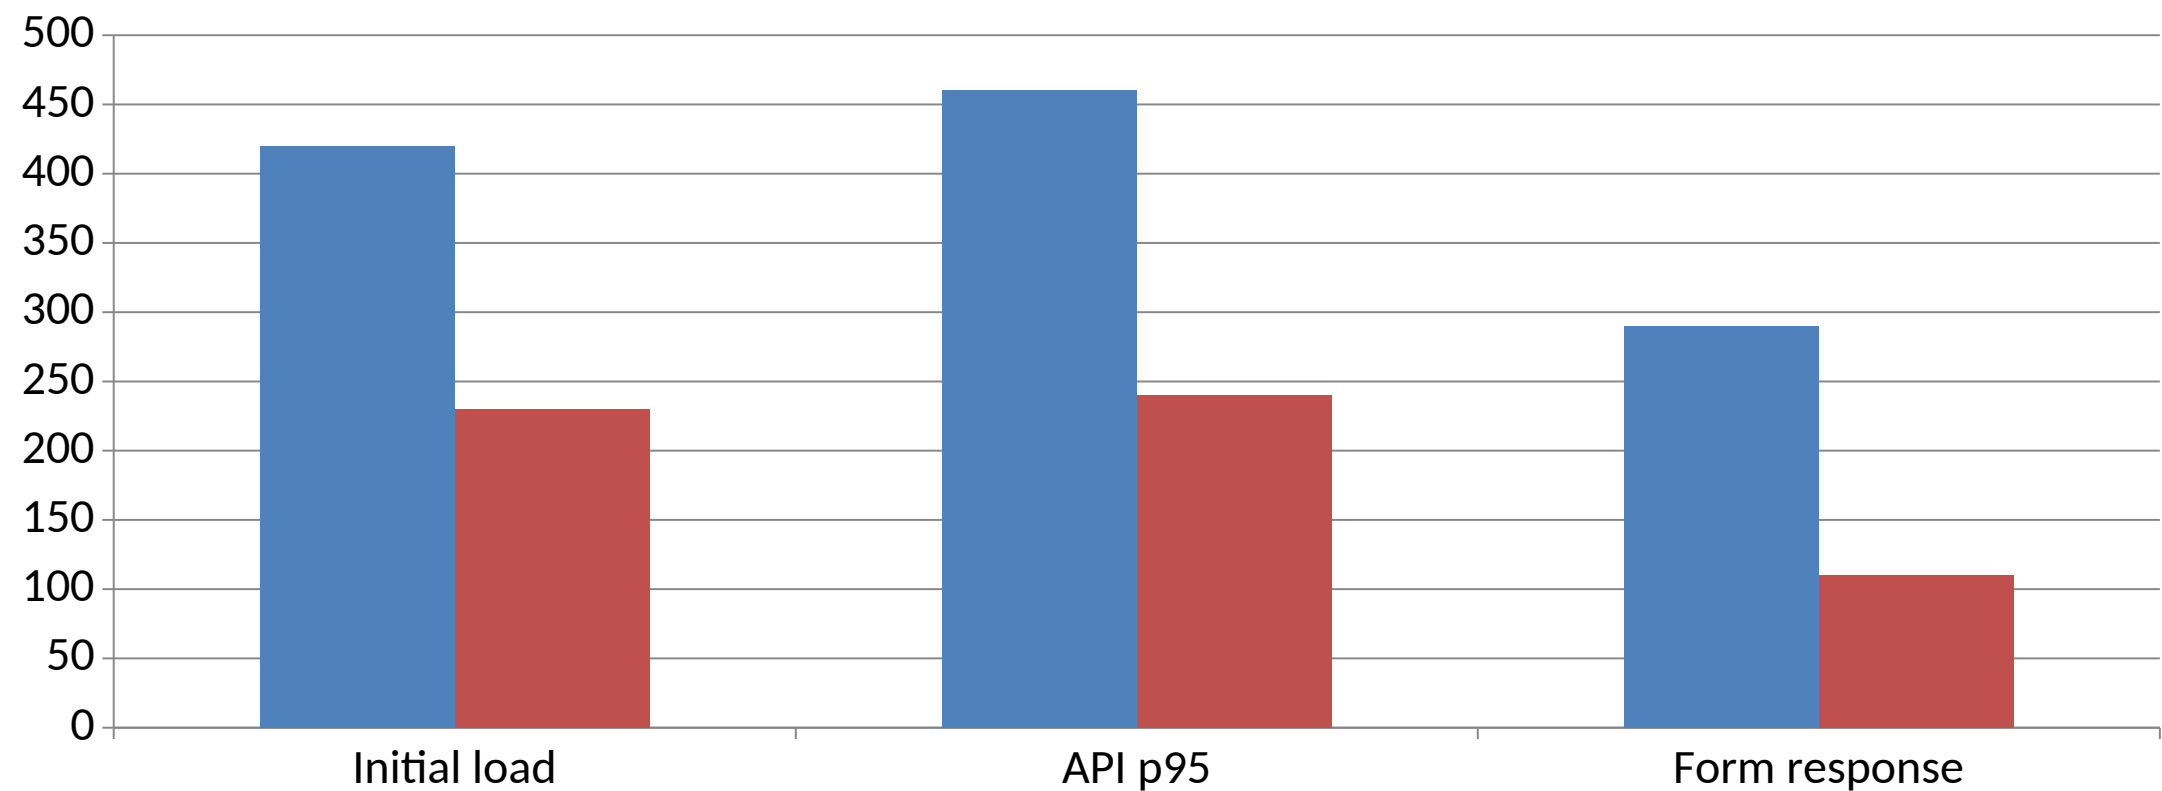

Illustrative local milliseconds; learners replace values with their measured results.

Course feedback and support

Course feedback

Complete the course feedback form

Questions

Raise them with your trainer before you leave

Materials

Slides, guide and labs on the LMS

Contact

enquiry@tertiaryinfotech.com