STORY · CHOICE

COURSE SLIDES · WSQ

Mastering Articulate Storyline 360 for e-Learning Content Creation

WSQ Course Code TGS-2024042308

TSC Content Strategy · ICT-SNM-4004-1.1

Provider Tertiary Infotech Academy Pte Ltd · UEN: 201200696W

Version v11 · 17 October 2026



MANDATORY WSQ ADMIN

Attendance and Feedback

AM attendance

Complete the SSG digital attendance QR shown by the trainer.

PM attendance

Complete the SSG digital attendance QR after the afternoon session.

Assessment attendance

Complete the separate digital attendance event for assessment.

TRAQOM survey

Complete the TRAQOM course-quality survey when instructed; it is separate from attendance.

FACILITATOR TEMPLATE

General Trainer Profile



TRAINER NAME

Insert approved profile photo and professional designation before delivery.

Industry practice

Relevant e-learning, Storyline and content-strategy experience.

Training practice

Adult-learning and facilitation credentials.

Course fit

Examples aligned to learner roles, devices and delivery channels.

Contact

Approved professional contact route.

COURSE FACILITATOR

Dr Alfred Ang



PRINCIPAL TRAINER

Tertiary Infotech Academy
enquiry@tertiaryinfotech.com

Expertise

Digital transformation, courseware and e-learning systems.

Facilitation

Concept explanation, coached Storyline practice and evidence review.

Quality

Traceable storyboards, accessible interactions and verified publishing.

Learning culture

Explain and test the reason behind every authoring decision.

OPENING DISCUSSION

Your E-Learning Context

Role

What learning or content do you create or manage?

Audience

Who must act differently after the experience?

Channel

LMS, web, Review 360, video or facilitated delivery?

Friction

Where does current authoring or review lose time?

Experience

Which Storyline feature is already familiar?

Evidence

What artifact will prove improvement?

GROUND RULES

Working Agreements

Participate

Try the tools and explain choices.

Respect

Critique the work, not the person.

Protect assets

Use permitted media and retain rights evidence.

Save versions

Preserve BEGIN/END files and name working copies.

Share safely

Protect learner data and assessment content.

Verify

Test preview and published output before delivery.

Download Course Materials



Mastering Articulate Storyline 360


Courseware · v11

PPTX	PDF	LG	LP	14
Trainer deck	Learner slides	Detailed guide	Delivery plan	Storyline activities

Outcome · the complete package is available in one authenticated course record.

COURSE FLOW

Four-Day Learning Journey

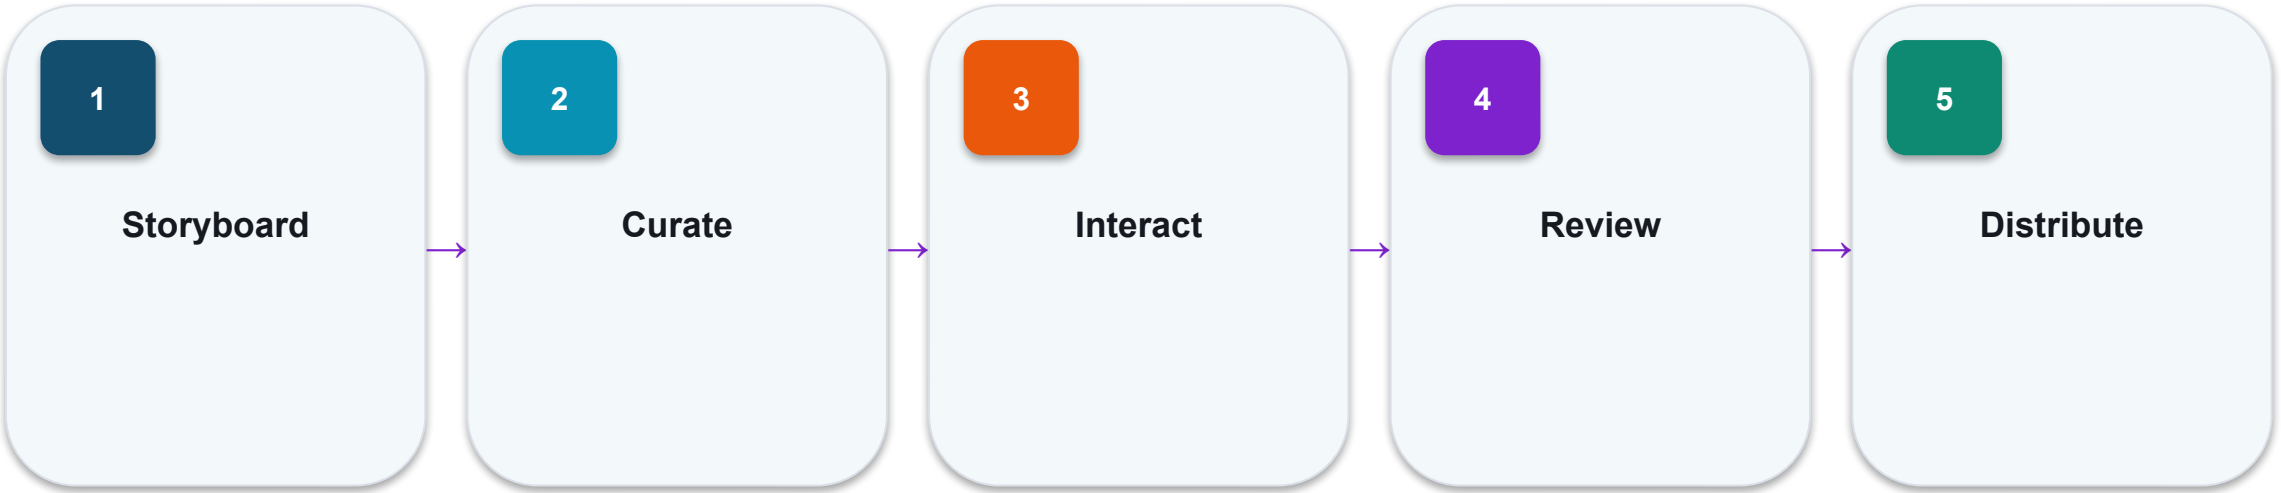

OUTCOME

The course moves from content intent to accessible Storyline construction, reliable interaction and governed delivery.

Skills Framework Alignment

TSC

Content Strategy · ICT-SNM-4004-1.1

Course

TGS-2024042308

Duration

4 days · 32 hours, including 2 hours of assessment

Knowledge

K1–K6

Abilities

A1–A7

Assessment

WA 60 min · PP 60 min

K1–K6

Knowledge Criteria

K1

Principles of digital storytelling

K2

Potential customers' evolving preferences for content types, styles and modes of delivery

K3

Process of developing a digital storyboard

K4

Parameters for delivering content for marketing purposes

K5

Features of marketing content

K6

Modes of content delivery for marketing

A1–A7

Ability Criteria

A1

Conceptualise content ideas to meet marketing objectives

A2

Map out digital storyboards as part of a content strategy

A3

Identify content requirements from customer and potential-customer preferences

A4

Determine the frequency of delivering marketing content to customers

A5

Determine the types and styles of content to deliver to customers

A6

Determine modes and processes for distributing content

A7

Develop guidelines for content-strategy execution

WHAT YOU WILL BE ABLE TO DO

Learning Outcomes

LO1

Conceptualise and map digital storyboards integrating principles of storytelling in Storyline 360.

LO2

Identify and determine diverse e-learning content aligned with audience preferences, industry trends and content features.

LO3

Determine effective modes and processes for distributing interactive e-learning content.

LO4

Develop guidelines and determine content delivery frequency for effective e-learning delivery.

FOUR CONNECTED LEARNING UNITS

Course Outline

Topic 1

Project Architecture and Storyboard
Blank project · scenes · theme · masters · storyboard · naming · variables · navigation · preview
LO1 · A1 · A2 · K1 · K3

Topic 2

Media, Interaction and Accessibility
Media Library · hazards · hotspots · layers · states · triggers · motion · simulation · audio · captions
LO2 · A3 · A5 · K2 · K5

Topic 3

Branching, Questions and Results
Branching · freeform · feedback · question banks · result slide · retry · review · completion
LO3 · A6 · K6

Topic 4

Review, Publishing and Governance
Player · translation · Review 360 · SCORM 1.2/2004 · Tin Can xAPI · LMS/LRS tests · retention
LO4 · A4 · A7 · K4

BEFORE ASSESSMENT

Assessment Briefing

Individual

Complete your own work with no discussion.

References

Use only materials approved by the assessor.

Phones

Place phones and other unapproved materials under the table.

Time

WA 60 min · PP 60 min.

Submission


Complete the provided document and upload through LMS-TMS.

Outcome

Competent or Not Yet Competent, with reassessment and appeal rights.

SUMMATIVE EVIDENCE

Assessment Design

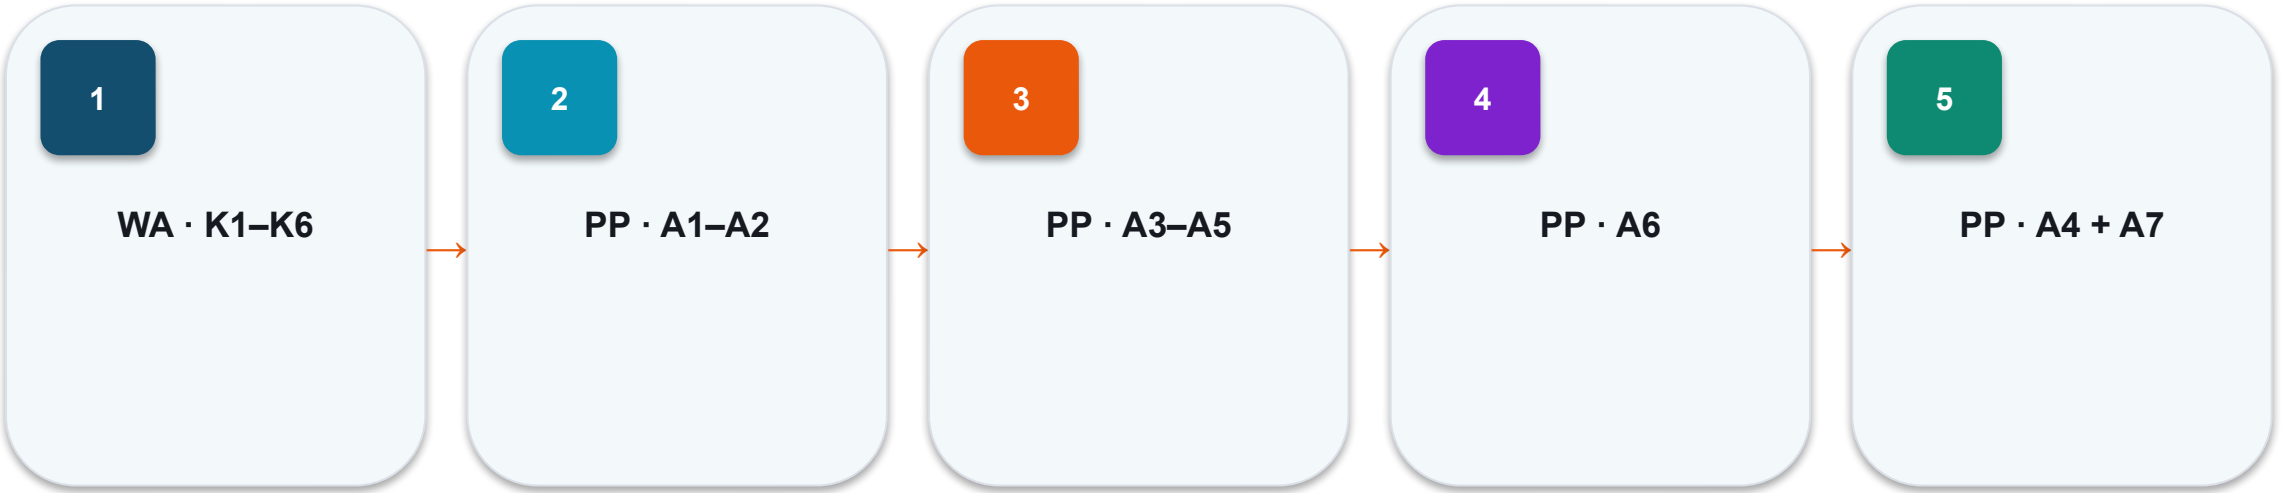

OUTCOME **Six written questions and four practical tasks; each instrument is 60 minutes and open book.**

Tools, Materials and Workspace

Hardware

A supported Windows laptop, suitable display, mouse and reliable storage.

Software

Current supported Articulate Storyline 360 desktop release.

Workspace

Local working folder with short paths and separate backup.

Sources

Rights-cleared pictures, audio, video, scripts and brand materials.

Output brief

Audience, device, channel, tracking, accessibility and update requirements.

Safety

Versioned .story files, protected assessment content and verified publishes.

TOOL CONTEXT

Storyline Scope

Industry use

Interactive e-learning, simulations, quizzes, scenarios and tracked packages.

Windows authoring

Storyline desktop authoring requires a supported Windows environment.

Interface drift

Labels may move as releases evolve; authoring principles remain stable.

Decision over clicks

Choose features by purpose, audience, accessibility and delivery.

Responsible AI

Review outputs and retain provenance and permission evidence.

Trademark

Articulate and Storyline are Articulate trademarks; this course is provider-developed.

01

Project Architecture and Storyboard

Blank project · scenes · theme · masters · storyboard · naming · variables · navigation · preview

LO1 · A1 · A2 · K1 · K3

EDITABLE STORYBOARD-PLANNING CHART

Where Authoring Effort Accumulates




READ THE CHART

Illustrative planning split: interactivity is only one workload. Story architecture, media readiness and review evidence must be planned before production.

Editable PowerPoint shape chart


Local project baseline

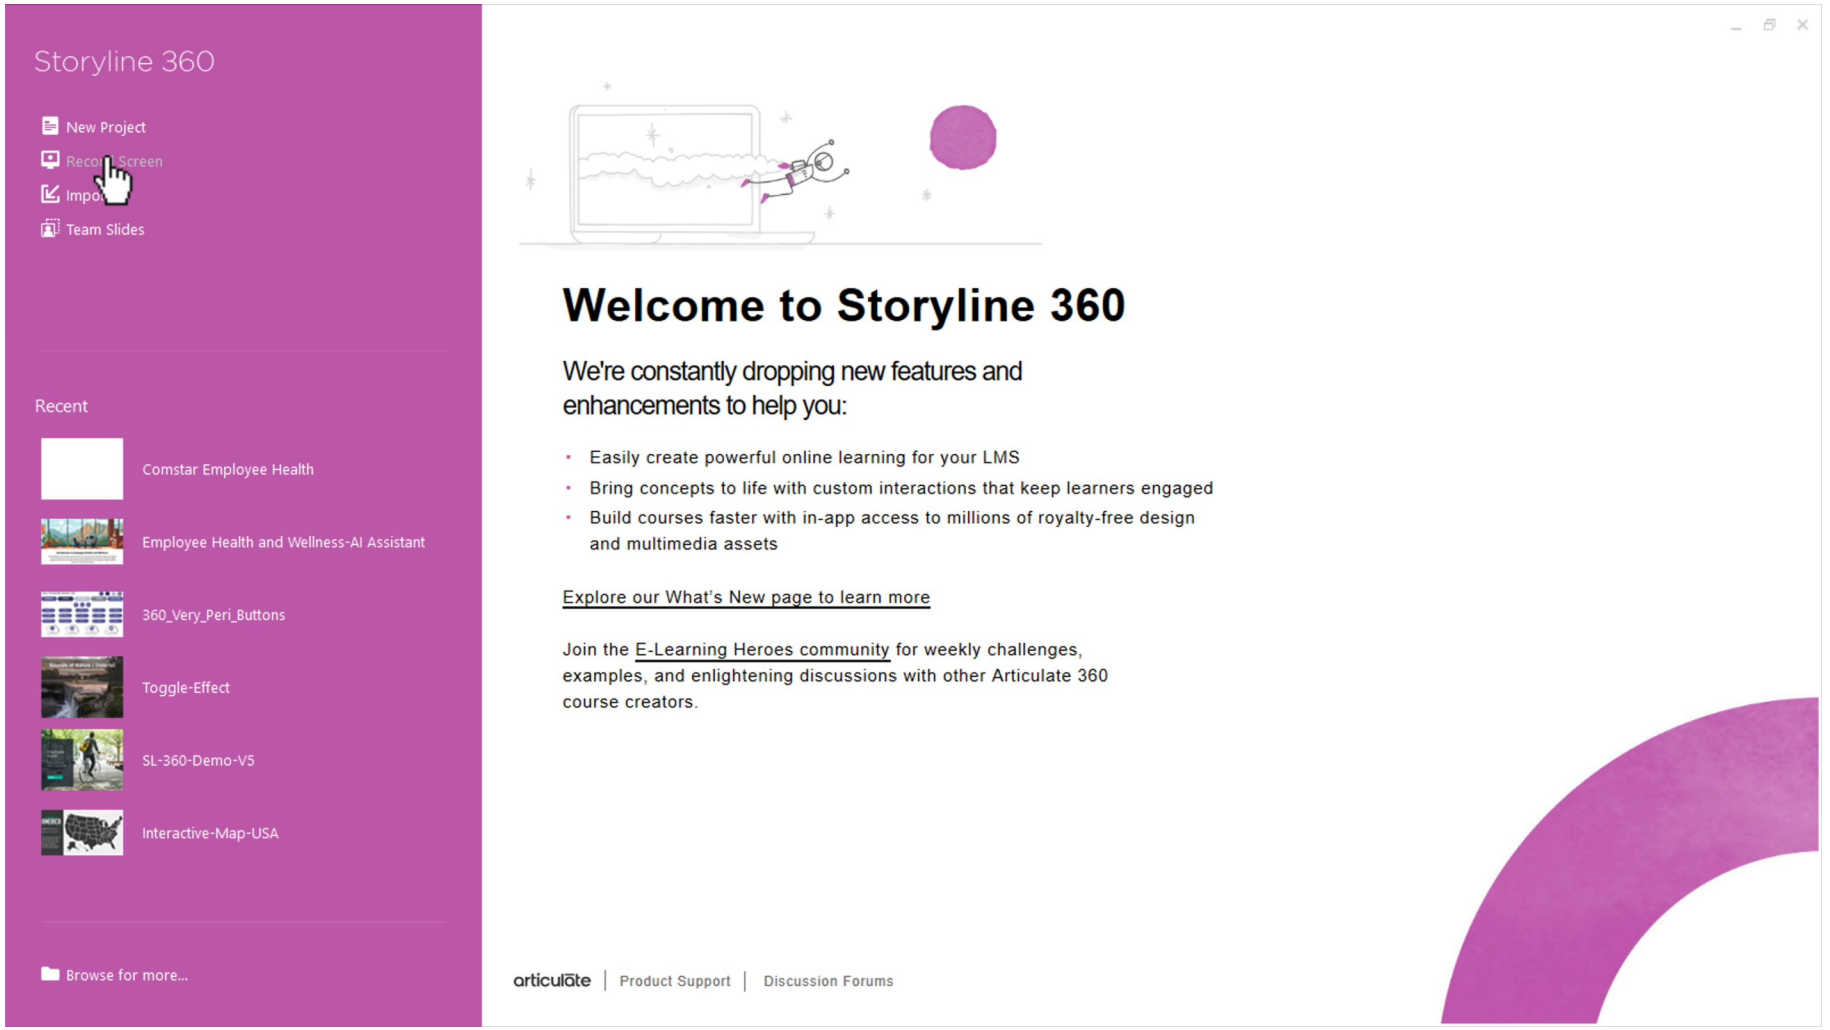

NAMED ARTIFACT	WSA-001-Local-project-baseline
MECHANISM	File > Save As creates WSA-YourName-v01.story on a local Windows drive
EXPECTED	v01 opens locally and the checksum/modified time identifies the retained…

Authentic Articulate interface reference · verify the named control


Local project baseline

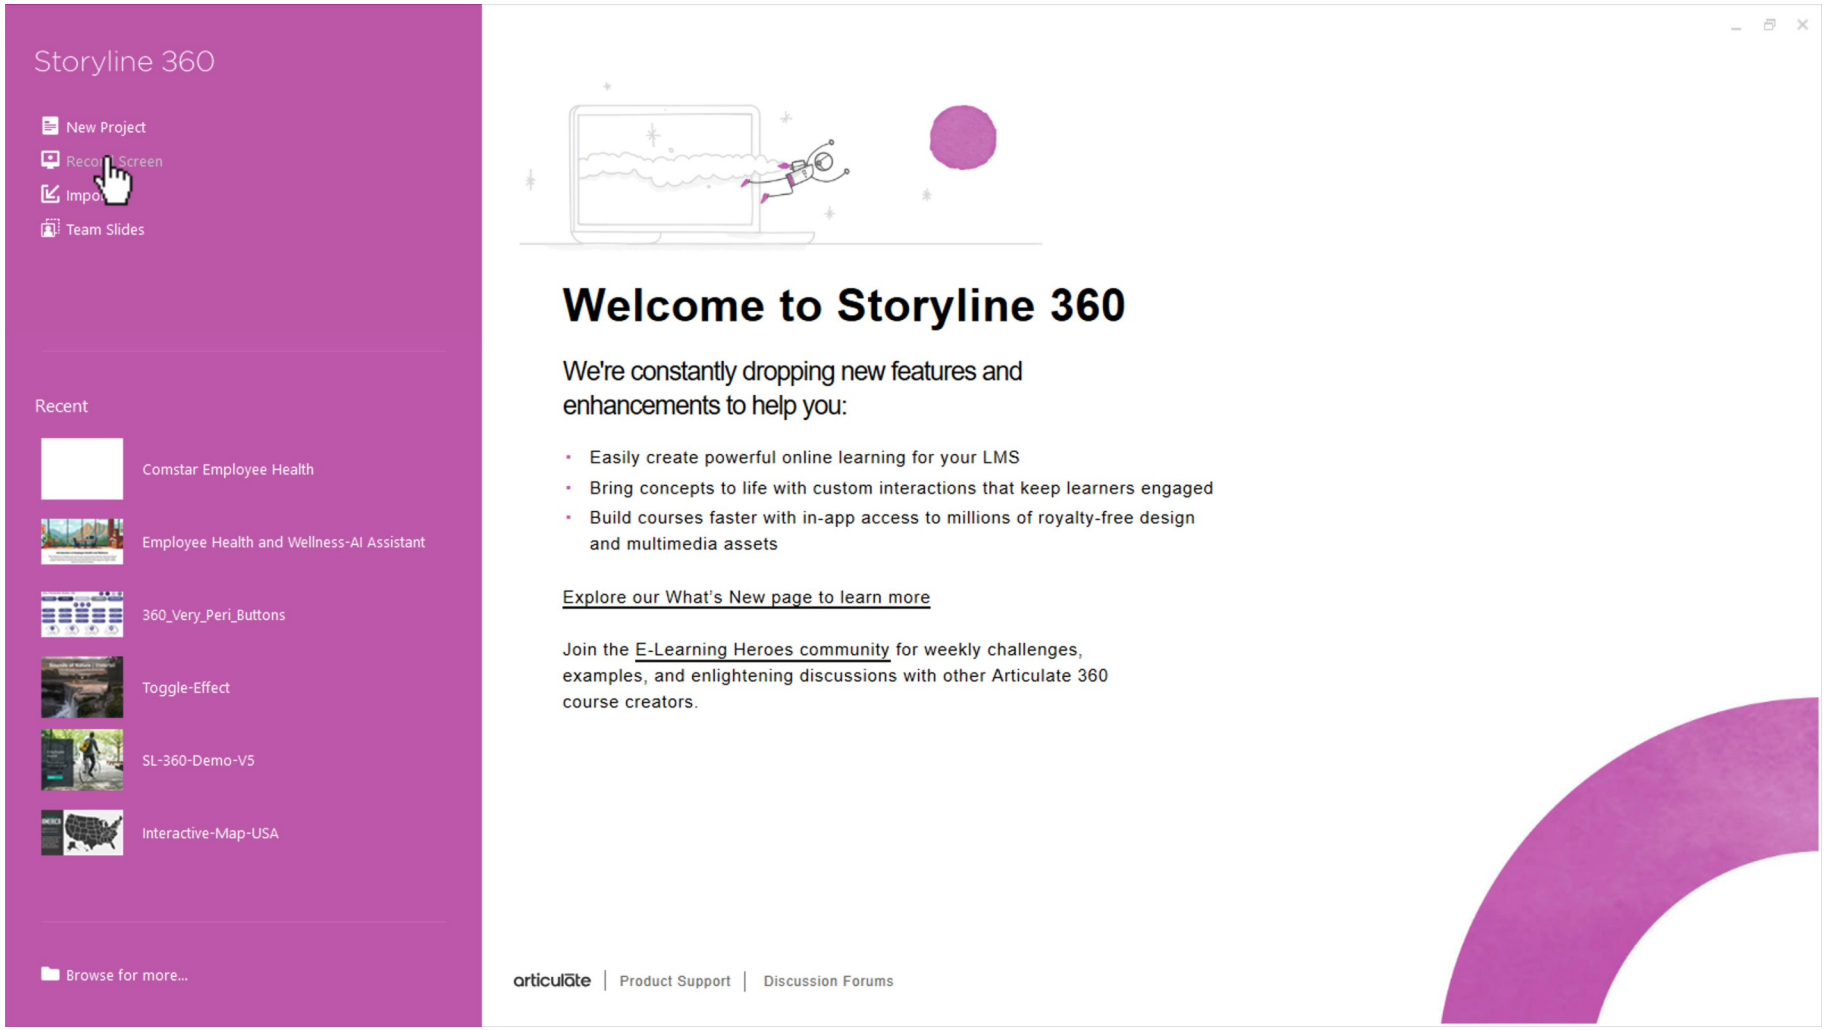

SET THESE CONTROLS	C1=short local path · C2=version suffix · C3=backup copy
REJECT WHEN	network/removable-drive authoring; overwriting the baseline
VERIFY READBACK	v01 opens locally and the checksum/modified time identifies the retained…

Authentic Articulate interface reference · verify the named control


Local project baseline

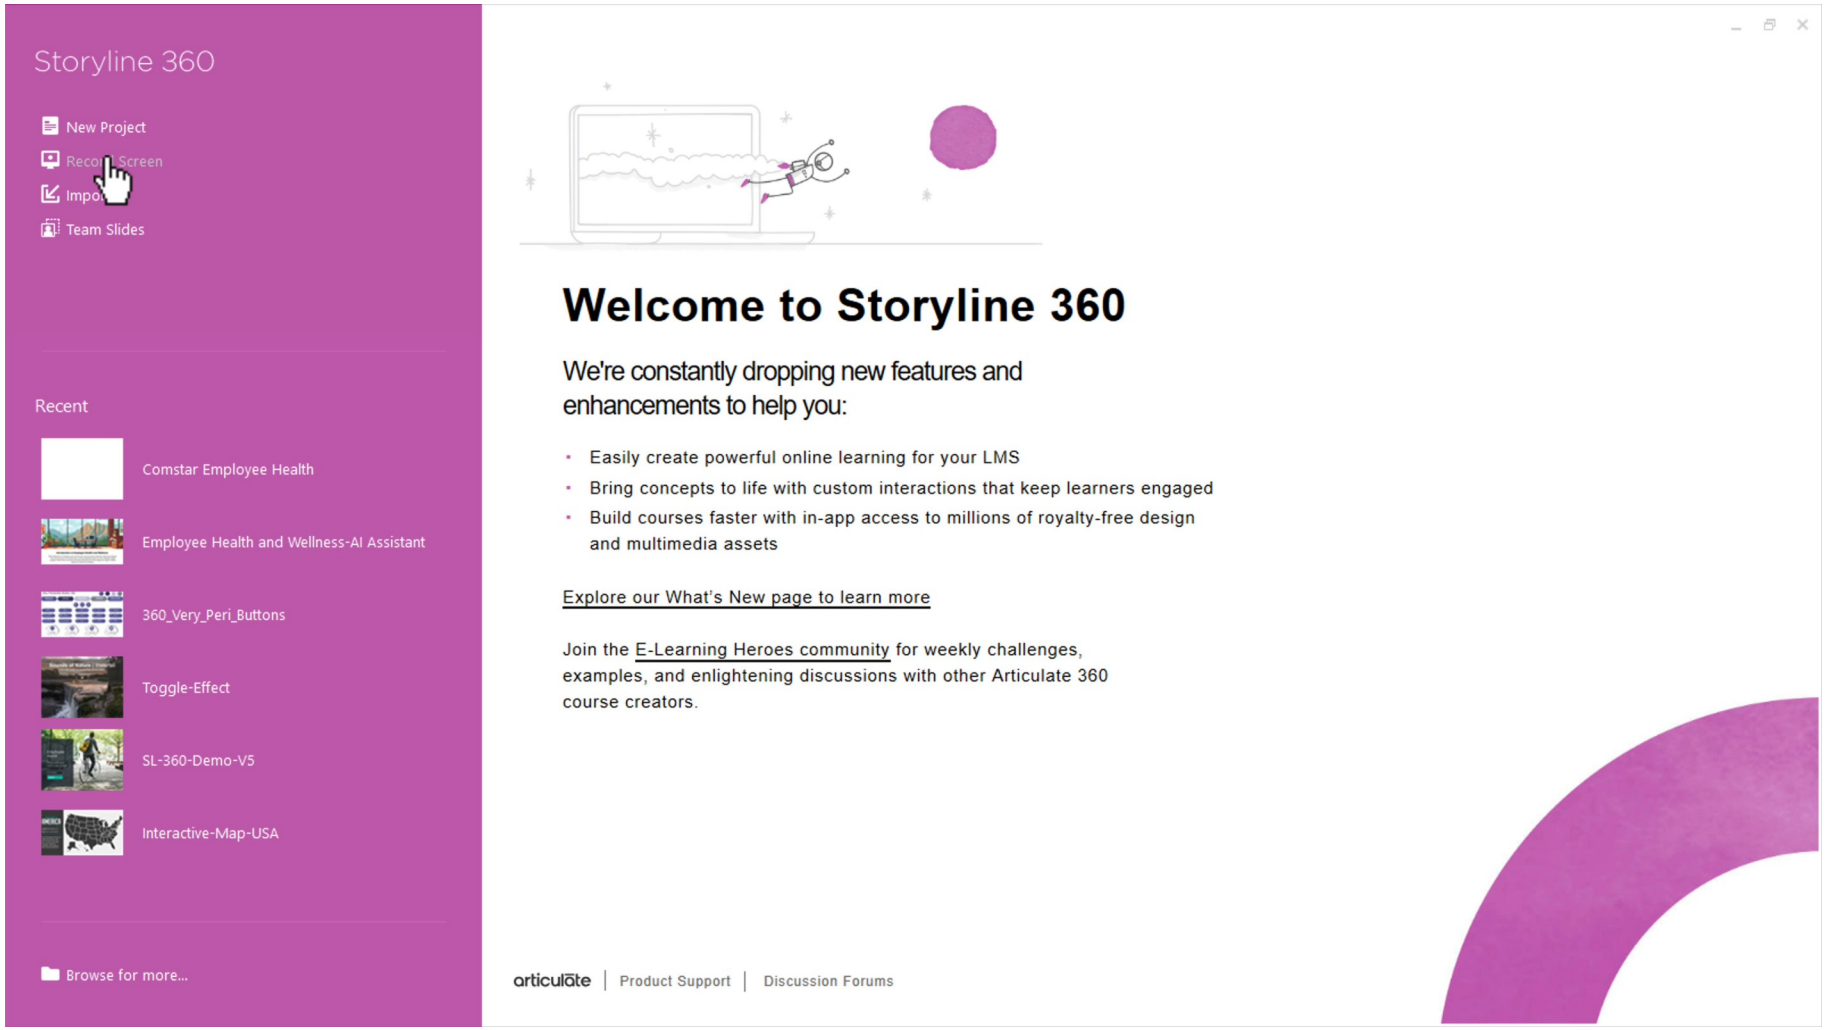

FAULTY OUTPUT (EXAMPLE)	network/removable-drive authoring; overwriting the baseline
FIX IN NAMED PANEL	short local path; version suffix; backup copy
EXPECTED AFTER FIX	v01 opens locally and the checksum/modified time identifies the retained…

Authentic Articulate interface reference · verify the named control


Story View scene architecture

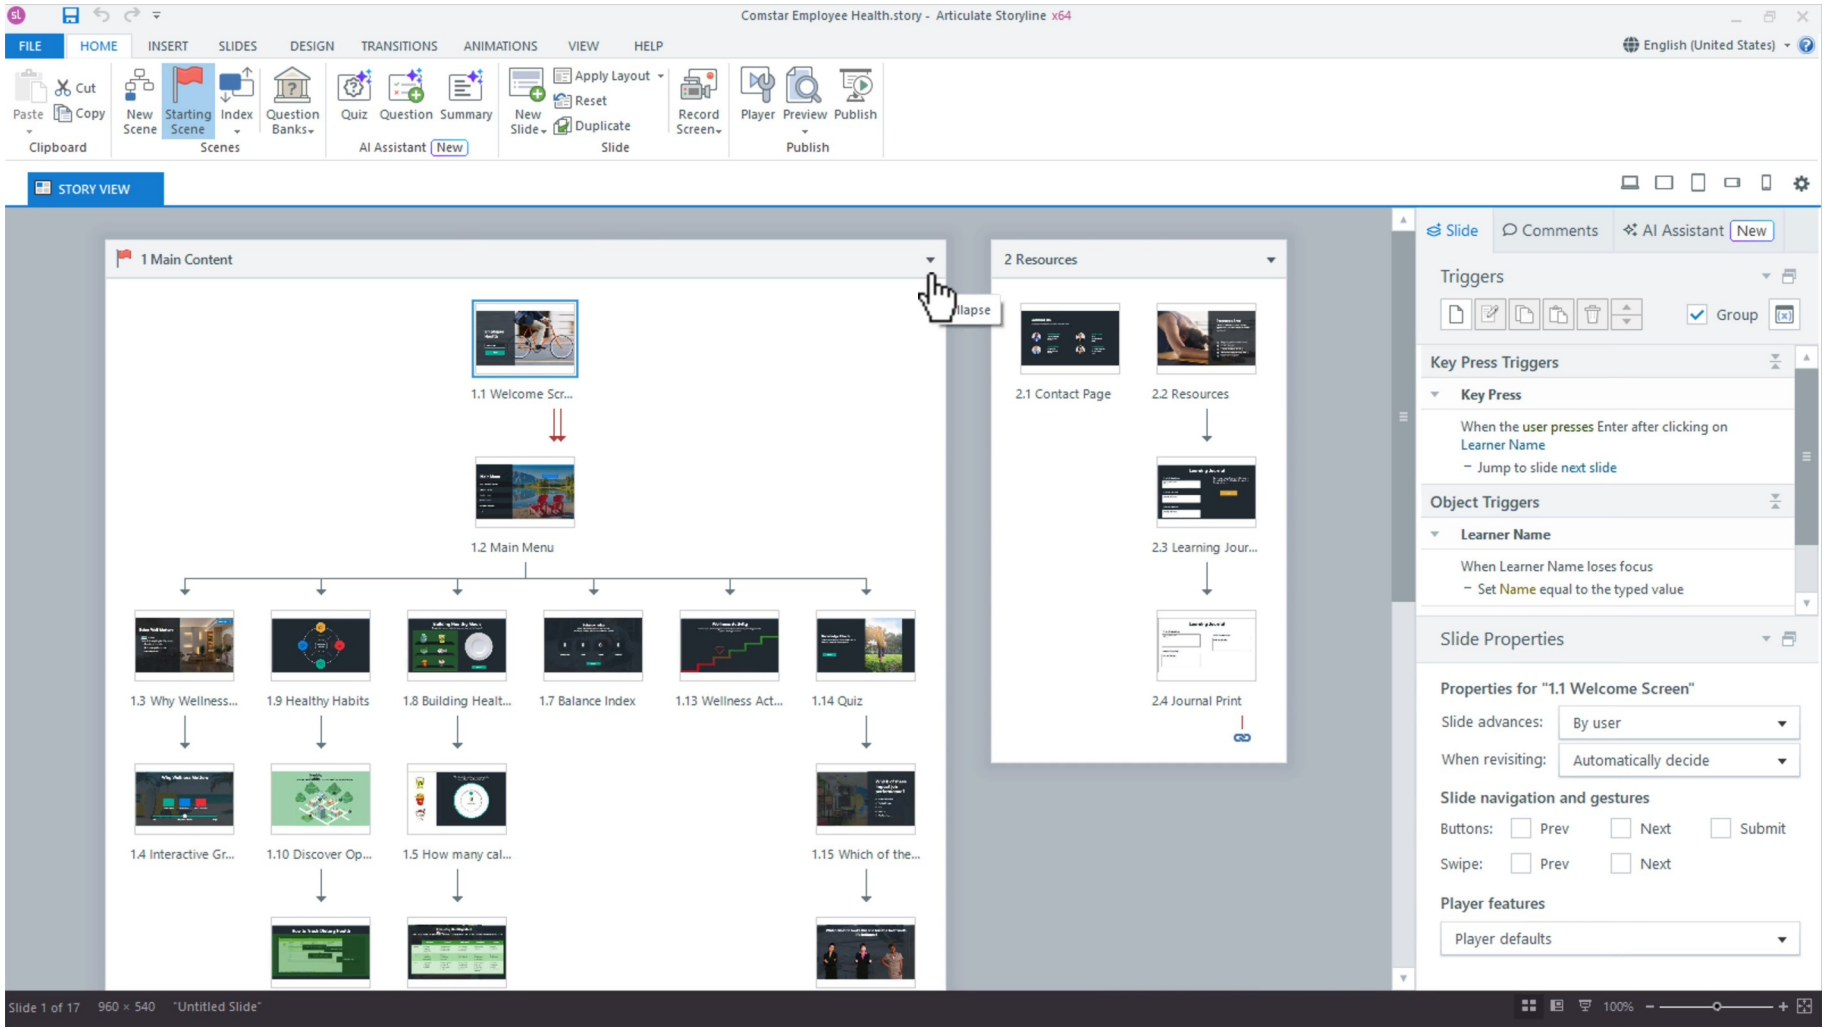

NAMED ARTIFACT	**WSA-002-Story-View-scene-architecture**
MECHANISM	**Story View groups Welcome, Learn, Practise, Quiz and Resources scenes and…**
EXPECTED	**every route has an intended entry, return and terminal slide**

Authentic Articulate interface reference · verify the named control

Story View scene architecture

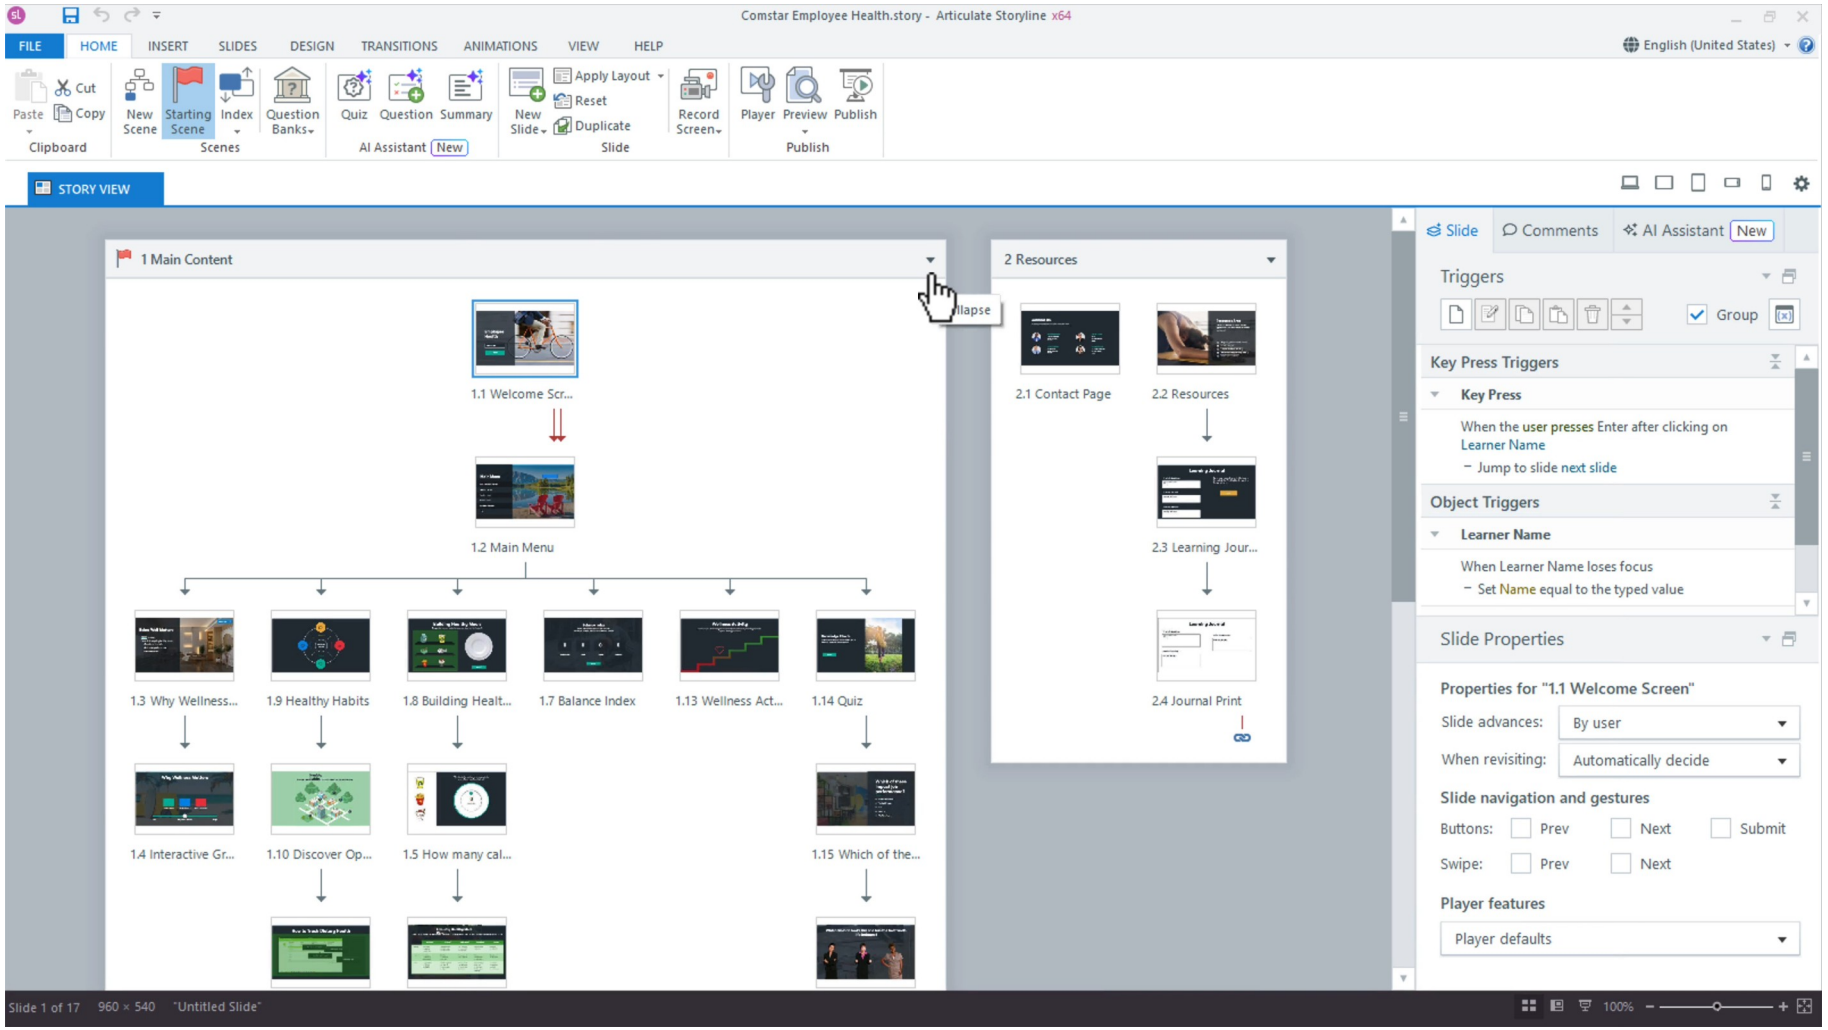


SET THESE CONTROLS C1=scene names · C2=start scene · C3=slide order · C4=jump targets

REJECT WHEN assuming canvas order controls runtime navigation

VERIFY READBACK every route has an intended entry, return and terminal slide

Authentic Articulate interface reference · verify the named control

Story View scene architecture

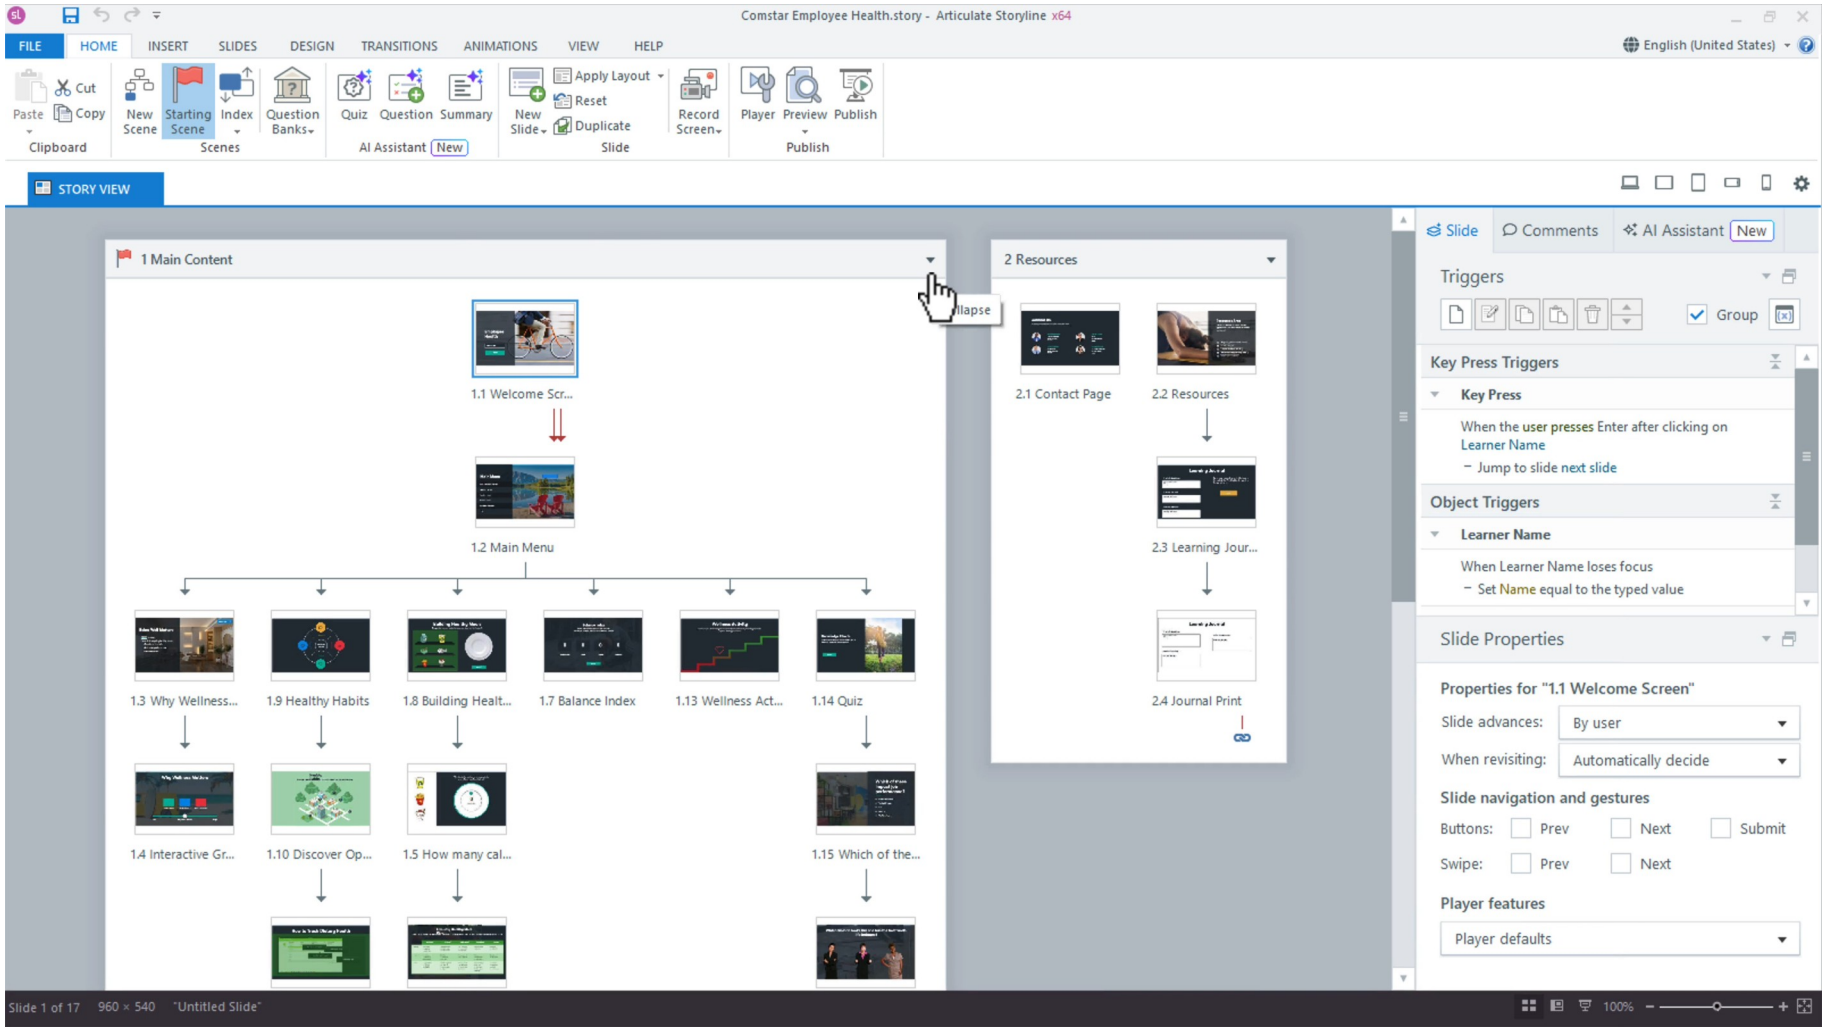

FAULTY OUTPUT (EXAMPLE) assuming canvas order controls runtime navigation

FIX IN NAMED PANEL scene names; start scene; slide order; jump targets

EXPECTED AFTER FIX every route has an intended entry, return and terminal slide · verify in…

Authentic Articulate interface reference · verify the named control

Slide size and safe area

Named HarbourLink WSH artifact

WSA-003-Slide-size-and-safe-area

Input / source state

WSA checkpoint plus 16:9 size; player chrome; caption area; minimum target size

Runtime mechanism

Design > Slide Size fixes the authoring canvas before layouts and media are placed

Expected output

preview at the intended player size keeps controls and captions visible

Rejected output

changing size after build and clipping controls

Evidence record

WSA-003-Slide-size-and-safe-area: capture the configured control and the runtime readback.

EDITABLE CONFIGURATION MODEL

Slide size and safe area

SET THESE CONTROLS

C1=16:9 size · C2=player chrome · C3=caption area · C4=minimum target size

→

REJECT WHEN

changing size after build and clipping controls

→

VERIFY READBACK

preview at the intended player size keeps controls and captions visible

Editable HarbourLink model · preview at the intended player size keeps controls and captions visible

Slide size and safe area

FAULTY OUTPUT (EXAMPLE)

changing size after build and clipping controls

→

CORRECT THE RECORD

16:9 size; player chrome; caption area; minimum target size

→

EXPECTED AFTER FIX

preview at the intended player size keeps controls and captions visible · verify in your own Preview

Editable HarbourLink model · preview at the intended player size keeps controls and captions visible

© 2026 Tertiary Infotech Academy Pte Ltd · Mastering Articulate Storyline 360 for e-Learning Content Creation · TGS-2024042308

CONCEPT 04 · HOW IT WORKS

Theme fonts and colours

Named HarbourLink WSH artifact

WSA-004-Theme-fonts-and-colours

Input / source state

WSA checkpoint plus heading/body fonts; contrast; semantic colours; theme naming

Runtime mechanism

Design > Fonts > Create New Theme Fonts and Design > Colors > Create New Theme Colors define the HarbourLink palette; Design > Themes saves the combined theme

Expected output

theme values reproduce consistently on three representative slides

Rejected output

manual near-match colours and colour-only meaning

Evidence record

WSA-004-Theme-fonts-and-colours: capture the configured control and the runtime readback.

EDITABLE CONFIGURATION MODEL

Theme fonts and colours

SET THESE CONTROLS

C1=heading/body fonts · C2=contrast · C3=semantic colours · C4=theme naming

→

REJECT WHEN

manual near-match colours and colour-only meaning

→

VERIFY READBACK

theme values reproduce consistently on three representative slides

Editable HarbourLink model · theme values reproduce consistently on three representative slides

Theme fonts and colours

FAULTY OUTPUT (EXAMPLE)

manual near-match colours and colour-only meaning

→

CORRECT THE RECORD

heading/body fonts; contrast; semantic colours; theme naming

→


EXPECTED AFTER FIX

theme values reproduce consistently on three representative slides · verify in your own Preview

Editable HarbourLink model · theme values reproduce consistently on three representative slides

© 2026 Tertiary Infotech Academy Pte Ltd · Mastering Articulate Storyline 360 for e-Learning Content Creation · TGS-2024042308


Slide master hierarchy

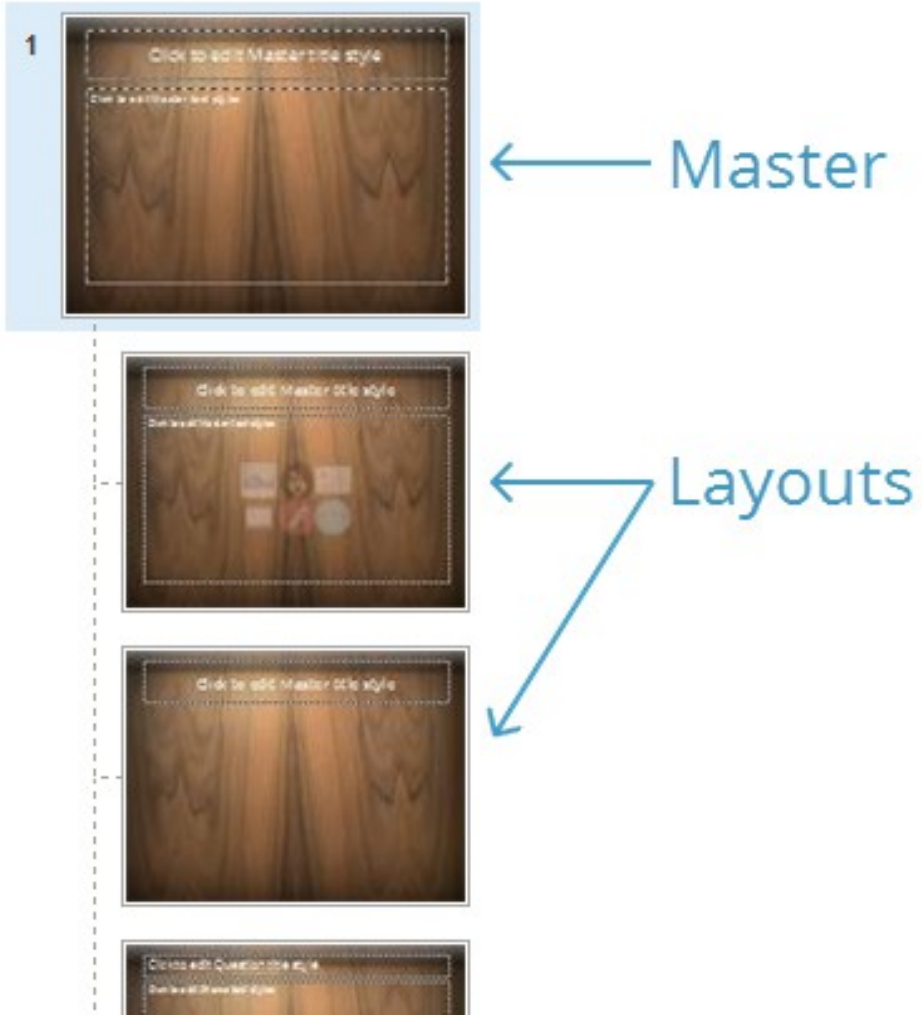

NAMED ARTIFACT	WSA-005-Slide-master-hierarchy
MECHANISM	View > Slide Master defines title, content, scenario and quiz layouts with…
EXPECTED	new slides inherit geometry without unwanted objects

Authentic Articulate interface reference · verify the named control


Slide master hierarchy

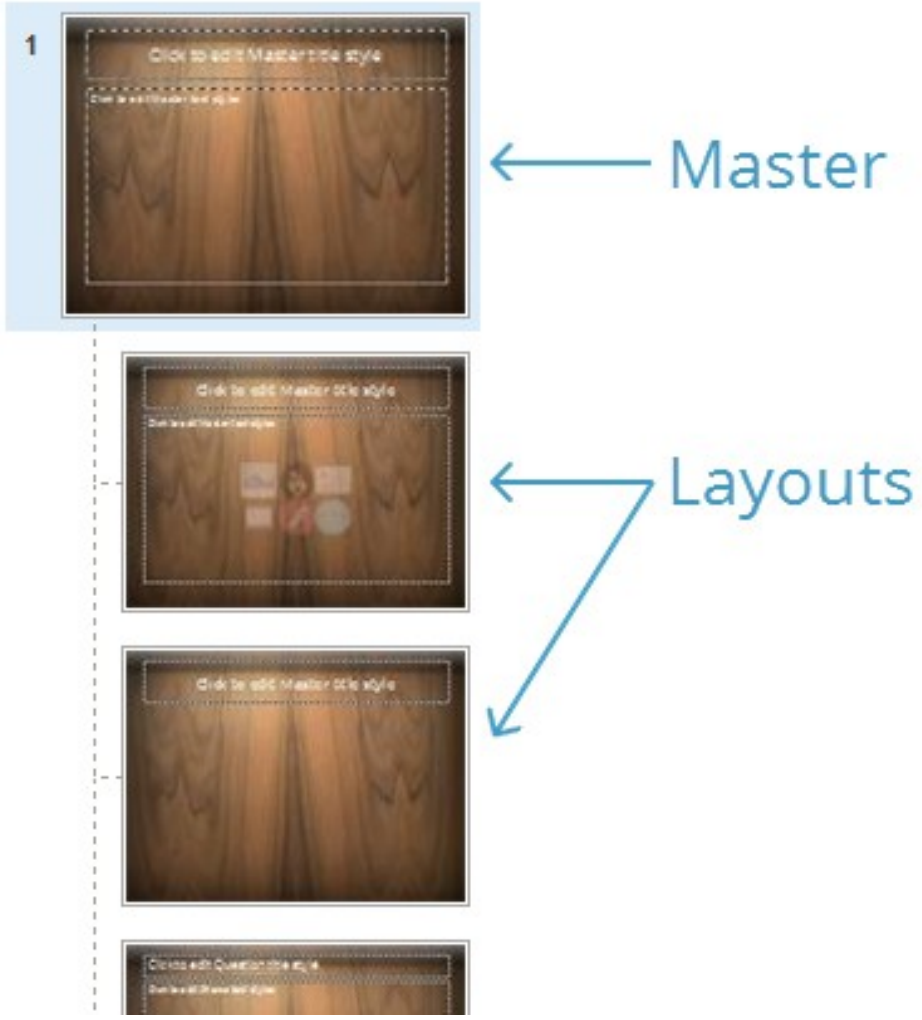

SET THESE CONTROLS	C1=master · C2=layout · C3=placeholder · C4=background · C5=inheritance
REJECT WHEN	placing course-specific content on the master
VERIFY READBACK	new slides inherit geometry without unwanted objects

Authentic Articulate interface reference · verify the named control

Slide master hierarchy

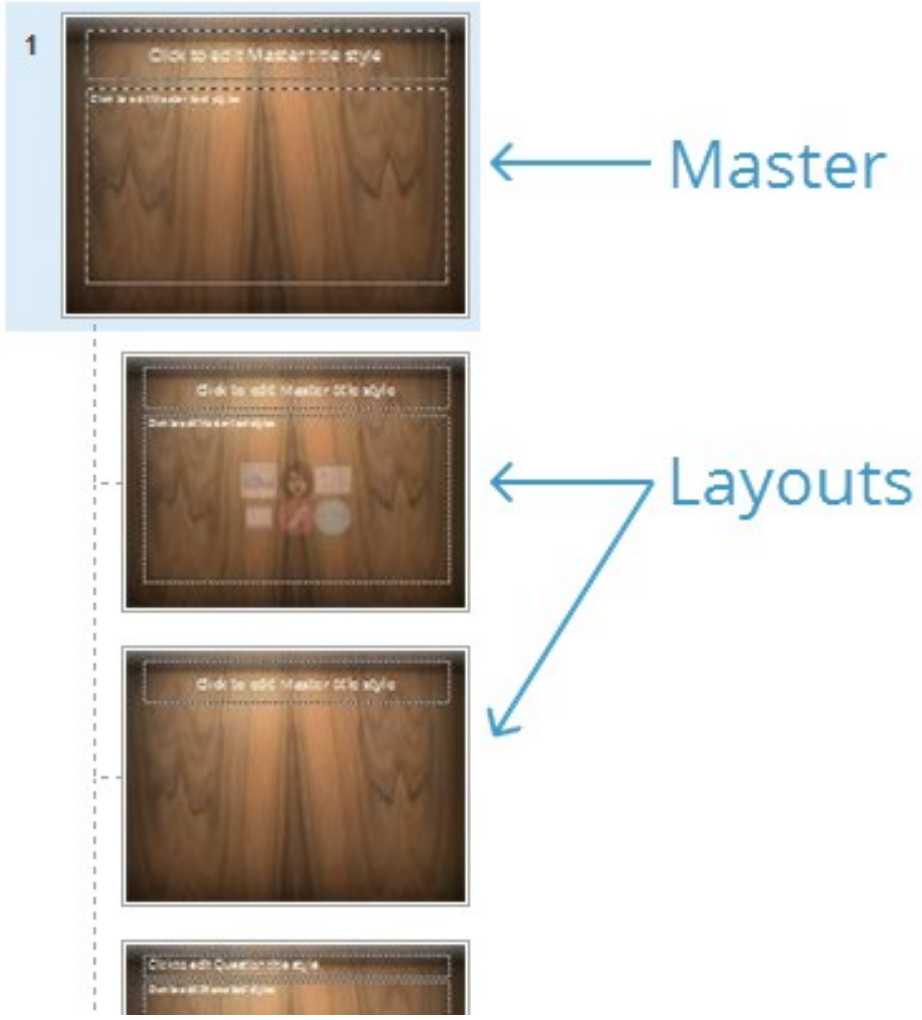

FAULTY OUTPUT (EXAMPLE)	placing course-specific content on the master
FIX IN NAMED PANEL	master; layout; placeholder; background; inheritance
EXPECTED AFTER FIX	new slides inherit geometry without unwanted objects · verify in your own…

Authentic Articulate interface reference · verify the named control

Storyboard screen specification

Named HarbourLink WSH artifact

WSA-006-Storyboard-screen-specification

Input / source state

WSA checkpoint plus unique IDs; owner; status; evidence; source

Runtime mechanism

The supplied CSV maps screen ID, purpose, narration, asset, interaction, branch and accessibility

Expected output

each Storyline slide maps to one storyboard row and acceptance check

Rejected output

building before branch and accessibility fields are resolved

Evidence record

WSA-006-Storyboard-screen-specification: capture the configured control and the runtime readback.

EDITABLE CONFIGURATION MODEL

Storyboard screen specification

SET THESE CONTROLS

C1=unique IDs · C2=owner · C3=status · C4=evidence · C5=source

REJECT WHEN

building before branch and accessibility fields are resolved

VERIFY READBACK

each Storyline slide maps to one storyboard row and acceptance check

Editable HarbourLink model · each Storyline slide maps to one storyboard row and acceptance check

Storyboard screen specification

FAULTY OUTPUT (EXAMPLE)

building before branch and accessibility fields are resolved

→

CORRECT THE RECORD

unique IDs; owner; status; evidence; source

→


EXPECTED AFTER FIX

each Storyline slide maps to one storyboard row and acceptance check · verify in your own Preview

Editable HarbourLink model · each Storyline slide maps to one storyboard row and acceptance check

© 2026 Tertiary Infotech Academy Pte Ltd · Mastering Articulate Storyline 360 for e-Learning Content Creation · TGS-2024042308


Object naming discipline

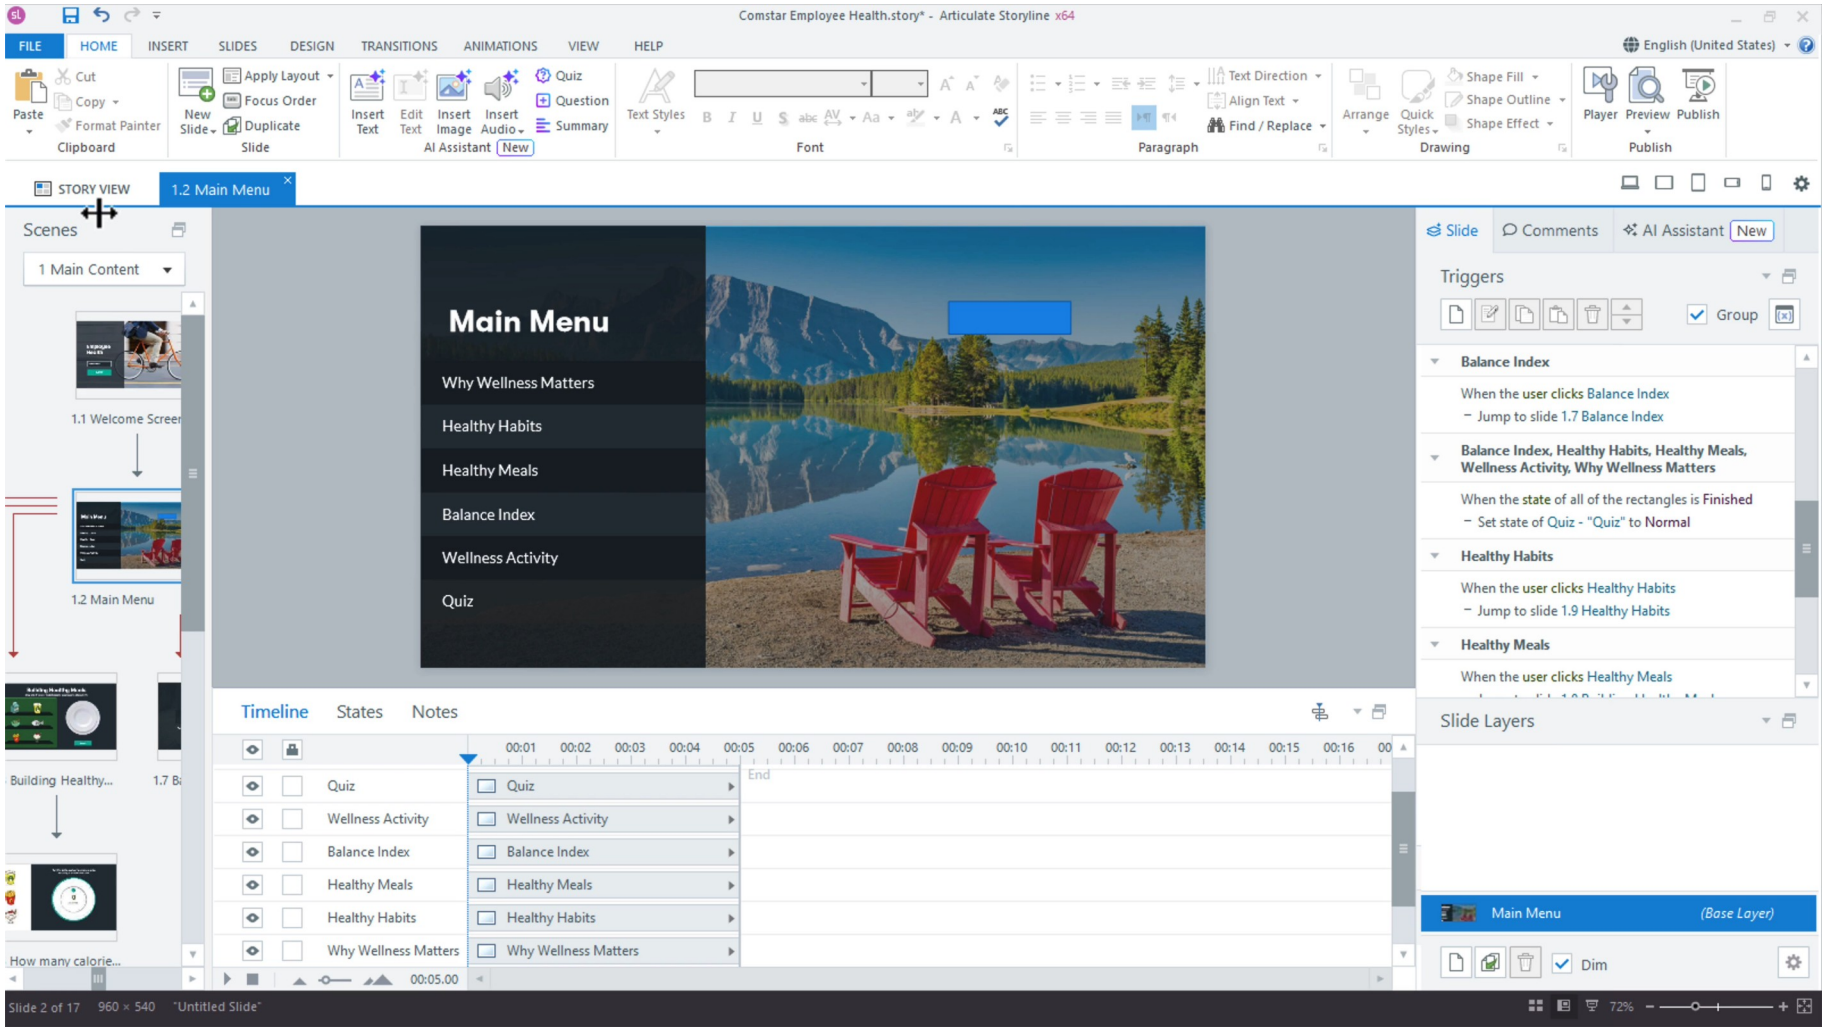

NAMED ARTIFACT	**WSA-007-Object-naming-discipline**	**MECHANISM**	**Timeline object names encode type and purpose such as btn_Hazard01 and…**	**EXPECTED**	**trigger and focus panels can be audited without selecting each object**

Authentic Articulate interface reference · verify the named control


Object naming discipline

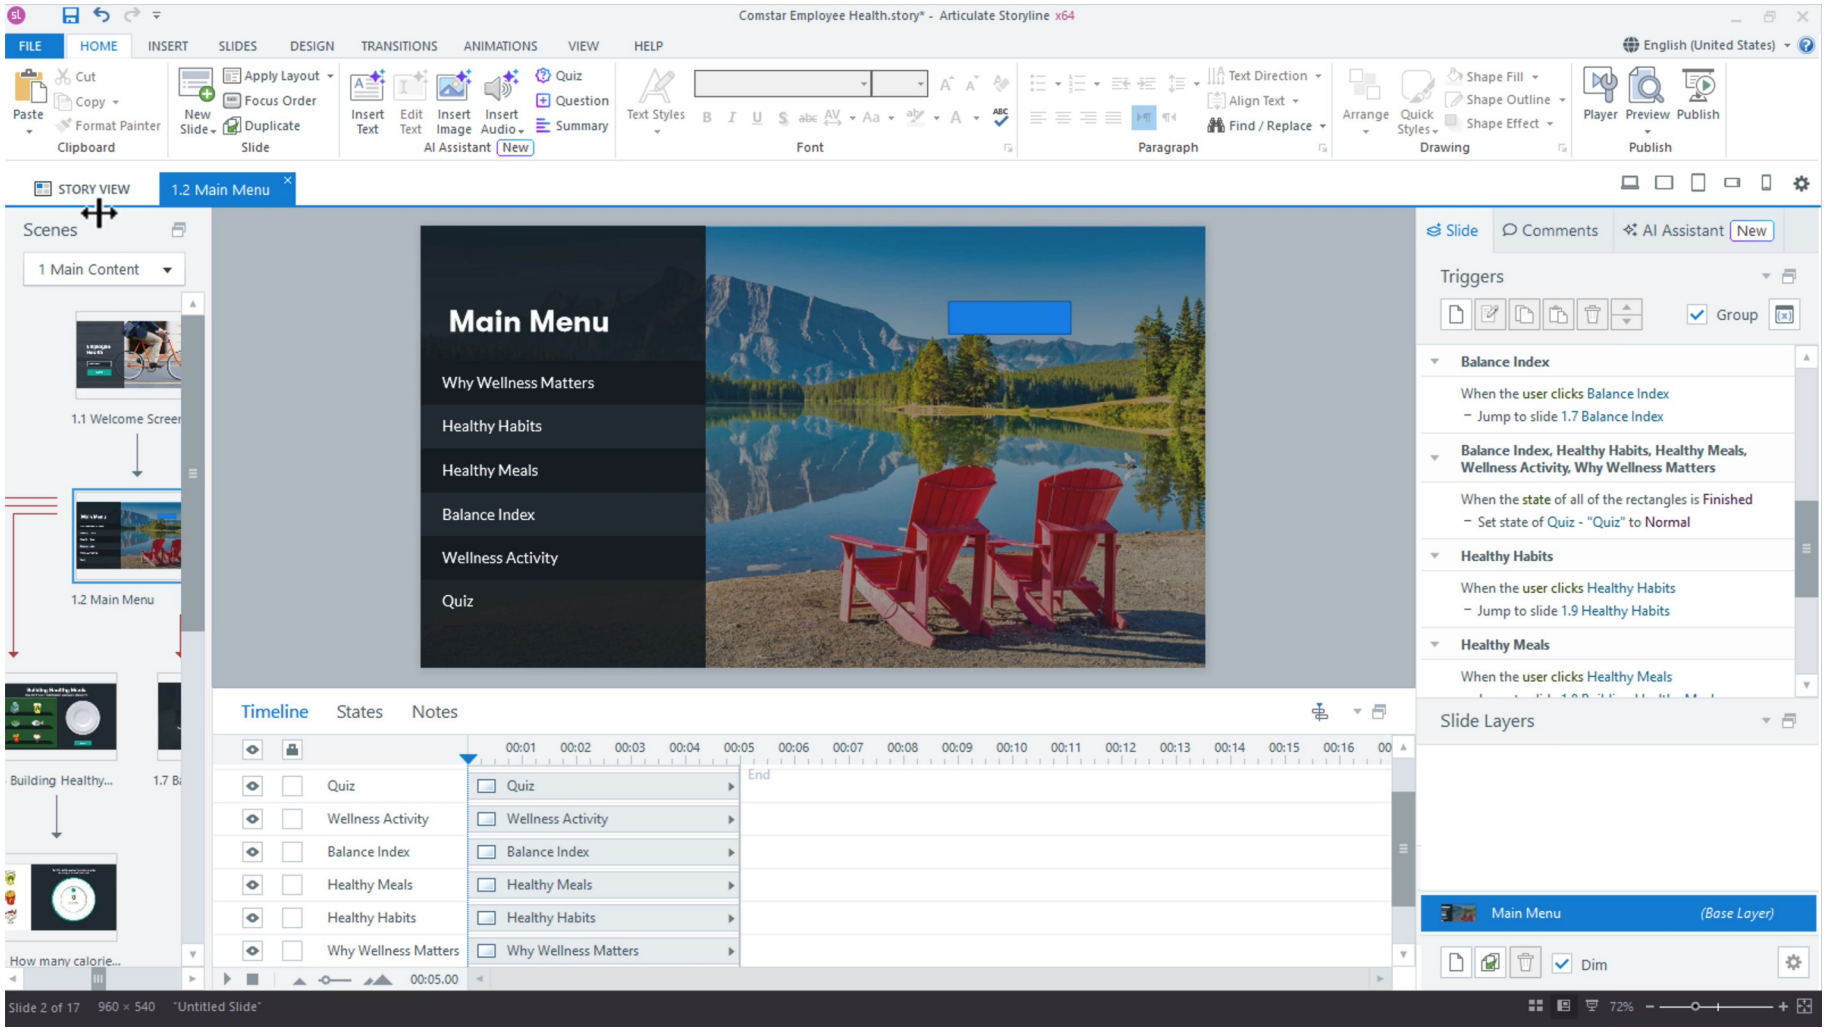

SET THESE CONTROLS	**C1=prefixes · C2=unique names · C3=layer names · C4=variable names**
REJECT WHEN	**leaving Rectangle 17 or duplicate names**
VERIFY READBACK	**trigger and focus panels can be audited without selecting each object**

Authentic Articulate interface reference · verify the named control

Object naming discipline

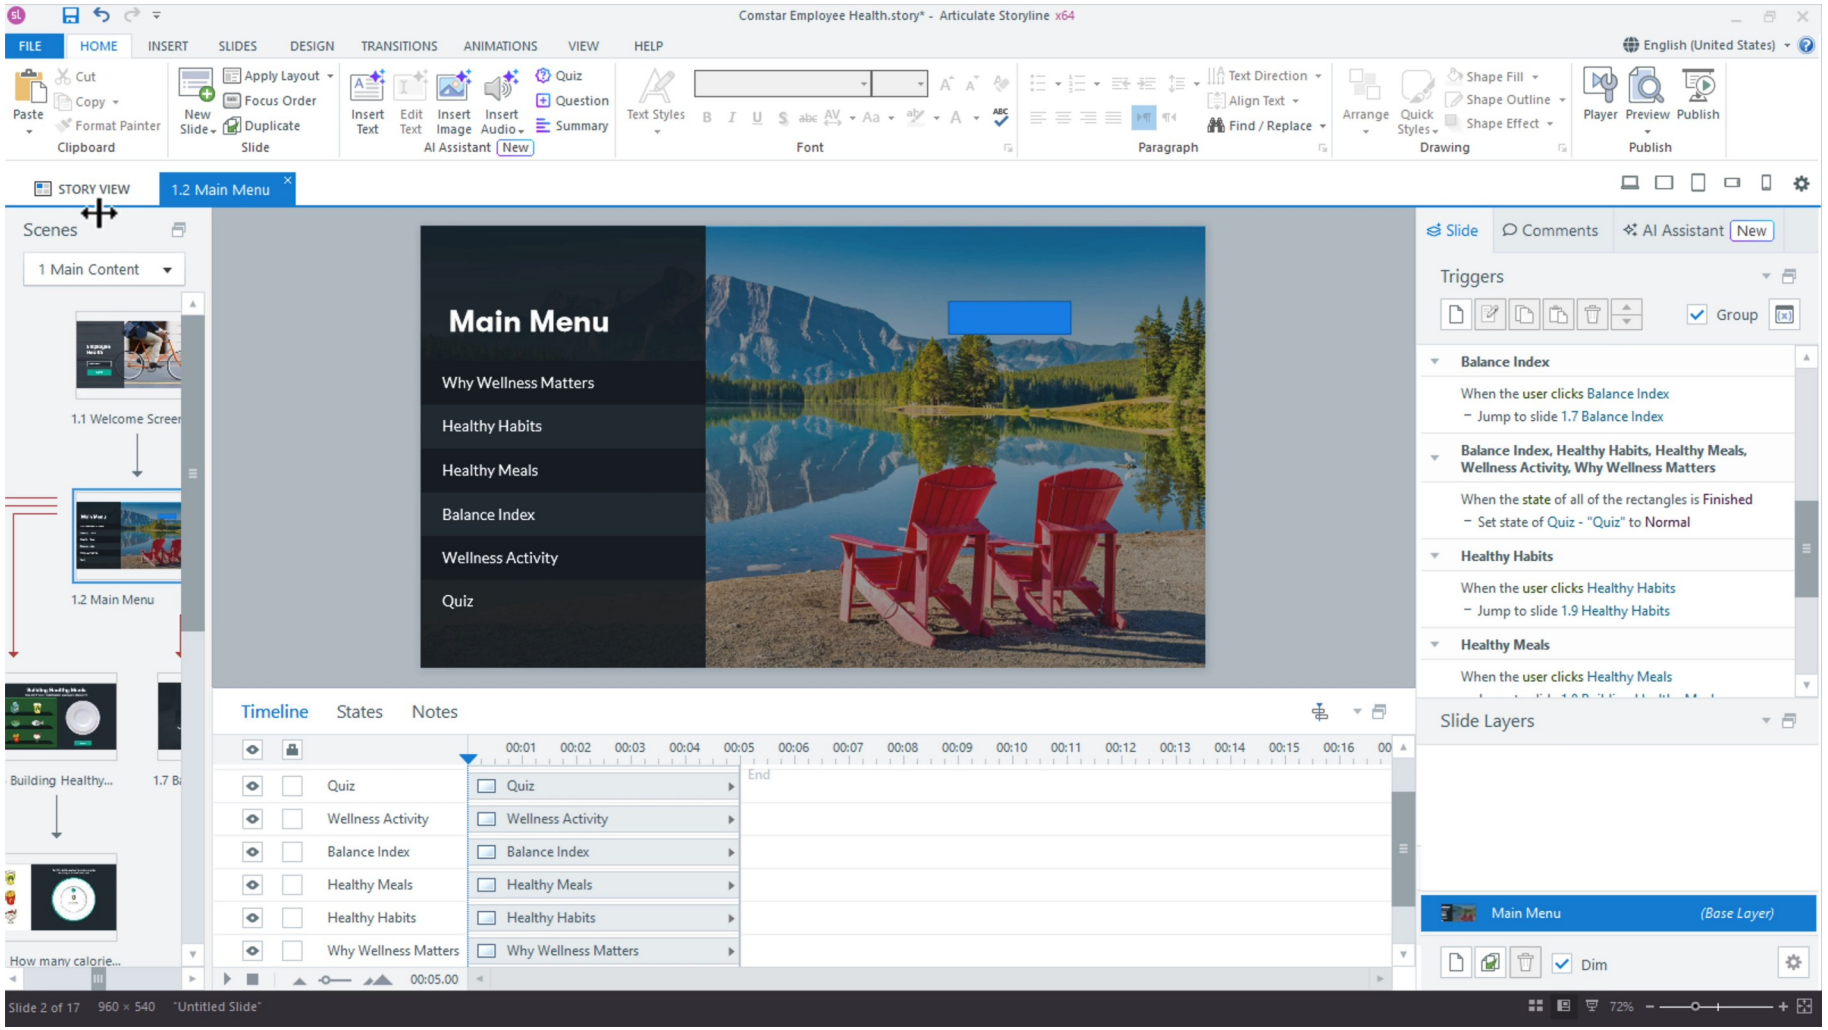


FAULTY OUTPUT (EXAMPLE) leaving Rectangle 17 or duplicate names

FIX IN NAMED PANEL prefixes; unique names; layer names; variable names

EXPECTED AFTER FIX trigger and focus panels can be audited without selecting each object ·…

Authentic Articulate interface reference · verify the named control


Timeline timing model

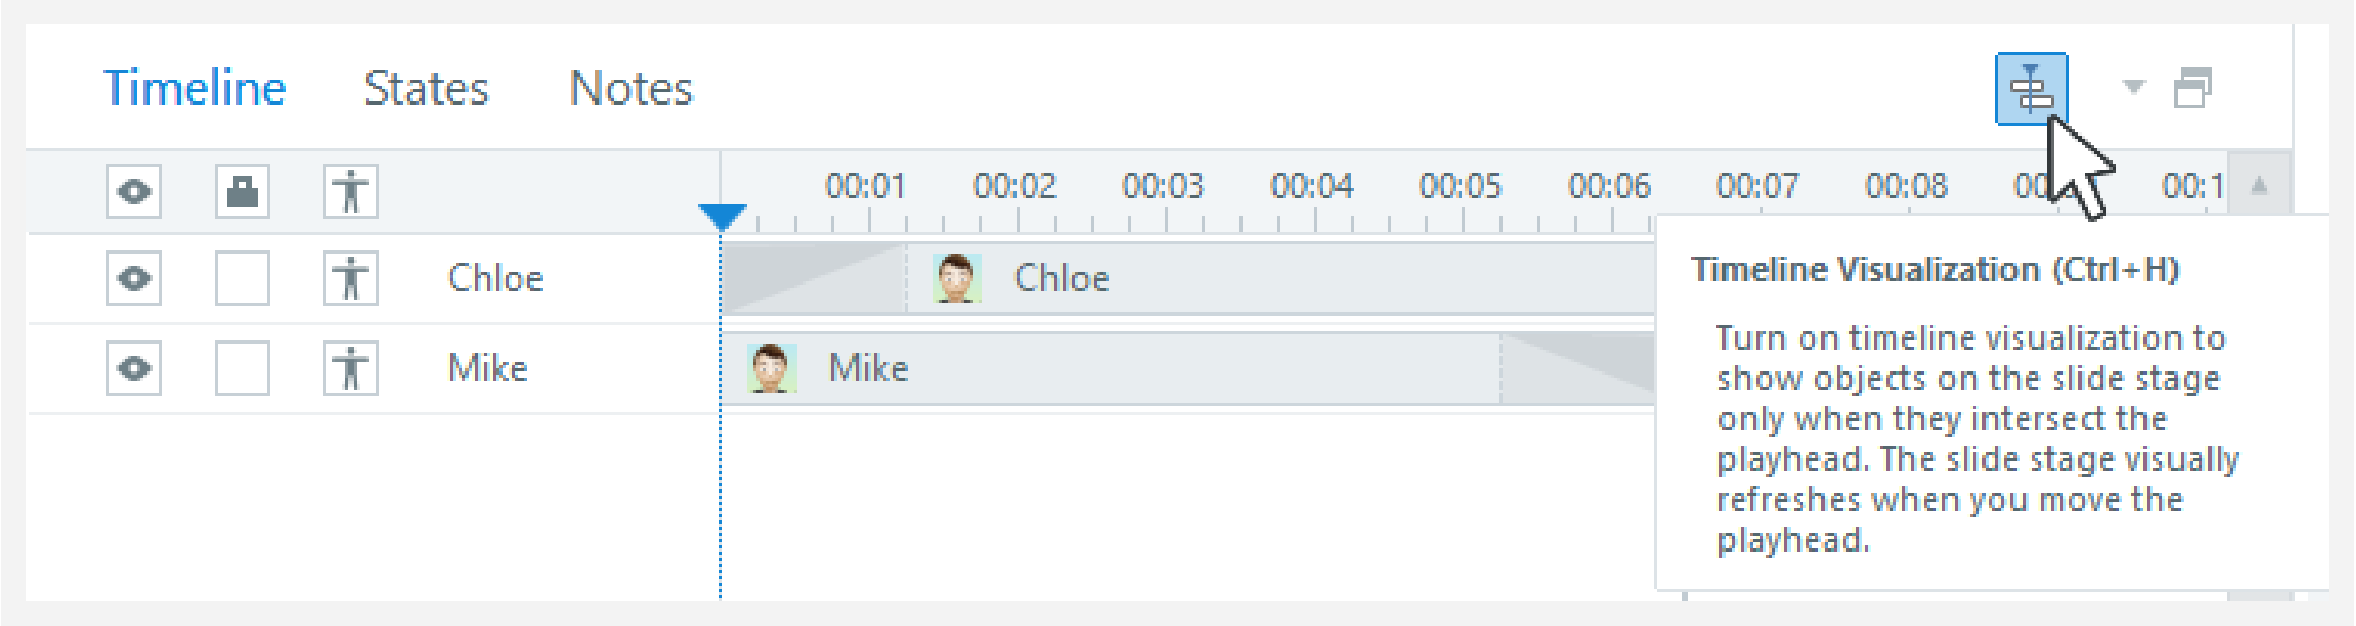

NAMED ARTIFACT	WSA-008-Timeline-timing-model
MECHANISM	Timeline start, duration and cue points coordinate narration, captions and…
EXPECTED	preview timing matches the narration script at each cue point

Authentic Articulate interface reference · verify the named control


Timeline timing model

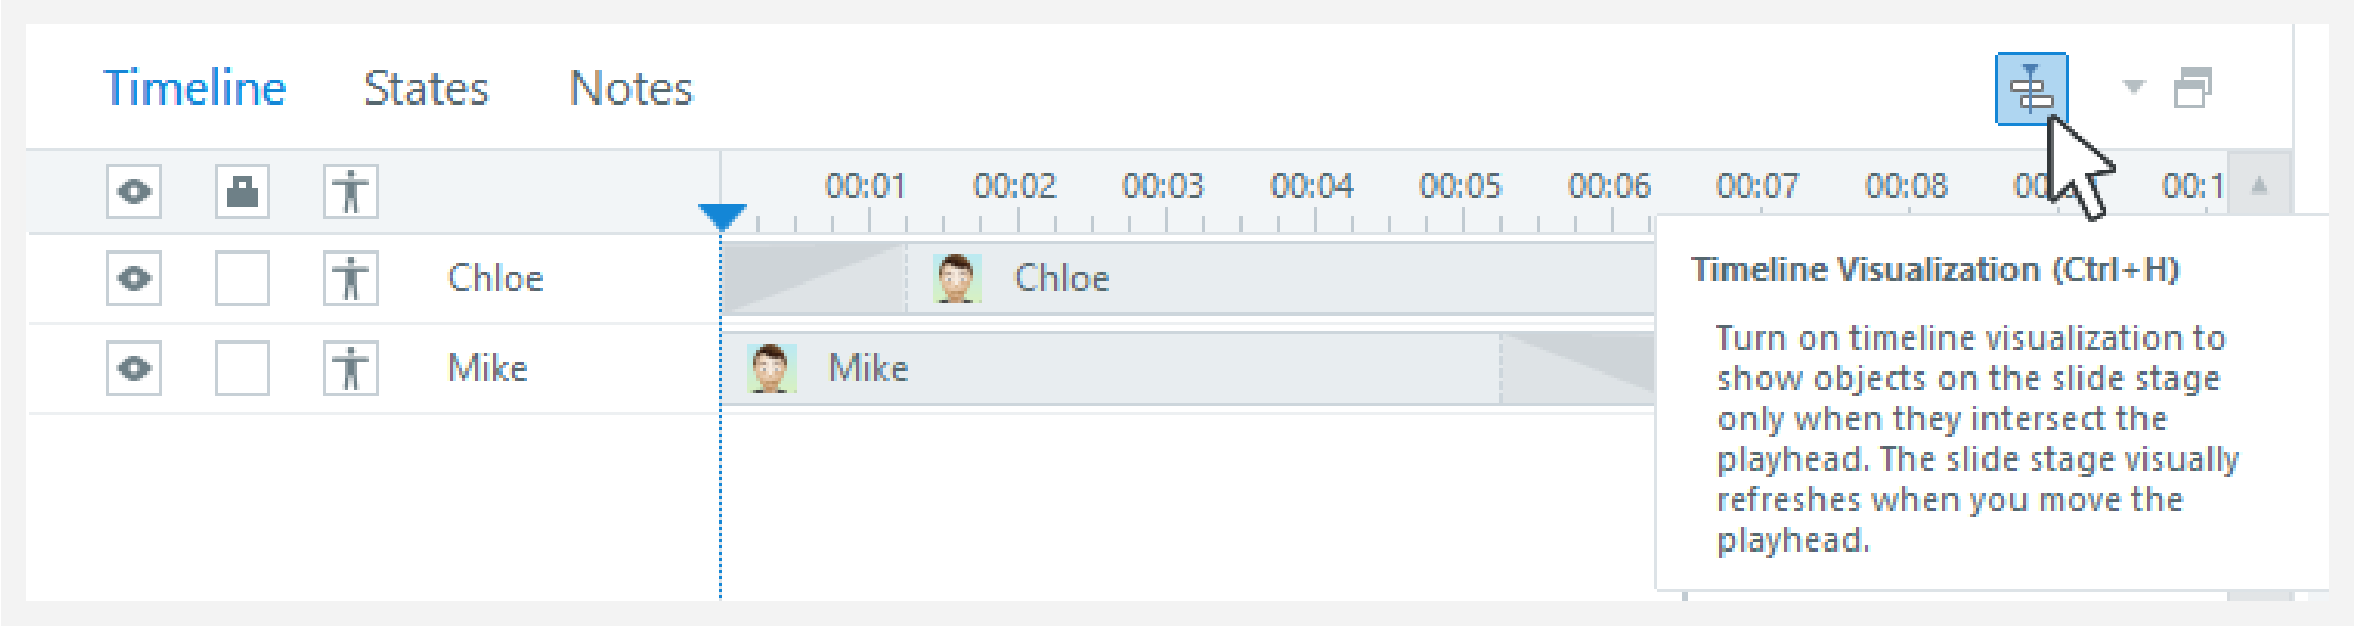

SET THESE CONTROLS	C1=playhead · C2=cue point · C3=show until end · C4=align to playhead
REJECT WHEN	objects appearing before narration or disappearing on revisit
VERIFY READBACK	preview timing matches the narration script at each cue point

Authentic Articulate interface reference · verify the named control

Timeline timing model

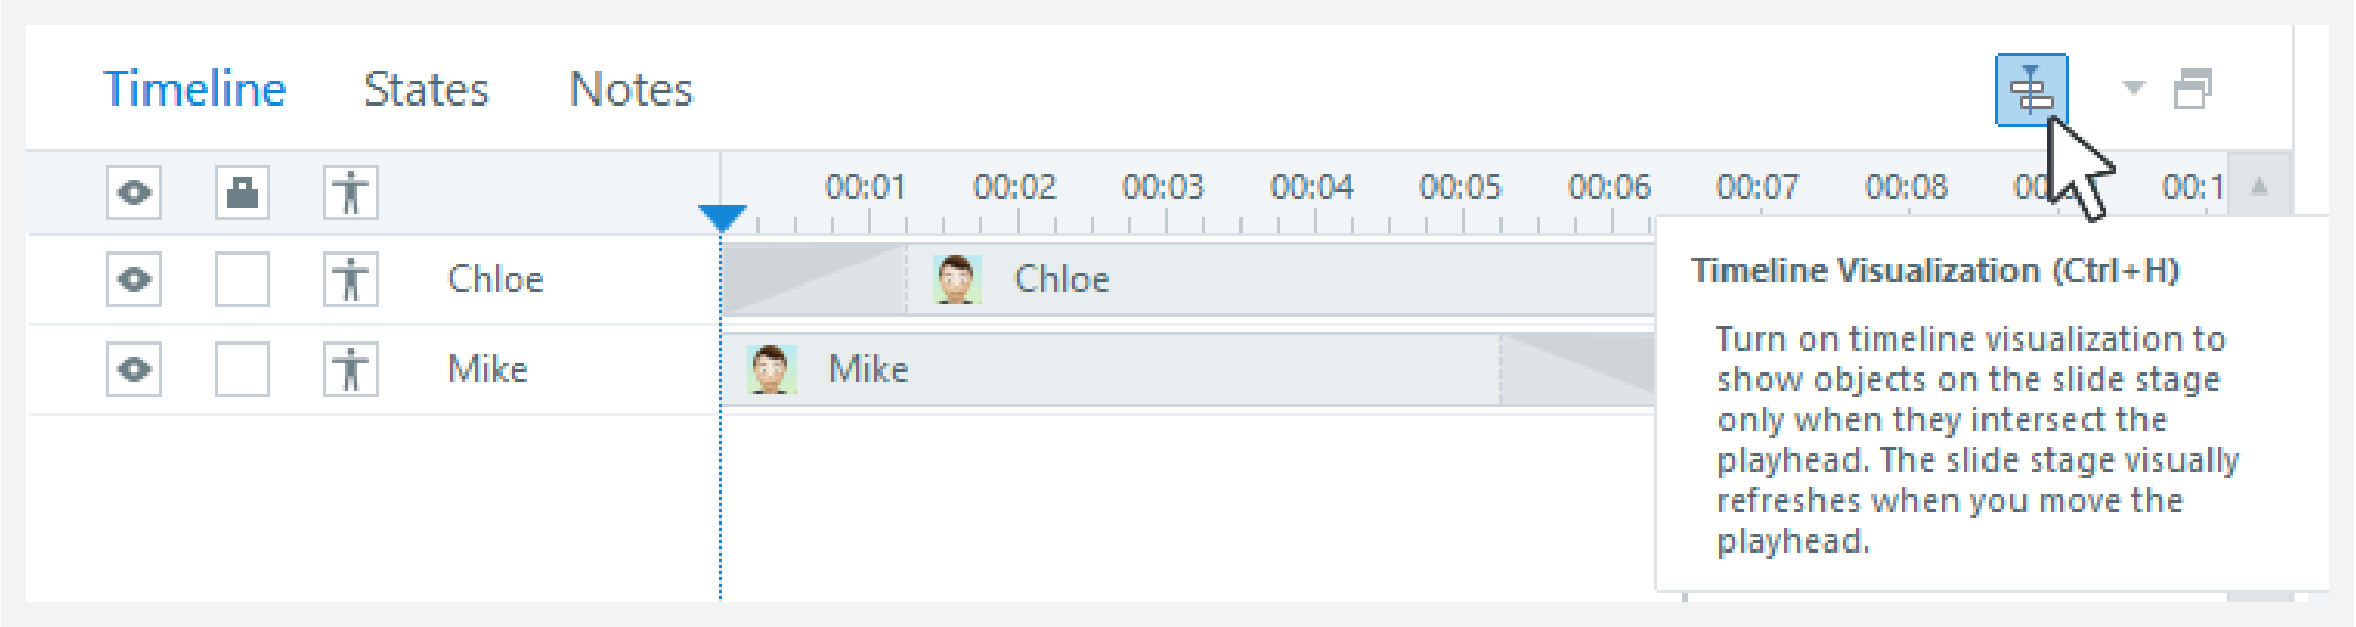

FAULTY OUTPUT (EXAMPLE)	objects appearing before narration or disappearing on revisit
FIX IN NAMED PANEL	playhead; cue point; show until end; align to playhead
EXPECTED AFTER FIX	preview timing matches the narration script at each cue point · verify in…

Authentic Articulate interface reference · verify the named control

Alignment and guides

Named HarbourLink WSH artifact

WSA-009-Alignment-and-guides

Input / source state

WSA checkpoint plus guides; margins; distribute; aspect ratio

Runtime mechanism

View guides plus Align and Distribute create a repeatable grid for text and controls

Expected output

shared edges and spacing remain consistent at delivery size

Rejected output

pixel drift and stretched images

Evidence record

WSA-009-Alignment-and-guides: capture the configured control and the runtime readback.

EDITABLE CONFIGURATION MODEL

Alignment and guides

SET THESE CONTROLS

C1=guides · C2=margins · C3=distribute · C4=aspect ratio

REJECT WHEN

pixel drift and stretched images

VERIFY READBACK

shared edges and spacing remain consistent at delivery size

Editable HarbourLink model · shared edges and spacing remain consistent at delivery size

Alignment and guides

FAULTY OUTPUT (EXAMPLE)

pixel drift and stretched images

→

CORRECT THE RECORD

guides; margins; distribute; aspect ratio

→


EXPECTED AFTER FIX

shared edges and spacing remain consistent at delivery size · verify in your own Preview

Editable HarbourLink model · shared edges and spacing remain consistent at delivery size

© 2026 Tertiary Infotech Academy Pte Ltd · Mastering Articulate Storyline 360 for e-Learning Content Creation · TGS-2024042308


Project variables register

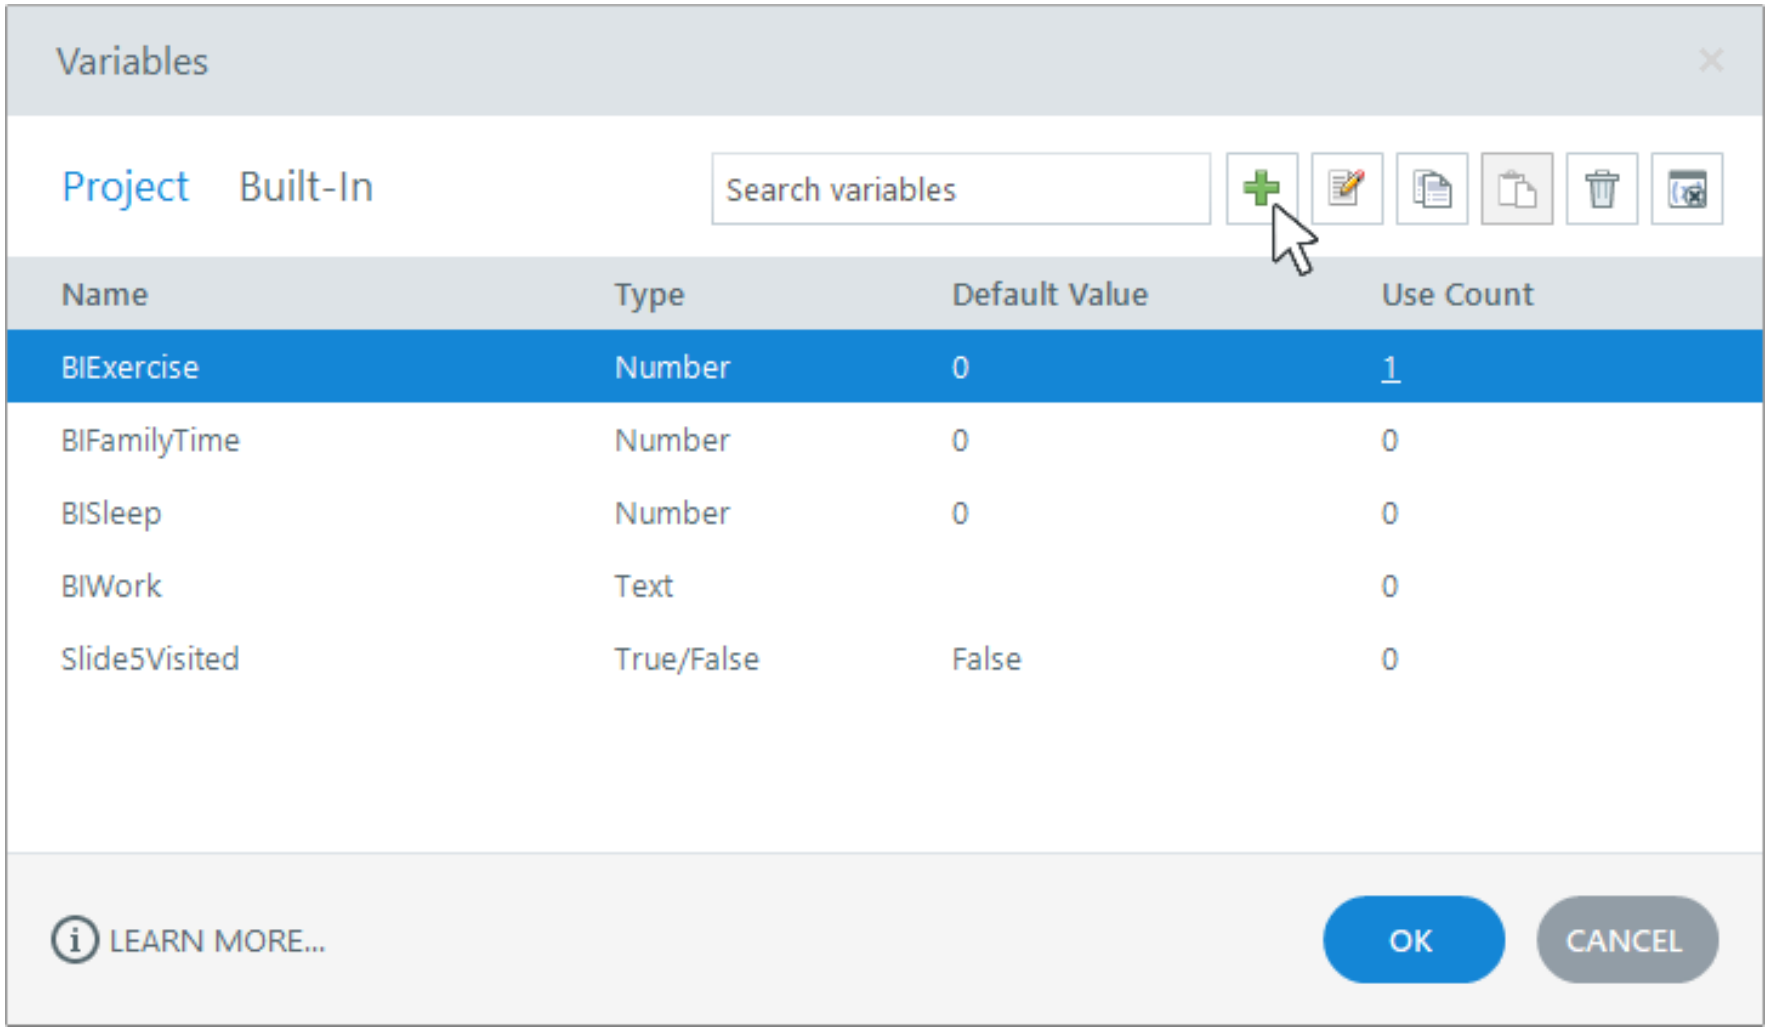

NAMED ARTIFACT	WSA-010-Project-variables-register
MECHANISM	Manage Project Variables defines typed names, defaults, purpose and reset…
EXPECTED	variable reference panel matches the supplied logic register

Authentic Articulate interface reference · verify the named control


Project variables register

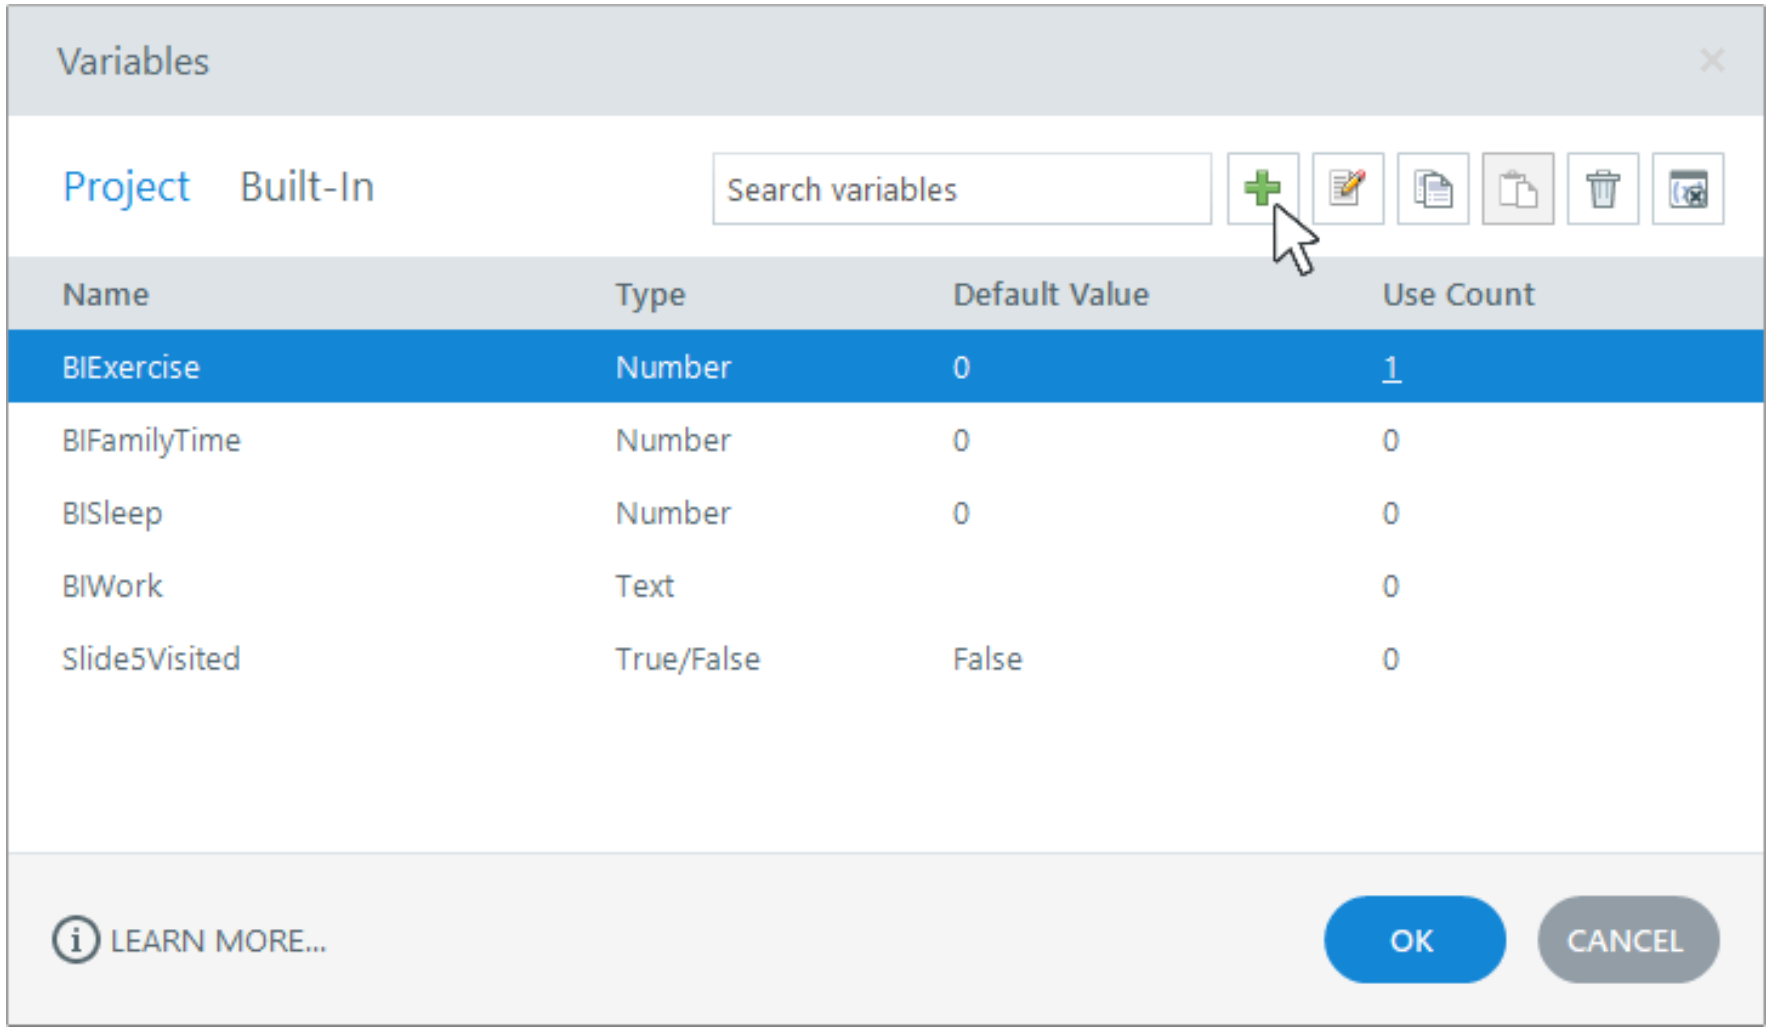

SET THESE CONTROLS	C1=True/False · C2=Number · C3=Text · C4=default · C5=scope
REJECT WHEN	variables with ambiguous names or stale values
VERIFY READBACK	variable reference panel matches the supplied logic register

Authentic Articulate interface reference · verify the named control

Project variables register

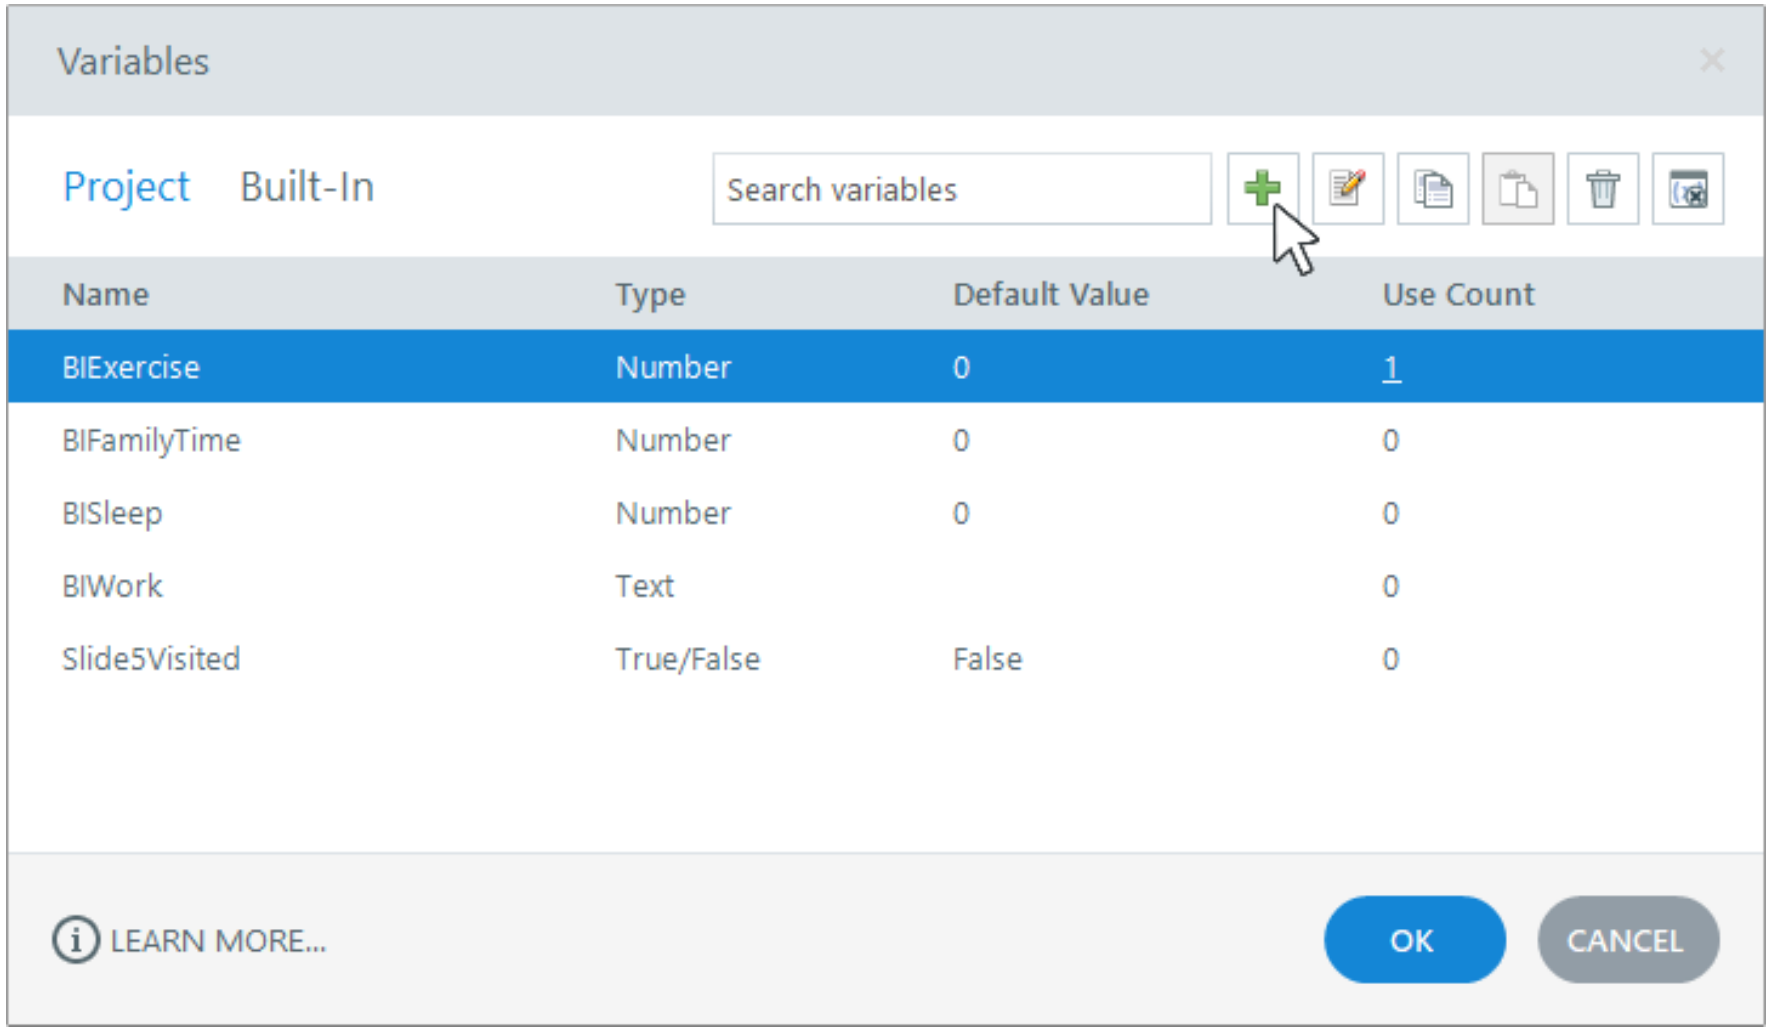


FAULTY OUTPUT (EXAMPLE) variables with ambiguous names or stale values

FIX IN NAMED PANEL True/False; Number; Text; default; scope

EXPECTED AFTER FIX variable reference panel matches the supplied logic register · verify in…

Authentic Articulate interface reference · verify the named control


Scene menu navigation

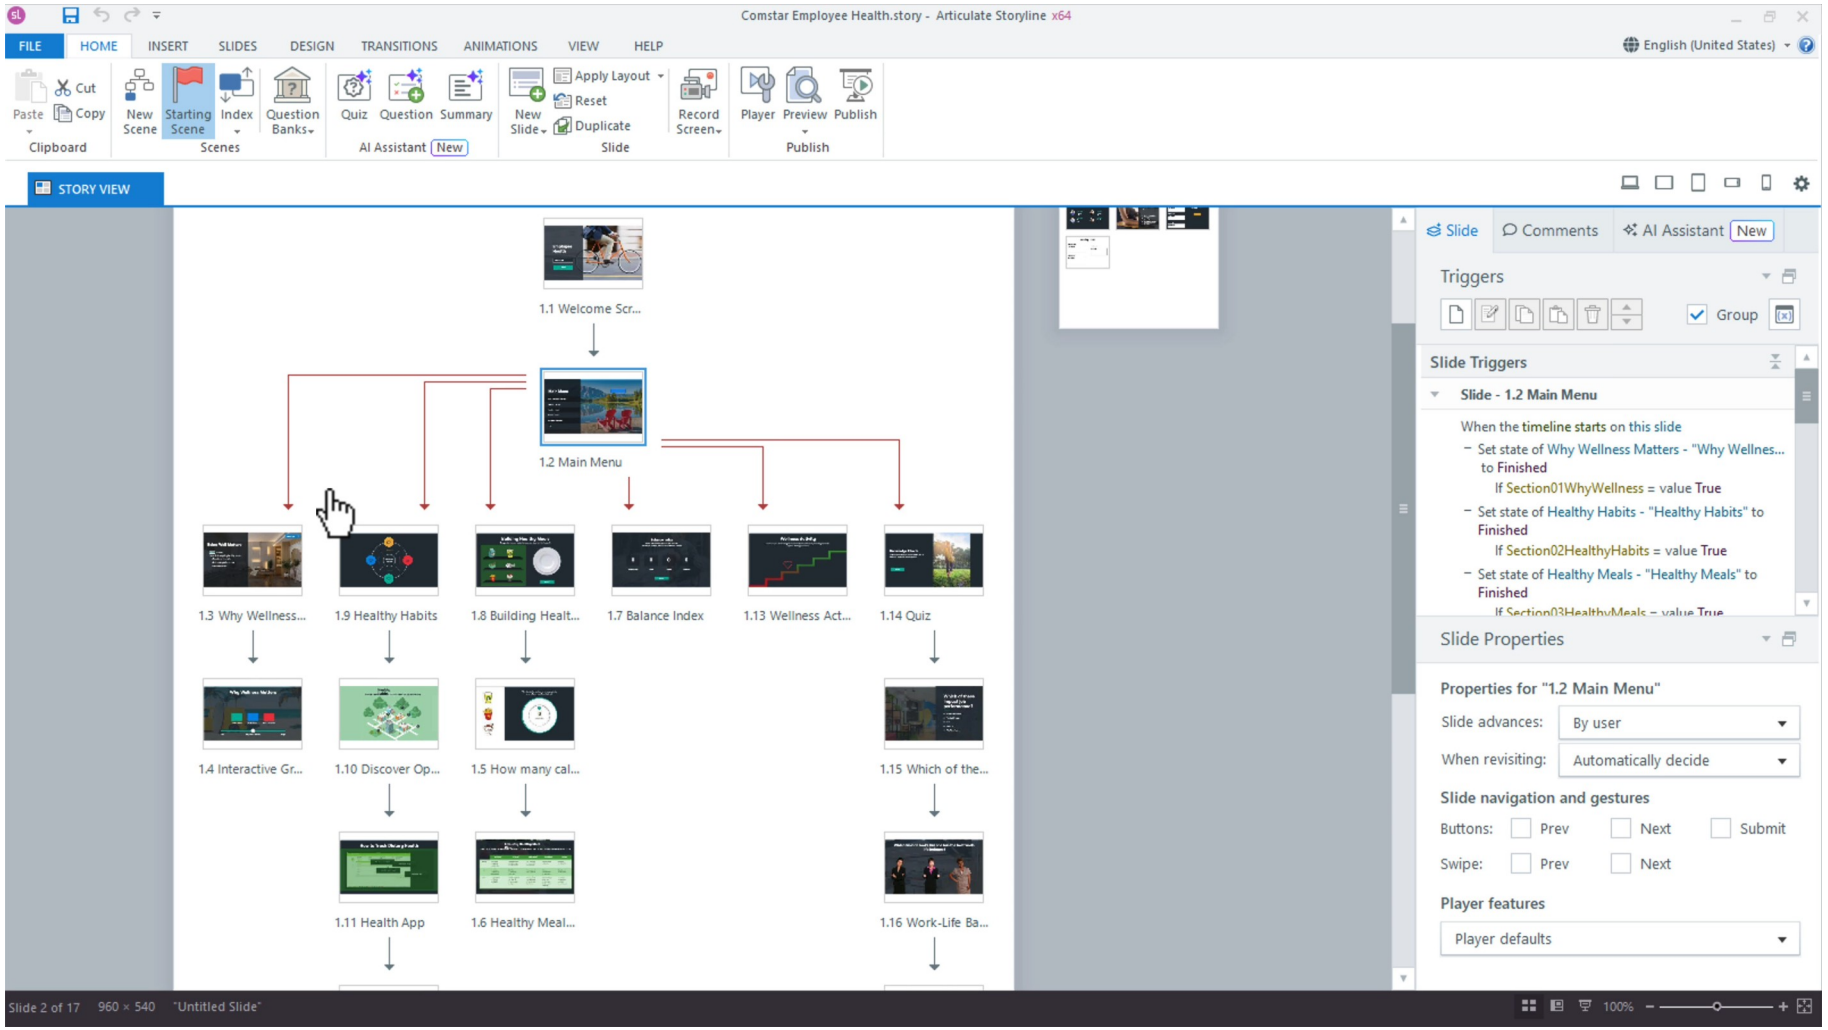

NAMED ARTIFACT	**WSA-011-Scene-menu-navigation**
MECHANISM	**A custom menu uses explicit Jump to slide triggers and visited states**
EXPECTED	**keyboard and pointer routes reach all four learning topics and return**

Authentic Articulate interface reference · verify the named control


Scene menu navigation

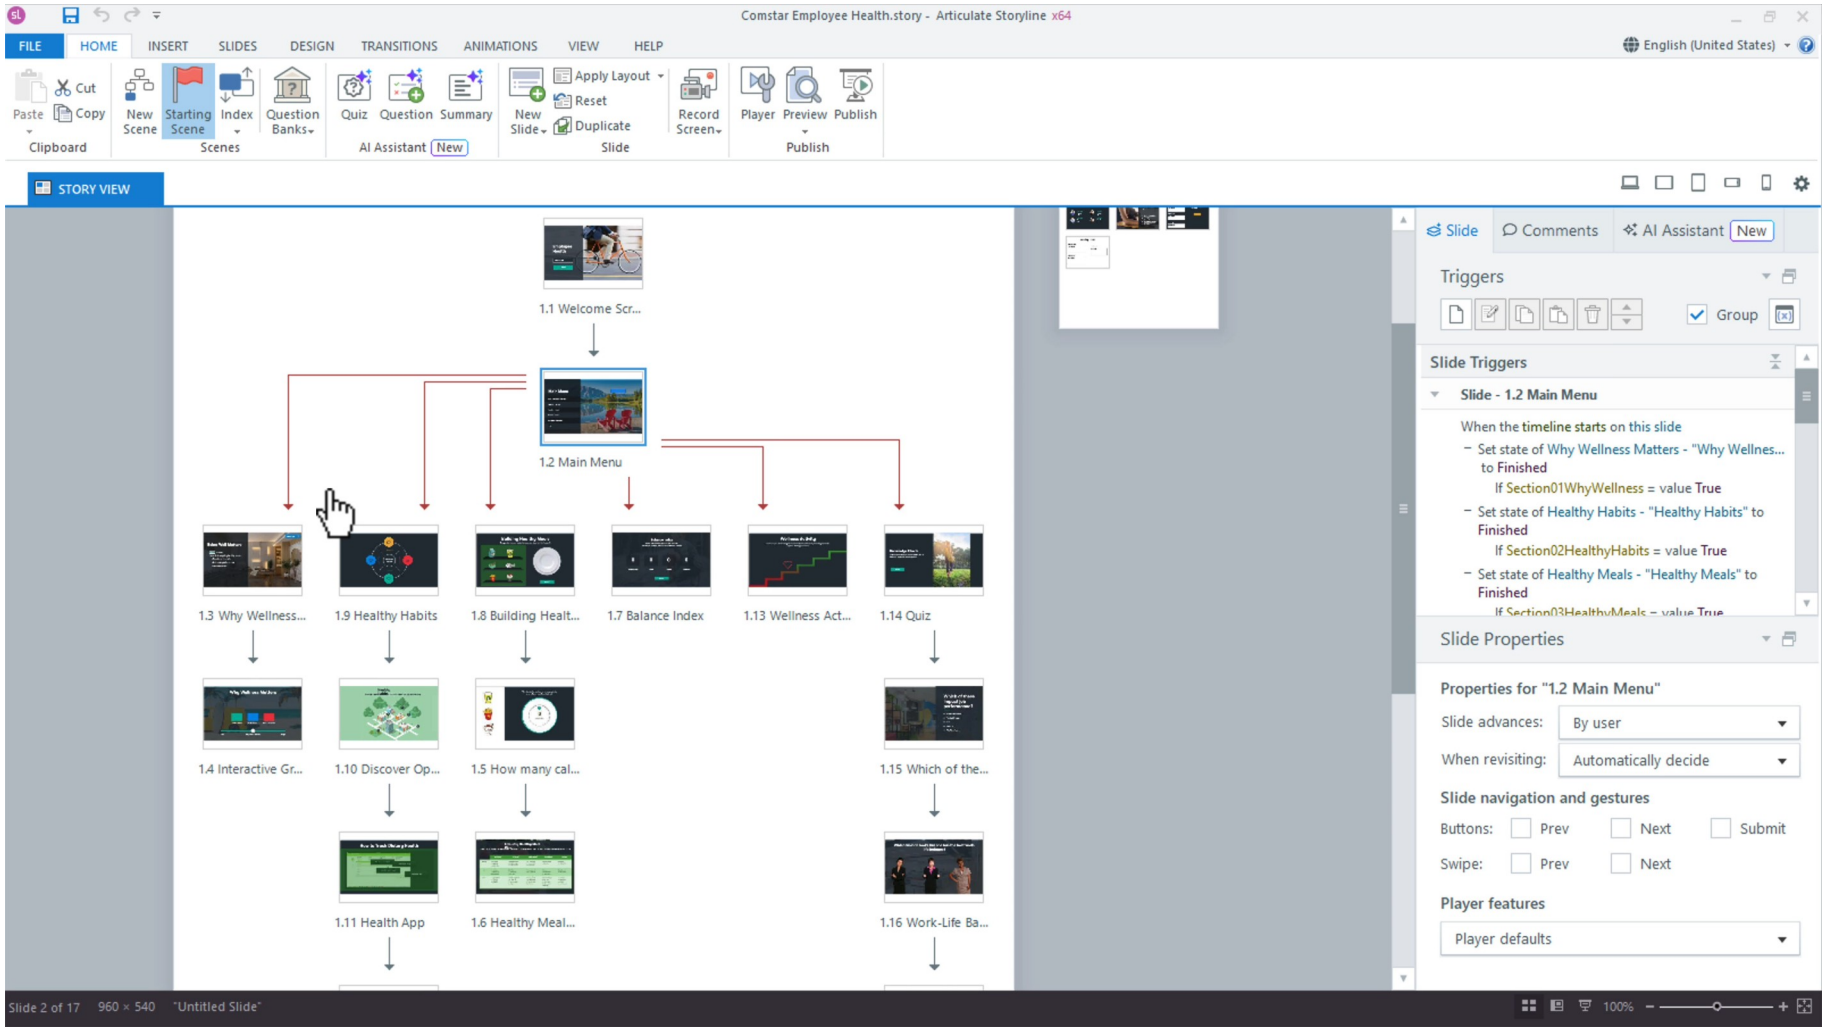

SET THESE CONTROLS	**C1=button state · C2=destination · C3=focus order · C4=return path**
REJECT WHEN	**relying on slide order or trapping the learner**
VERIFY READBACK	**keyboard and pointer routes reach all four learning topics and return**

Authentic Articulate interface reference · verify the named control

Scene menu navigation

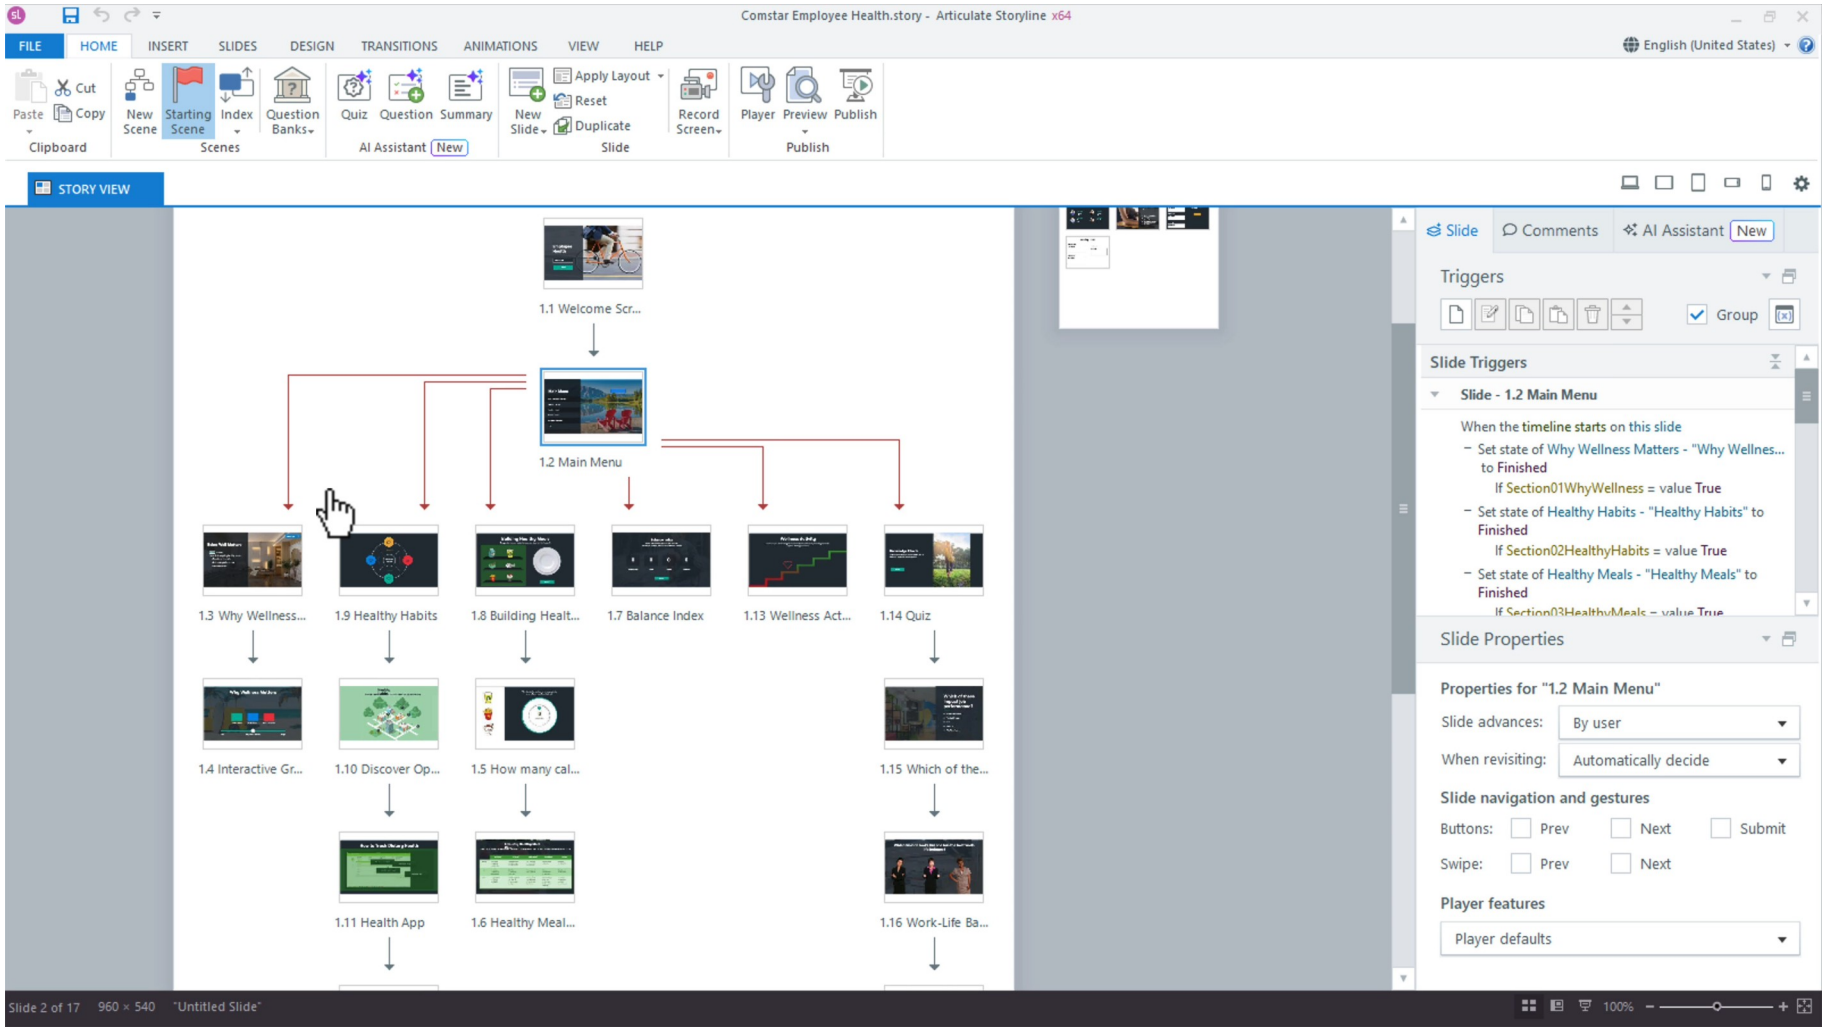


FAULTY OUTPUT (EXAMPLE) relying on slide order or trapping the learner

FIX IN NAMED PANEL button state; destination; focus order; return path

EXPECTED AFTER FIX keyboard and pointer routes reach all four learning topics and return ·…

Authentic Articulate interface reference · verify the named control


Revisit behaviour

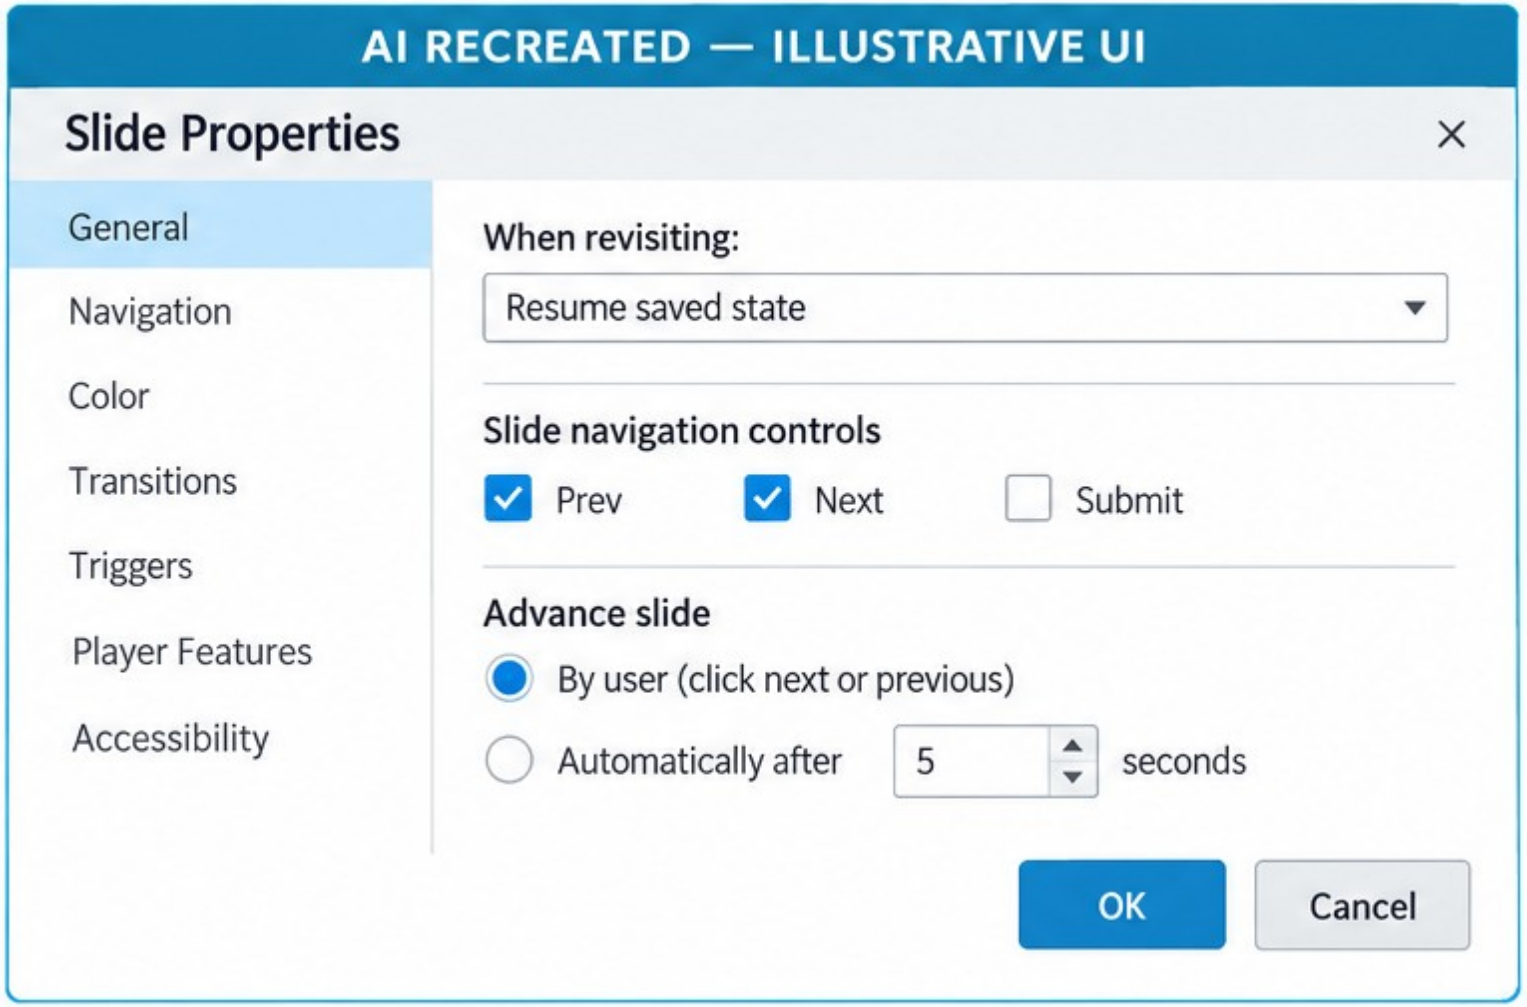

NAMED ARTIFACT	WSA-012-Revisit-behaviour
MECHANISM	Slide Properties selects Automatically decide, Resume saved state or Reset…
EXPECTED	back, next and relaunch tests produce the specified state

AI RECREATED — ILLUSTRATIVE UI · verify the named control


Revisit behaviour

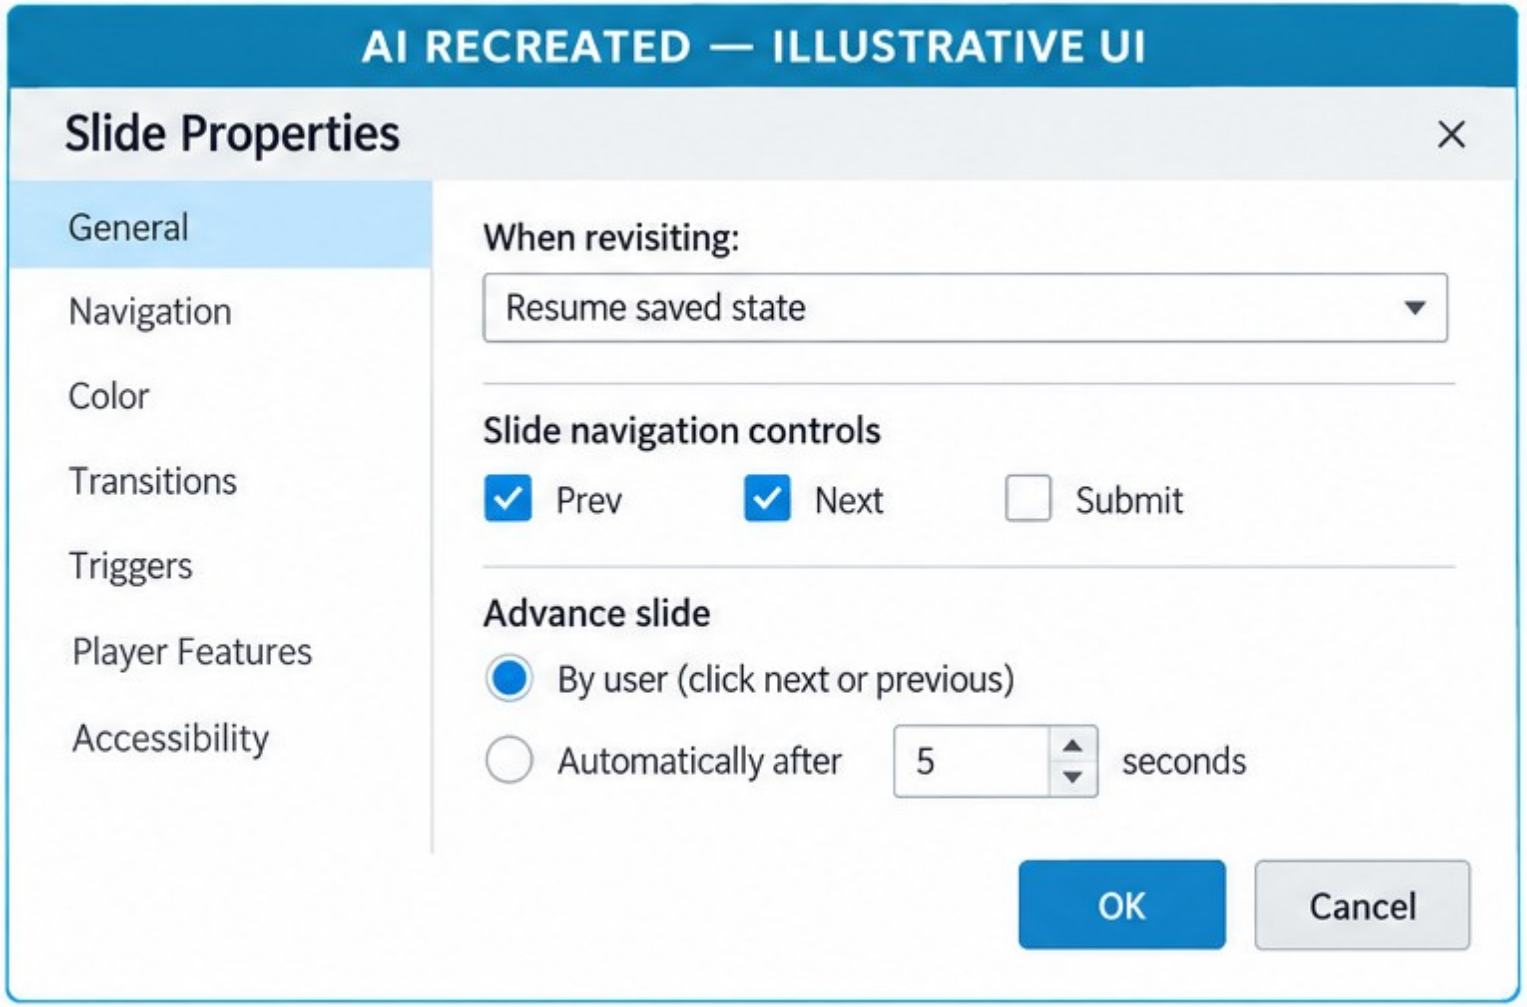

SET THESE CONTROLS	C1=revisit mode · C2=timeline · C3=layer state · C4=variable persistence
REJECT WHEN	global revisit choice applied without testing
VERIFY READBACK	back, next and relaunch tests produce the specified state

AI RECREATED — ILLUSTRATIVE UI · verify the named control

Revisit behaviour

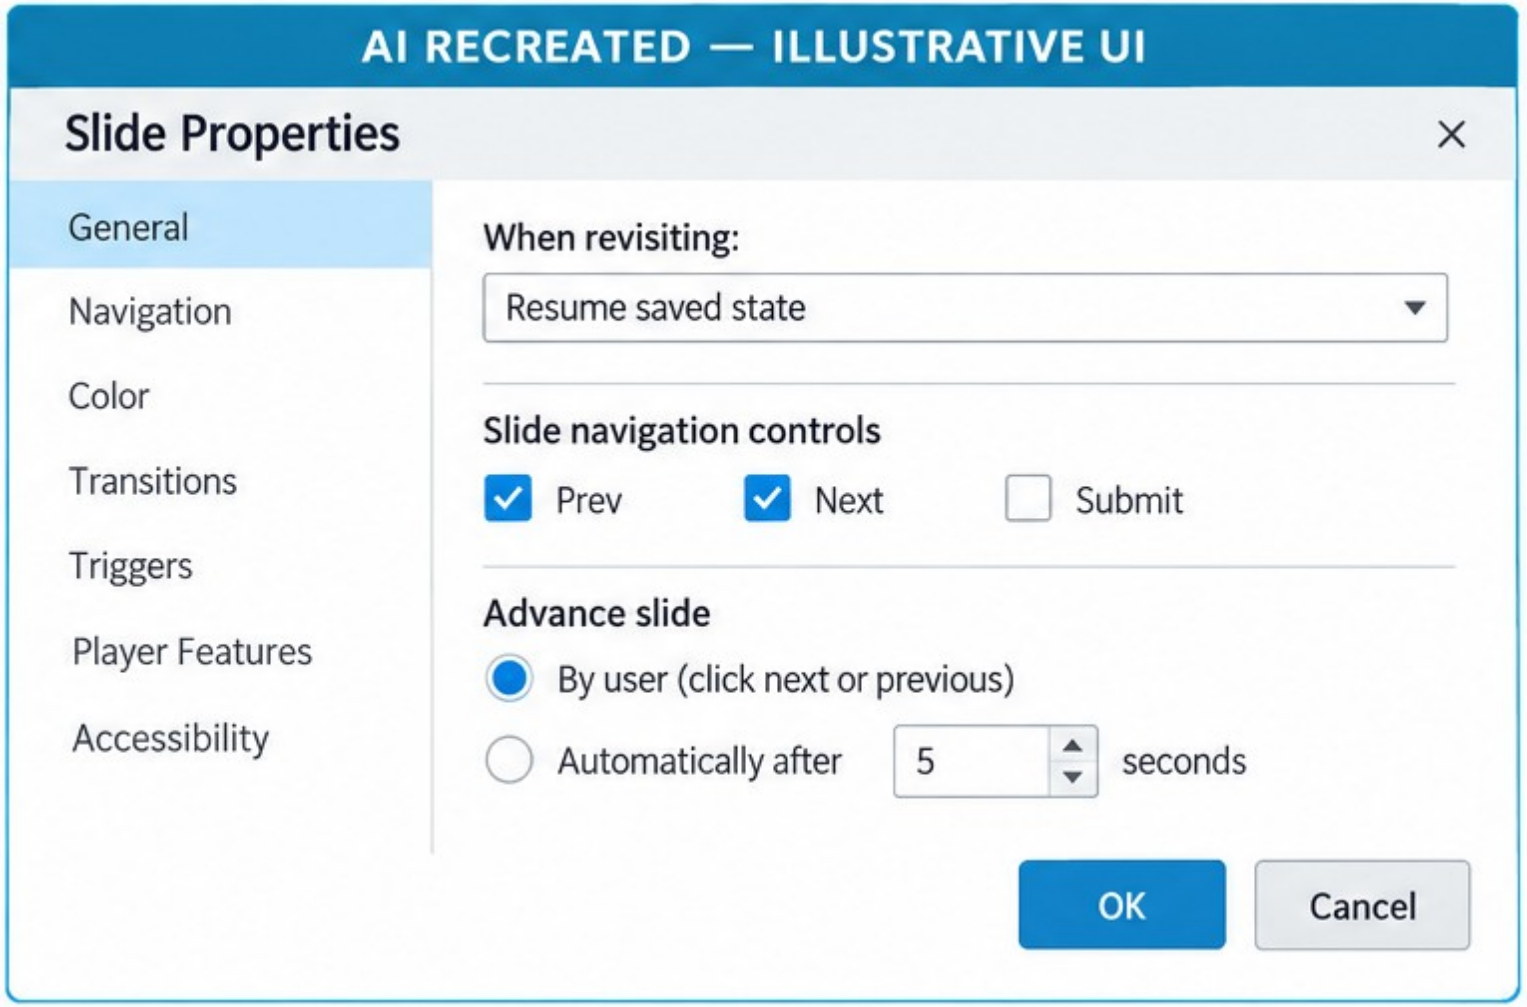


FAULTY OUTPUT (EXAMPLE) global revisit choice applied without testing

FIX IN NAMED PANEL revisit mode; timeline; layer state; variable persistence

EXPECTED AFTER FIX back, next and relaunch tests produce the specified state · verify in your…

AI RECREATED — ILLUSTRATIVE UI · verify the named control


Player feature baseline

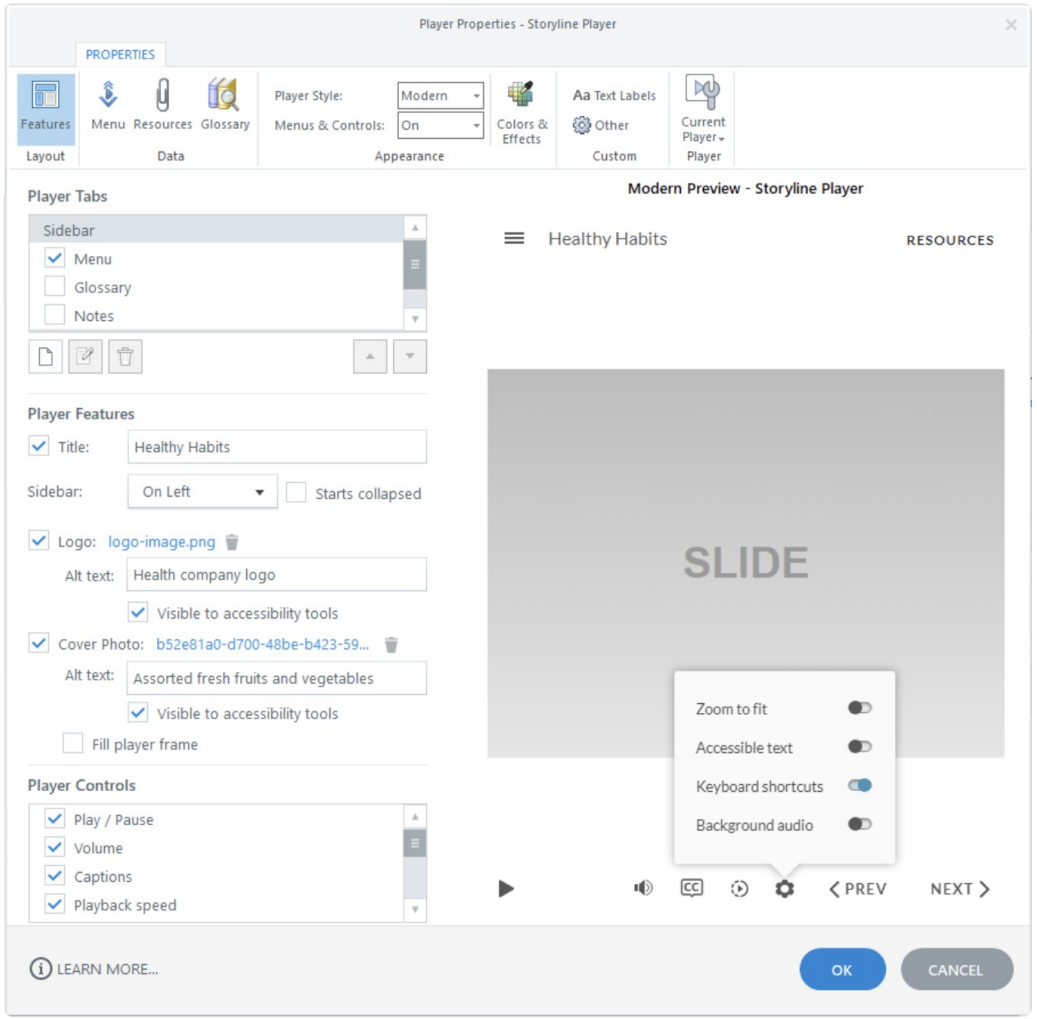

NAMED ARTIFACT	**WSA-013-Player-feature-baseline**
MECHANISM	**Player Properties exposes only required controls and a predictable course…**
EXPECTED	**player and slide controls do not conflict in keyboard testing**

Authentic Articulate interface reference · verify the named control


Player feature baseline

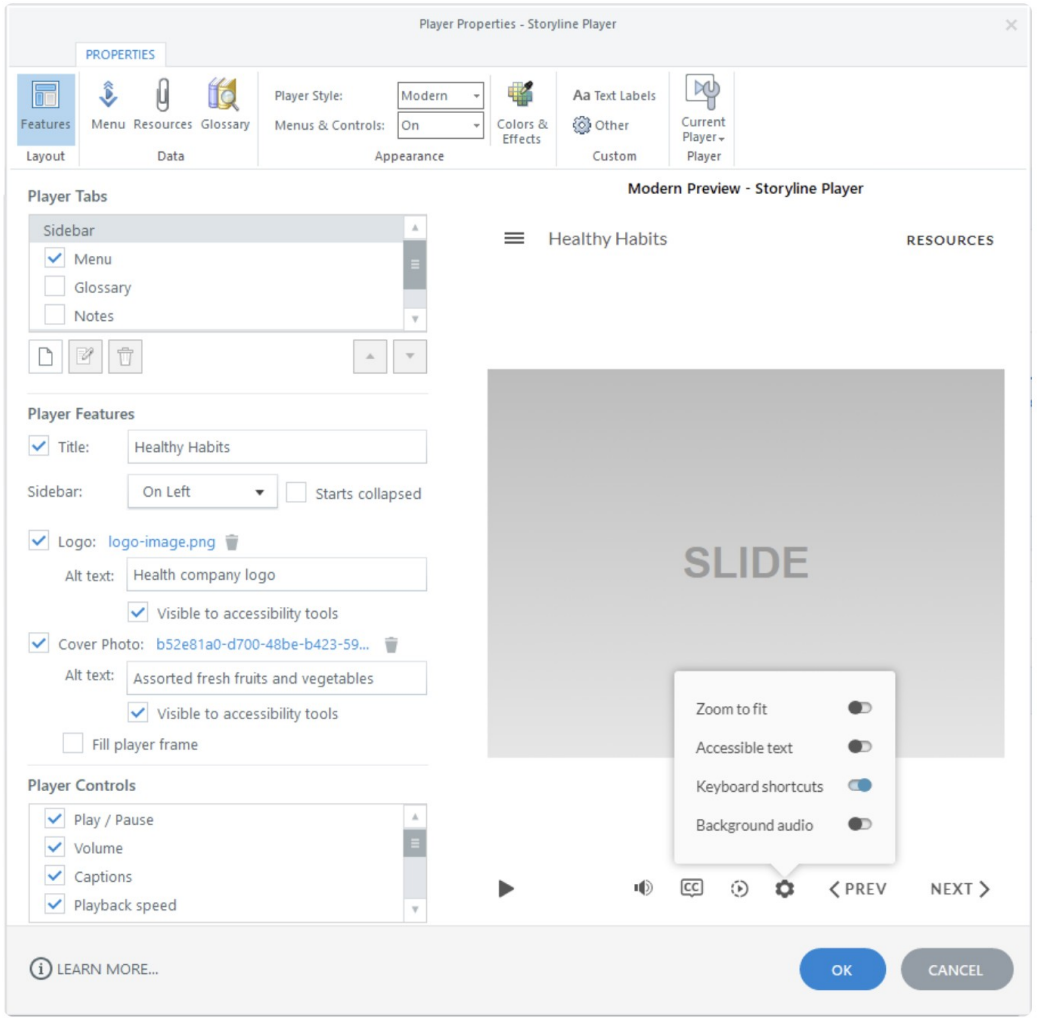

SET THESE CONTROLS	**C1=menu · C2=seekbar · C3=volume · C4=captions · C5=glossary · C6=resources**
REJECT WHEN	**duplicated navigation and inaccessible custom chrome**
VERIFY READBACK	**player and slide controls do not conflict in keyboard testing**

Authentic Articulate interface reference · verify the named control

Player feature baseline

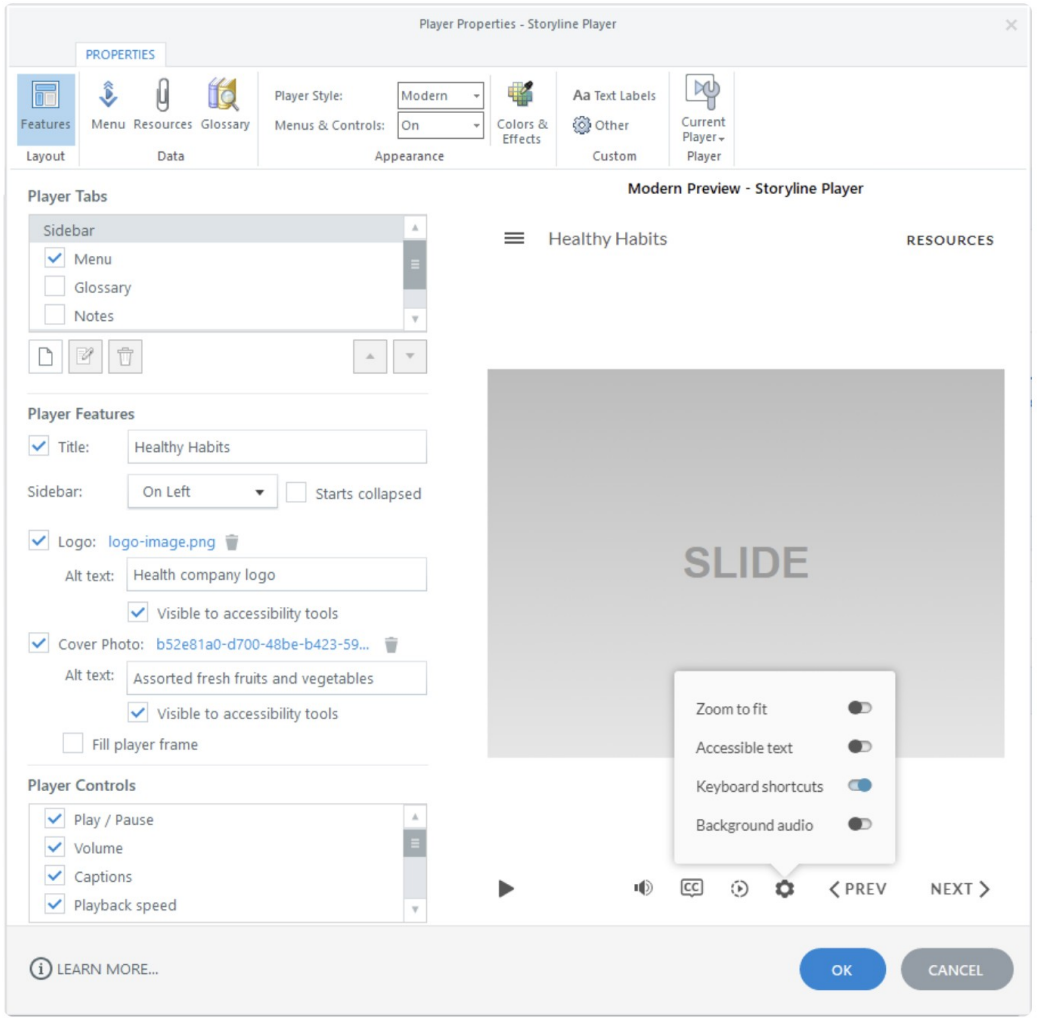

FAULTY OUTPUT (EXAMPLE)	duplicated navigation and inaccessible custom chrome
FIX IN NAMED PANEL	menu; seekbar; volume; captions; glossary; resources
EXPECTED AFTER FIX	player and slide controls do not conflict in keyboard testing · verify in…

Authentic Articulate interface reference · verify the named control

Preview test levels

Named HarbourLink WSH artifact

WSA-014-Preview-test-levels

Input / source state

WSA checkpoint plus slide logic; cross-slide routing; project variables; player

Runtime mechanism

Preview This Slide, This Scene and Entire Project reveal different classes of defects

Expected output

scene and project test logs cover entry, exit, revisit and resume

Rejected output

signing off from single-slide preview

Evidence record

WSA-014-Preview-test-levels: capture the configured control and the runtime readback.

Preview test levels

SET THESE CONTROLS

C1=slide logic · C2=cross-slide routing · C3=project variables · C4=player

→

REJECT WHEN

signing off from single-slide preview

→

VERIFY READBACK

scene and project test logs cover entry, exit, revisit and resume

Editable HarbourLink model · scene and project test logs cover entry, exit, revisit and resume

Preview test levels

FAULTY OUTPUT (EXAMPLE)

signing off from single-slide preview

→

CORRECT THE RECORD

slide logic; cross-slide routing; project variables; player

→

EXPECTED AFTER FIX

scene and project test logs cover entry, exit, revisit and resume · verify in your own Preview

Editable HarbourLink model · scene and project test logs cover entry, exit, revisit and resume

© 2026 Tertiary Infotech Academy Pte Ltd · Mastering Articulate Storyline 360 for e-Learning Content Creation · TGS-2024042308

Recovery and version handoff

Named HarbourLink WSH artifact

WSA-015-Recovery-and-version-handoff

Input / source state

WSA checkpoint plus source version; owner; publish ID; backup; archive

Runtime mechanism

Save As versions plus a release register separate editable source from published output

Expected output

handoff opens the exact source used to create the tested package

Rejected output

renaming only the published ZIP or losing the .story source

Evidence record

WSA-015-Recovery-and-version-handoff: capture the configured control and the runtime readback.

Recovery and version handoff

SET THESE CONTROLS

C1=source version · C2=owner · C3=publish ID · C4=backup · C5=archive

REJECT WHEN

renaming only the published ZIP or losing the .story source

VERIFY READBACK

handoff opens the exact source used to create the tested package

Editable HarbourLink model · handoff opens the exact source used to create the tested package

© 2026 Tertiary Infotech Academy Pte Ltd · Mastering Articulate Storyline 360 for e-Learning Content Creation · TGS-2024042308

Recovery and version handoff

FAULTY OUTPUT (EXAMPLE)

renaming only the published ZIP or losing the .story source

→

CORRECT THE RECORD

source version; owner; publish ID; backup; archive

→

EXPECTED AFTER FIX

handoff opens the exact source used to create the tested package · verify in your own Preview

Editable HarbourLink model · handoff opens the exact source used to create the tested package

HarbourLink annual WSH narrative beat map

Named HarbourLink WSH artifact

WSA-016-HarbourLink-annual-WSH-narrative-beat-map

Input / source state

WSA checkpoint plus protagonist; workplace goal; hazard tension; learner choice; consequence; resolution

Runtime mechanism

A worked beat map links normal work, visible disruption, decision, consequence and safer resolution across screen IDs WSA-001 to WSA-401

Expected output

each beat maps to a slide, learner action and observable safety outcome

Rejected output

adding a decorative story that does not change the learner decision

Evidence record

WSA-016-HarbourLink-annual-WSH-narrative-beat-map: capture the configured control and the runtime readback.

EDITABLE CONFIGURATION MODEL

HarbourLink annual WSH narrative beat map

SET THESE CONTROLS

C1=protagonist · C2=workplace goal · C3=hazard tension · C4=learner choice · C5=consequence · C6=resolution

→

REJECT WHEN

adding a decorative story that does not change the learner decision

→

VERIFY READBACK

each beat maps to a slide, learner action and observable safety outcome

Editable HarbourLink model · each beat maps to a slide, learner action and observable safety outcome

HarbourLink annual WSH narrative beat map

FAULTY OUTPUT (EXAMPLE)

adding a decorative story that does not change the learner decision

→

CORRECT THE RECORD

protagonist; workplace goal; hazard tension; learner choice; consequence; resolution

→

EXPECTED AFTER FIX

each beat maps to a slide, learner action and observable safety outcome · verify in your own Preview

Editable HarbourLink model · each beat maps to a slide, learner action and observable safety outcome

© 2026 Tertiary Infotech Academy Pte Ltd · Mastering Articulate Storyline 360 for e-Learning Content Creation · TGS-2024042308

Marketing objective to learning promise

Named HarbourLink WSH artifact

WSA-017-Marketing-objective-to-learning-promise

Input / source state

WSA checkpoint plus business objective; audience action; course promise; metric; data owner

Runtime mechanism

A traceability row converts the provider objective 'increase induction completion and safe-reporting uptake' into a learner promise and measurable action

Expected output

objective, promise, interaction and metric read as one causal chain

Rejected output

claiming engagement without a defined behaviour or measure

Evidence record

WSA-017-Marketing-objective-to-learning-promise: capture the configured control and the runtime readback.

EDITABLE CONFIGURATION MODEL

Marketing objective to learning promise

SET THESE CONTROLS

C1=business objective · C2=audience action · C3=course promise · C4=metric · C5=data owner

→

REJECT WHEN

claiming engagement without a defined behaviour or measure

→

VERIFY READBACK

objective, promise, interaction and metric read as one causal chain

Editable HarbourLink model · objective, promise, interaction and metric read as one causal chain

Marketing objective to learning promise

FAULTY OUTPUT (EXAMPLE)

claiming engagement without a defined behaviour or measure

→

CORRECT THE RECORD

business objective; audience action; course promise; metric; data owner

→

EXPECTED AFTER FIX

objective, promise, interaction and metric read as one causal chain · verify in your own Preview

Editable HarbourLink model · objective, promise, interaction and metric read as one causal chain

© 2026 Tertiary Infotech Academy Pte Ltd · Mastering Articulate Storyline 360 for e-Learning Content Creation · TGS-2024042308

Digital storyboard production cycle

Named HarbourLink WSH artifact

WSA-018-Digital-storyboard-production-cycle

Input / source state

WSA checkpoint plus screen ID; owner; asset; branch; access; version; approval

Runtime mechanism

The HarbourLink annual WSH storyboard moves through brief, screen map, narration/media, interaction/branch, accessibility, prototype review and signed revision

Expected output

one reviewed CSV row contains every required production field and disposition

Rejected output

treating the storyboard as on-screen copy only

Evidence record

WSA-018-Digital-storyboard-production-cycle: capture the configured control and the runtime readback.

EDITABLE CONFIGURATION MODEL

Digital storyboard production cycle

SET THESE CONTROLS

C1=screen ID · C2=owner · C3=asset · C4=branch · C5=access · C6=version · C7=approval

→

REJECT WHEN

treating the storyboard as on-screen copy only

→

VERIFY READBACK

one reviewed CSV row contains every required production field and disposition

Editable HarbourLink model · one reviewed CSV row contains every required production field and disposition

Digital storyboard production cycle

FAULTY OUTPUT (EXAMPLE)

treating the storyboard as on-screen copy only

→

CORRECT THE RECORD

screen ID; owner; asset; branch; access; version; approval

→

EXPECTED AFTER FIX

one reviewed CSV row contains every required production field and disposition · verify in your own Preview

Editable HarbourLink model · one reviewed CSV row contains every required production field and disposition

PowerPoint slide import

Named HarbourLink WSH artifact

WSA-019-PowerPoint-slide-import

Input / source state

WSA checkpoint plus source file; selected slides; destination scene; imported masters; media links

Runtime mechanism

Home > New Slide > Import imports selected source slides into a named scene, followed by master, font and trigger inspection

Expected output

import log lists selected slides and the review confirms masters, focus order and navigation

Rejected output

assuming imported slide order, theme or accessibility is production-ready

Evidence record

WSA-019-PowerPoint-slide-import: capture the configured control and the runtime readback.

EDITABLE CONFIGURATION MODEL

PowerPoint slide import

SET THESE CONTROLS

C1=source file · C2=selected slides · C3=destination scene · C4=imported masters · C5=media links

→

REJECT WHEN

assuming imported slide order, theme or accessibility is production-ready

→

VERIFY READBACK

import log lists selected slides and the review confirms masters, focus order and navigation

Editable HarbourLink model · import log lists selected slides and the review confirms masters, focus order and navigation

PowerPoint slide import

FAULTY OUTPUT (EXAMPLE)

assuming imported slide order, theme or accessibility is production-ready

→

CORRECT THE RECORD

source file; selected slides; destination scene; imported masters; media links

→

EXPECTED AFTER FIX


import log lists selected slides and the review confirms masters, focus order and navigation · verify in your own Preview

Editable HarbourLink model · import log lists selected slides and the review confirms masters, focus order and navigation

© 2026 Tertiary Infotech Academy Pte Ltd · Mastering Articulate Storyline 360 for e-Learning Content Creation · TGS-2024042308

Activity 01 · Start the Safety Module and Storyboard

Create the local source baseline, five-scene architecture and traceable storyboard.

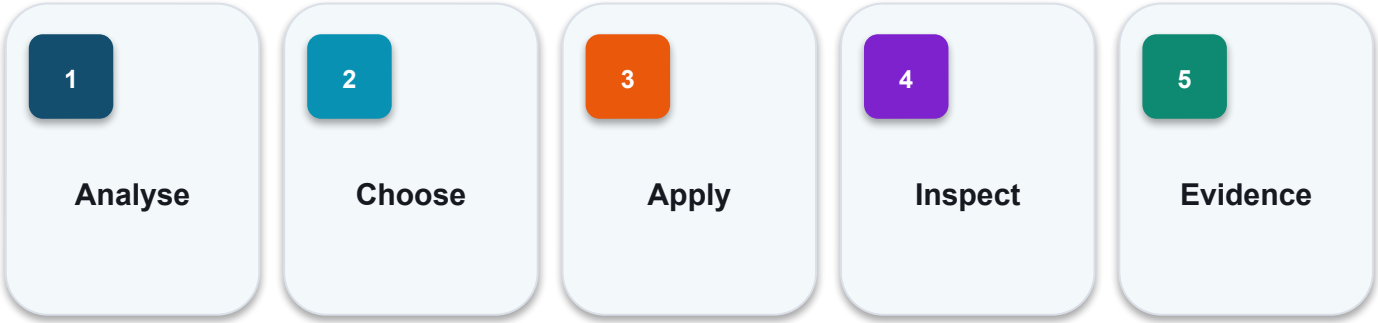


EVIDENCE

Retain the named .story checkpoint, the completed self-check table and one screenshot for each task showing the final state or setting that proves the acceptance criteria.

Full click-by-click procedure · Learner Guide / Activity 01

© 2026 Tertiary Infotech Academy Pte Ltd · Mastering Articulate Storyline 360 for e-Learning Content Creation · TGS-2024042308

Activity 01 · Interface Reference

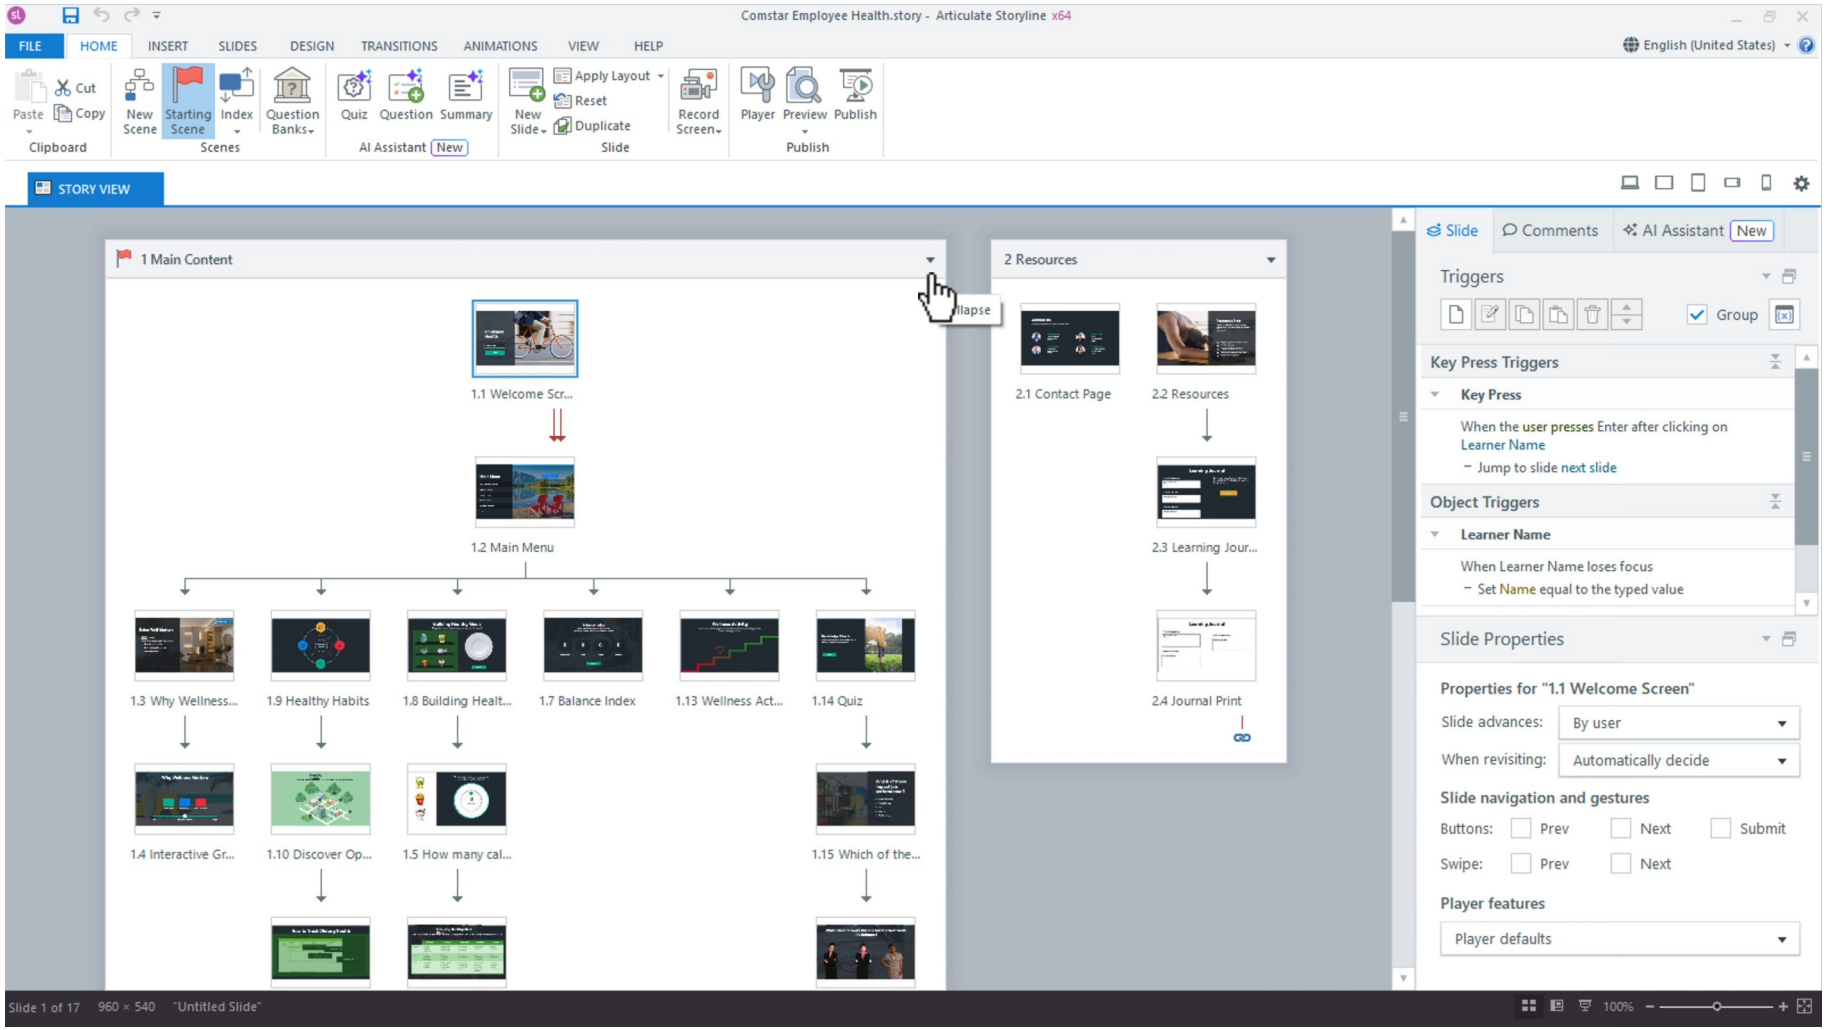

Locate	Use this authentic interface capture to find the named…
Set	In Story View, create and name scenes `01 Welcome`, `02…
Verify	Five named scenes and storyboard IDs match.
Evidence	Capture one final-state screenshot for the task; this…

EDITABLE TECHNICAL MODEL

Activity 01 · Artifact Model

Artifact

HarbourLink-WSH-Checkpoint-01-YourName.story

Purpose

Create the local source baseline, five-scene architecture and traceable storyboard.

Scenario input

HarbourLink annual WSH refresher; picture-first content, narration, captions, keyboard access and five-question 80% practice quiz.

Required output

Five named scenes and storyboard IDs match.

Control point

Variables use the specified type and default.

Readback

Retain the named .story checkpoint, the completed self-check table and one screenshot for each task showing the final state or setting that proves the acceptance criteria.

EDITABLE TECHNICAL MODEL

Activity 01 · Runtime State Trace

Initial state

Open with declared defaults and no prior test residue.

Input

Use the named WSA asset, learner decision or publish setting.

Control

Five named scenes and storyboard IDs match.

Stored state

Variables use the specified type and default.

Runtime output

Source and checkpoint are versioned locally.

Boundary

Whole-project preview has no dead end.

EDITABLE TECHNICAL MODEL

Activity 01 · Worked Failure Case

Expected

Five named scenes and storyboard IDs match.

Incomplete

Fail when: Variables use the specified type and default. is not demonstrated.

Repeat

Repeat/revisit must preserve: Source and checkpoint are versioned locally.

Access

Whole-project preview has no dead end.

Recovery

Correct the named setting in the next checkpoint, then rerun the same case.

Log

Record expected, actual, pass/fail and corrected version.

EDITABLE TECHNICAL MODEL

Activity 01 · Evidence Record

Source

HarbourLink-WSH-Checkpoint-01-YourName.story

Evidence rule

One decisive learner screenshot per task.

Setting evidence

Five named scenes and storyboard IDs match.

Runtime evidence

Variables use the specified type and default.


Regression evidence

Whole-project preview has no dead end.

Retention

Retain the named .story checkpoint, the completed self-check table and one screenshot for each task showing the final state or setting that proves the acceptance criteria.

Activity 01 · Verify the Panel

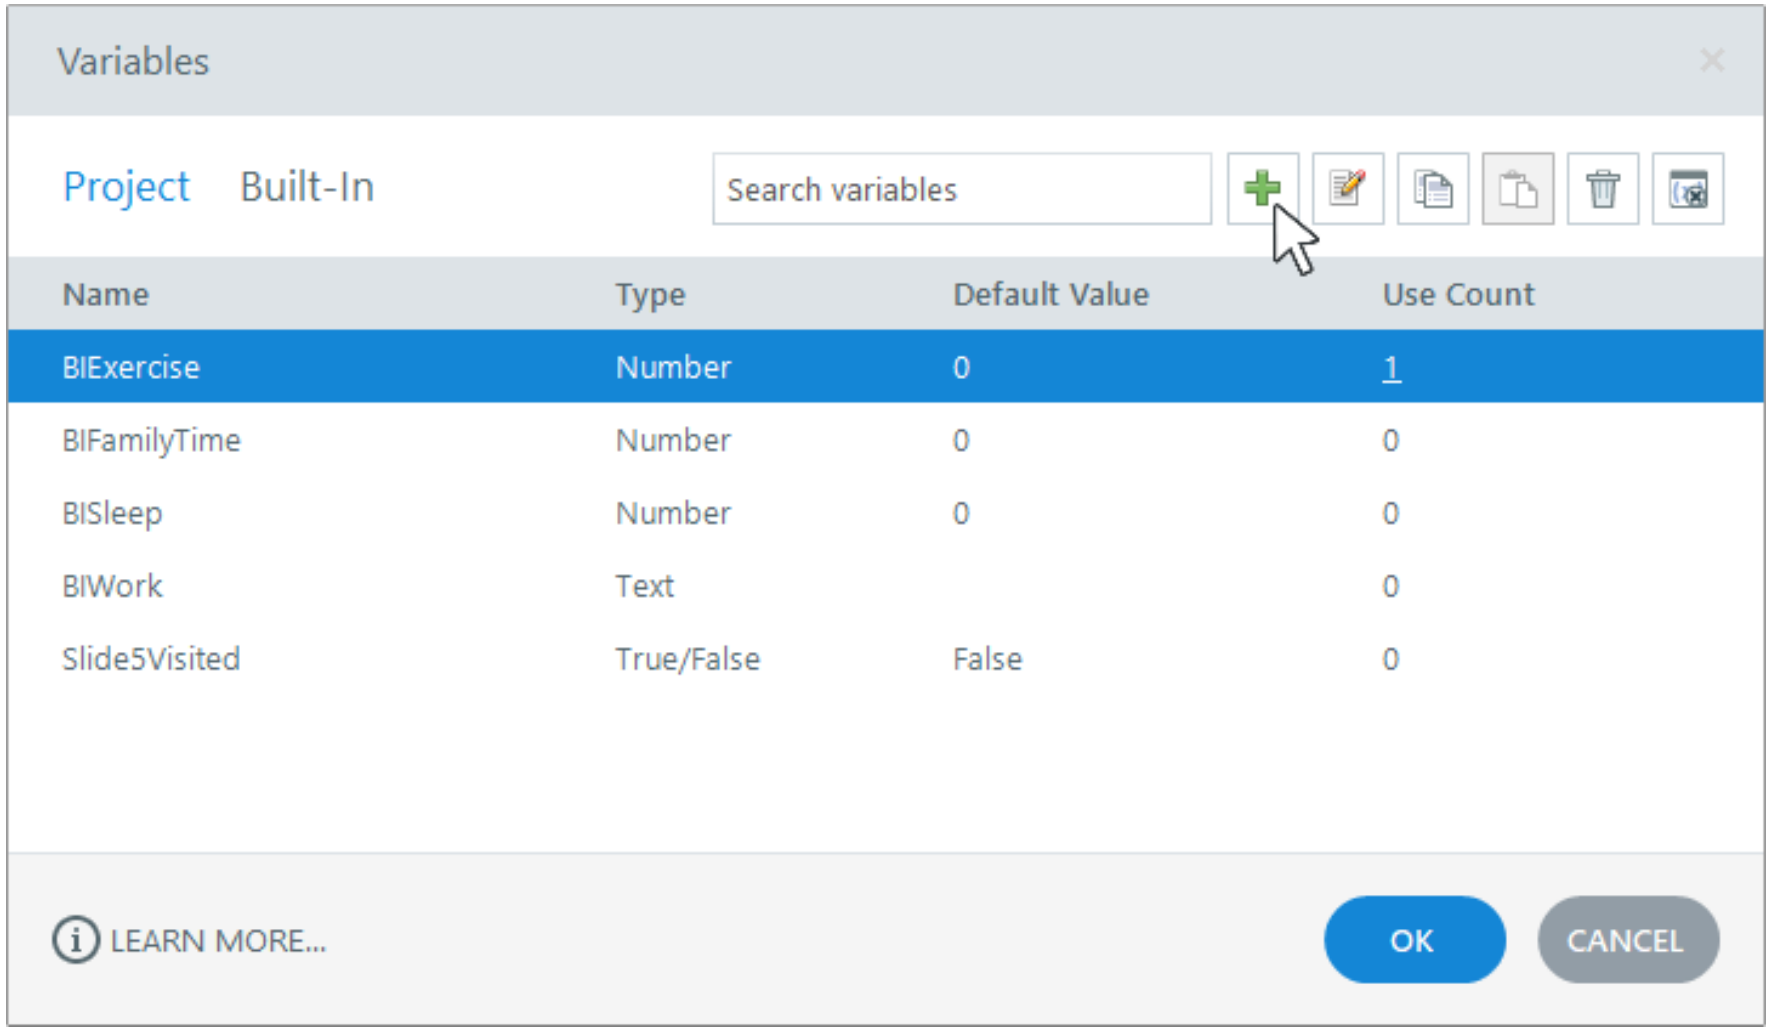

Named setting	Import `source/storyboard.csv` into your working notes and…	Expected output	Five named scenes and storyboard IDs match.	Boundary	Whole-project preview has no dead end.	Own evidence	Show the learner-created checkpoint and final setting, not…

EXPECTED VERSUS ACTUAL

Activity 01 · Test Matrix

Case 1

Five named scenes and storyboard IDs match.

Case 2

Variables use the specified type and default.

Case 3

Source and checkpoint are versioned locally.

Case 4

Whole-project preview has no dead end.

Revisit


Navigate away and back; compare actual state with the specified revisit rule.

Record

Log expected, actual, pass/fail, defect owner and corrected checkpoint filename.

Activity 02 · Build Theme, Masters and Menu

Create reusable visual layouts and accessible scene navigation.

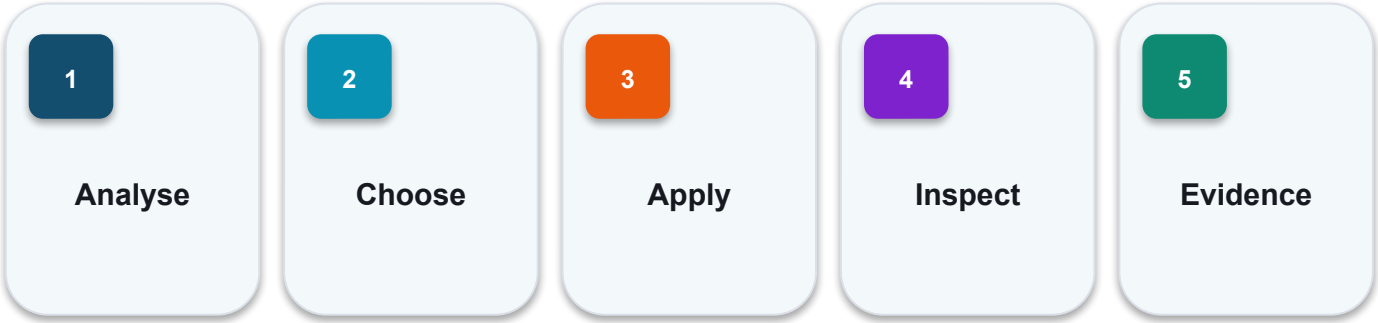


EVIDENCE

Retain the named .story checkpoint, the completed self-check table and one screenshot for each task showing the final state or setting that proves the acceptance criteria.

Full click-by-click procedure · Learner Guide / Activity 02

Activity 02 · Interface Reference

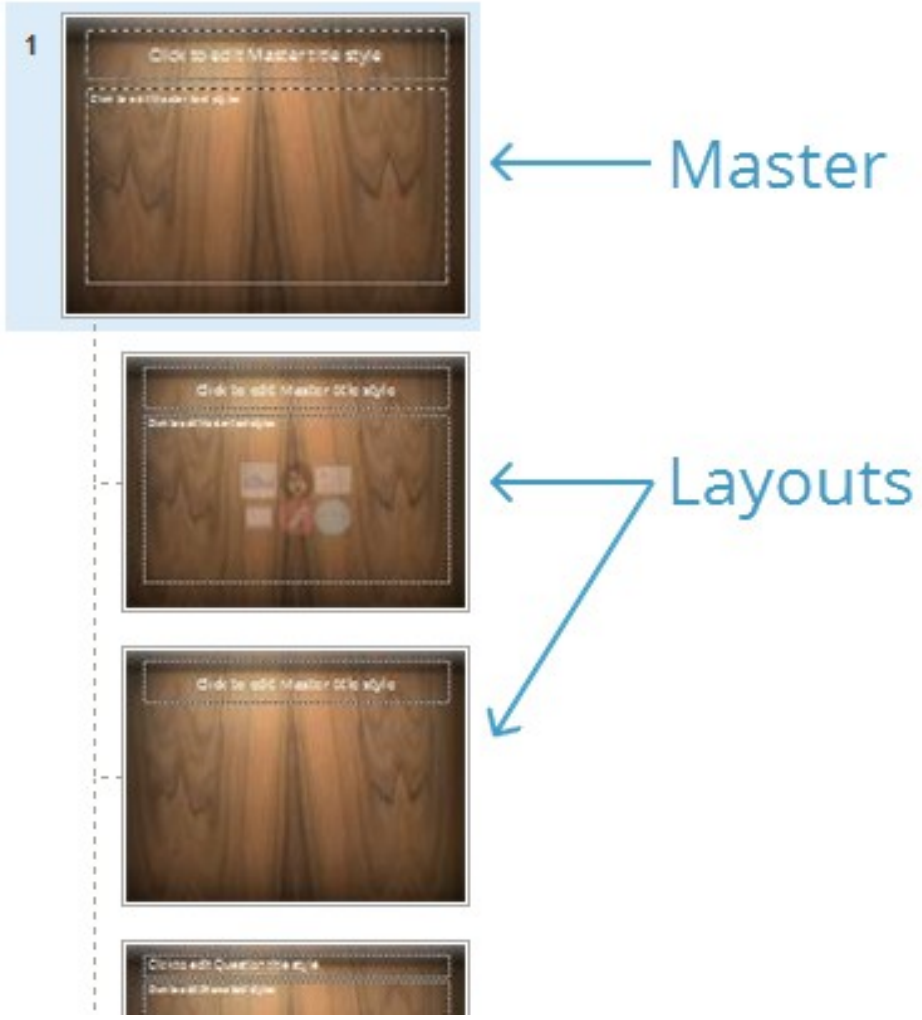

Locate	**Use this authentic interface capture to find the named…**
Set	**Choose Design > Fonts > Create New Theme Fonts and Design…**
Verify	**Four reusable layouts inherit correctly.**
Evidence	**Capture one final-state screenshot for the task; this…**

EDITABLE TECHNICAL MODEL

Activity 02 · Artifact Model

Artifact

HarbourLink-WSH-Checkpoint-02-YourName.story

Purpose

Create reusable visual layouts and accessible scene navigation.

Scenario input

HarbourLink annual WSH refresher; picture-first content, narration, captions, keyboard access and five-question 80% practice quiz.

Required output

Four reusable layouts inherit correctly.

Control point

Theme values match the style guide.

Readback

Retain the named .story checkpoint, the completed self-check table and one screenshot for each task showing the final state or setting that proves the acceptance criteria.

EDITABLE TECHNICAL MODEL

Activity 02 · Runtime State Trace

Initial state

Open with declared defaults and no prior test residue.

Input

Use the named WSA asset, learner decision or publish setting.

Control

Four reusable layouts inherit correctly.

Stored state

Theme values match the style guide.

Runtime output

Menu routes and returns correctly.

Boundary

Keyboard focus and state changes are visible.

EDITABLE TECHNICAL MODEL

Activity 02 · Worked Failure Case

Expected

Four reusable layouts inherit correctly.

Incomplete

Fail when: Theme values match the style guide. is not demonstrated.

Repeat

Repeat/revisit must preserve: Menu routes and returns correctly.

Access

Keyboard focus and state changes are visible.

Recovery

Correct the named setting in the next checkpoint, then rerun the same case.

Log

Record expected, actual, pass/fail and corrected version.

EDITABLE TECHNICAL MODEL

Activity 02 · Evidence Record

Source

HarbourLink-WSH-Checkpoint-02-YourName.story

Evidence rule

One decisive learner screenshot per task.

Setting evidence

Four reusable layouts inherit correctly.

Runtime evidence

Theme values match the style guide.


Regression evidence

Keyboard focus and state changes are visible.

Retention

Retain the named .story checkpoint, the completed self-check table and one screenshot for each task showing the final state or setting that proves the acceptance criteria.

Activity 02 · Verify the Panel

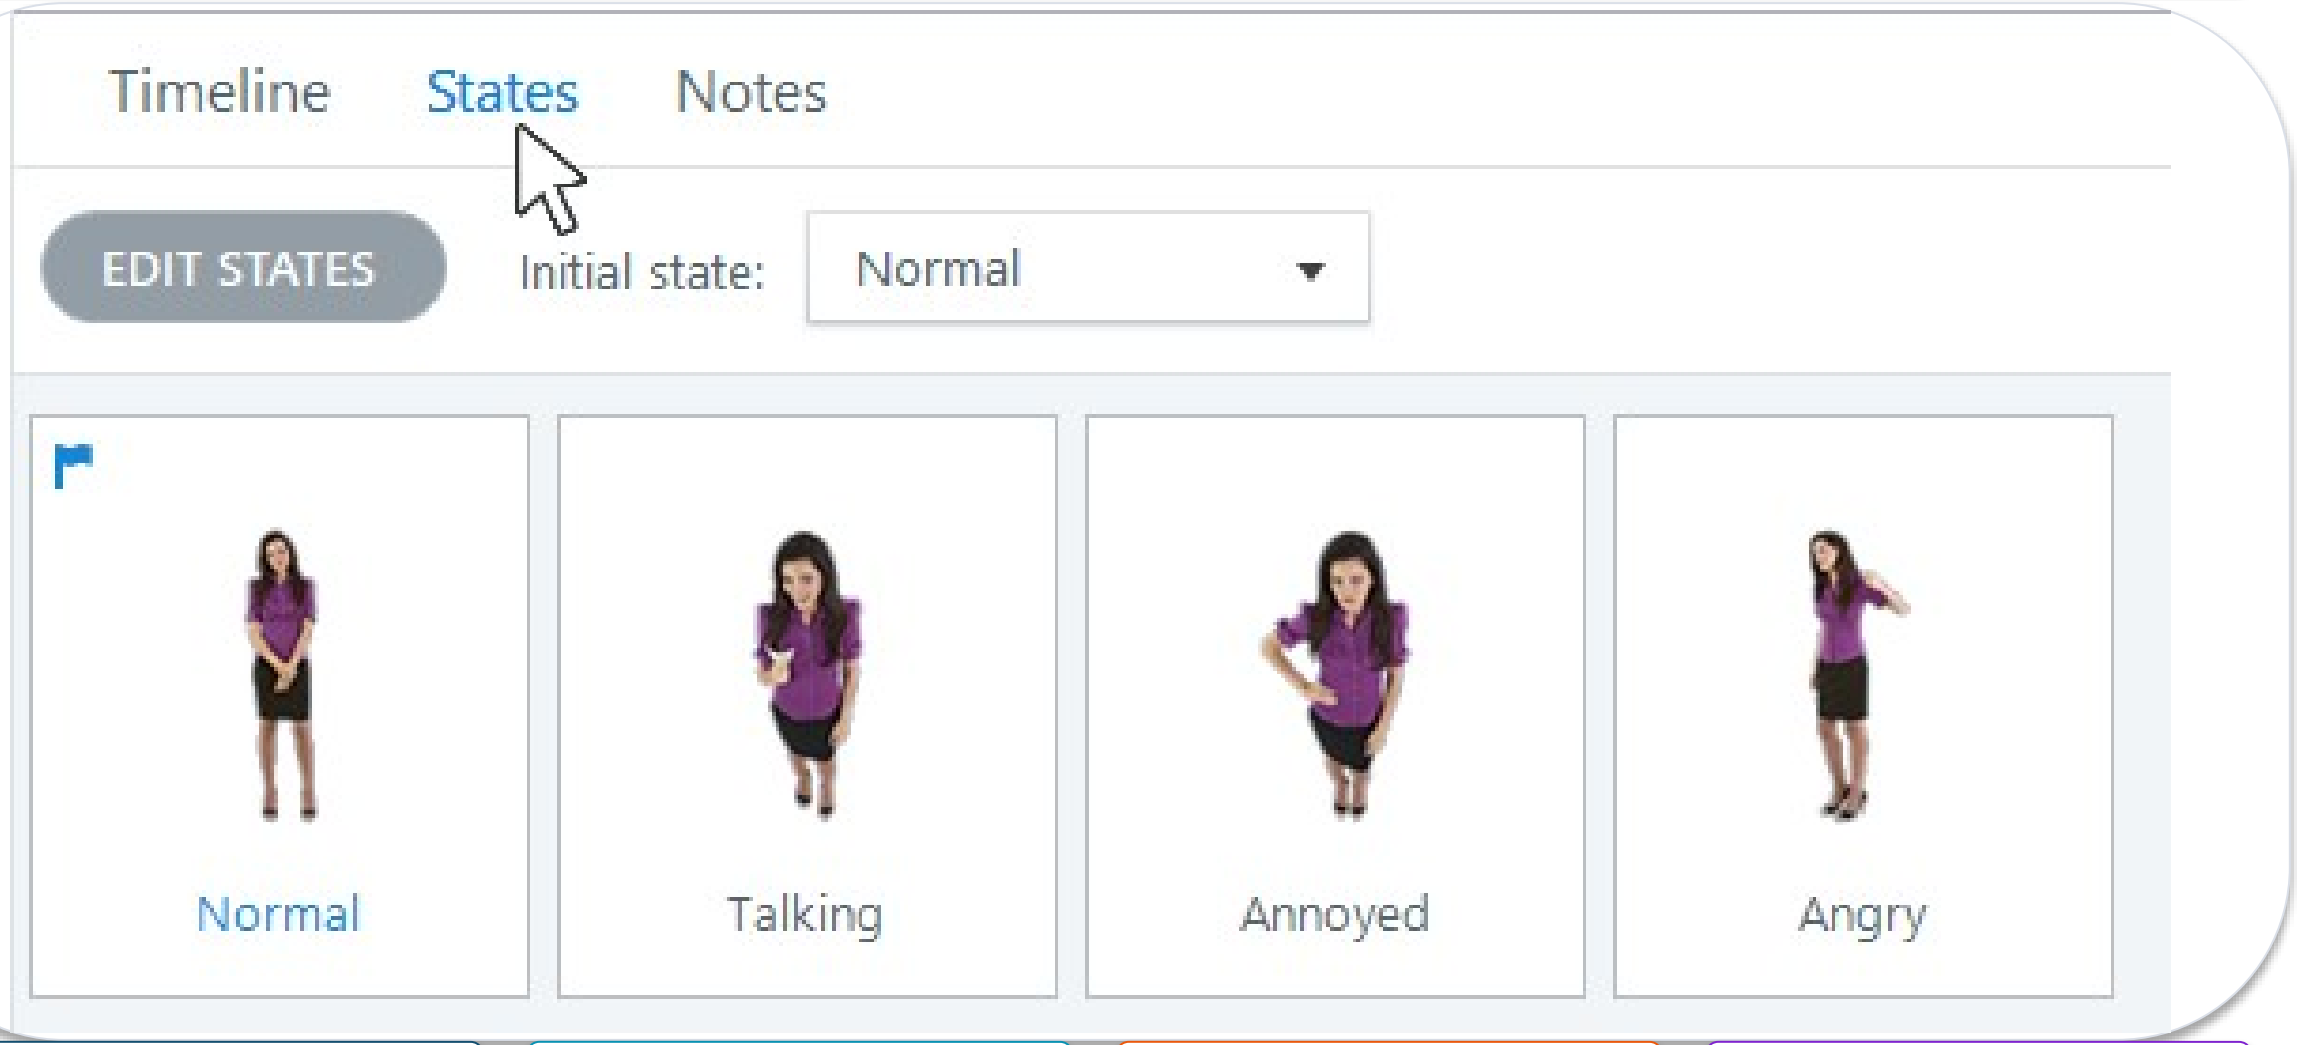

Named setting	Open View > Slide Master and build title, content,…
Expected output	Four reusable layouts inherit correctly.
Boundary	Keyboard focus and state changes are visible.
Own evidence	Show the learner-created checkpoint and final setting, not…

EXPECTED VERSUS ACTUAL

Activity 02 · Test Matrix

Case 1

Four reusable layouts inherit correctly.

Case 2

Theme values match the style guide.

Case 3

Menu routes and returns correctly.

Case 4

Keyboard focus and state changes are visible.

Revisit

Navigate away and back; compare actual state with the specified revisit rule.

Record

Log expected, actual, pass/fail, defect owner and corrected checkpoint filename.

Topic 1 Checkpoint

Source

HarbourLink-WSH-Checkpoint-02-YourName.story

Scenes

Welcome · Learn · Practise · Quiz · Resources

Variables

HazardsFound=0; Hazard01Found–07=False

Menu test

Four destinations and explicit return paths

Revisit

Reset/resume choice recorded per slide

Evidence

Story View, variable list and keyboard menu screenshot

02


Media, Interaction and Accessibility

Media Library · hazards · hotspots · layers · states · triggers · motion · simulation · audio · captions

LO2 · A3 · A5 · K2 · K5

EDITABLE CONTENT-PLANNING CHART

Accessible Media Mix

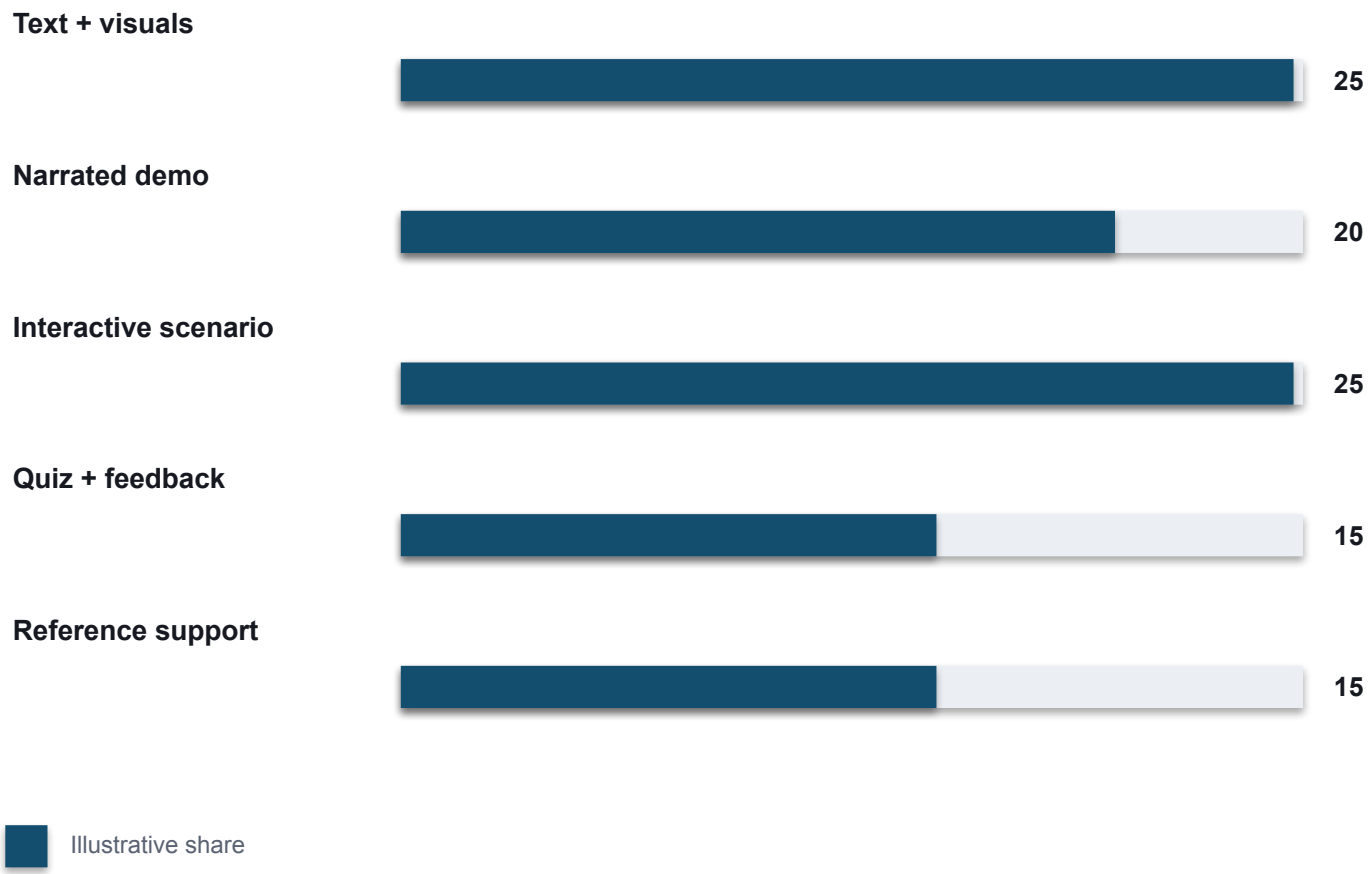

READ THE CHART

A mixed design serves different learning needs. Every audio/video element still needs captions, an accessible path and a reason to exist.

Editable PowerPoint shape chart

Picture insertion and crop

Named HarbourLink WSH artifact

WSA-020-Picture-insertion-and-crop

Input / source state

WSA checkpoint plus crop focal point; compression; alt text; source

Runtime mechanism

Insert > Picture plus Picture Format > Crop fits safety photography without distortion

Expected output

image remains sharp and the hazard stays visible at player size

Rejected output

stretching media or hiding critical hazard detail

Evidence record

WSA-020-Picture-insertion-and-crop: capture the configured control and the runtime readback.

EDITABLE CONFIGURATION MODEL

Picture insertion and crop

SET THESE CONTROLS

C1=crop focal point · C2=compression · C3=alt text · C4=source

→

REJECT WHEN

stretching media or hiding critical hazard detail

→

VERIFY READBACK

image remains sharp and the hazard stays visible at player size

Editable HarbourLink model · image remains sharp and the hazard stays visible at player size

Picture insertion and crop

FAULTY OUTPUT (EXAMPLE)

stretching media or hiding critical hazard detail

→

CORRECT THE RECORD

crop focal point; compression; alt text; source

→

EXPECTED AFTER FIX

image remains sharp and the hazard stays visible at player size · verify in your own Preview

Editable HarbourLink model · image remains sharp and the hazard stays visible at player size

© 2026 Tertiary Infotech Academy Pte Ltd · Mastering Articulate Storyline 360 for e-Learning Content Creation · TGS-2024042308

Illustration and icon system

Named HarbourLink WSH artifact

WSA-021-Illustration-and-icon-system

Input / source state

WSA checkpoint plus style; size; theme colour; decorative flag

Runtime mechanism

Insert > Icons/Illustrations creates consistent editable safety cues

Expected output

icons reinforce labels and remain understandable without colour

Rejected output

mixing styles or announcing decorative icons

Evidence record

WSA-021-Illustration-and-icon-system: capture the configured control and the runtime readback.

Illustration and icon system

SET THESE CONTROLS

C1=style · C2=size · C3=theme colour · C4=decorative flag

REJECT WHEN

mixing styles or announcing decorative icons

VERIFY READBACK

icons reinforce labels and remain understandable without colour

Editable HarbourLink model · icons reinforce labels and remain understandable without colour

Illustration and icon system

FAULTY OUTPUT (EXAMPLE)

mixing styles or announcing decorative icons

→

CORRECT THE RECORD

style; size; theme colour; decorative flag


→

EXPECTED AFTER FIX

icons reinforce labels and remain understandable without colour · verify in your own Preview

Editable HarbourLink model · icons reinforce labels and remain understandable without colour

Media Library replacement

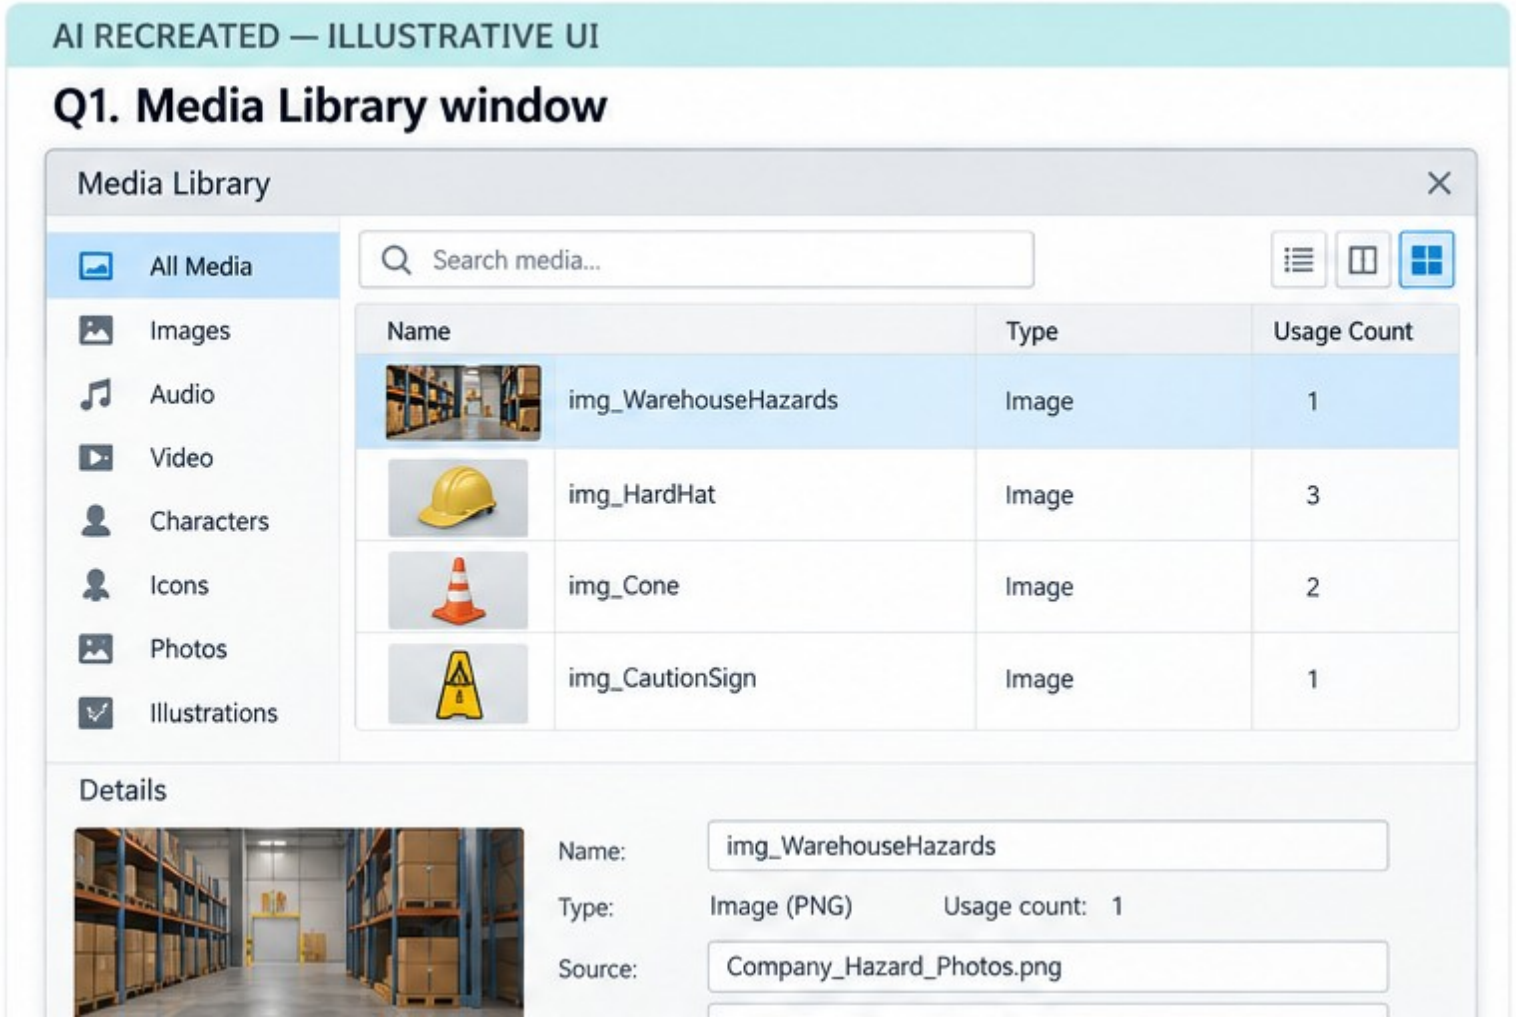


NAMED ARTIFACT	WSA-022-Media-Library-replacement
MECHANISM	View > Media Library replaces a source asset and exposes where it is used
EXPECTED	replacement updates intended uses and preserves crops after review

AI RECREATED — ILLUSTRATIVE UI · verify the named control

Media Library replacement

AI RECREATED — ILLUSTRATIVE UI


Q1. Media Library window

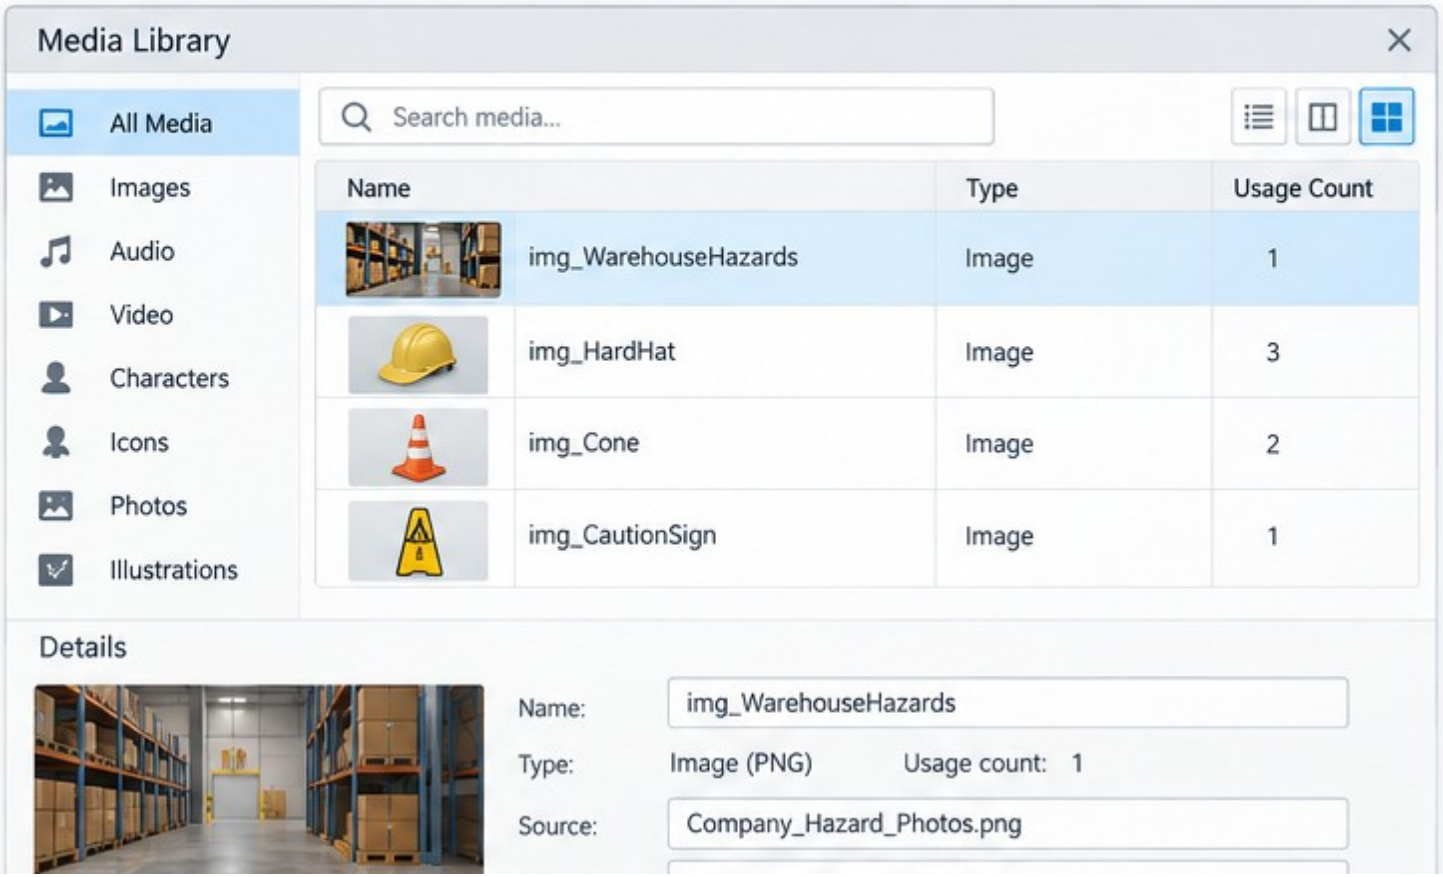

SET THESE CONTROLS	**C1=asset name · C2=usage count · C3=replace · C4=source record**
REJECT WHEN	**changing one instance while duplicates drift**
VERIFY READBACK	**replacement updates intended uses and preserves crops after review**

AI RECREATED — ILLUSTRATIVE UI · verify the named control

Media Library replacement

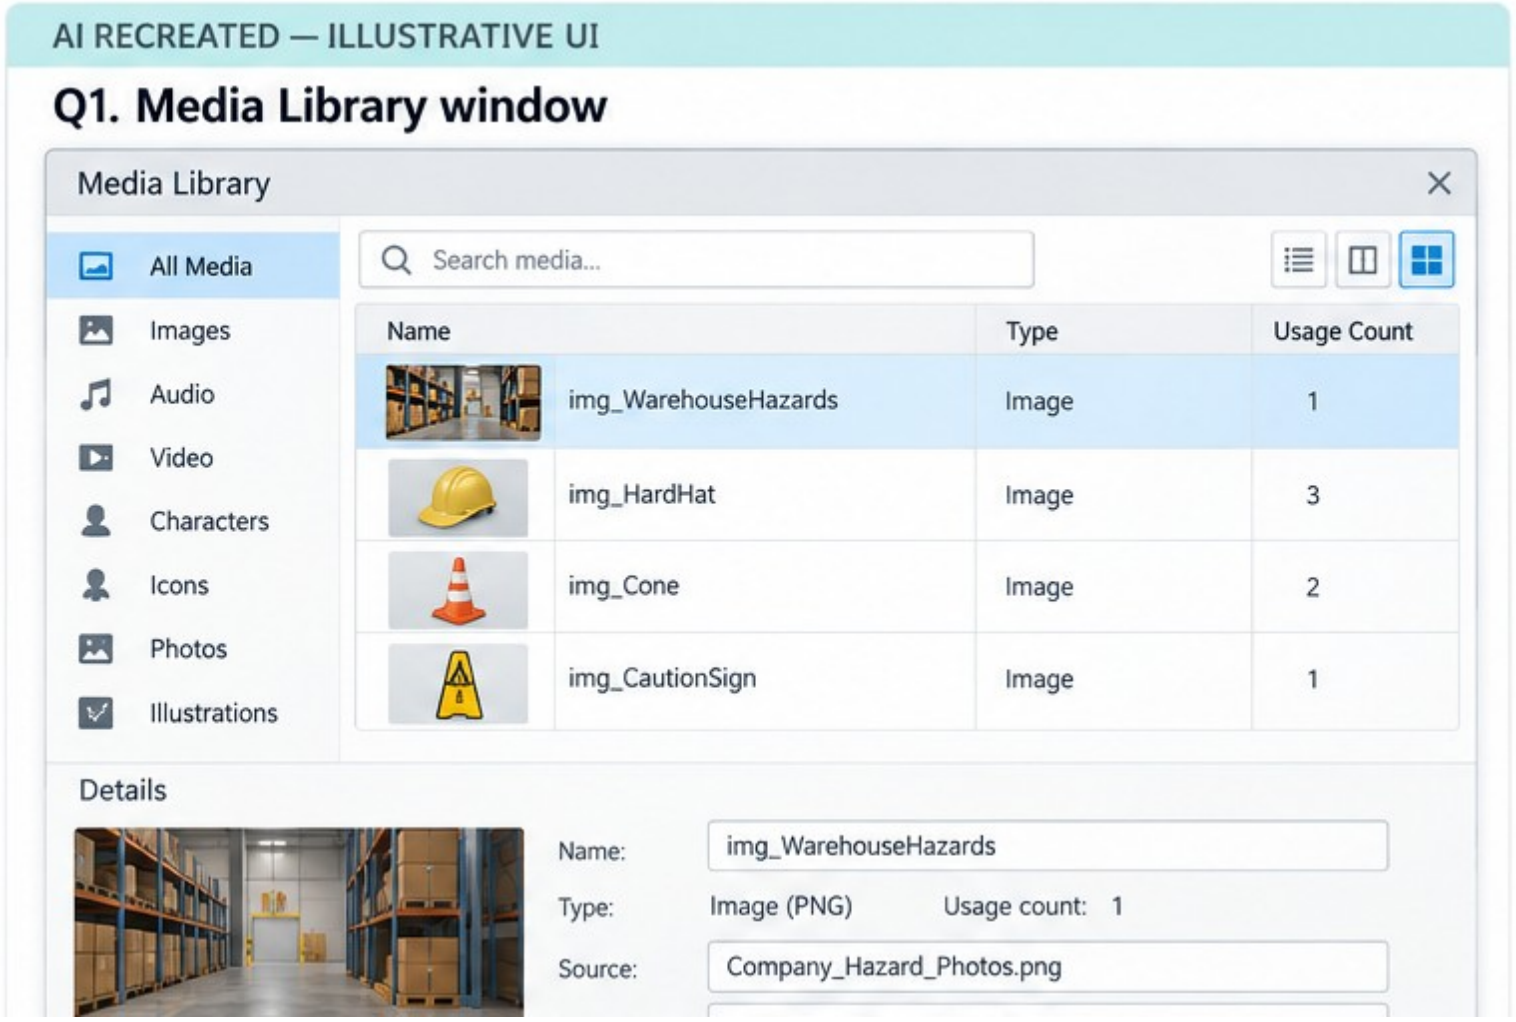


FAULTY OUTPUT (EXAMPLE) changing one instance while duplicates drift

FIX IN NAMED PANEL asset name; usage count; replace; source record

EXPECTED AFTER FIX replacement updates intended uses and preserves crops after review ·…

AI RECREATED — ILLUSTRATIVE UI · verify the named control


Hazard hotspot geometry

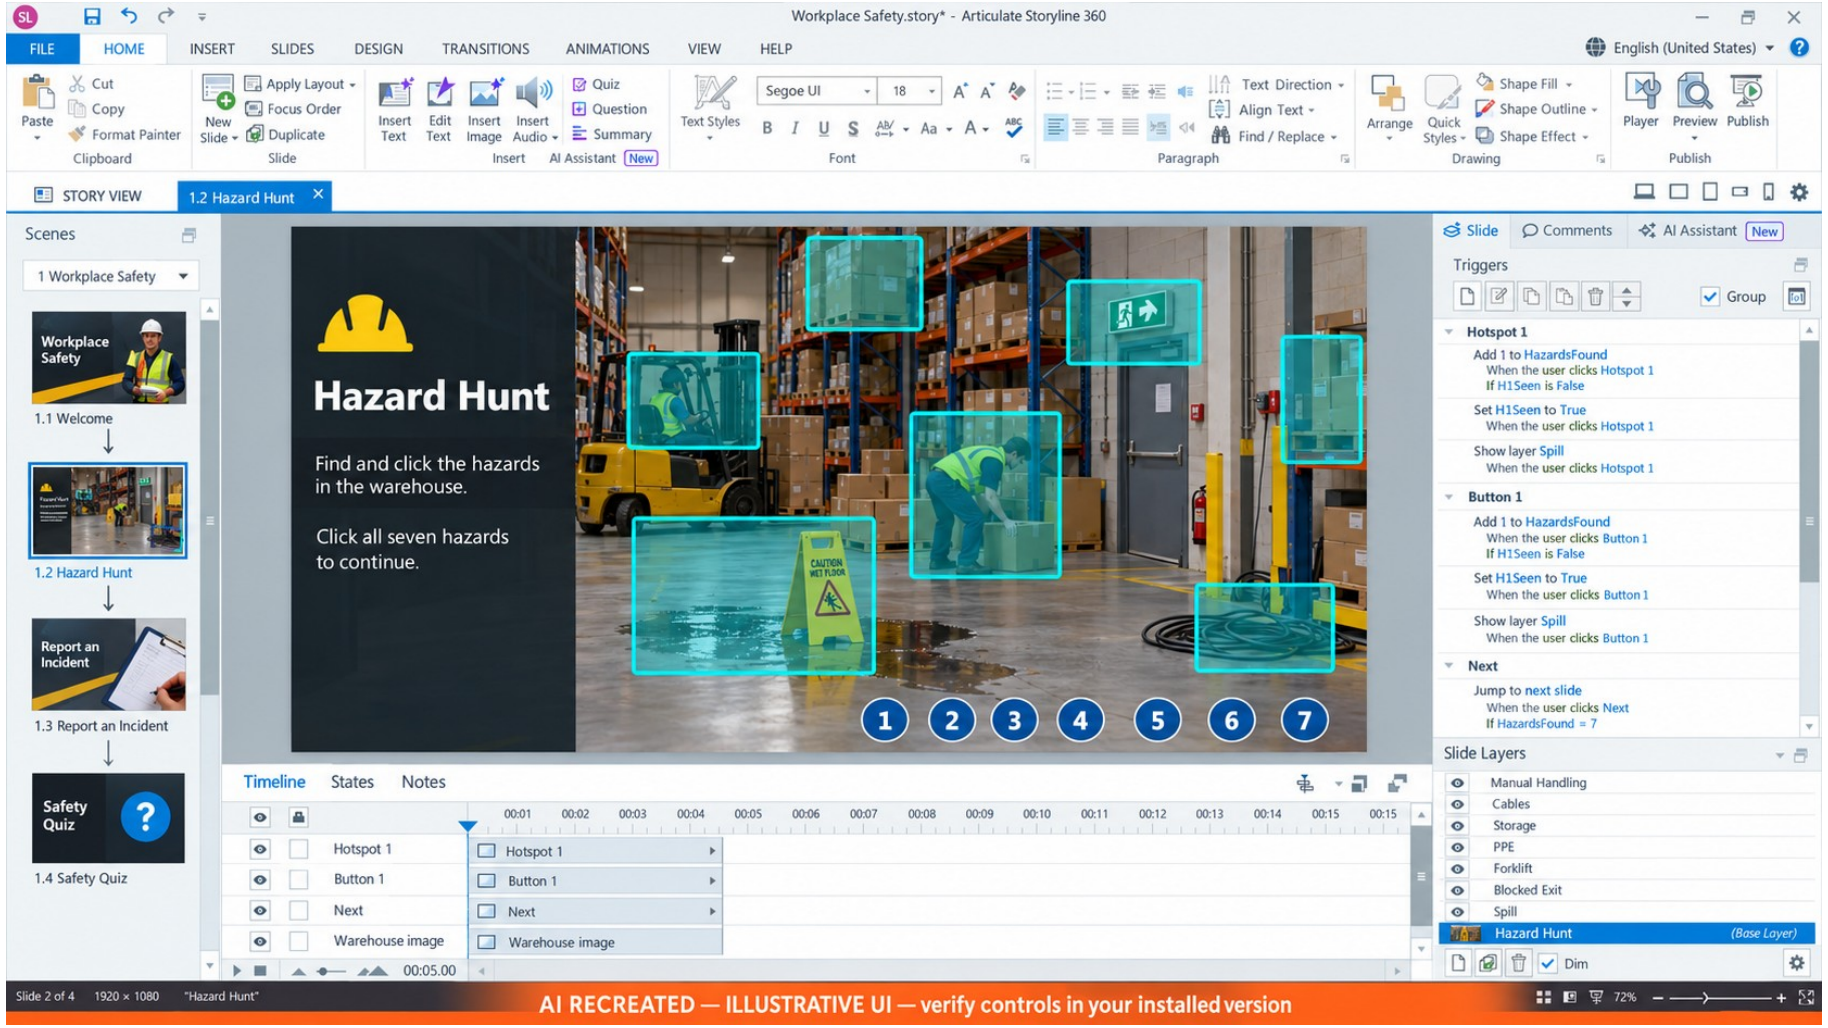

NAMED ARTIFACT	**WSA-023-Hazard-hotspot-geometry**
MECHANISM	**Hotspots sit over seven visible hazards with non-overlapping target regions**
EXPECTED	**all hazards can be activated by pointer and equivalent keyboard controls**

AI RECREATED — ILLUSTRATIVE UI · verify the named control


Hazard hotspot geometry

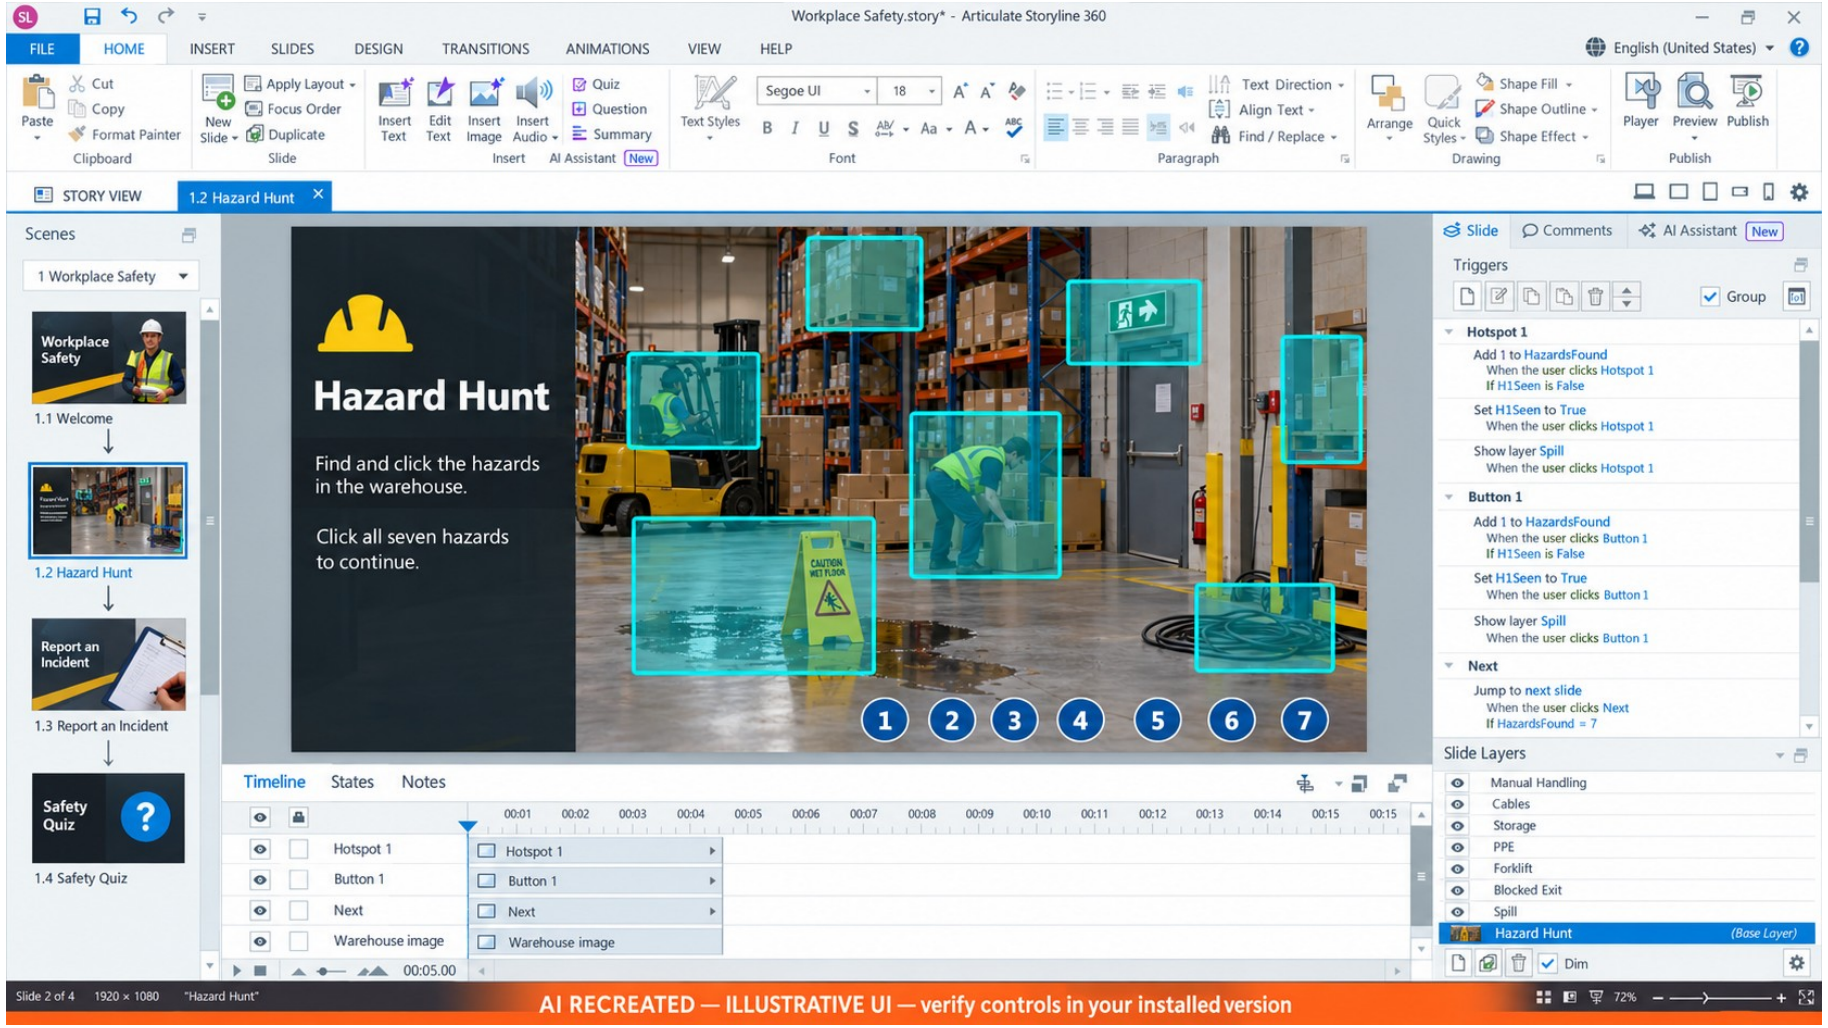

SET THESE CONTROLS	**C1=target bounds · C2=label · C3=focus alternative · C4=z-order**
REJECT WHEN	**tiny invisible targets or overlapping hotspots**
VERIFY READBACK	**all hazards can be activated by pointer and equivalent keyboard controls**

AI RECREATED — ILLUSTRATIVE UI · verify the named control

Hazard hotspot geometry

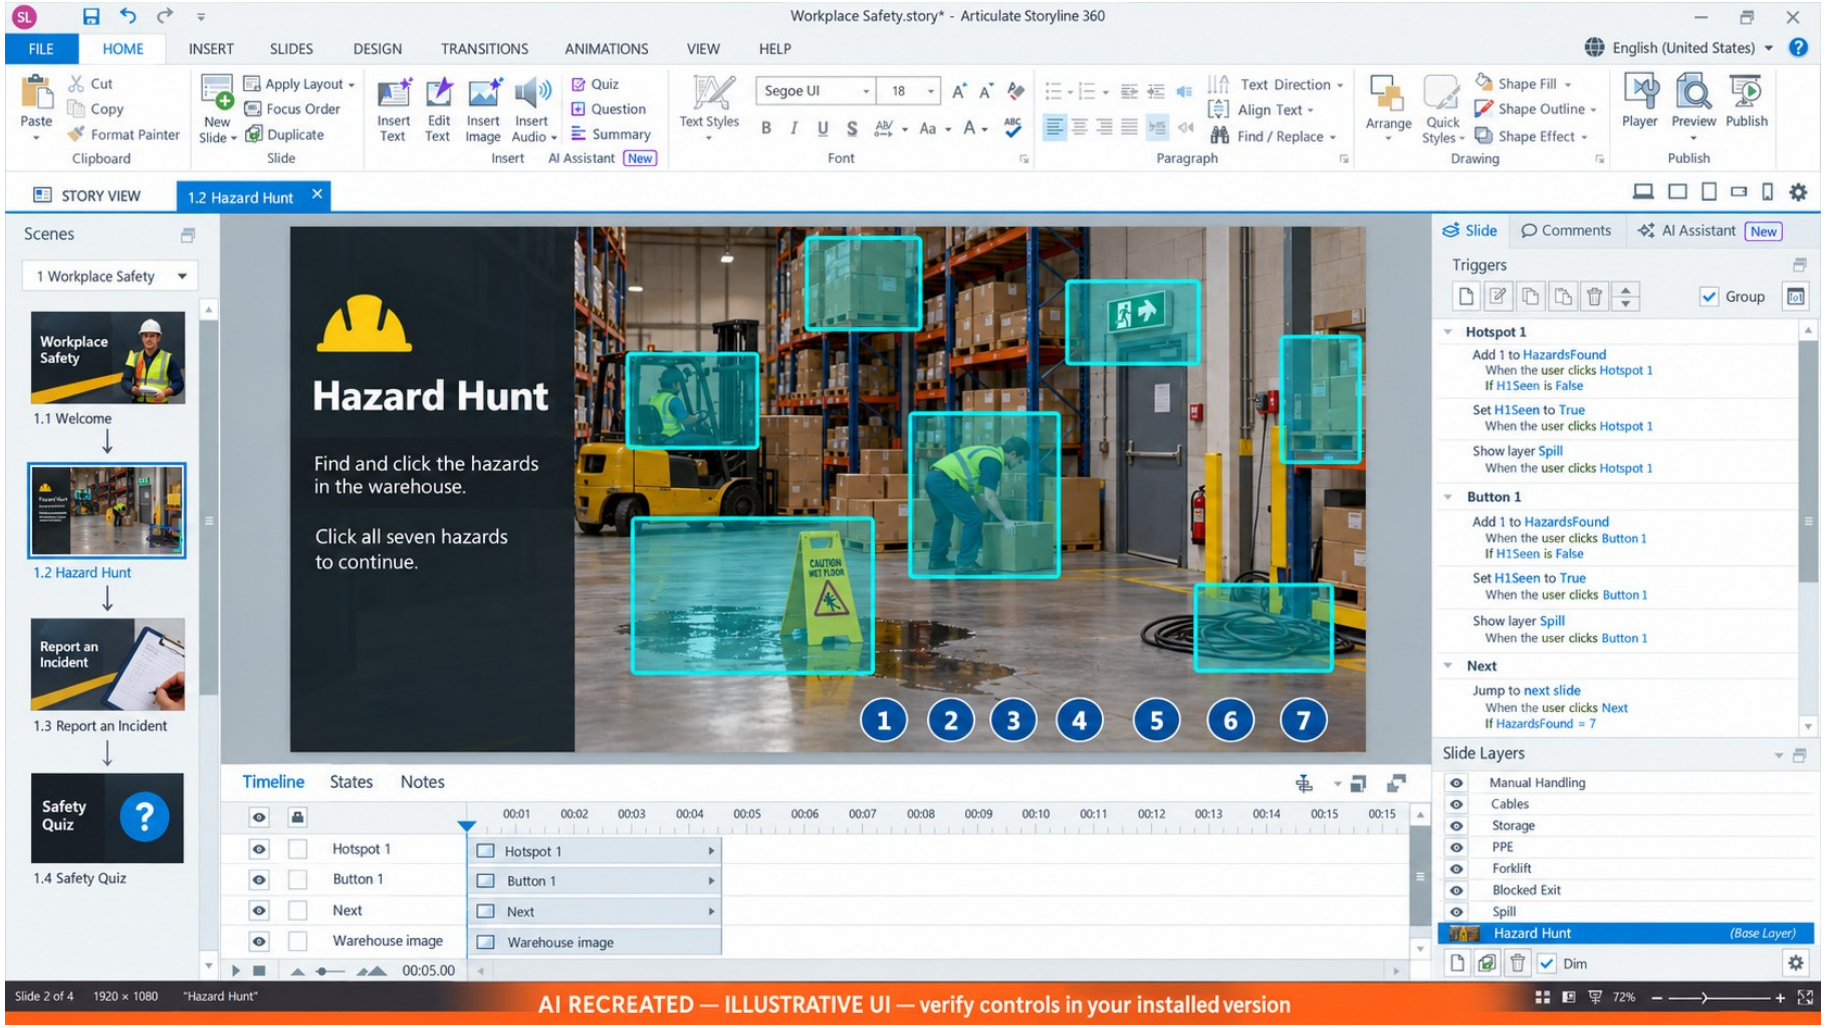


FAULTY OUTPUT (EXAMPLE) tiny invisible targets or overlapping hotspots

FIX IN NAMED PANEL target bounds; label; focus alternative; z-order

EXPECTED AFTER FIX all hazards can be activated by pointer and equivalent keyboard controls ·…

AI RECREATED — ILLUSTRATIVE UI · verify the named control


Hotspot information layers

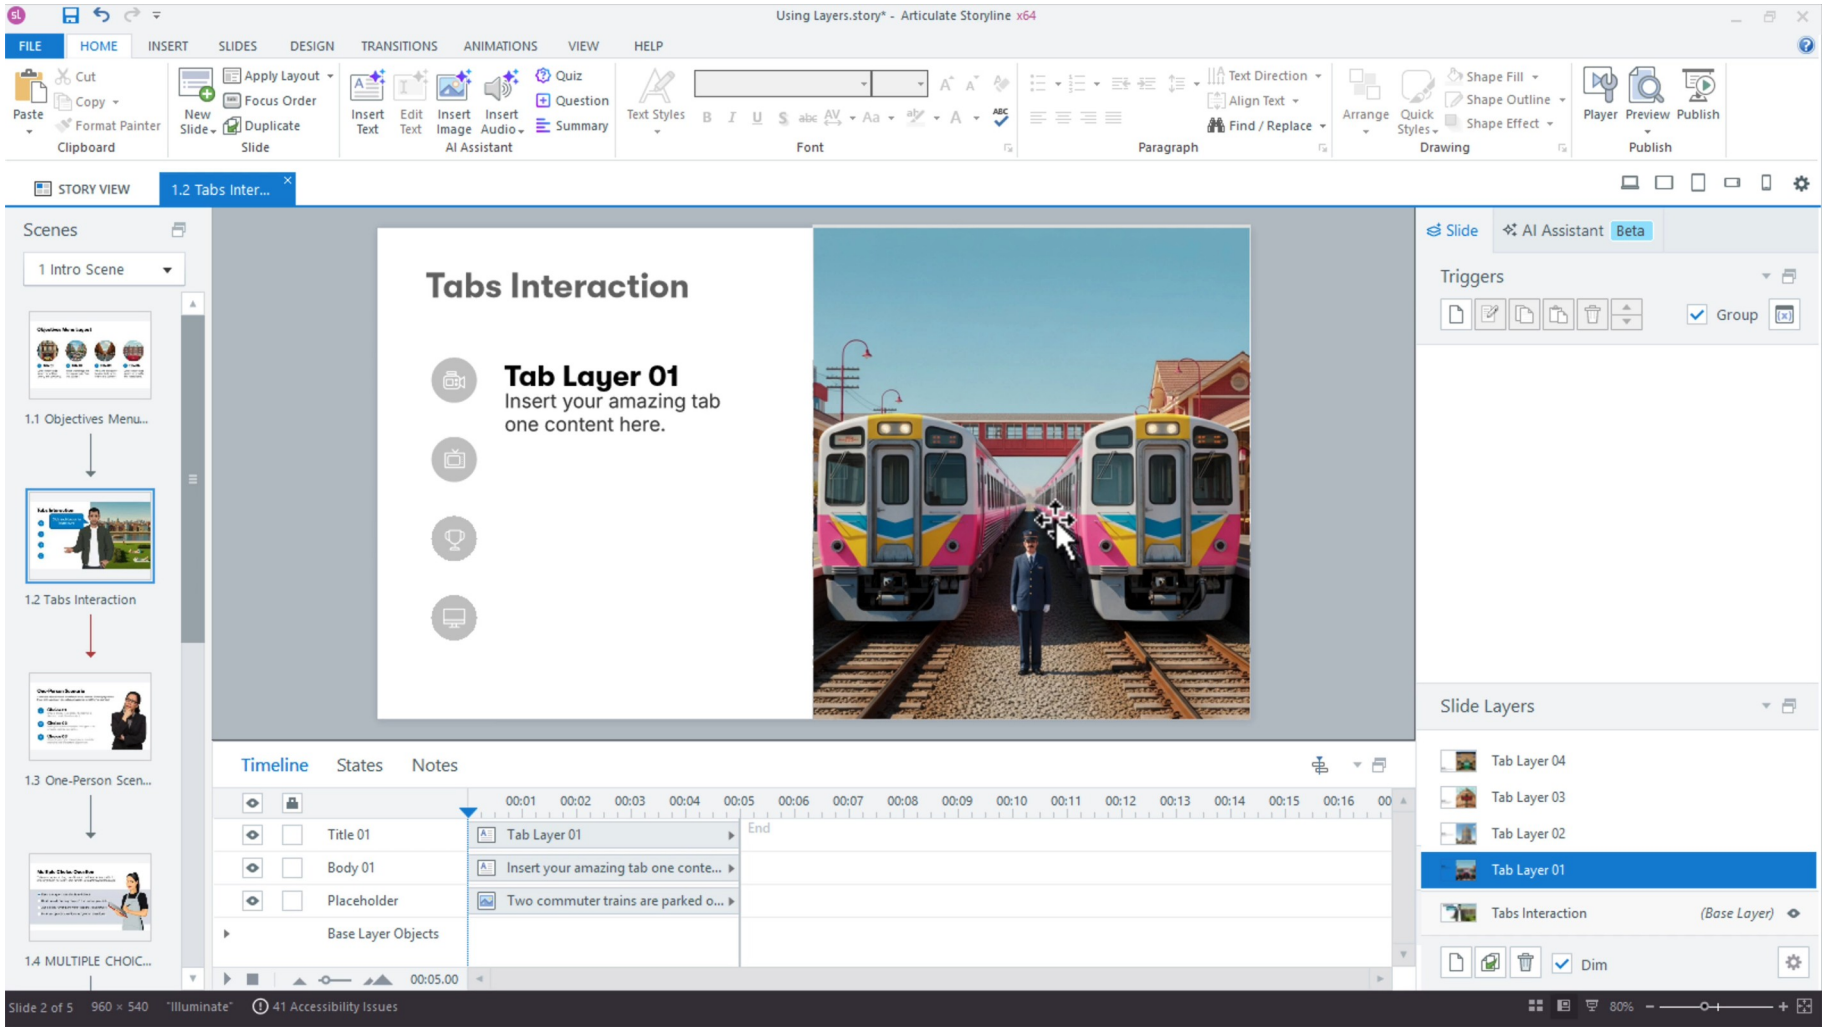

NAMED ARTIFACT	**WSA-024-Hotspot-information-layers**
MECHANISM	**Each hazard opens one named layer with risk, control and close action**
EXPECTED	**open/close cycles return focus to the invoking hazard control**

Authentic Articulate interface reference · verify the named control


Hotspot information layers

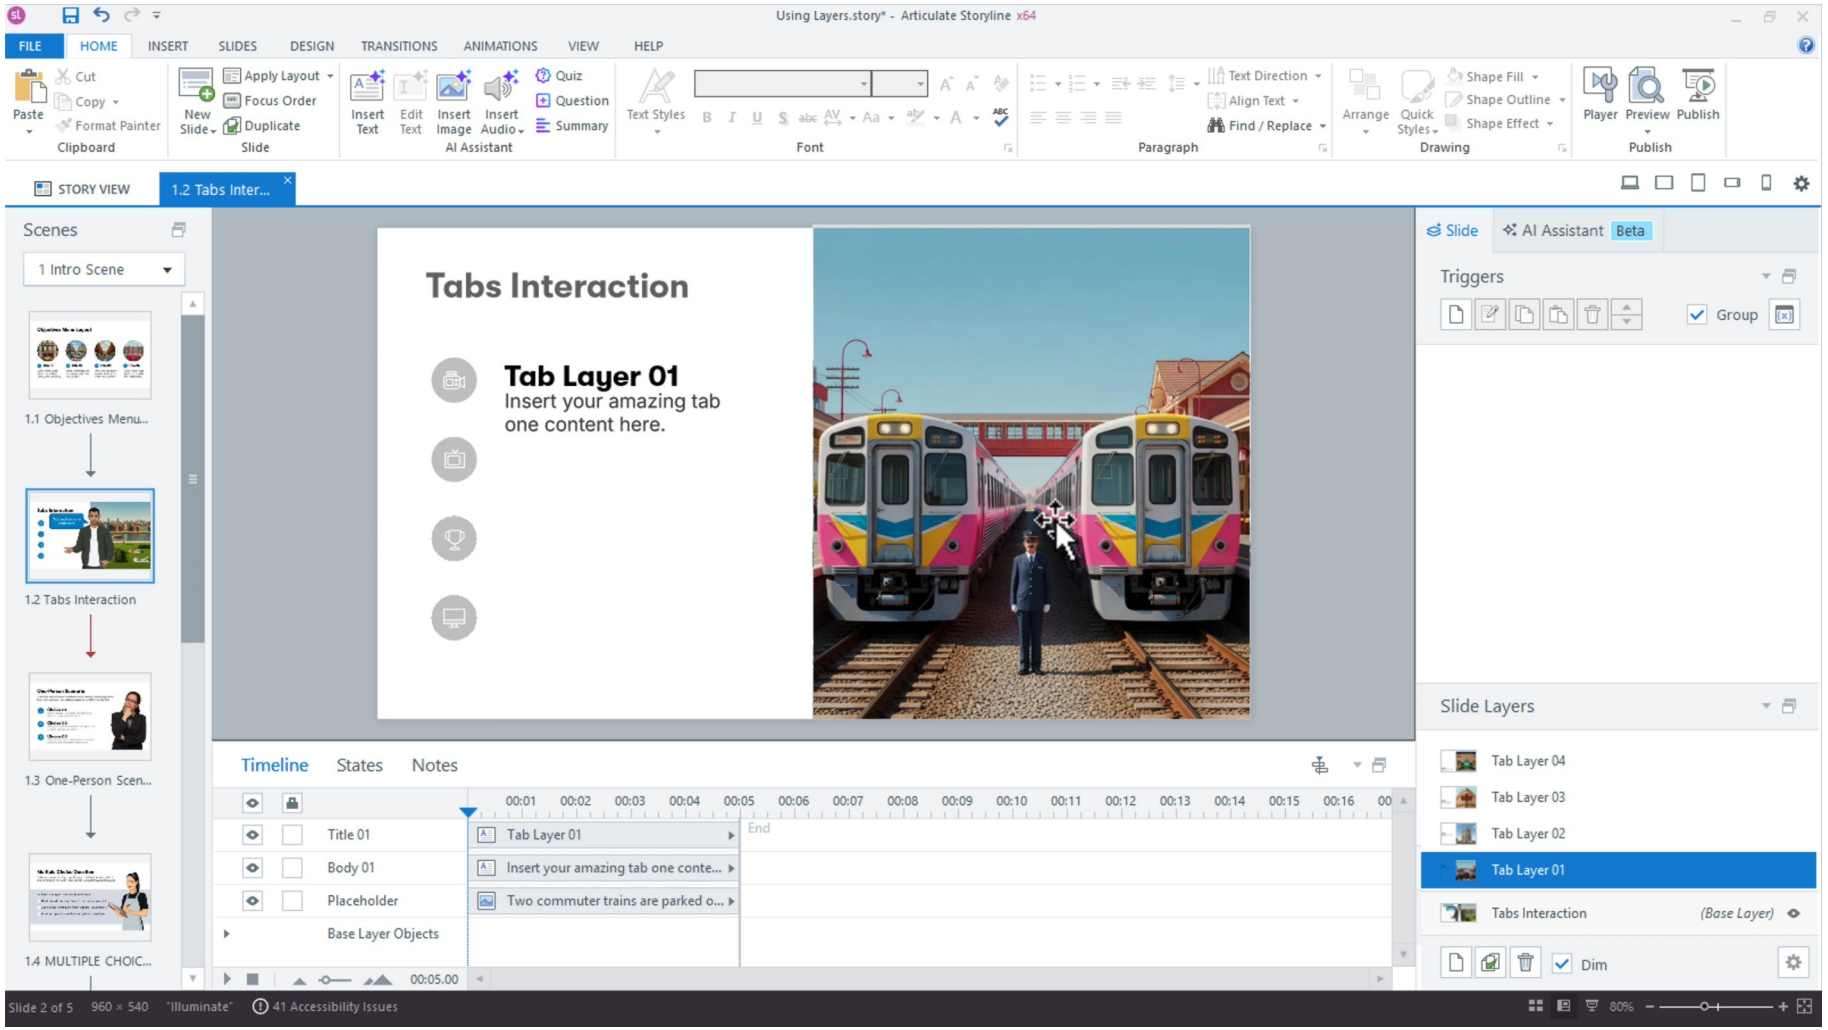

SET THESE CONTROLS	**C1=show layer · C2=hide layer · C3=focus · C4=pause base timeline**
REJECT WHEN	**click-through behind the layer or stranded focus**
VERIFY READBACK	**open/close cycles return focus to the invoking hazard control**

Authentic Articulate interface reference · verify the named control


Hotspot information layers

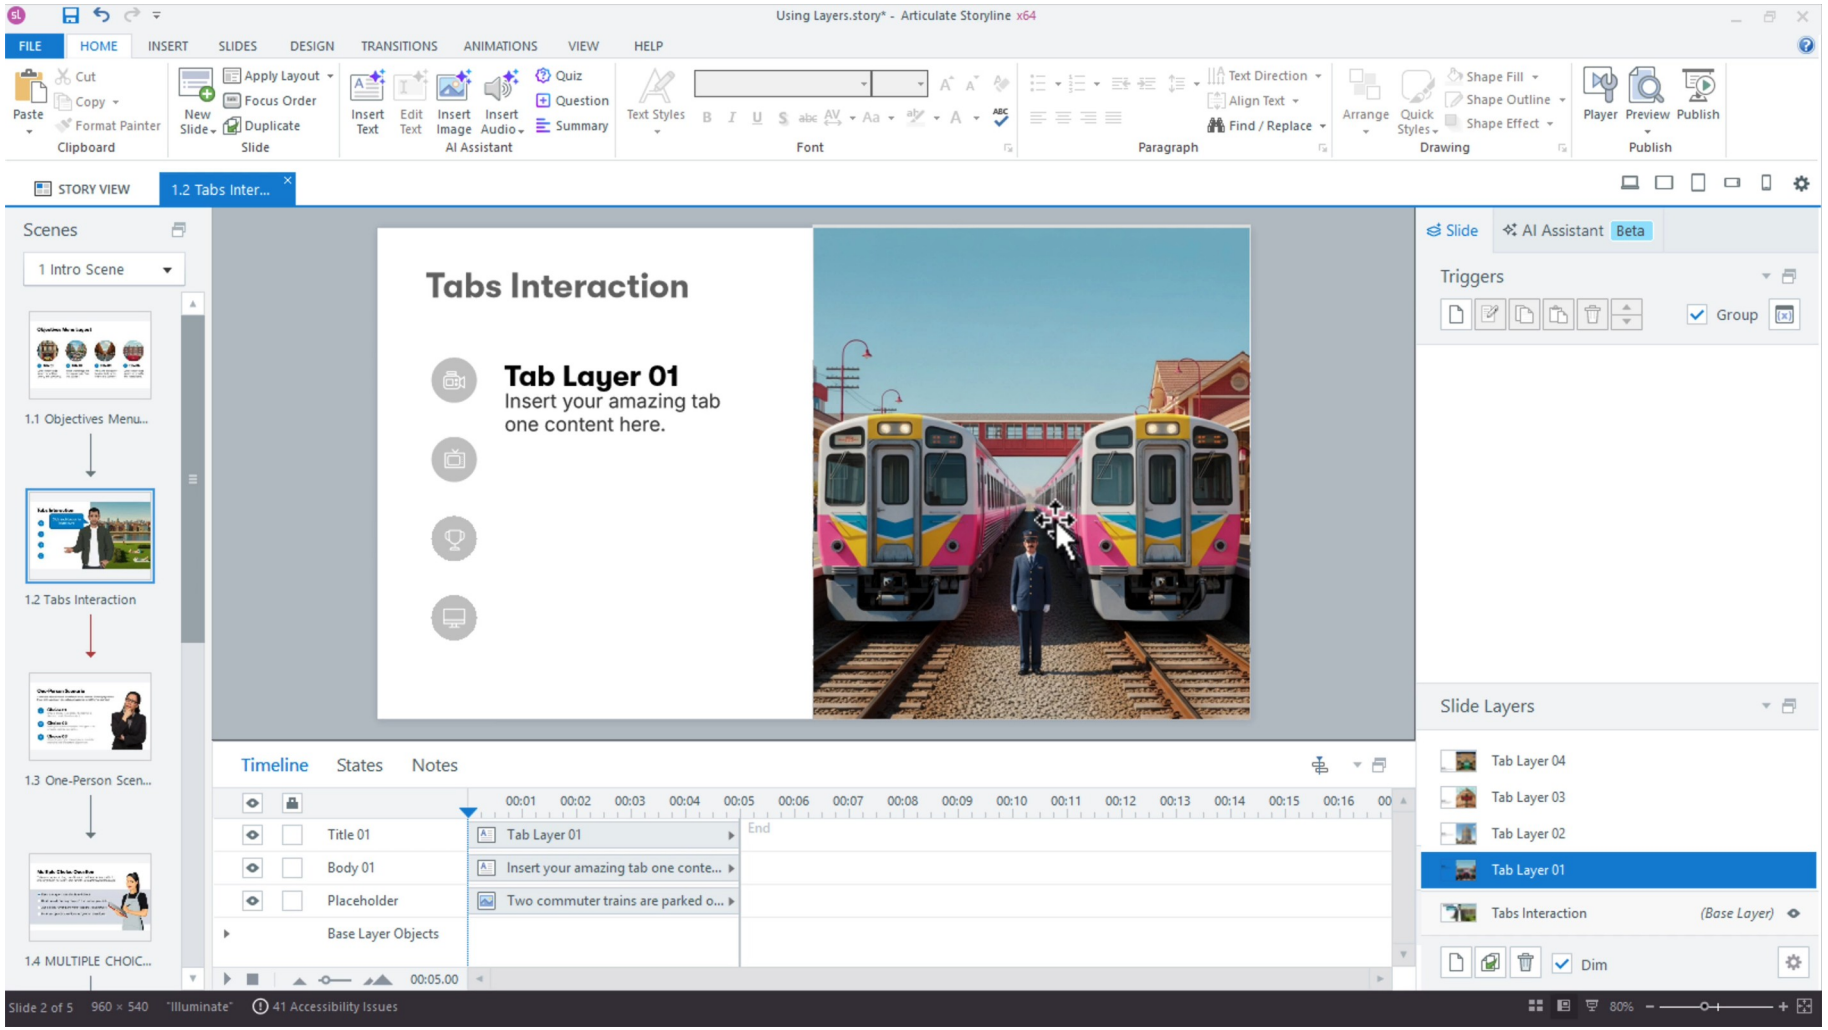

FAULTY OUTPUT (EXAMPLE)	click-through behind the layer or stranded focus
FIX IN NAMED PANEL	show layer; hide layer; focus; pause base timeline
EXPECTED AFTER FIX	open/close cycles return focus to the invoking hazard control · verify in…

Authentic Articulate interface reference · verify the named control


Keyboard hotspot alternative

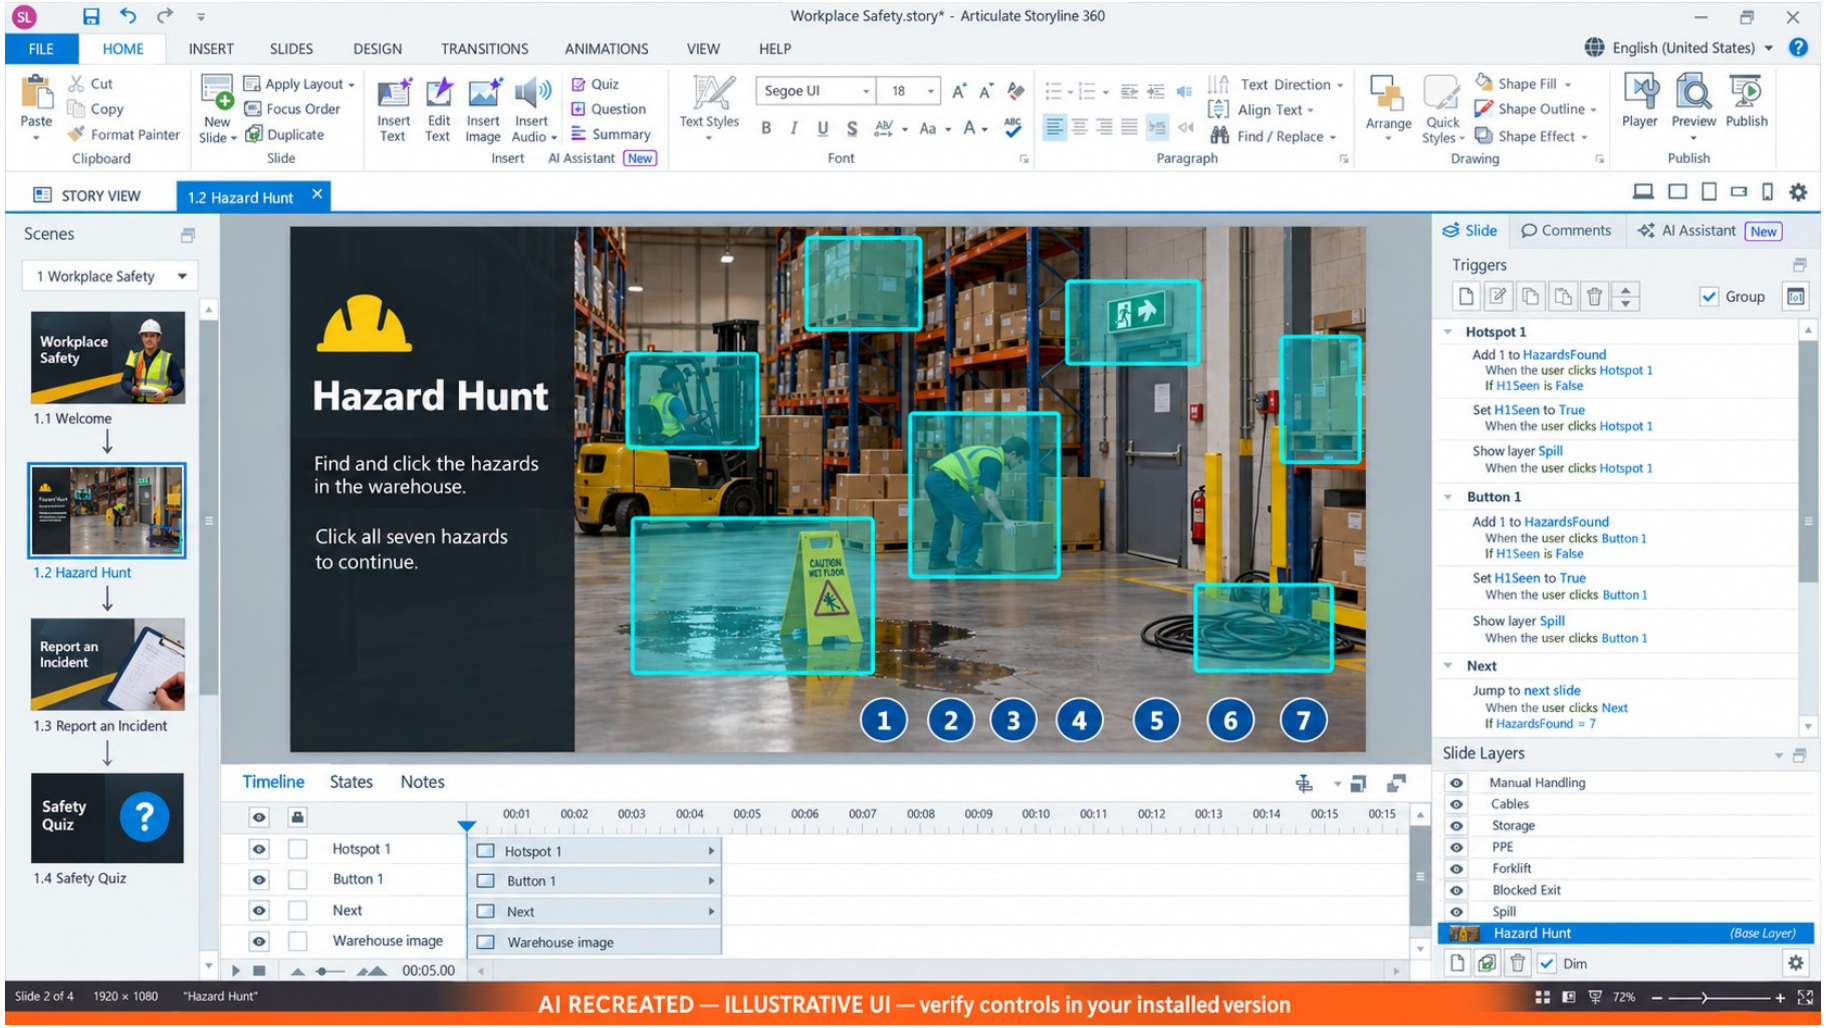

NAMED ARTIFACT	WSA-025-Keyboard-hotspot-alternative
MECHANISM	Visible numbered buttons mirror hotspot triggers for keyboard and…
EXPECTED	keyboard activation shows the same hazard layer and visited state

AI RECREATED — ILLUSTRATIVE UI · verify the named control


Keyboard hotspot alternative

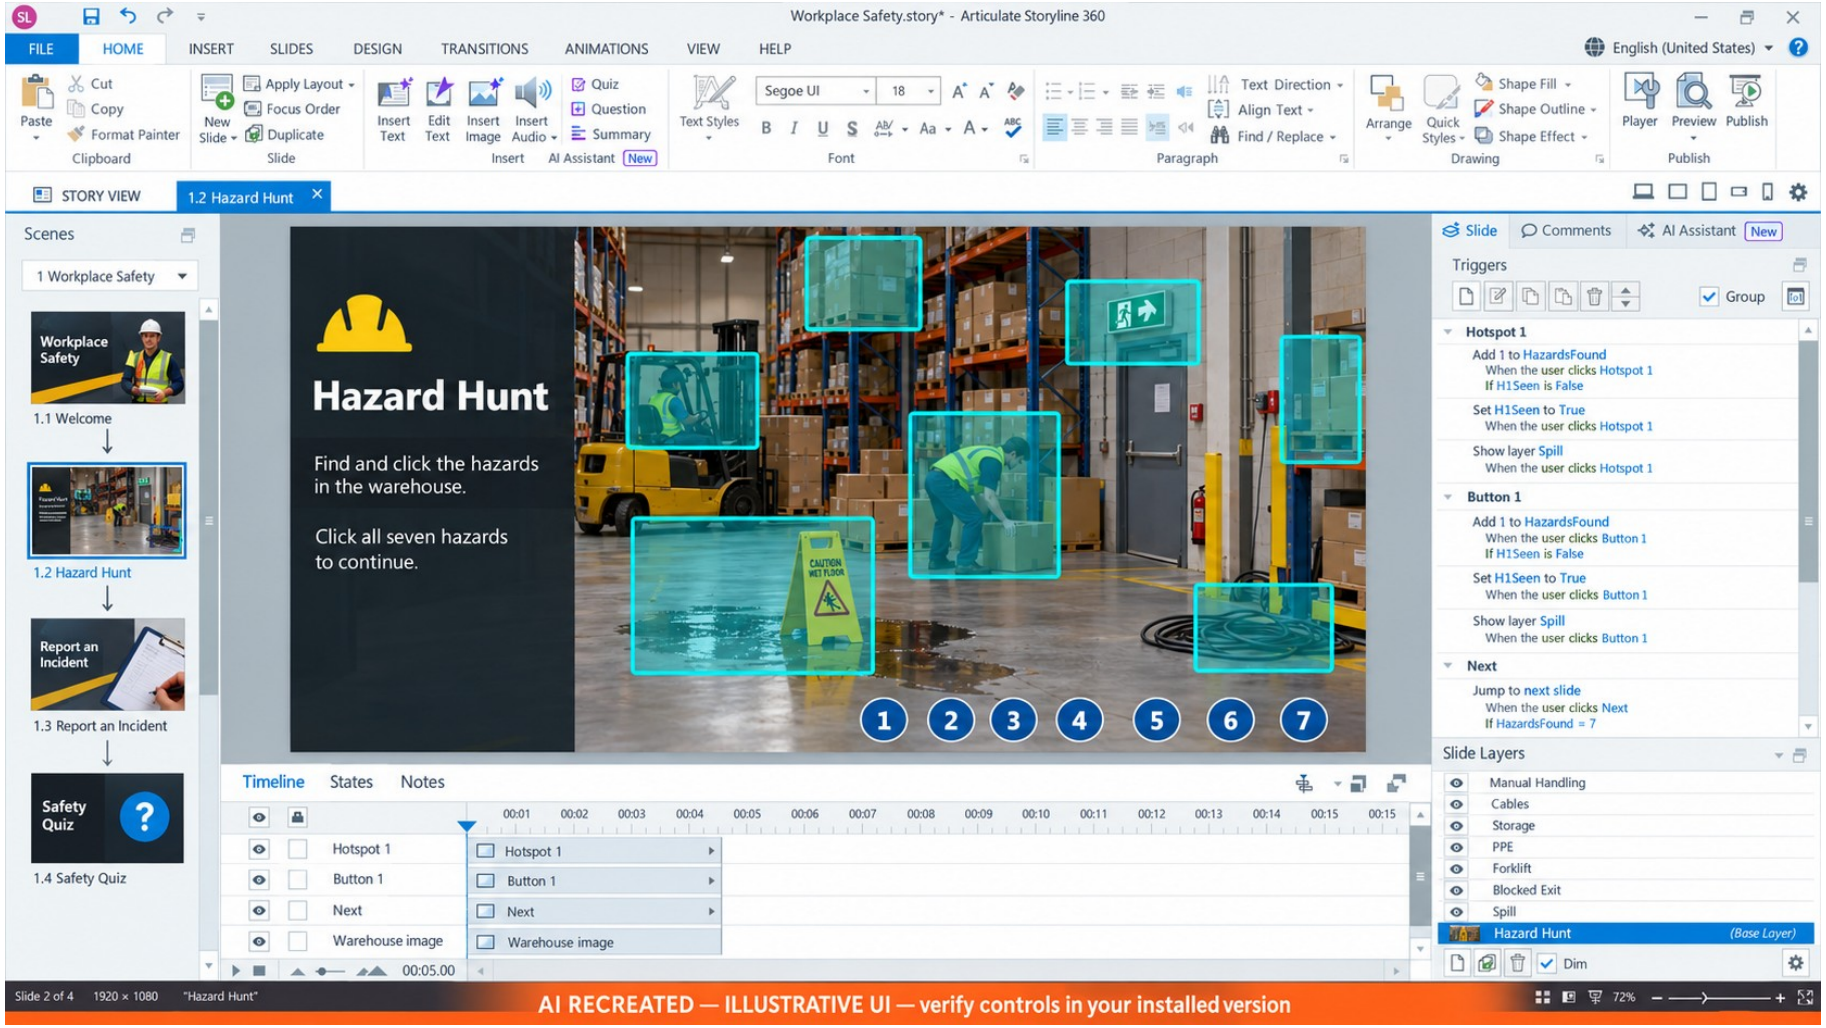

SET THESE CONTROLS	**C1=button label · C2=trigger parity · C3=focus order · C4=visible focus**
REJECT WHEN	**mouse-only discovery**
VERIFY READBACK	**keyboard activation shows the same hazard layer and visited state**

AI RECREATED — ILLUSTRATIVE UI · verify the named control


Keyboard hotspot alternative

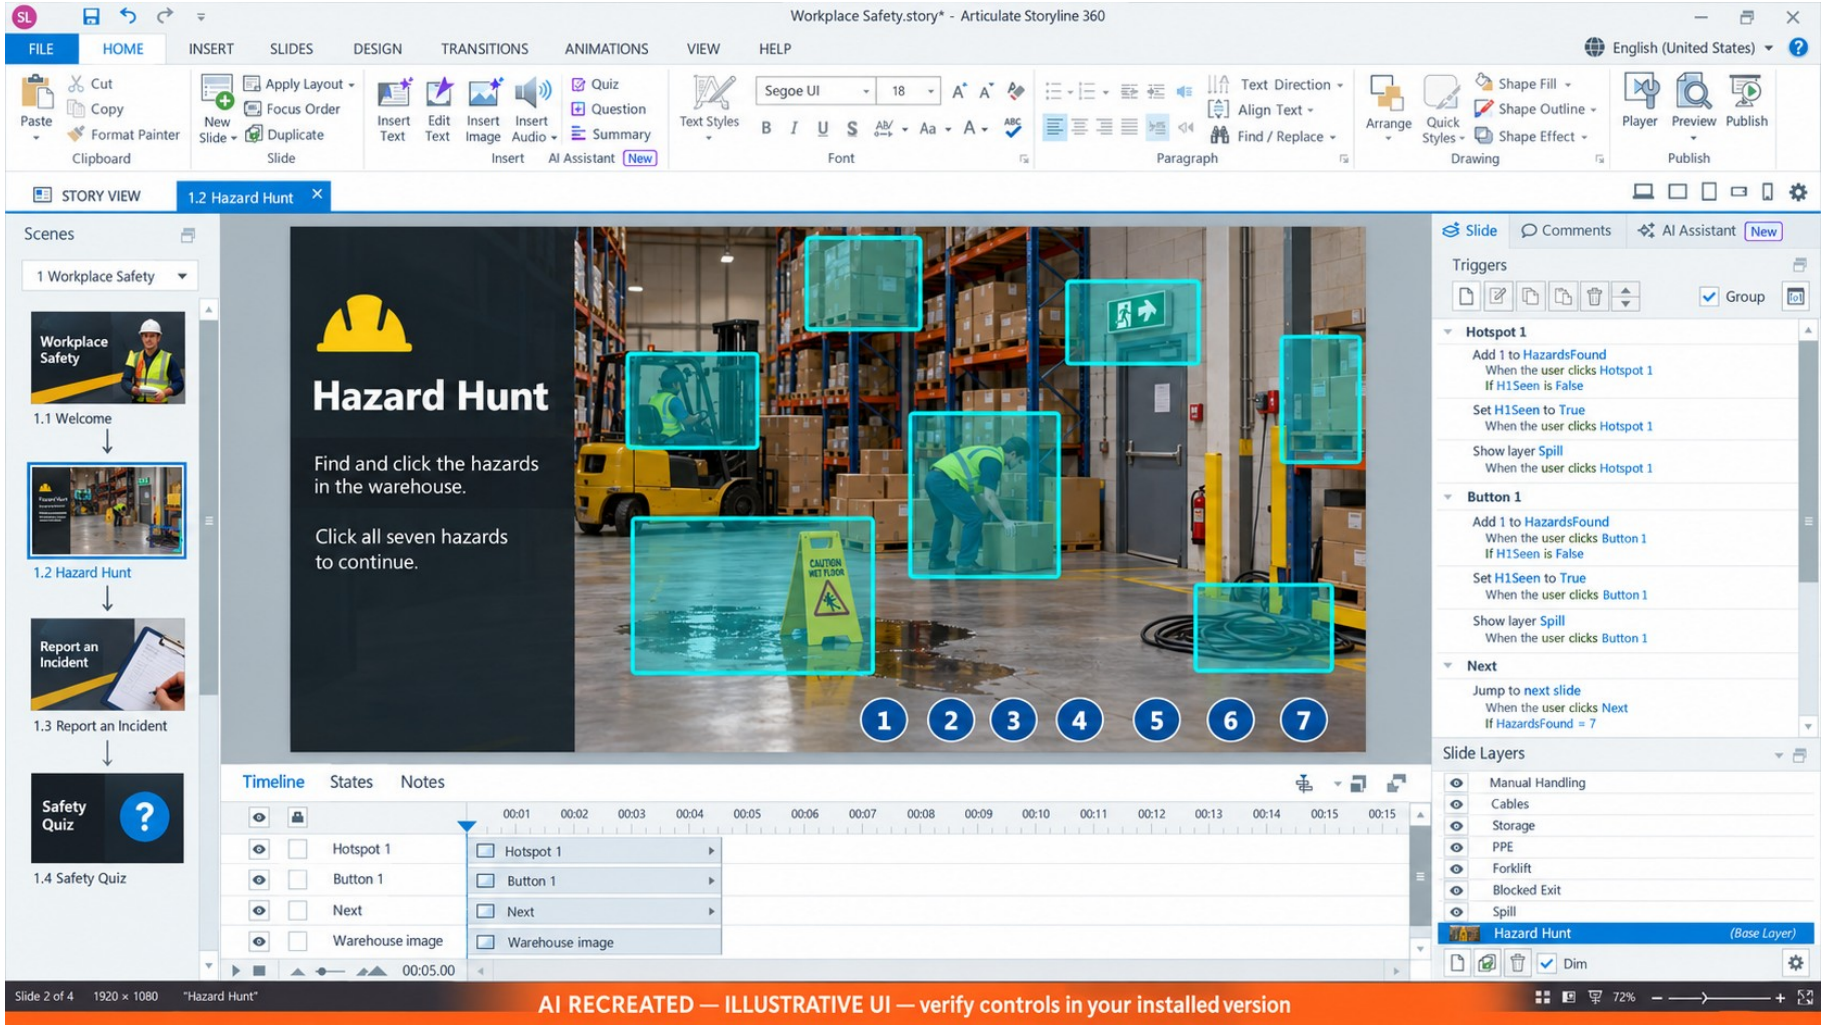

FAULTY OUTPUT (EXAMPLE)	mouse-only discovery
FIX IN NAMED PANEL	button label; trigger parity; focus order; visible focus
EXPECTED AFTER FIX	keyboard activation shows the same hazard layer and visited state · verify…

AI RECREATED — ILLUSTRATIVE UI · verify the named control


Layer properties

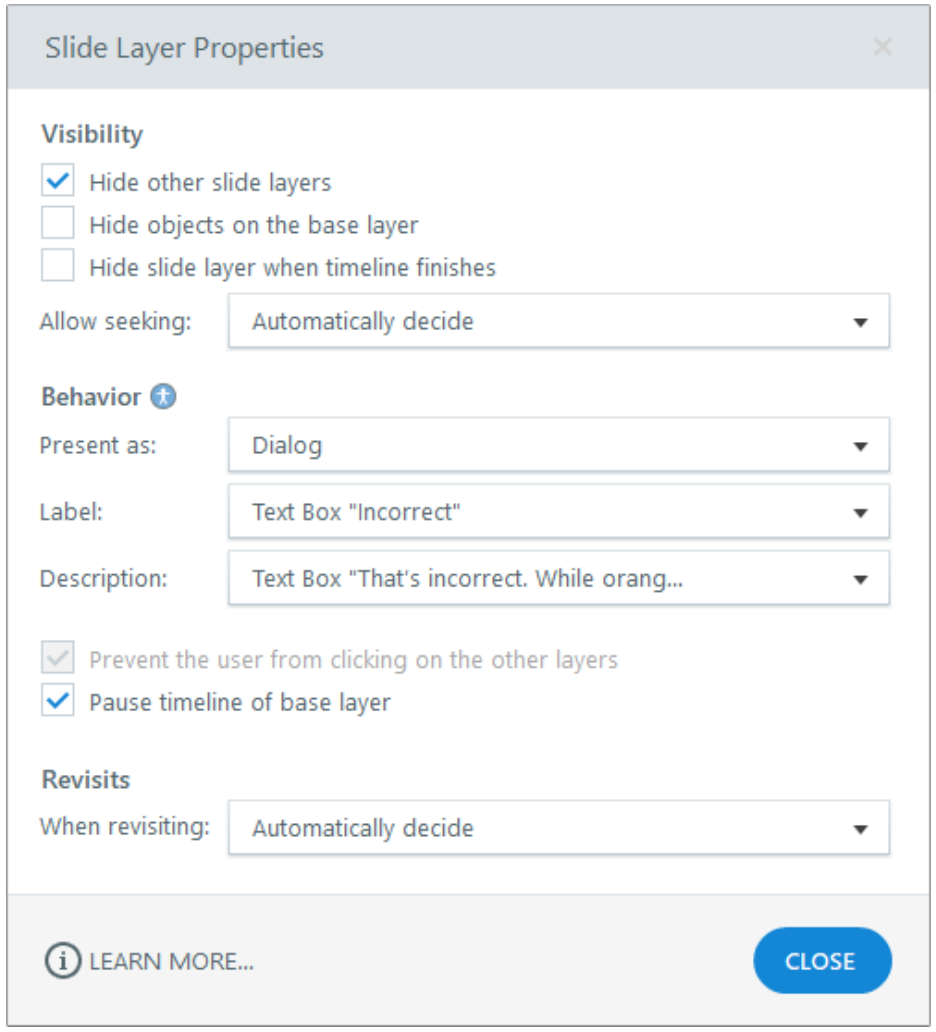

NAMED ARTIFACT	WSA-026-Layer-properties
MECHANISM	Layer Properties controls hide other layers, prevent base clicks, pause…
EXPECTED	only one layer is operable and close restores the base slide

Authentic Articulate interface reference · verify the named control


Layer properties

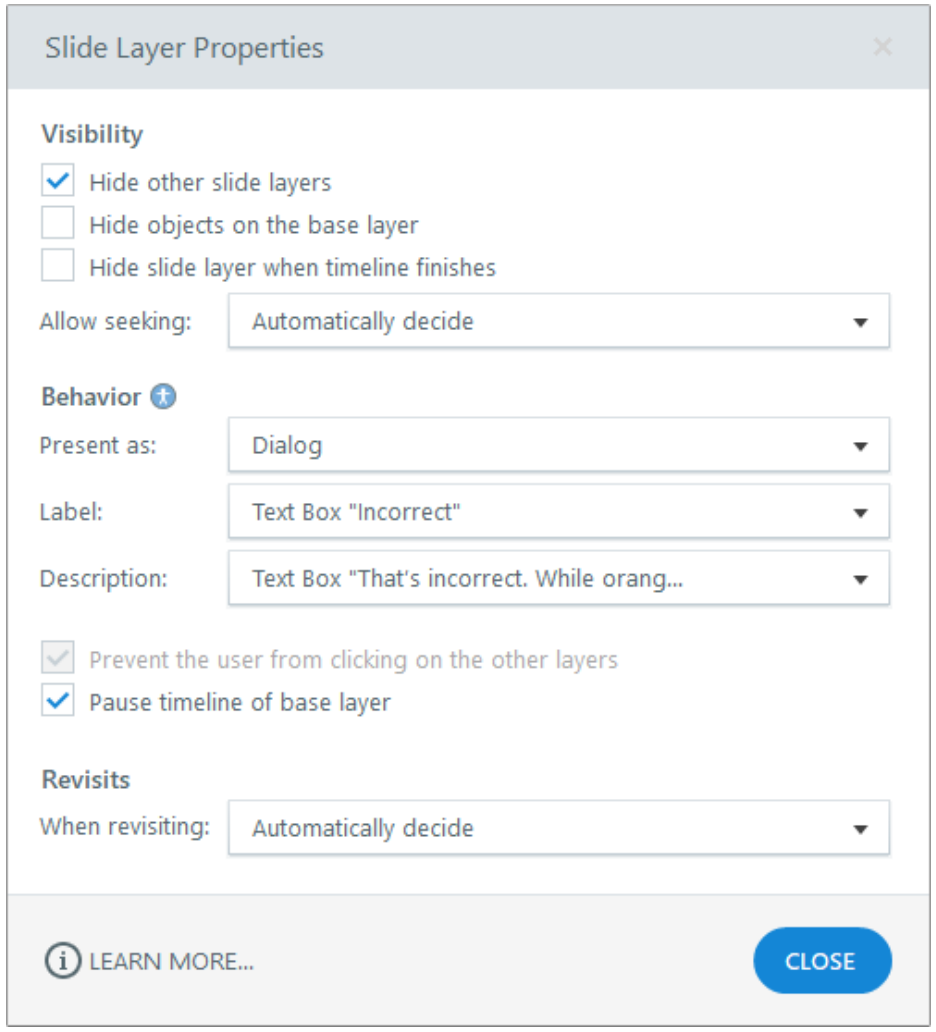

SET THESE CONTROLS	C1=modal behaviour · C2=base visibility · C3=reset/resume
REJECT WHEN	two hazard layers visible or base controls active behind modal
VERIFY READBACK	only one layer is operable and close restores the base slide

Authentic Articulate interface reference · verify the named control

Layer properties

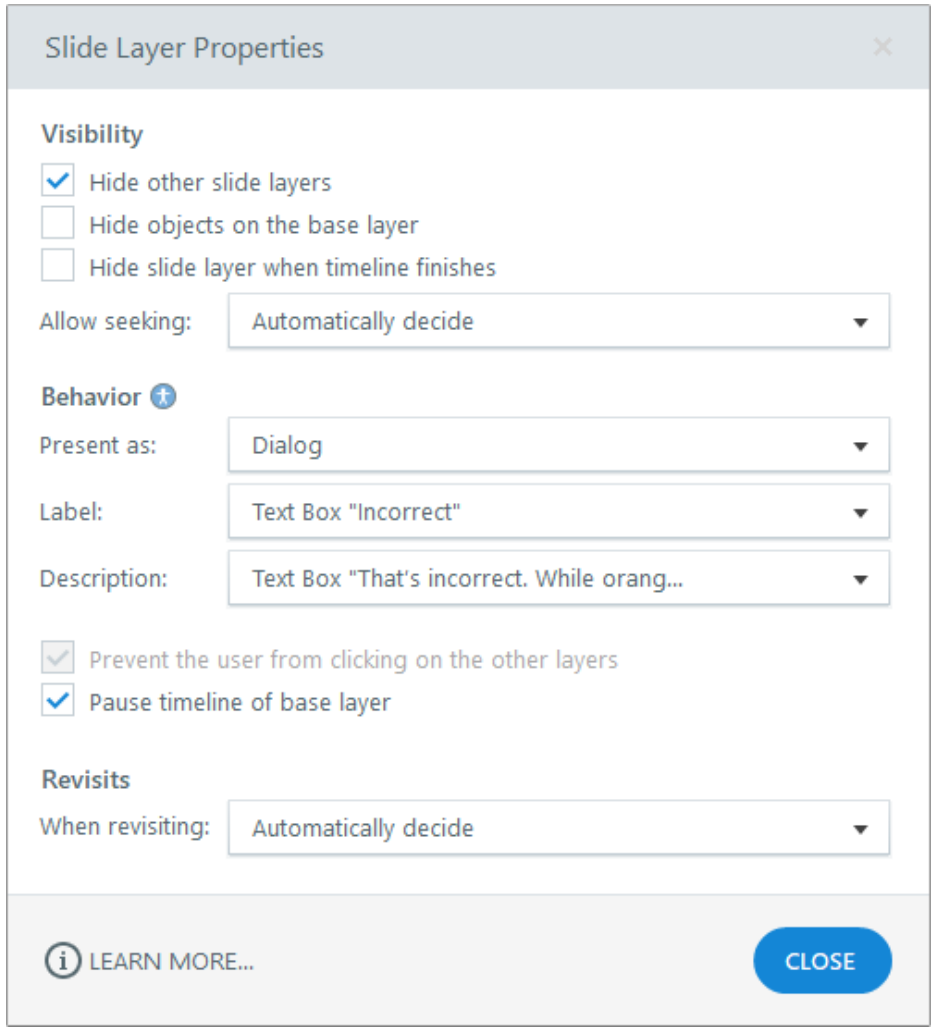


FAULTY OUTPUT (EXAMPLE) two hazard layers visible or base controls active behind modal

FIX IN NAMED PANEL modal behaviour; base visibility; reset/resume

EXPECTED AFTER FIX only one layer is operable and close restores the base slide · verify in…

Authentic Articulate interface reference · verify the named control


Built-in object states

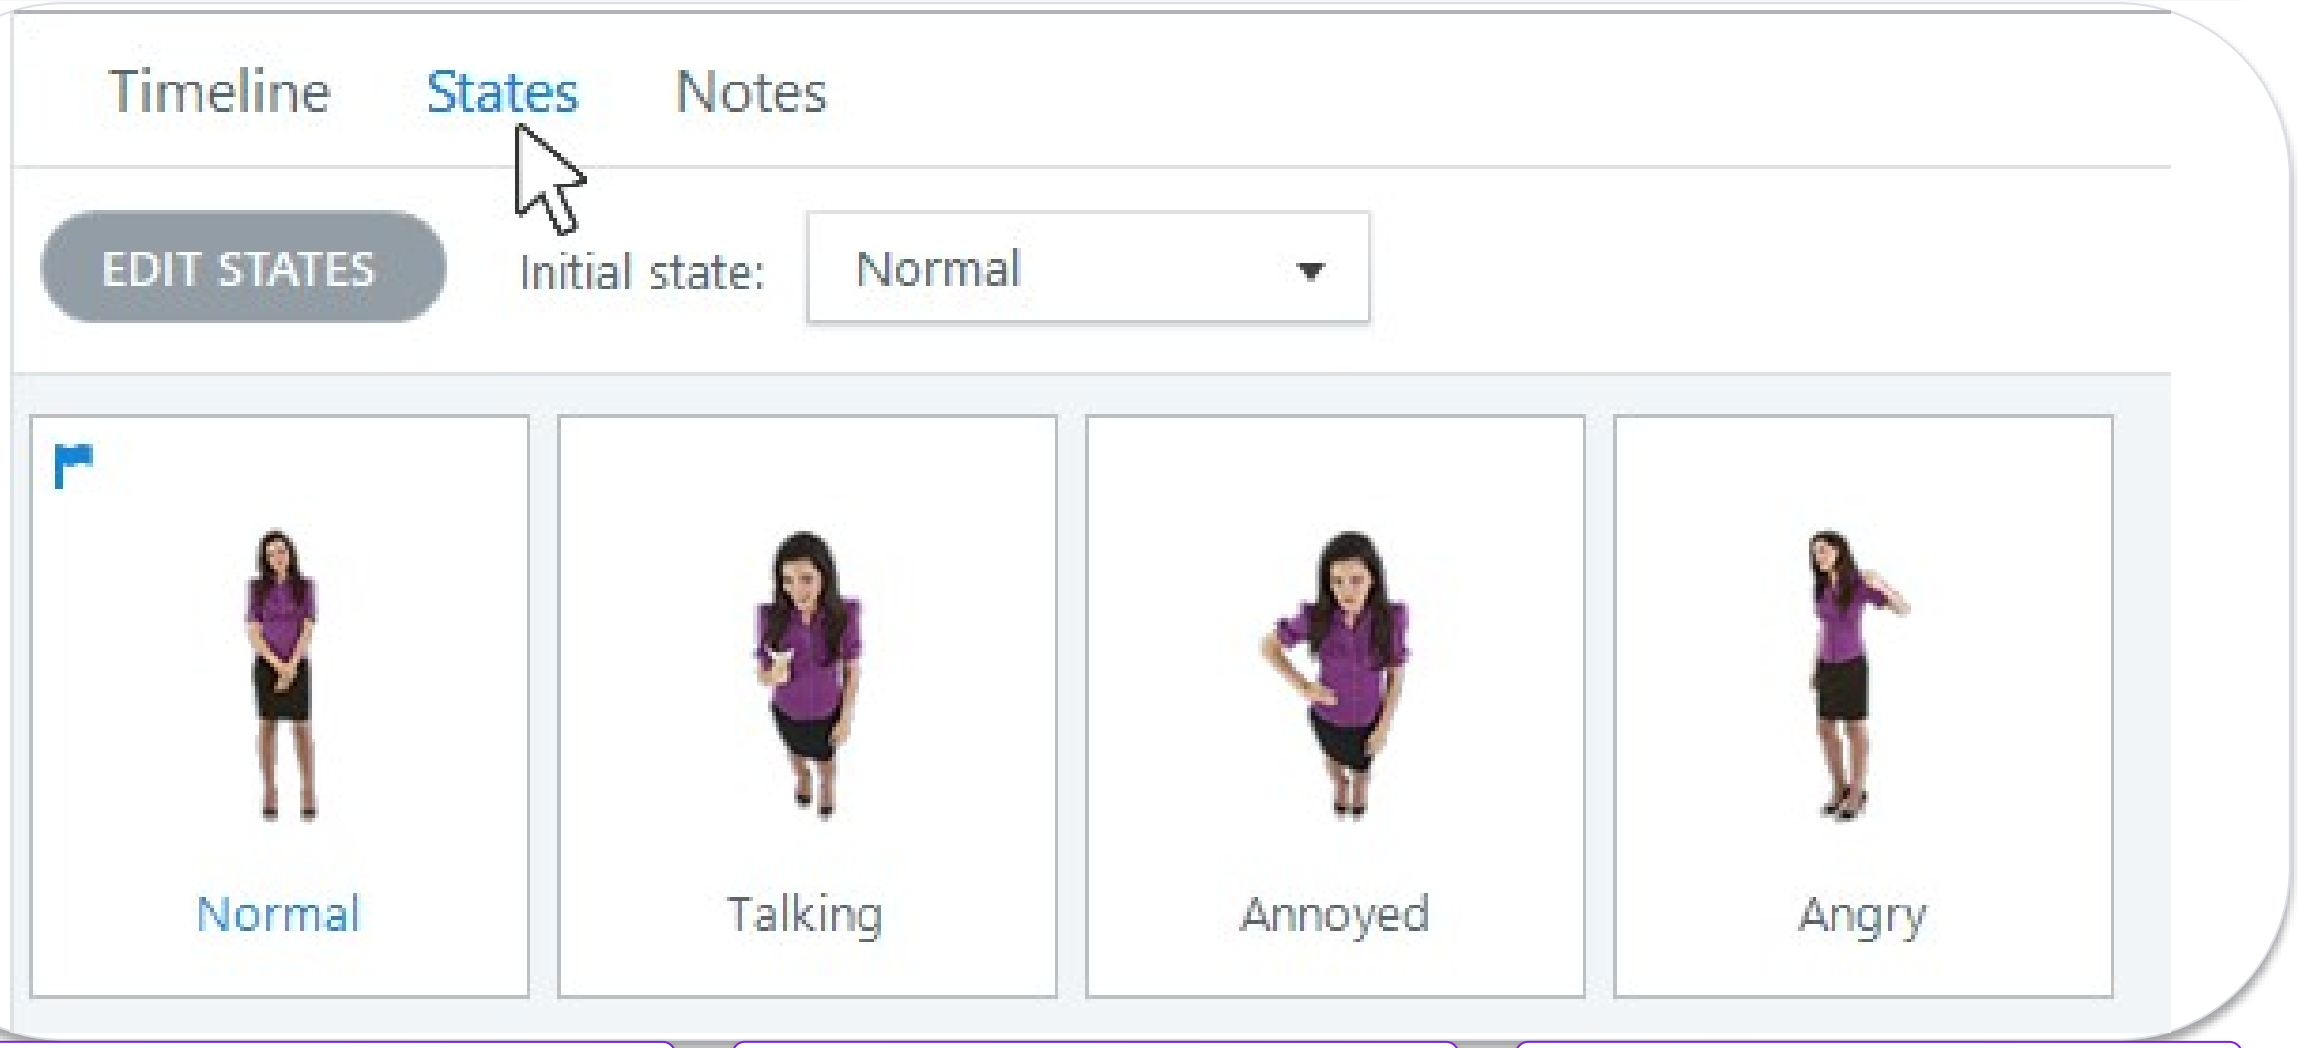

NAMED ARTIFACT	WSA-027-Built-in-object-states
MECHANISM	Normal, Hover, Down, Visited and Disabled states communicate interaction…
EXPECTED	state change is perceivable in pointer and keyboard paths

Authentic Articulate interface reference · verify the named control


Built-in object states

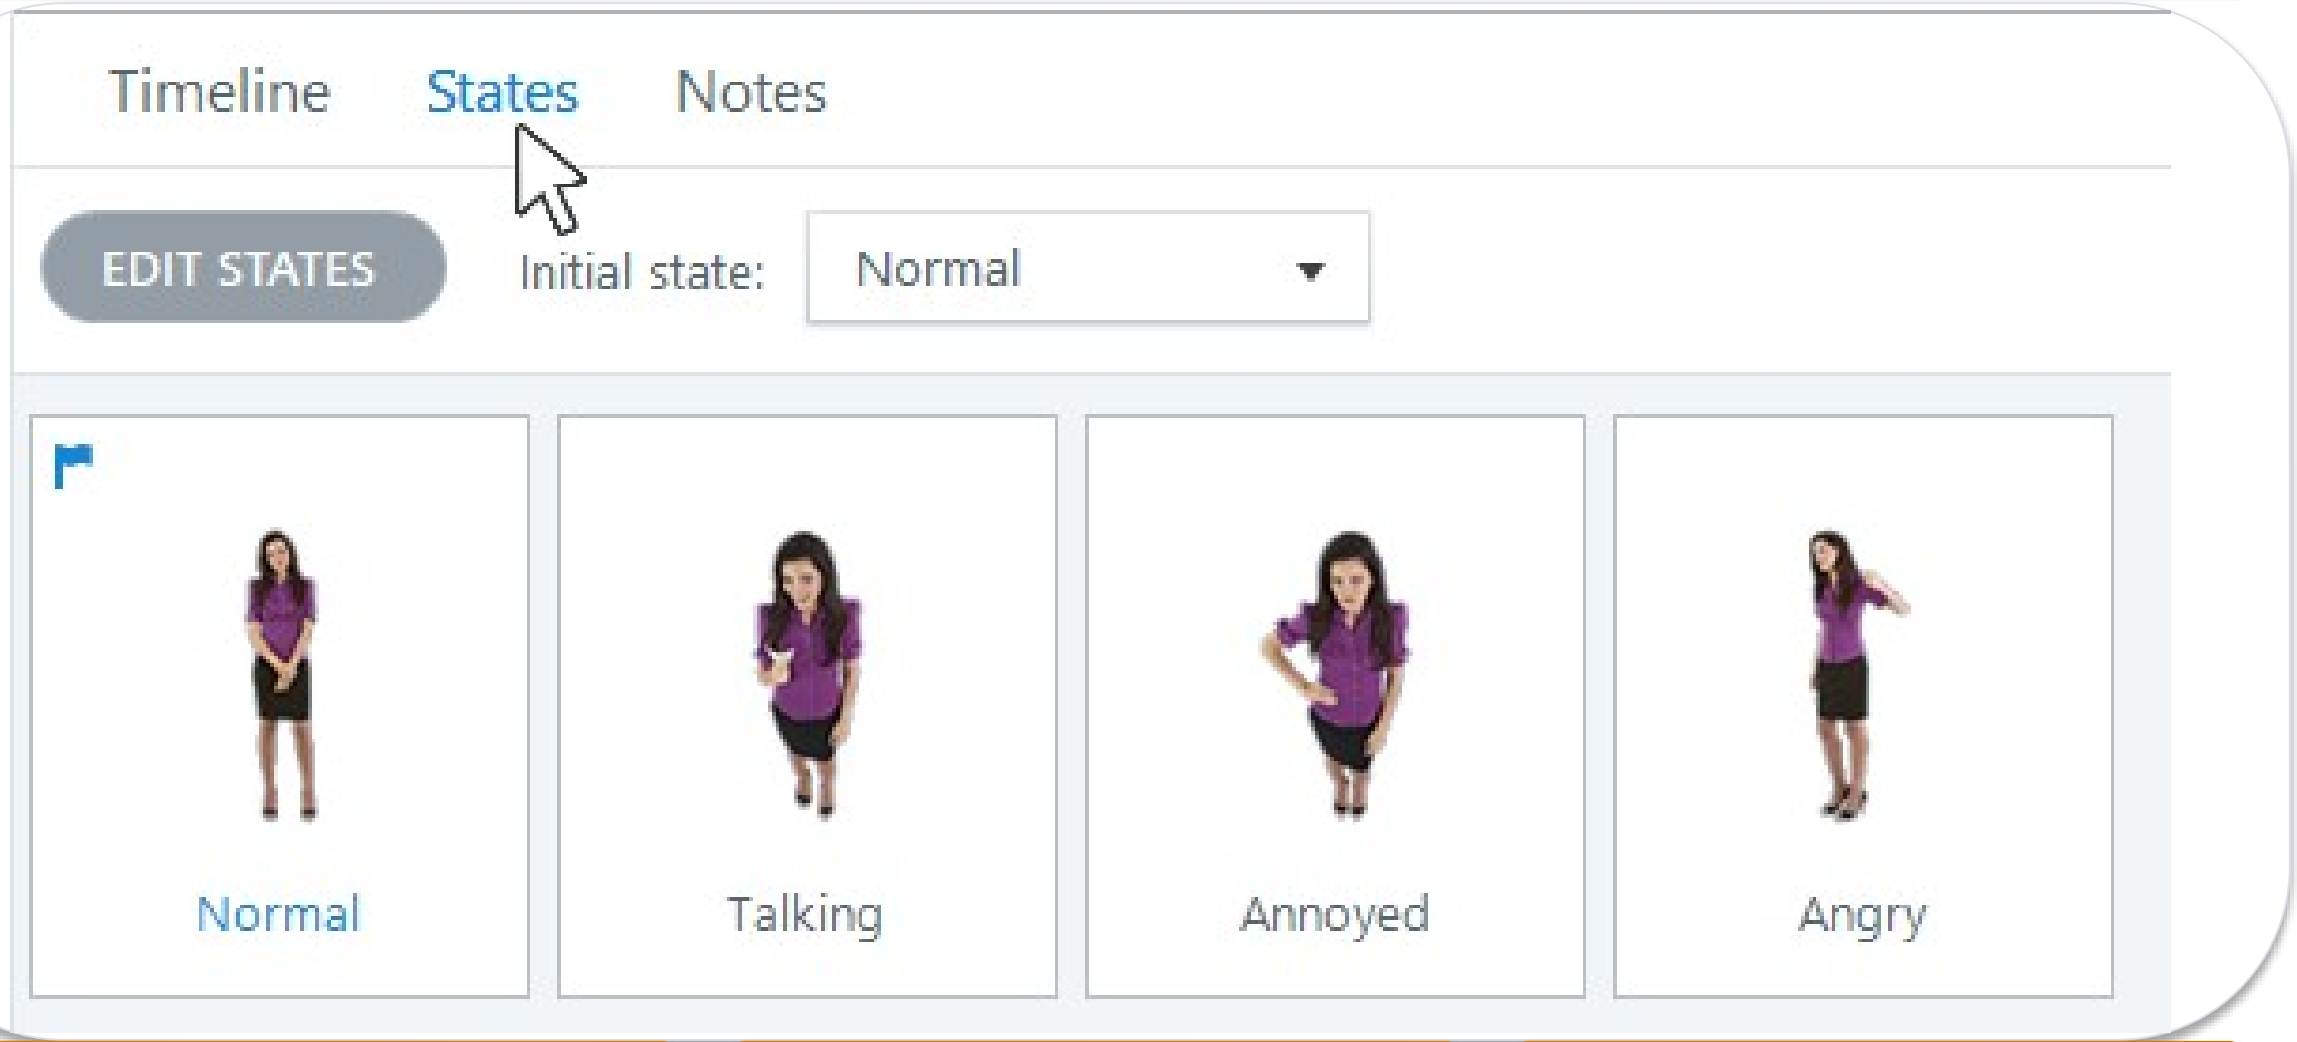

SET THESE CONTROLS	C1=state name · C2=contrast · C3=icon/text cue · C4=initial state
REJECT WHEN	colour-only visited state or disabled focus target
VERIFY READBACK	state change is perceivable in pointer and keyboard paths

Authentic Articulate interface reference · verify the named control


Built-in object states

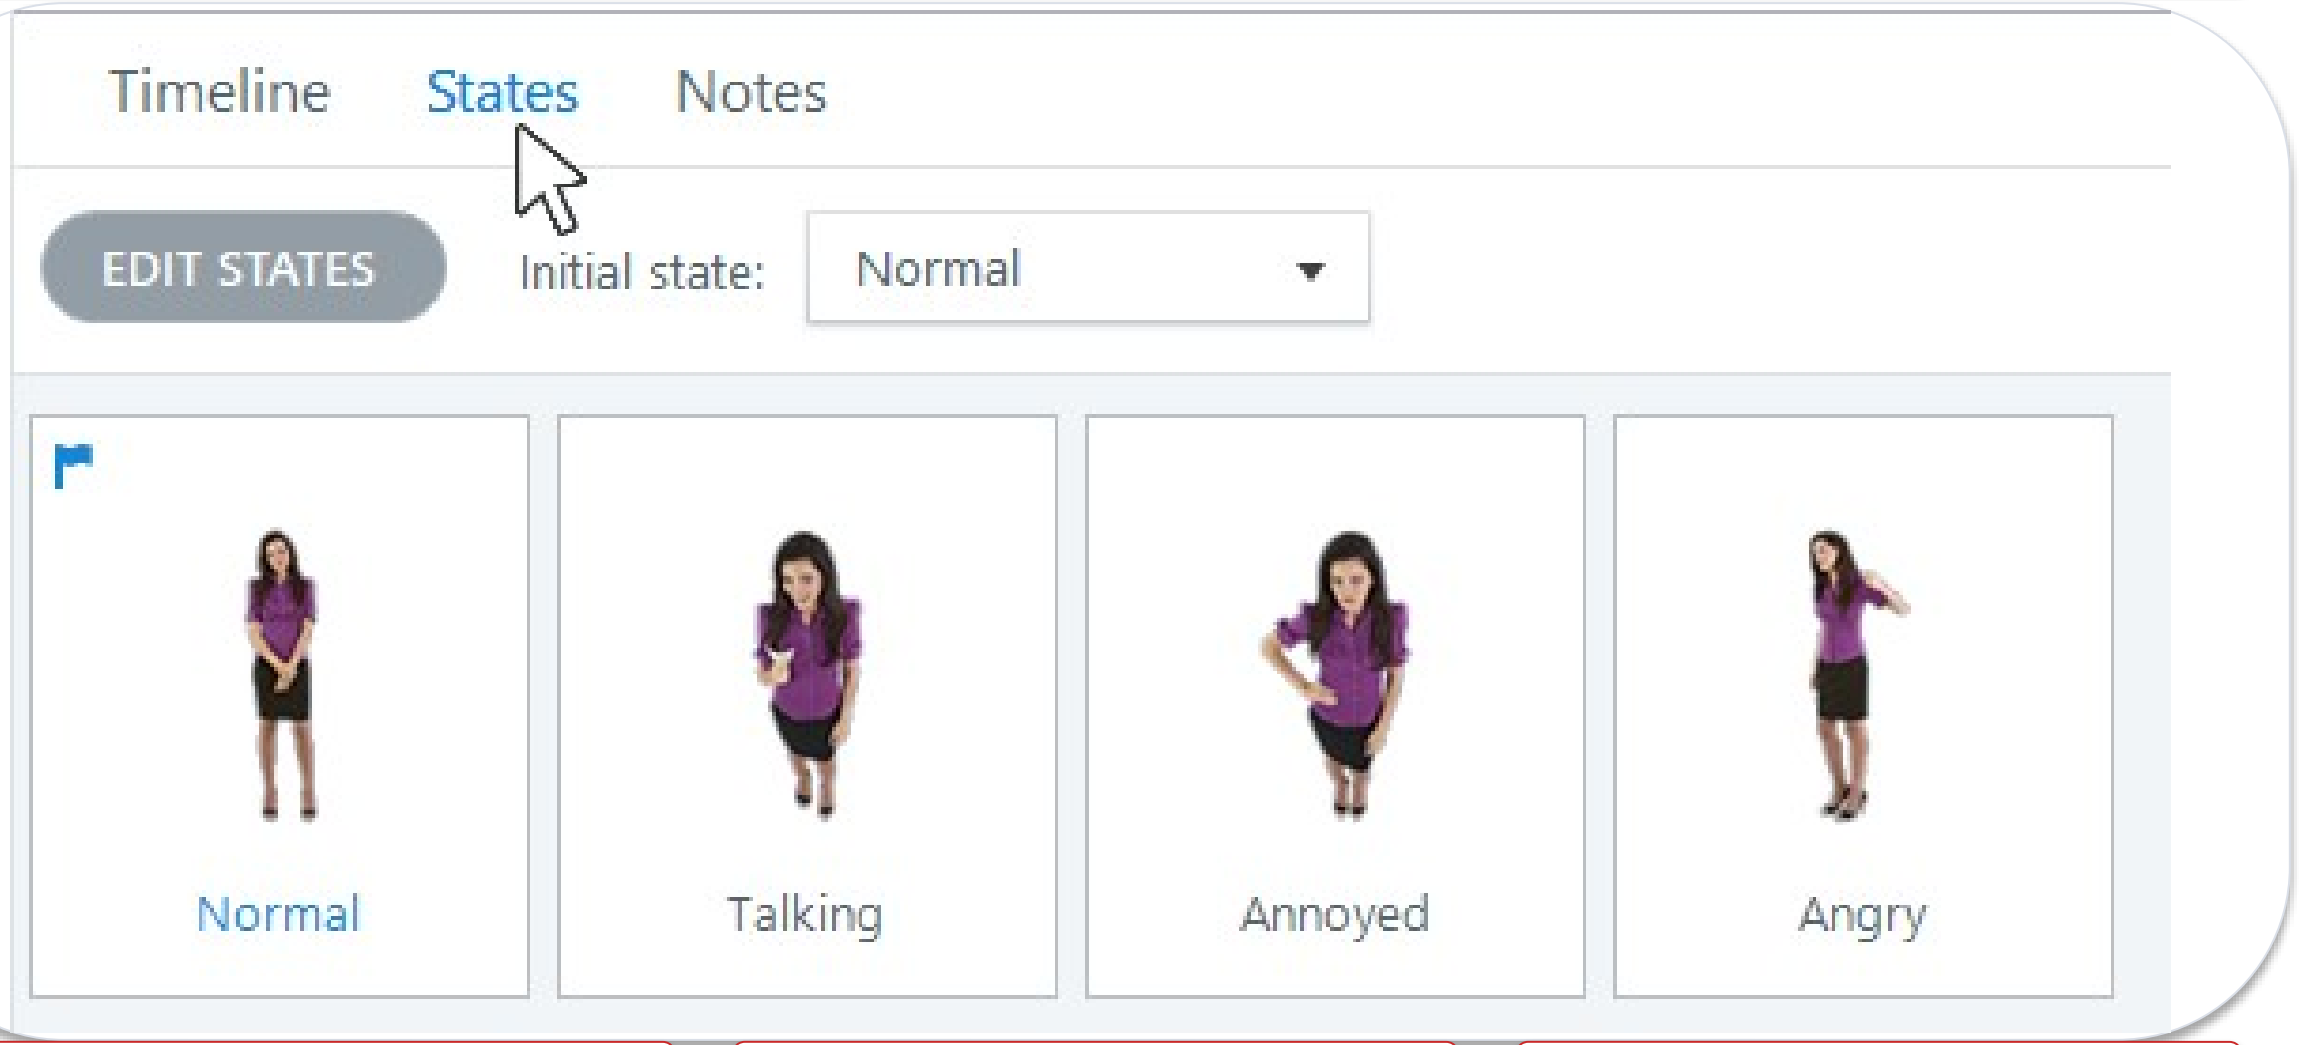

FAULTY OUTPUT (EXAMPLE)	colour-only visited state or disabled focus target
FIX IN NAMED PANEL	state name; contrast; icon/text cue; initial state
EXPECTED AFTER FIX	state change is perceivable in pointer and keyboard paths · verify in your…

Authentic Articulate interface reference · verify the named control


Custom hazard states

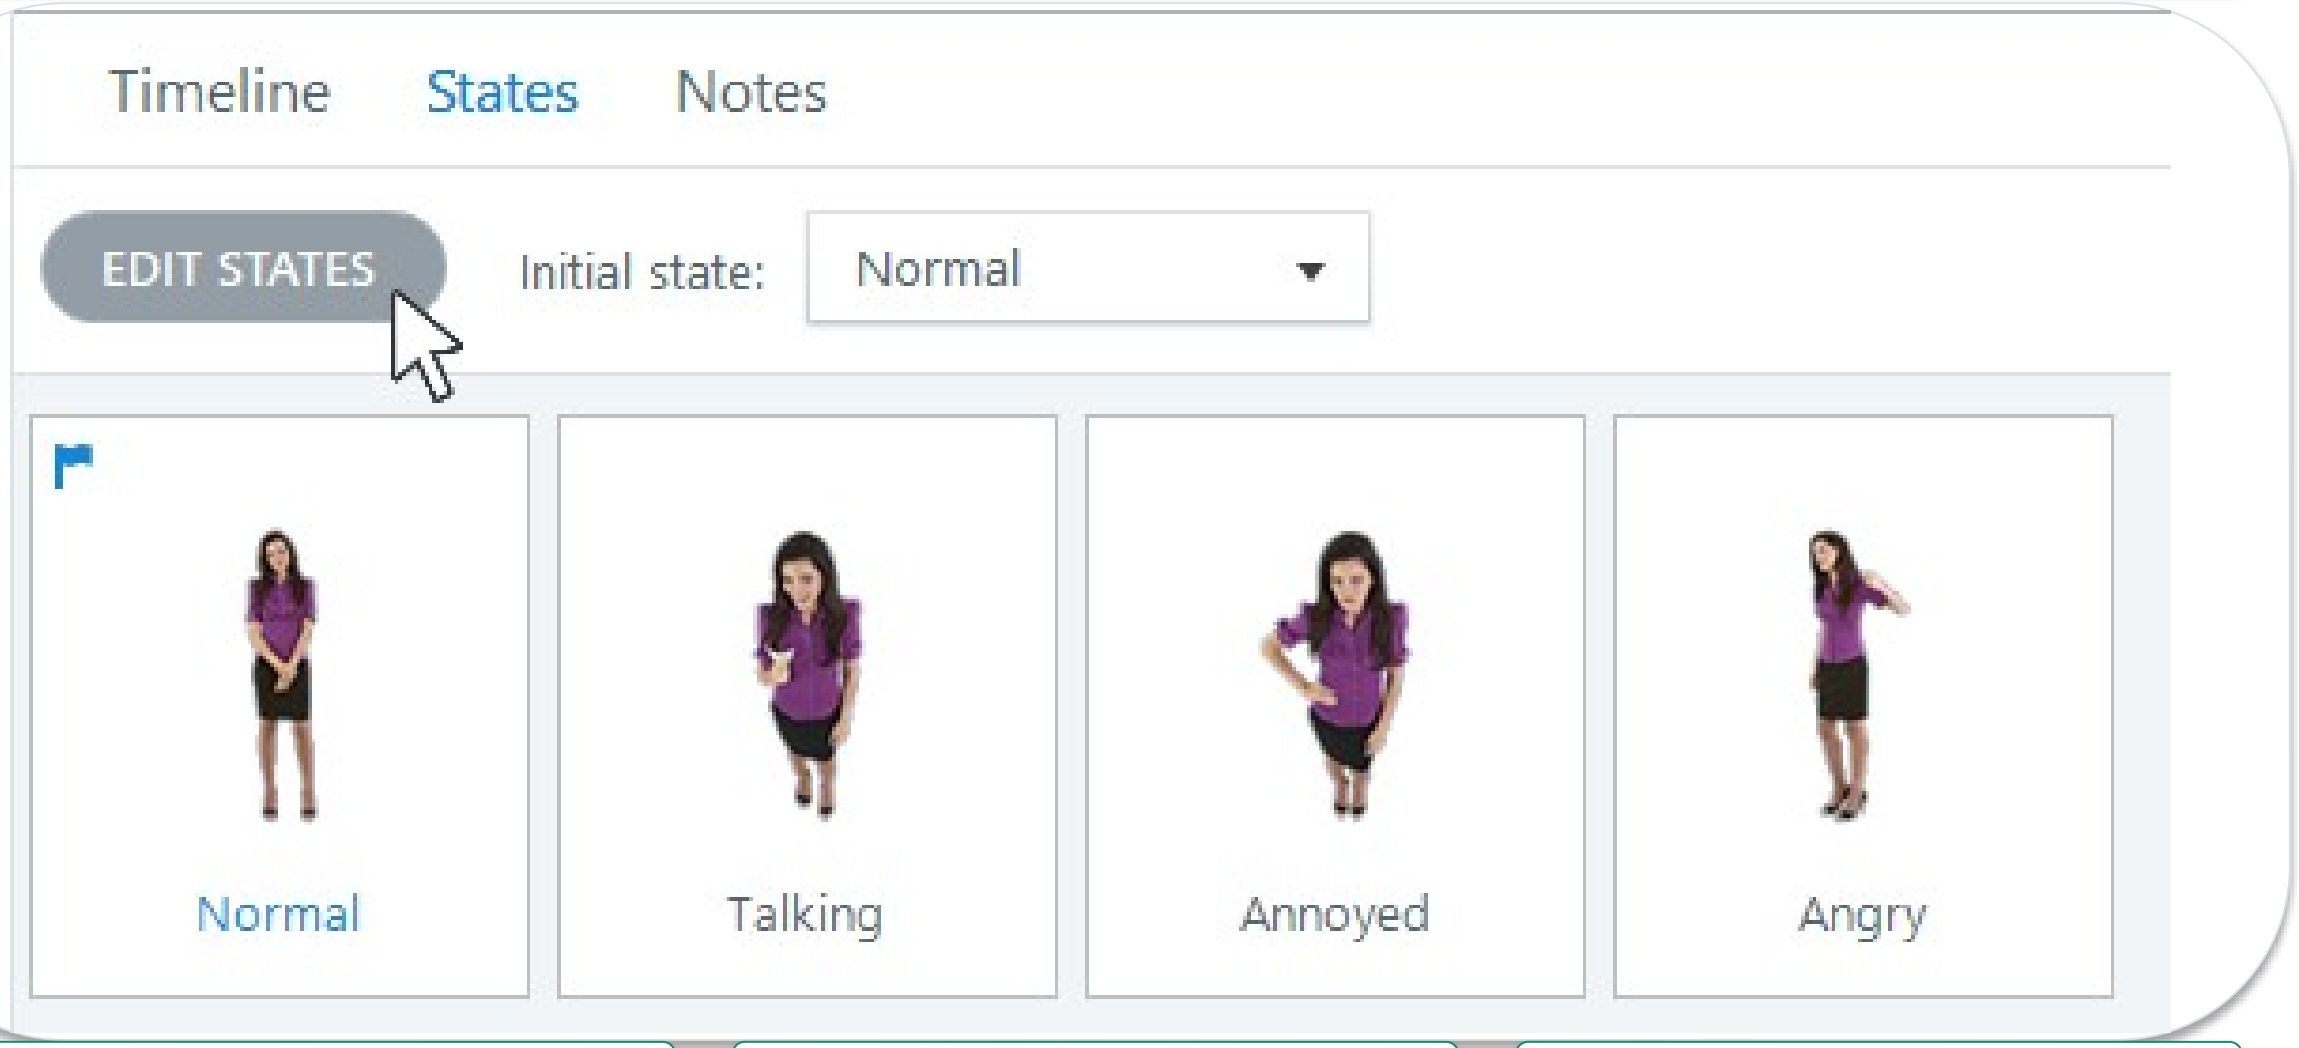

NAMED ARTIFACT	WSA-028-Custom-hazard-states
MECHANISM	Custom Safe and Selected states show mitigated equipment after a learner…
EXPECTED	one object changes predictably without shifting geometry

Authentic Articulate interface reference · verify the named control


Custom hazard states

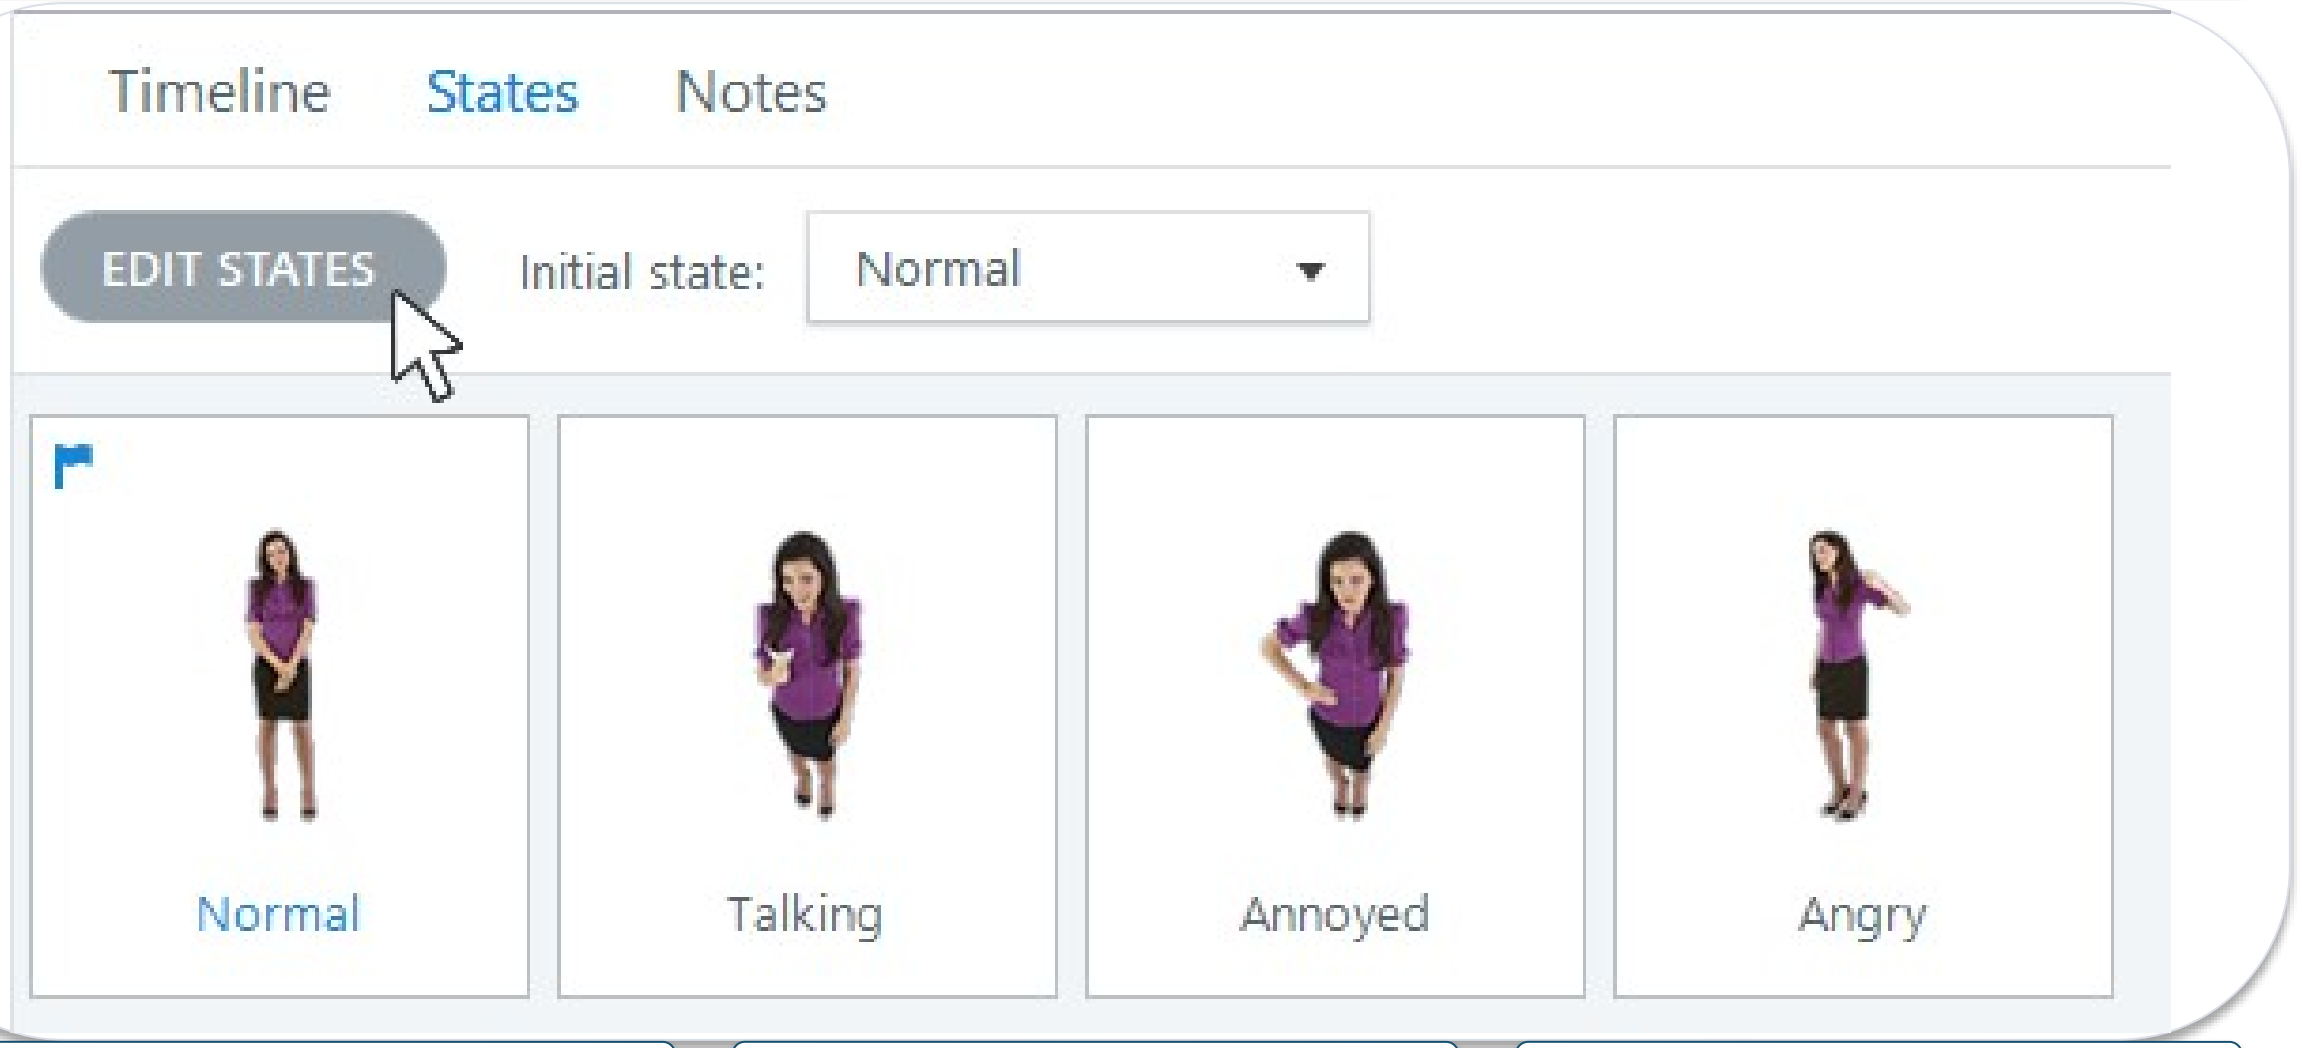

SET THESE CONTROLS	C1=custom state · C2=trigger condition · C3=persistent variable
REJECT WHEN	duplicating whole objects for visual changes
VERIFY READBACK	one object changes predictably without shifting geometry

Authentic Articulate interface reference · verify the named control


Custom hazard states

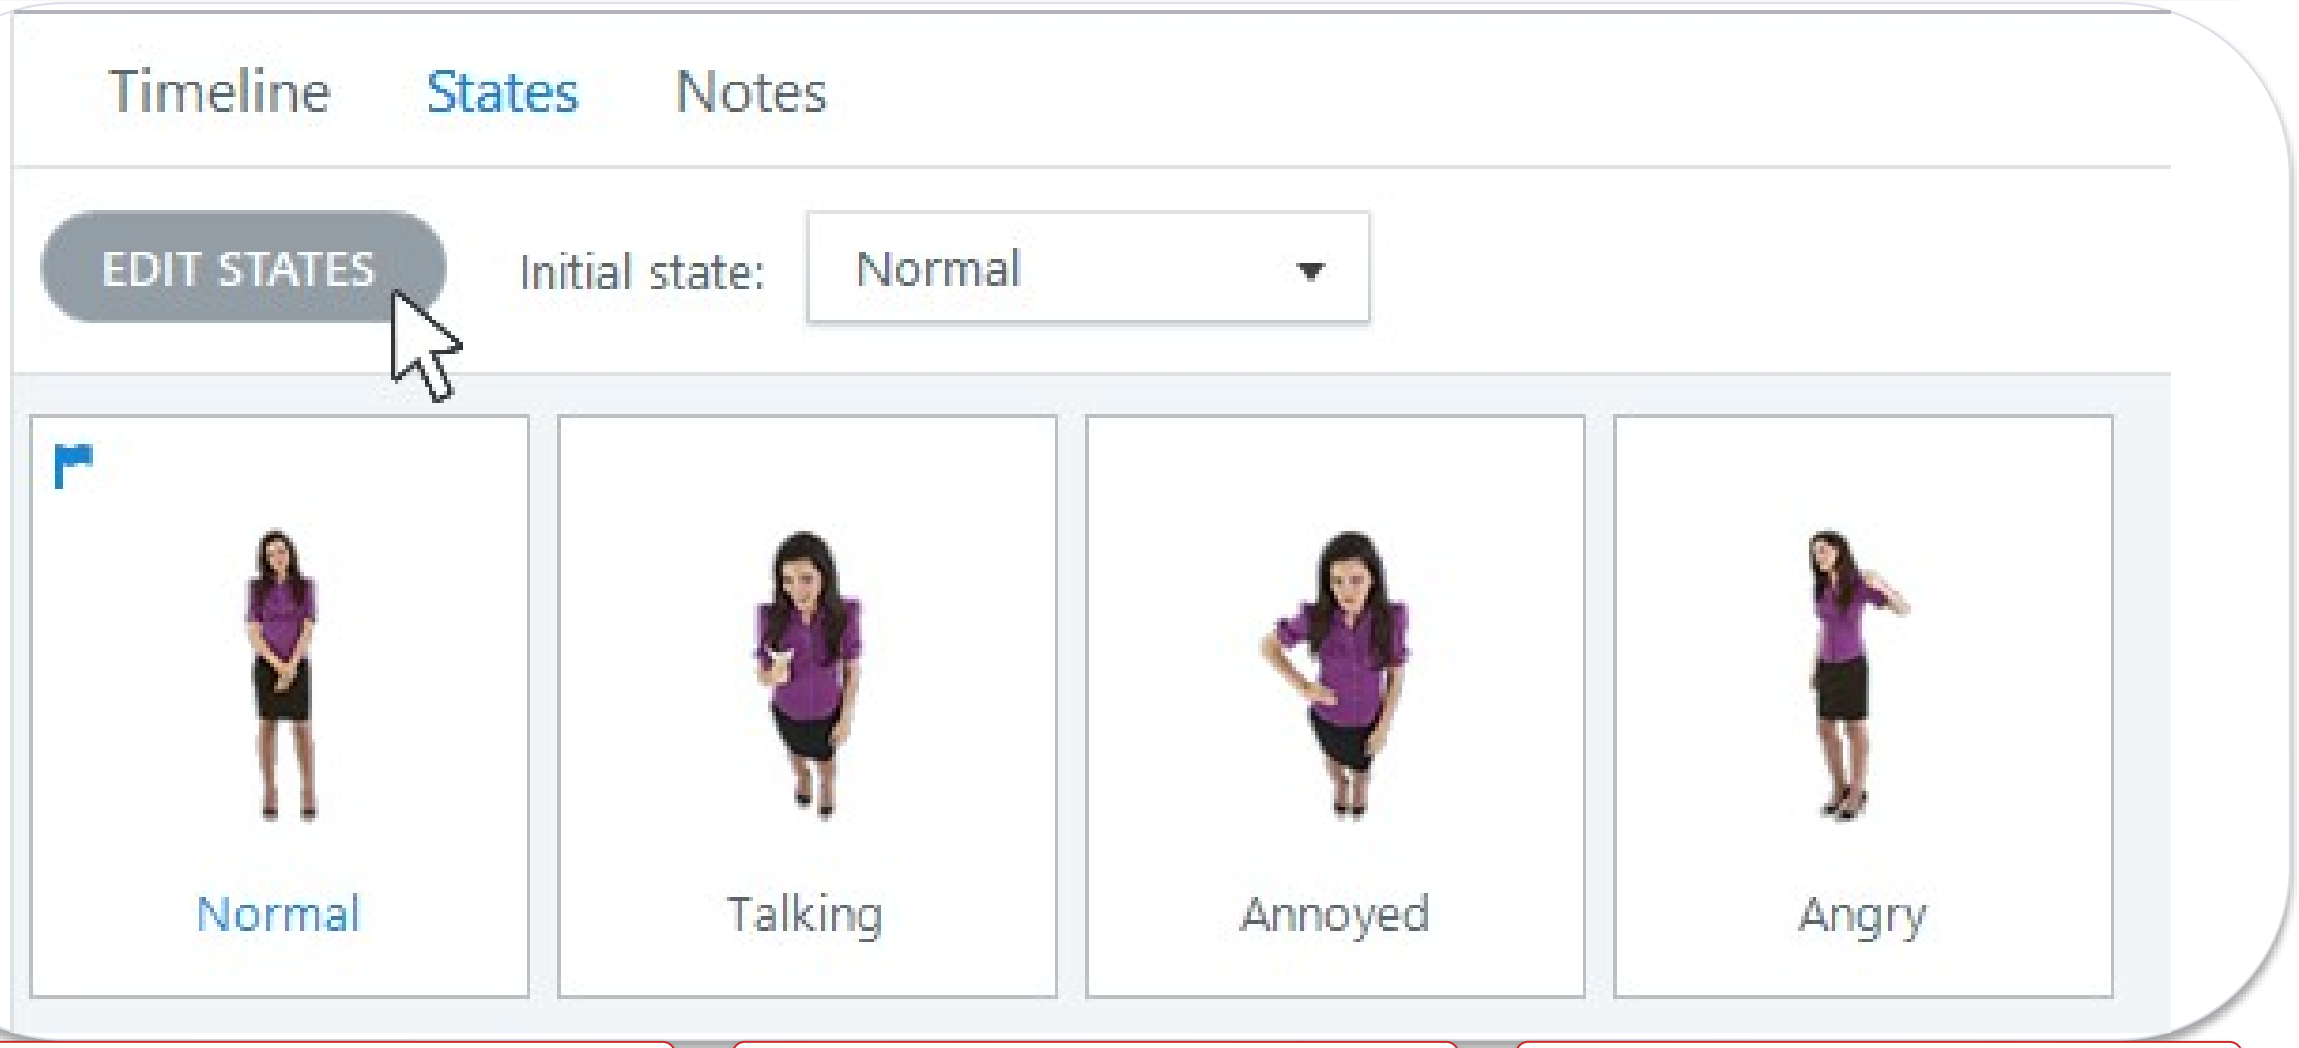

FAULTY OUTPUT (EXAMPLE)	duplicating whole objects for visual changes
FIX IN NAMED PANEL	custom state; trigger condition; persistent variable
EXPECTED AFTER FIX	one object changes predictably without shifting geometry · verify in your…

Authentic Articulate interface reference · verify the named control


Trigger execution order

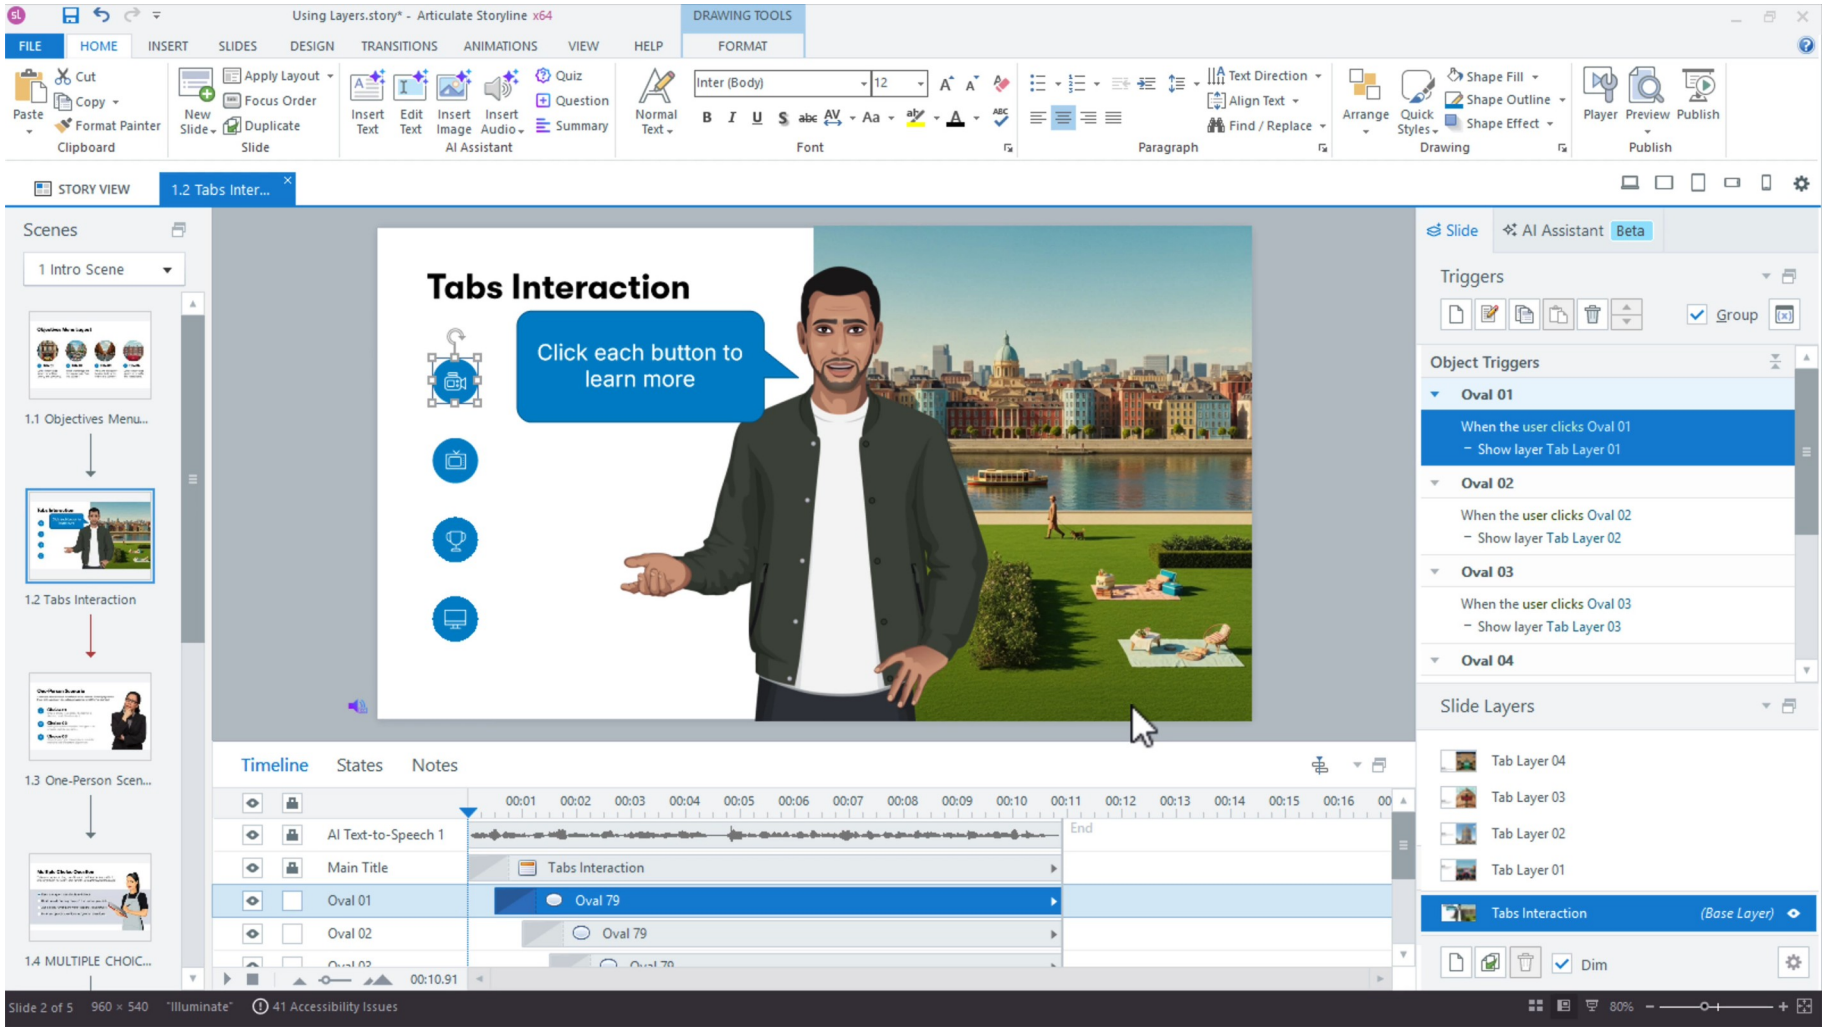

NAMED ARTIFACT	**WSA-029-Trigger-execution-order**
MECHANISM	**The Triggers panel orders adjust-variable, change-state and show-layer…**
EXPECTED	**trigger trace shows the variable updated before feedback/navigation**

Authentic Articulate interface reference · verify the named control


Trigger execution order

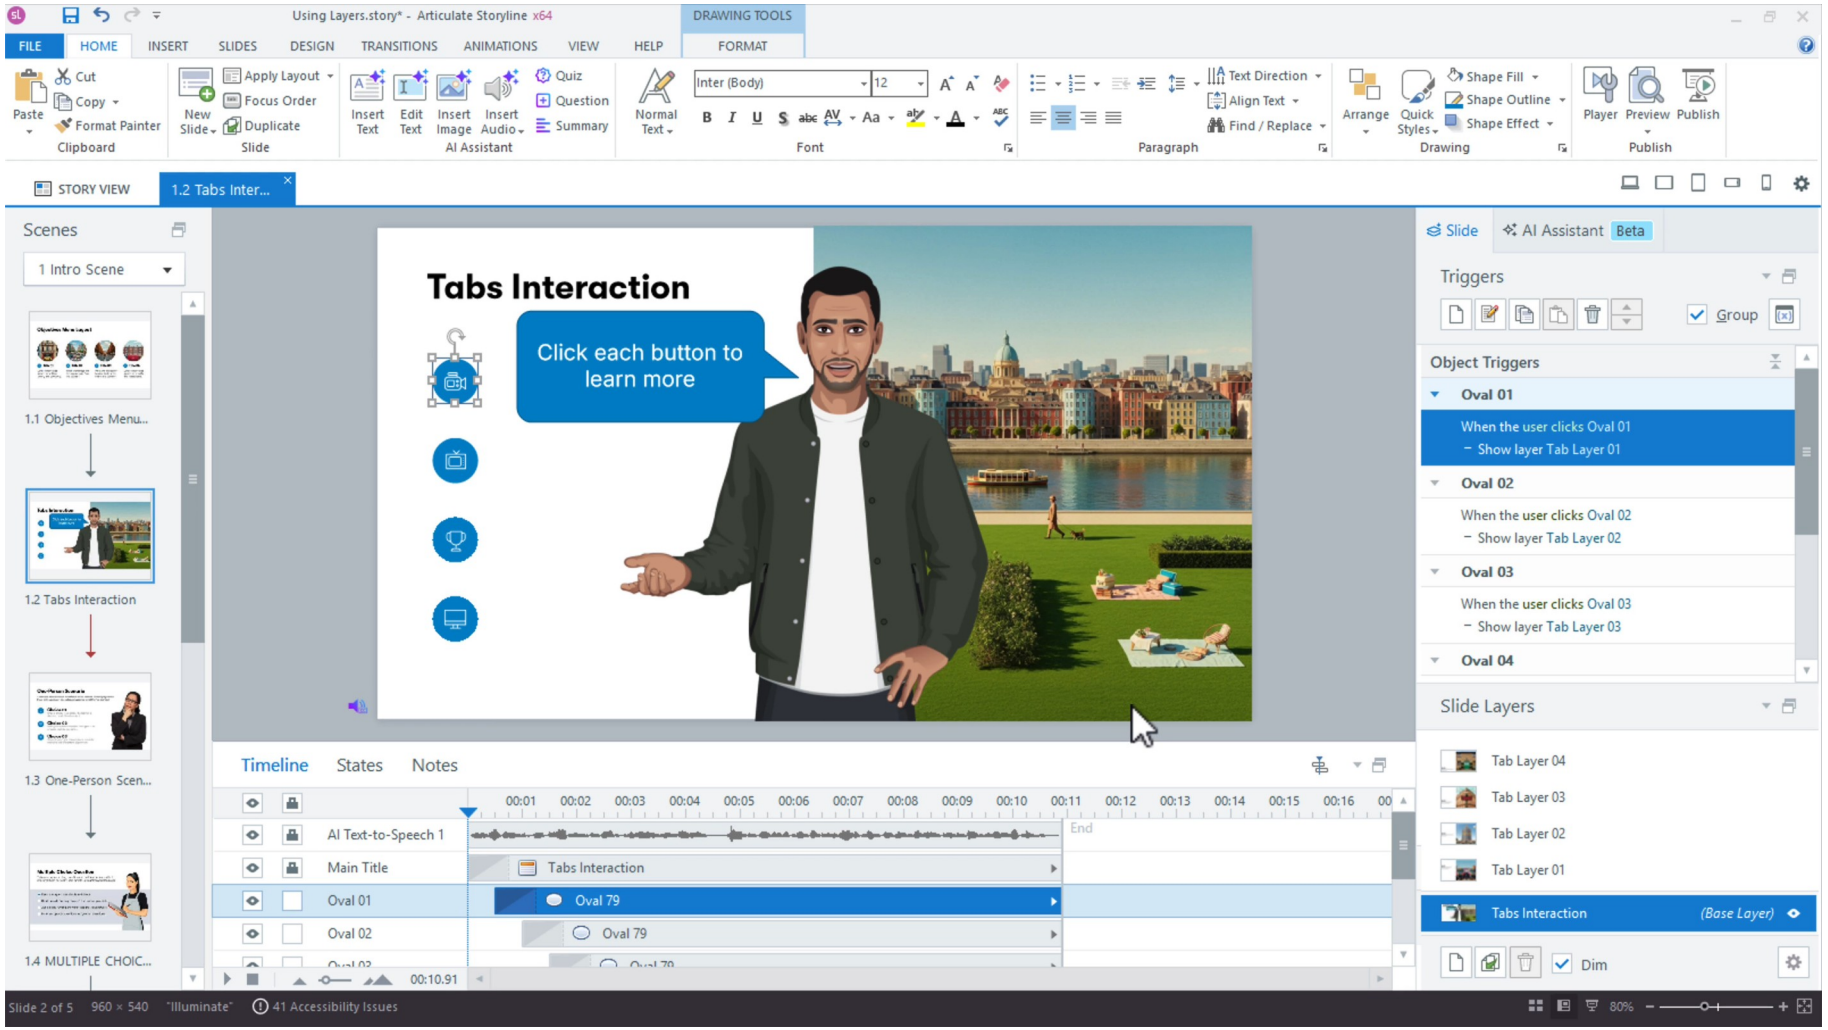

SET THESE CONTROLS	**C1=event · C2=object · C3=condition · C4=top-to-bottom order**
REJECT WHEN	**navigation fires before evidence is stored**
VERIFY READBACK	**trigger trace shows the variable updated before feedback/navigation**

Authentic Articulate interface reference · verify the named control


Trigger execution order

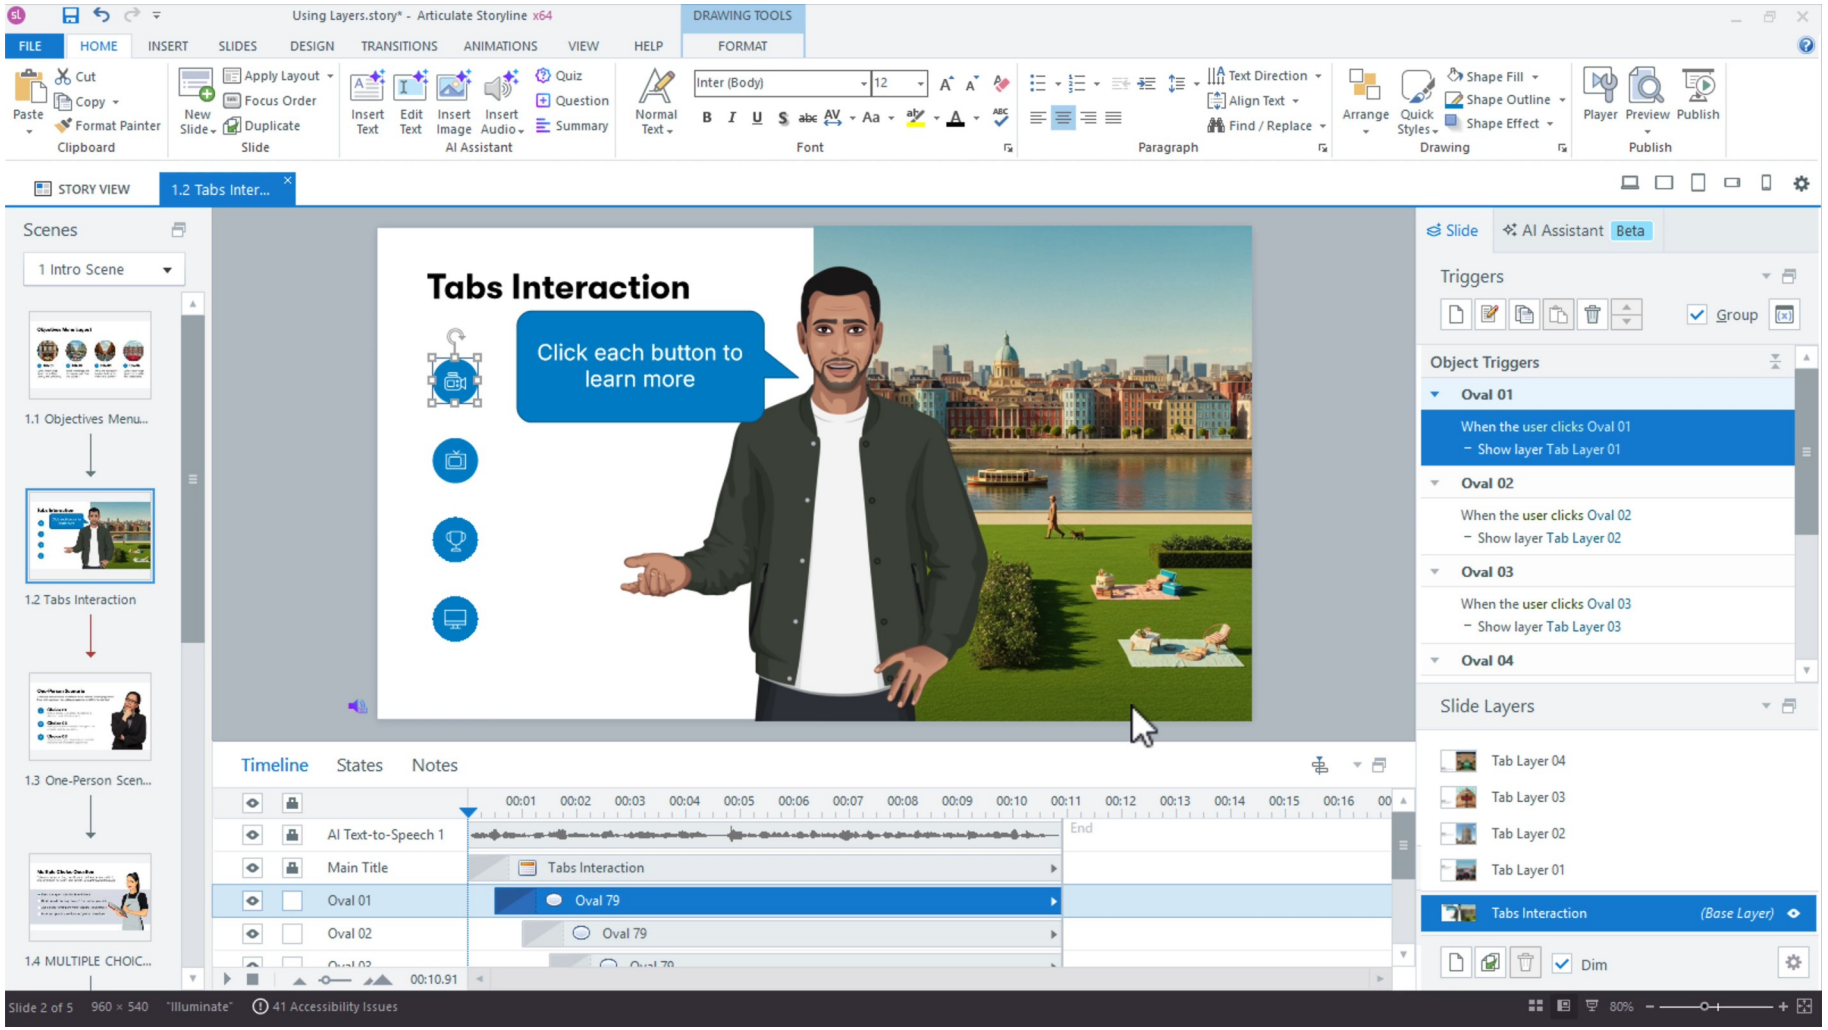

FAULTY OUTPUT (EXAMPLE)	**navigation fires before evidence is stored**
FIX IN NAMED PANEL	**event; object; condition; top-to-bottom order**
EXPECTED AFTER FIX	**trigger trace shows the variable updated before feedback/navigation ·…**

Authentic Articulate interface reference · verify the named control


Conditional trigger gate

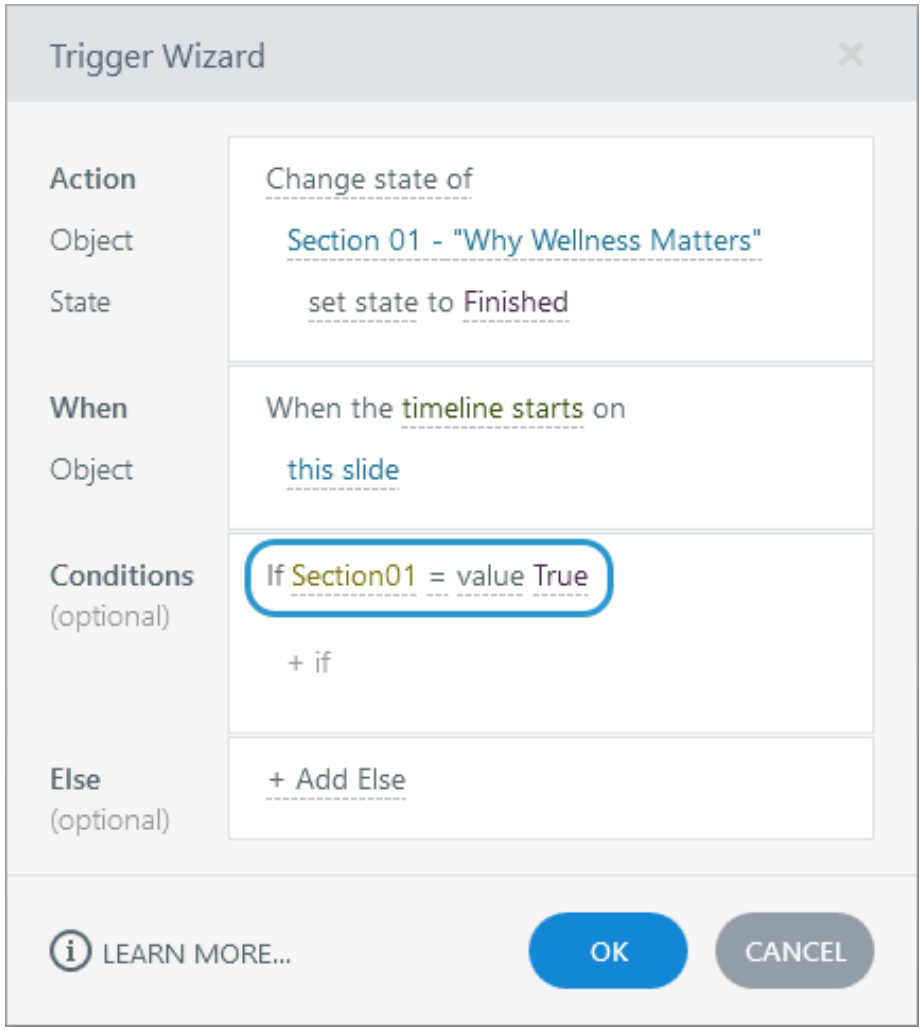

NAMED ARTIFACT	WSA-030-Conditional-trigger-gate
MECHANISM	Next jumps only when HazardsFound equals 7; otherwise a prompt layer opens
EXPECTED	six hazards block progression; seven allow it

Authentic Articulate interface reference · verify the named control

Conditional trigger gate

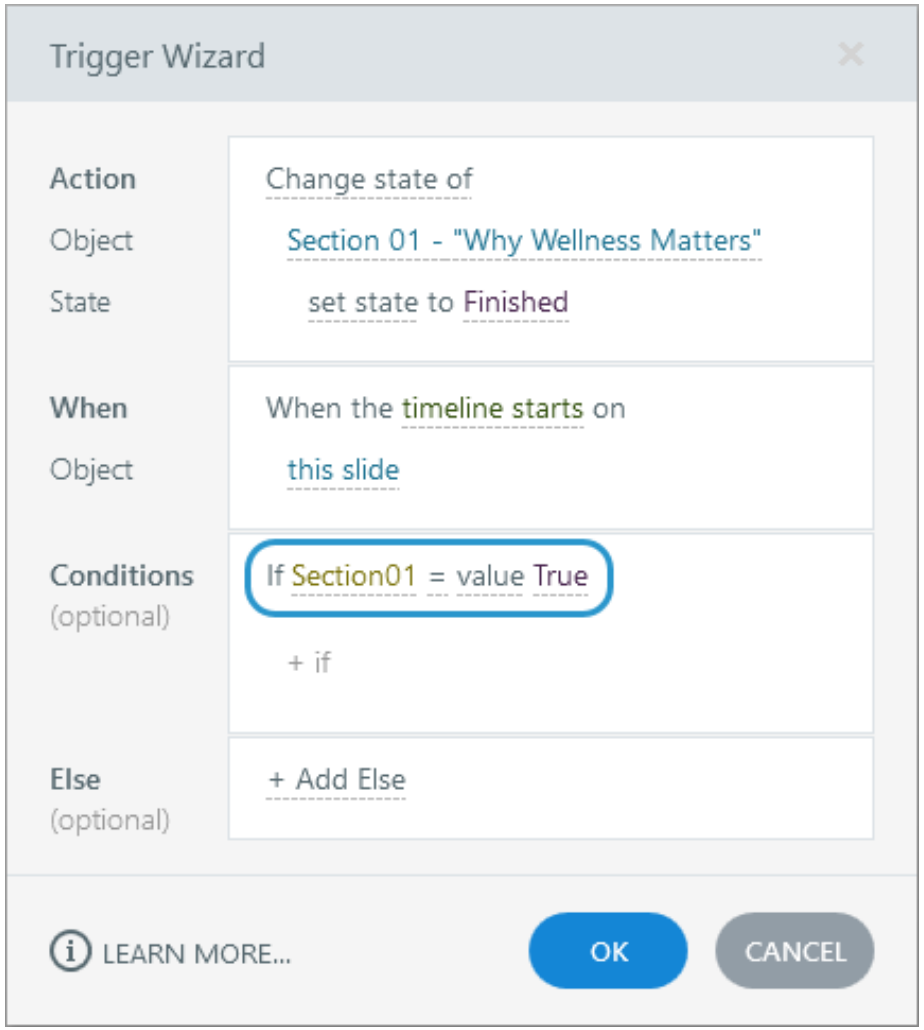


SET THESE CONTROLS C1=condition · C2=comparison · C3=else feedback · C4=count display

REJECT WHEN hidden dead-end or gate based on clicks rather than distinct hazards

VERIFY READBACK six hazards block progression; seven allow it

Authentic Articulate interface reference · verify the named control

Conditional trigger gate

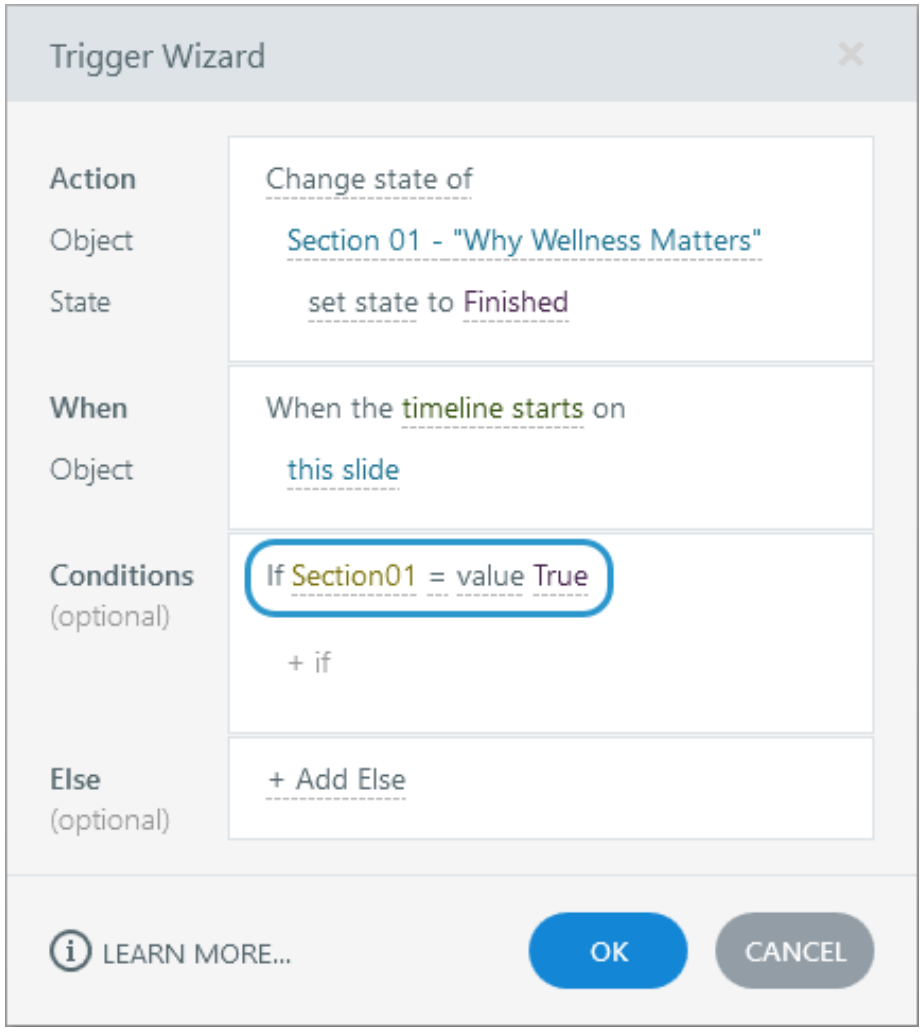


FAULTY OUTPUT (EXAMPLE) hidden dead-end or gate based on clicks rather than distinct hazards

FIX IN NAMED PANEL condition; comparison; else feedback; count display

EXPECTED AFTER FIX six hazards block progression; seven allow it · verify in your own Preview

Authentic Articulate interface reference · verify the named control


True/False completion flags

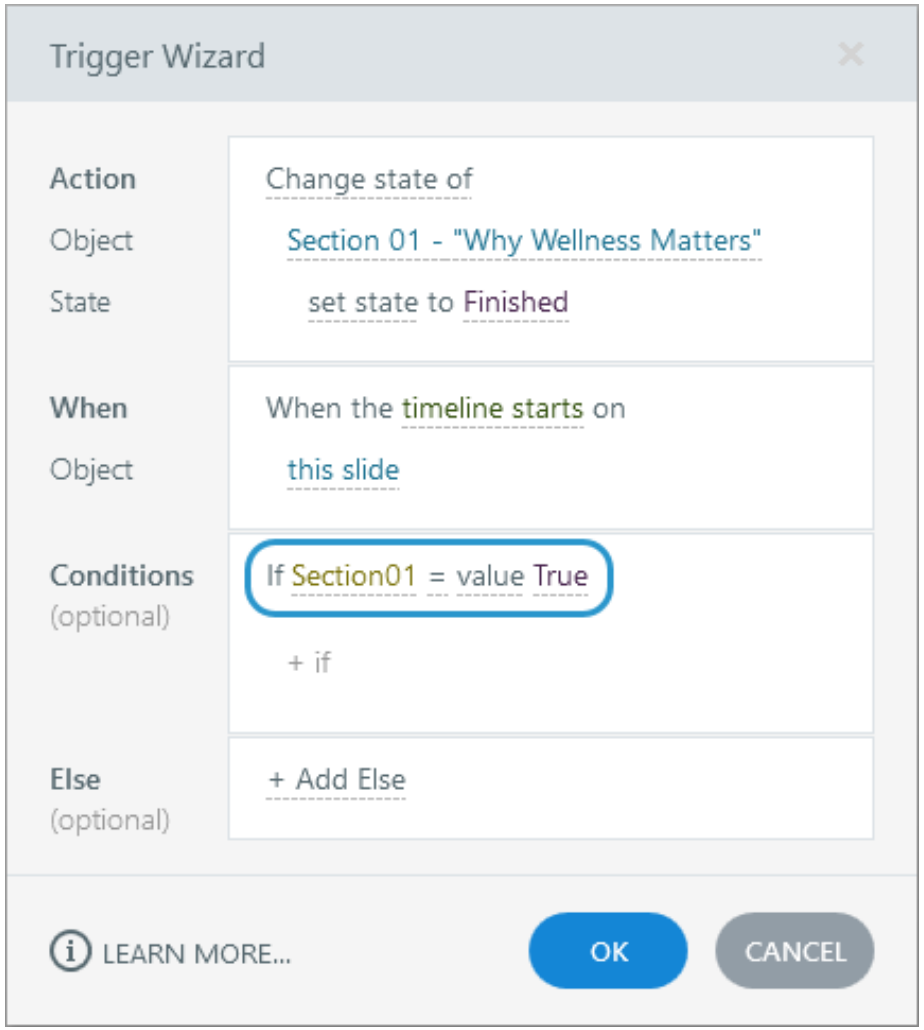

NAMED ARTIFACT	WSA-031-True-False-completion-flags
MECHANISM	Hazard01Found through Hazard07Found prevent repeated clicks inflating the…
EXPECTED	repeated activation leaves HazardsFound unchanged

Authentic Articulate interface reference · verify the named control


True/False completion flags

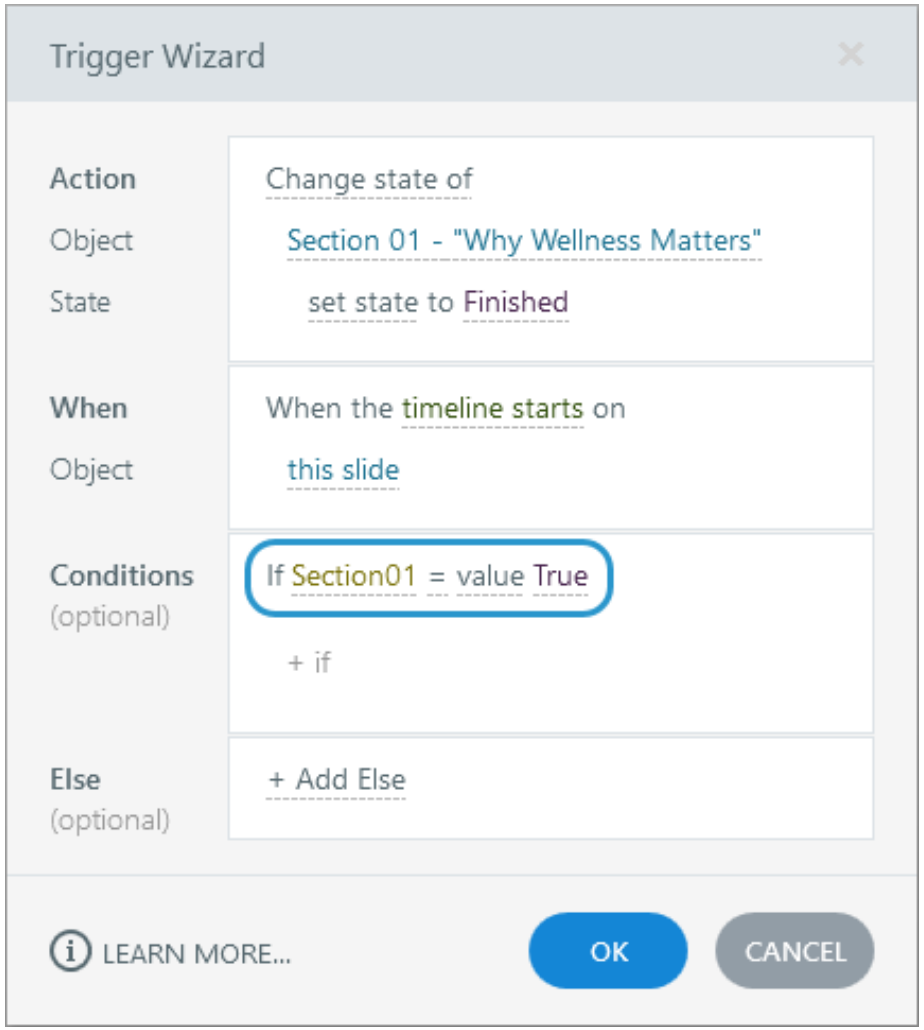

SET THESE CONTROLS	C1=default False · C2=condition False · C3=set True
REJECT WHEN	incrementing every time a hotspot is clicked
VERIFY READBACK	repeated activation leaves HazardsFound unchanged

Authentic Articulate interface reference · verify the named control

True/False completion flags

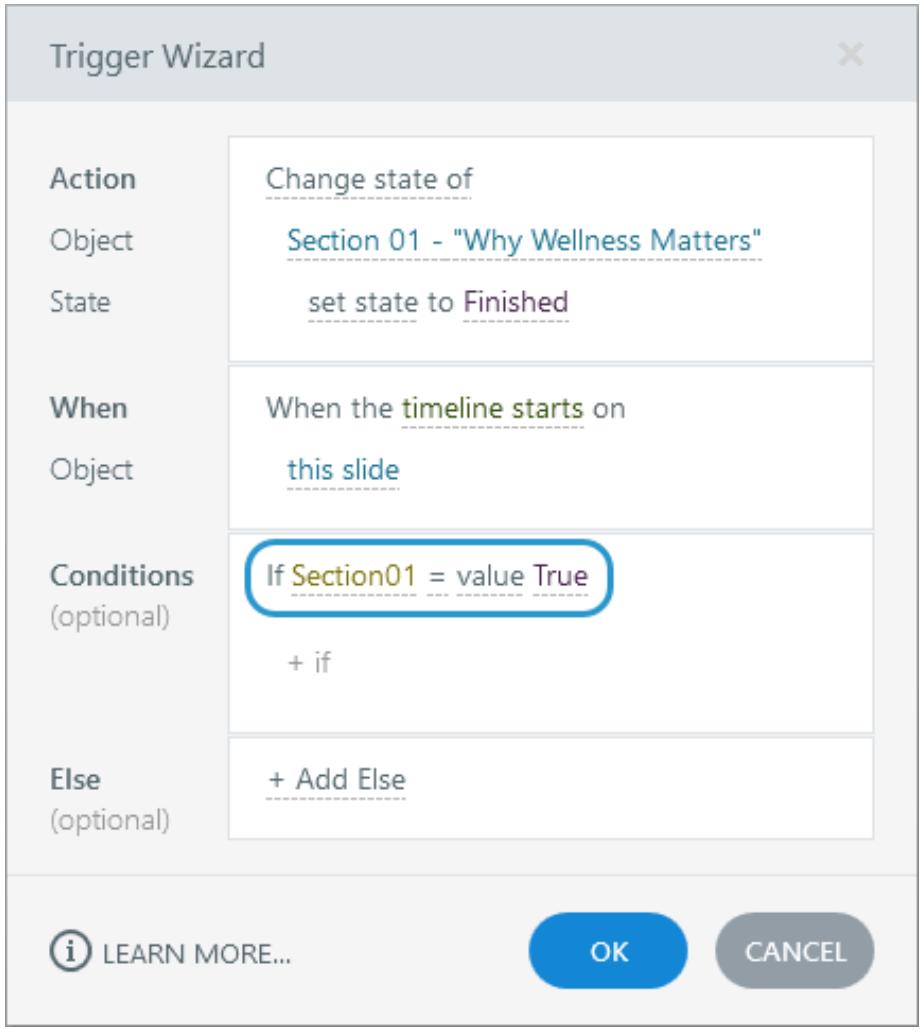


FAULTY OUTPUT (EXAMPLE) incrementing every time a hotspot is clicked

FIX IN NAMED PANEL default False; condition False; set True

EXPECTED AFTER FIX repeated activation leaves HazardsFound unchanged · verify in your own Preview

Authentic Articulate interface reference · verify the named control


Number variable counter

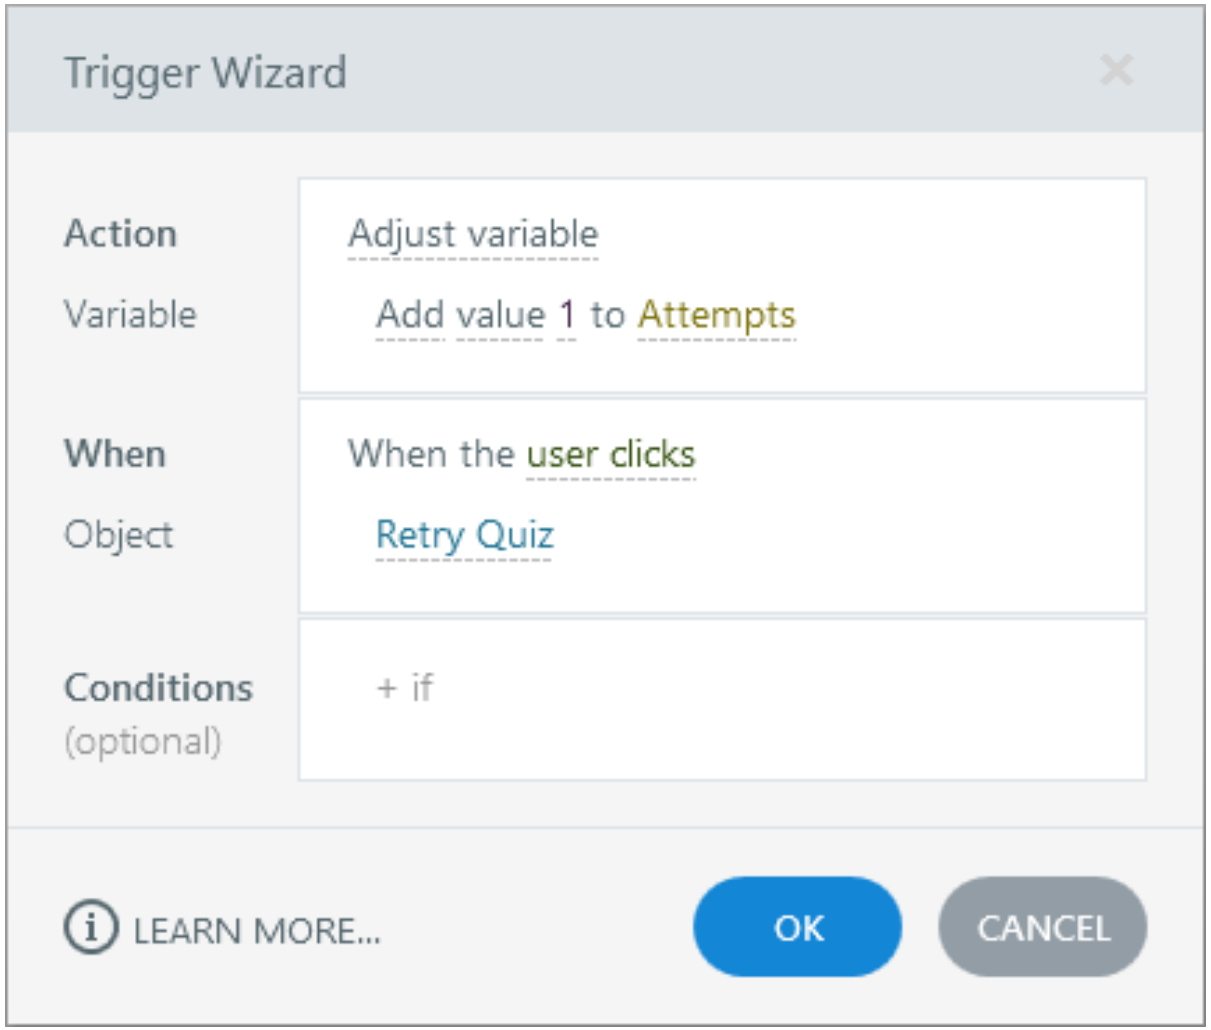

NAMED ARTIFACT	WSA-032-Number-variable-counter
MECHANISM	HazardsFound increments once per newly identified hazard and drives…
EXPECTED	counter sequence is 0–7 and survives specified revisit

Authentic Articulate interface reference · verify the named control

Number variable counter

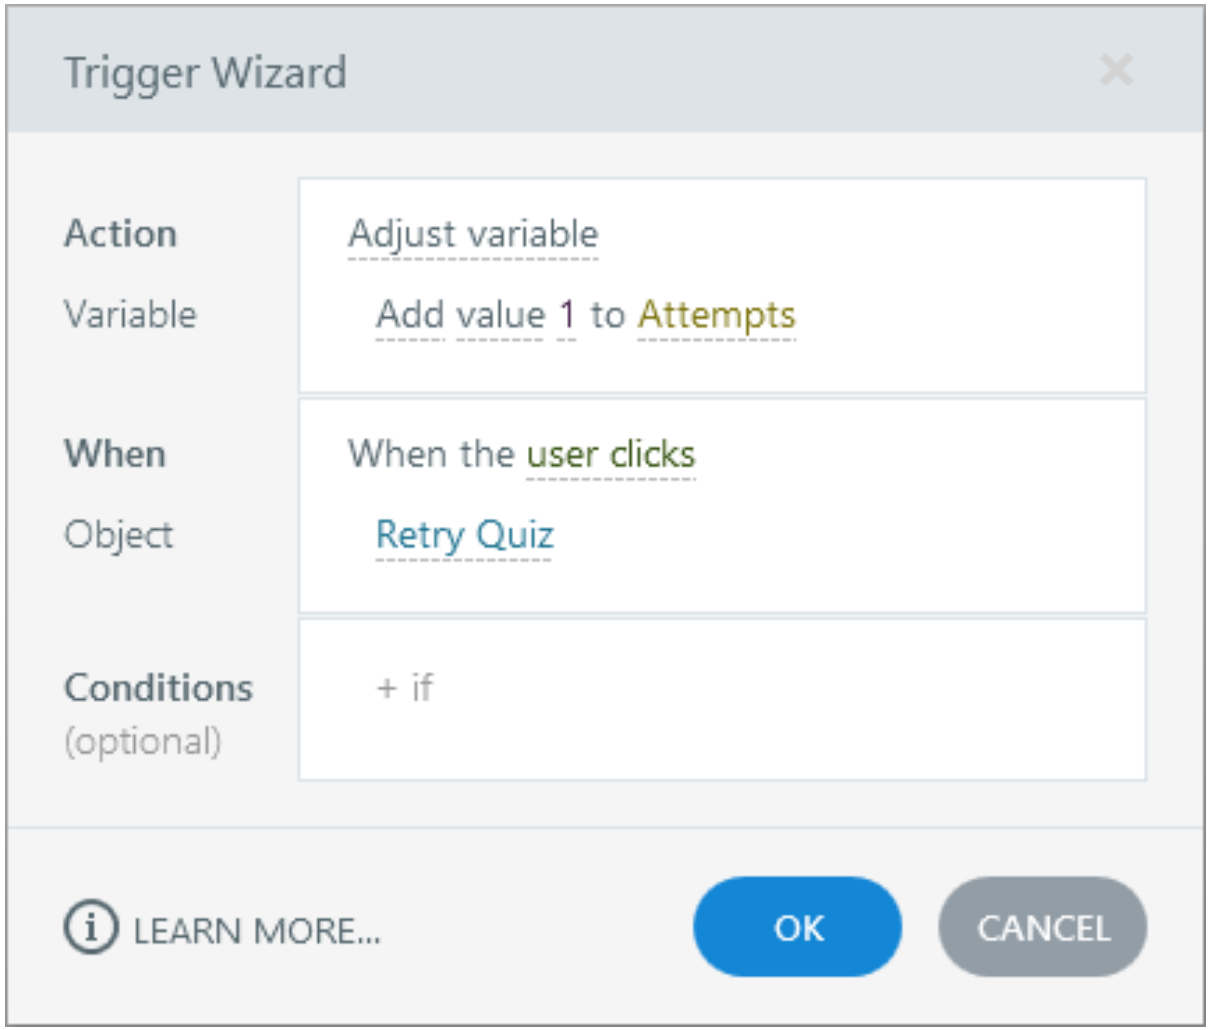


SET THESE CONTROLS C1=add 1 · C2=variable reference · C3=upper bound · C4=reset

REJECT WHEN counter exceeding seven or resetting on revisit

VERIFY READBACK counter sequence is 0–7 and survives specified revisit

Authentic Articulate interface reference · verify the named control

Number variable counter

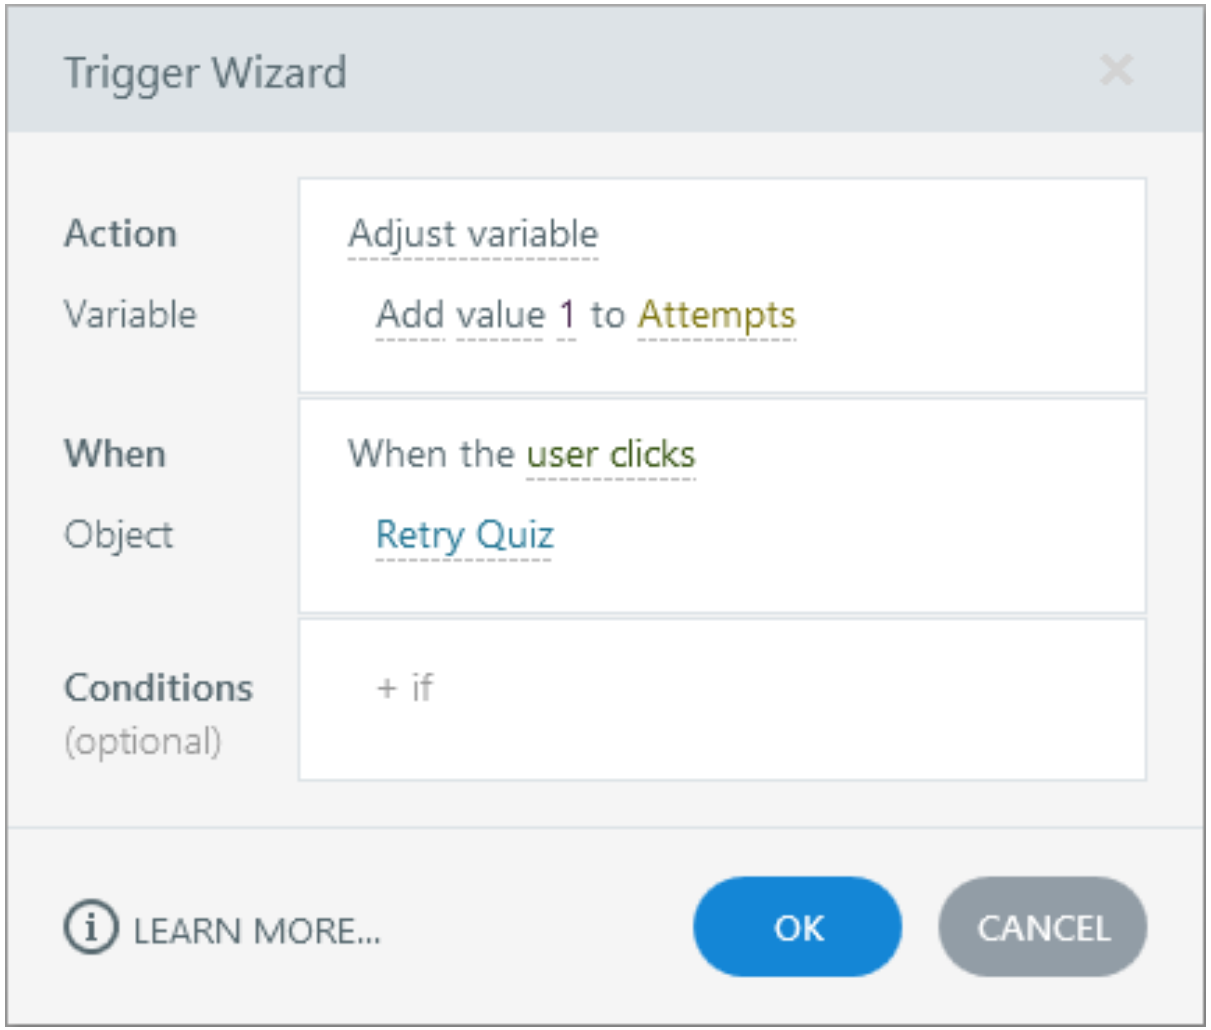

FAULTY OUTPUT (EXAMPLE) counter exceeding seven or resetting on revisit

FIX IN NAMED PANEL add 1; variable reference; upper bound; reset

EXPECTED AFTER FIX counter sequence is 0–7 and survives specified revisit · verify in your…

Authentic Articulate interface reference · verify the named control

Variable references

Named HarbourLink WSH artifact

WSA-033-Variable-references

Input / source state

WSA checkpoint plus reference syntax; accessible label; update event

Runtime mechanism

Text %HazardsFound% of 7 found gives visible progress tied to runtime state

Expected output

display matches the variable after every unique selection

Rejected output

hard-coded progress text drifting from logic

Evidence record

WSA-033-Variable-references: capture the configured control and the runtime readback.

Variable references

SET THESE CONTROLS

C1=reference syntax · C2=accessible label · C3=update event

→

REJECT WHEN

hard-coded progress text drifting from logic

→

VERIFY READBACK

display matches the variable after every unique selection

Editable HarbourLink model · display matches the variable after every unique selection

© 2026 Tertiary Infotech Academy Pte Ltd · Mastering Articulate Storyline 360 for e-Learning Content Creation · TGS-2024042308

Variable references

FAULTY OUTPUT (EXAMPLE)

hard-coded progress text drifting from logic

→

CORRECT THE RECORD

reference syntax; accessible label; update event

→


EXPECTED AFTER FIX

display matches the variable after every unique selection · verify in your own Preview

Editable HarbourLink model · display matches the variable after every unique selection

© 2026 Tertiary Infotech Academy Pte Ltd · Mastering Articulate Storyline 360 for e-Learning Content Creation · TGS-2024042308


Motion path forklift

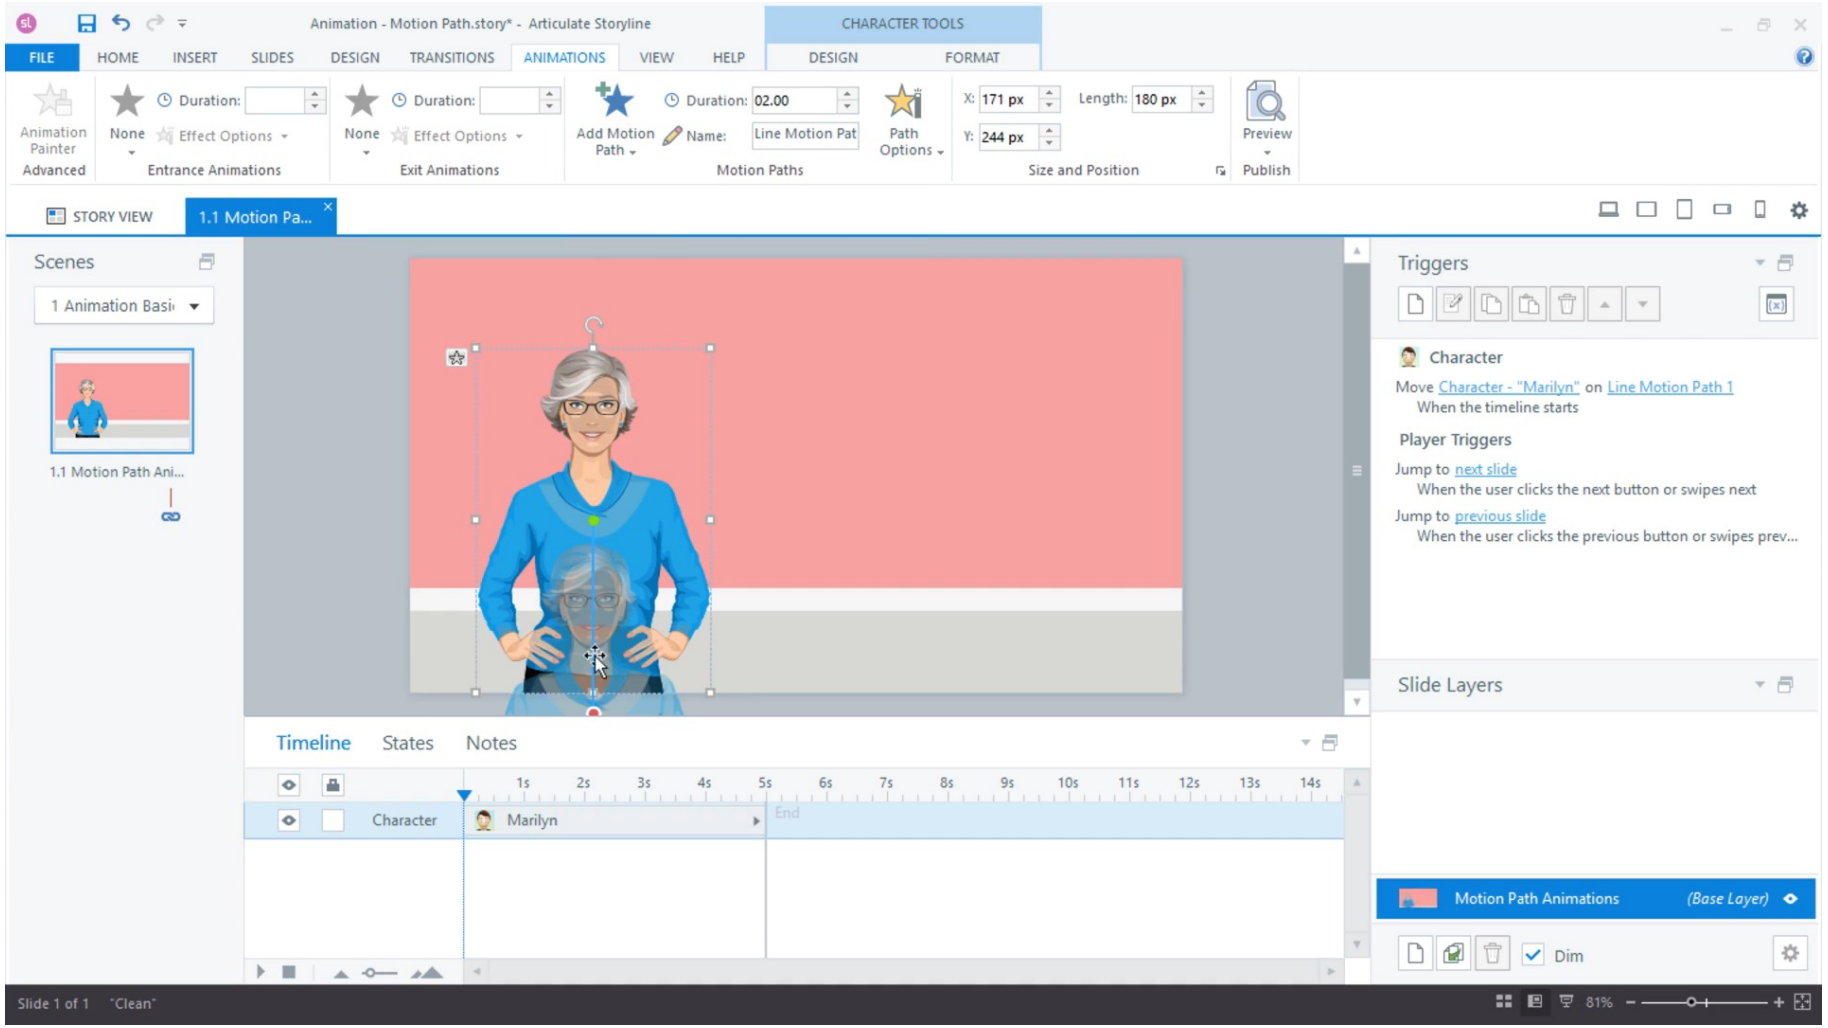

NAMED ARTIFACT	**WSA-034-Motion-path-forklift**
MECHANISM	**A named motion path demonstrates a moving-forklift hazard and supports…**
EXPECTED	**motion starts on learner action, remains visible and can be paused**

Authentic Articulate interface reference · verify the named control


Motion path forklift

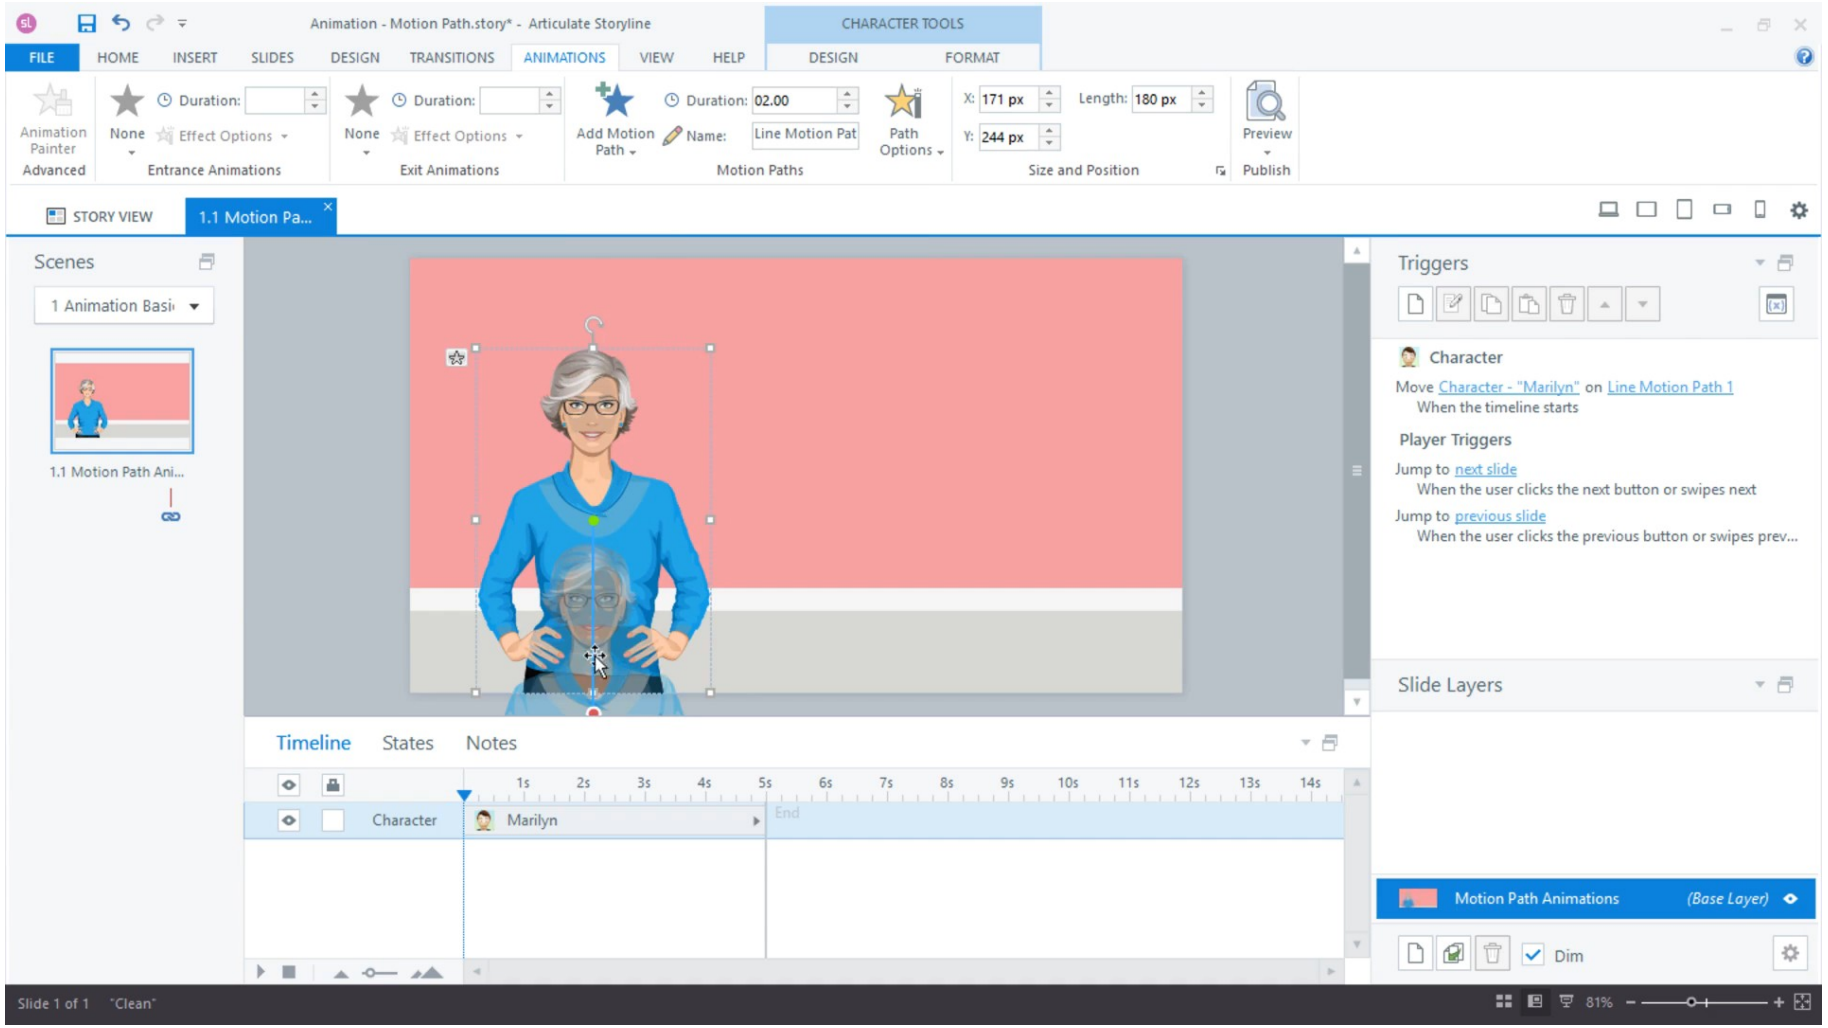

SET THESE CONTROLS	**C1=path name · C2=duration · C3=relative start · C4=reverse · C5=trigger**
REJECT WHEN	**uncontrolled autoplay motion or path ending off-canvas**
VERIFY READBACK	**motion starts on learner action, remains visible and can be paused**

Authentic Articulate interface reference · verify the named control

Motion path forklift

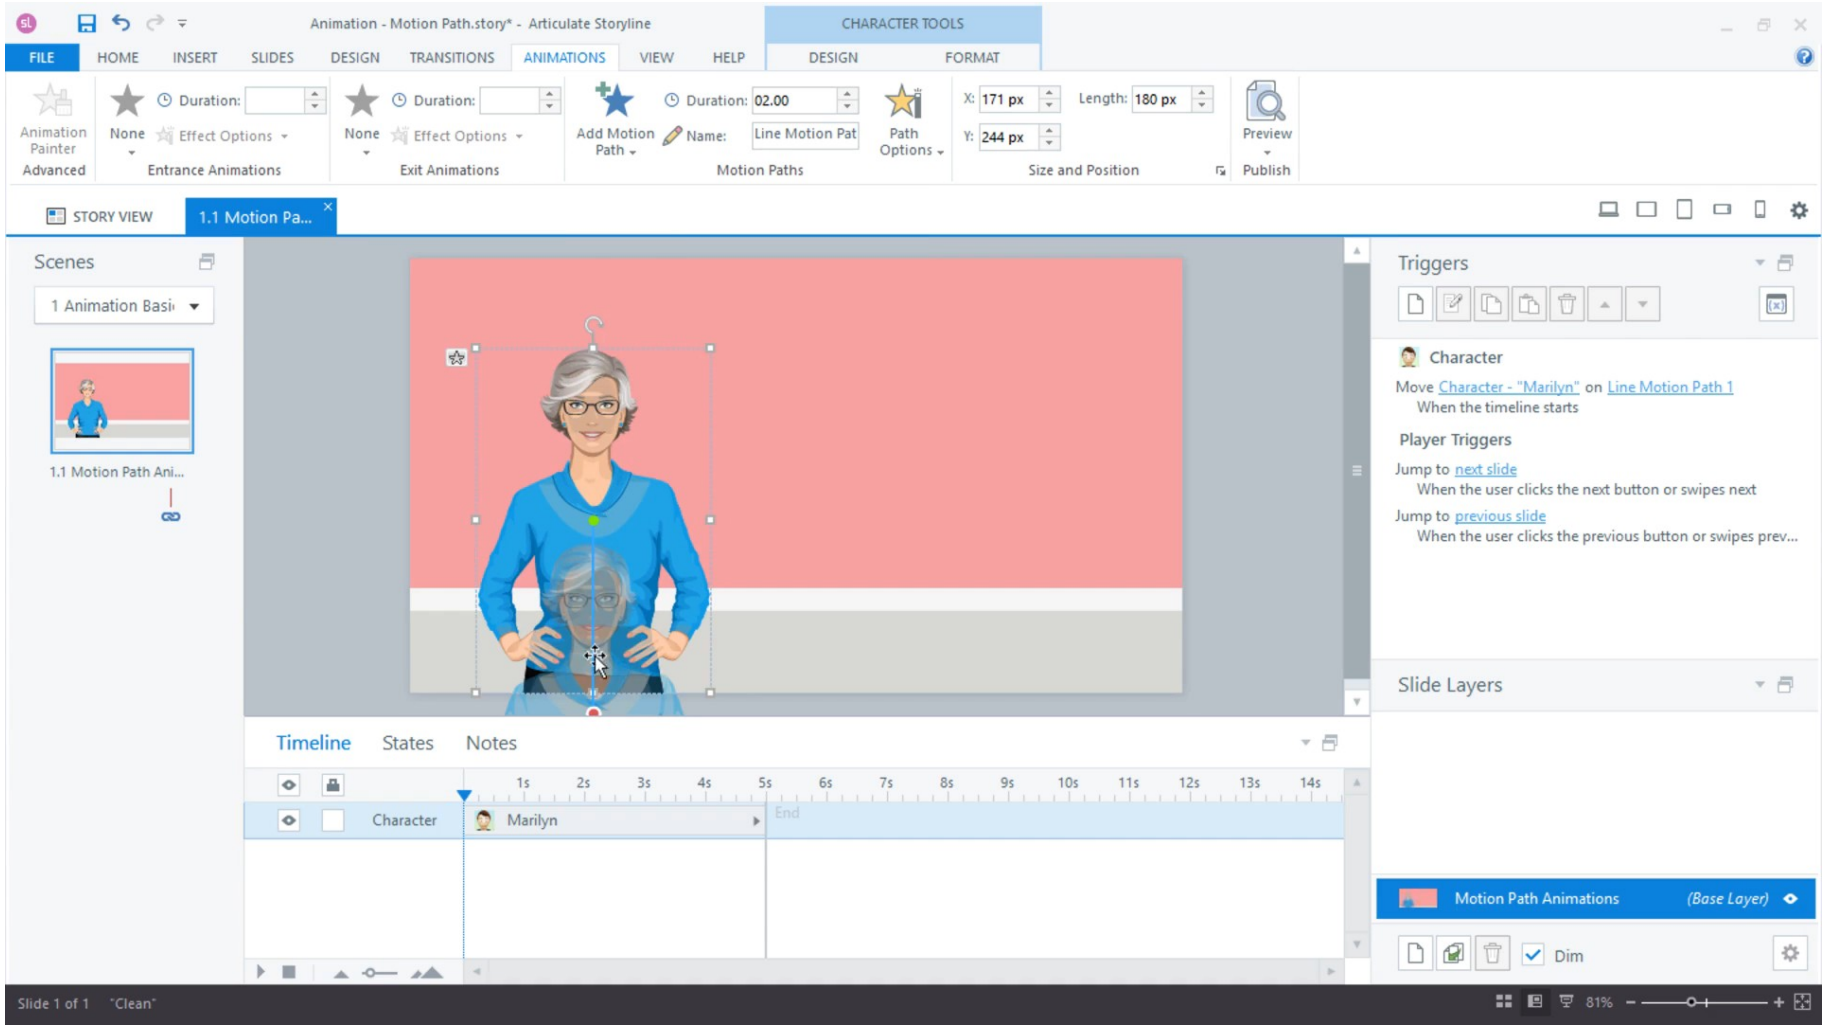

FAULTY OUTPUT (EXAMPLE)	**uncontrolled autoplay motion or path ending off-canvas**
FIX IN NAMED PANEL	**path name; duration; relative start; reverse; trigger**
EXPECTED AFTER FIX	**motion starts on learner action, remains visible and can be paused ·…**

Authentic Articulate interface reference · verify the named control

Animation accessibility

Named HarbourLink WSH artifact

WSA-035-Animation-accessibility

Input / source state

WSA checkpoint plus play/pause; duration; alternative; no flashing

Runtime mechanism

Motion is brief, purposeful and paired with static explanation and learner control

Expected output

meaning is available when animation is paused or skipped

Rejected output

decorative motion causing distraction or vestibular discomfort

Evidence record

WSA-035-Animation-accessibility: capture the configured control and the runtime readback.

EDITABLE CONFIGURATION MODEL

Animation accessibility

SET THESE CONTROLS

C1=play/pause · C2=duration · C3=alternative · C4=no flashing

→

REJECT WHEN

decorative motion causing distraction or vestibular discomfort

→

VERIFY READBACK

meaning is available when animation is paused or skipped

Editable HarbourLink model · meaning is available when animation is paused or skipped

Animation accessibility

FAULTY OUTPUT (EXAMPLE)

decorative motion causing distraction or vestibular discomfort

→

CORRECT THE RECORD

play/pause; duration; alternative; no flashing

→


EXPECTED AFTER FIX

meaning is available when animation is paused or skipped · verify in your own Preview

Editable HarbourLink model · meaning is available when animation is paused or skipped

© 2026 Tertiary Infotech Academy Pte Ltd · Mastering Articulate Storyline 360 for e-Learning Content Creation · TGS-2024042308


Slider risk control

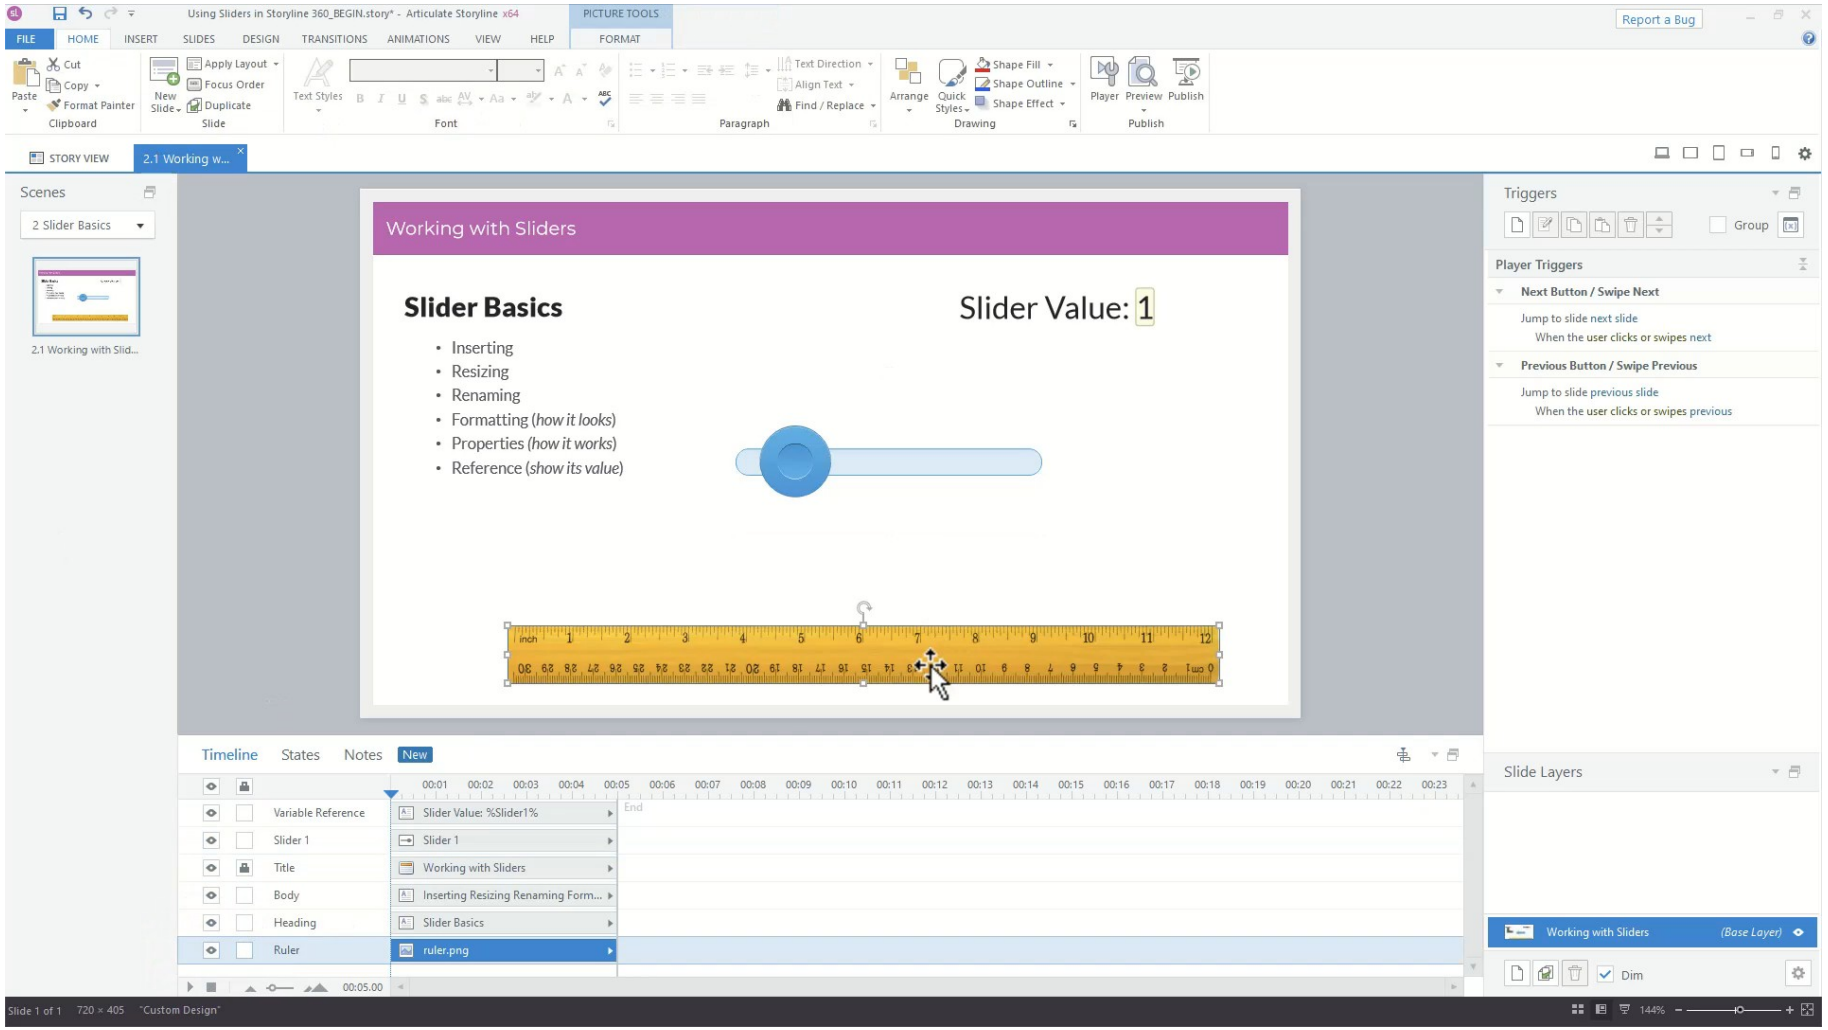

NAMED ARTIFACT	**WSA-036-Slider-risk-control**
MECHANISM	**A 1–5 slider writes RiskLevel and updates a textual risk classification**
EXPECTED	**arrow keys change the value and every value has a text equivalent**

Authentic Articulate interface reference · verify the named control


Slider risk control

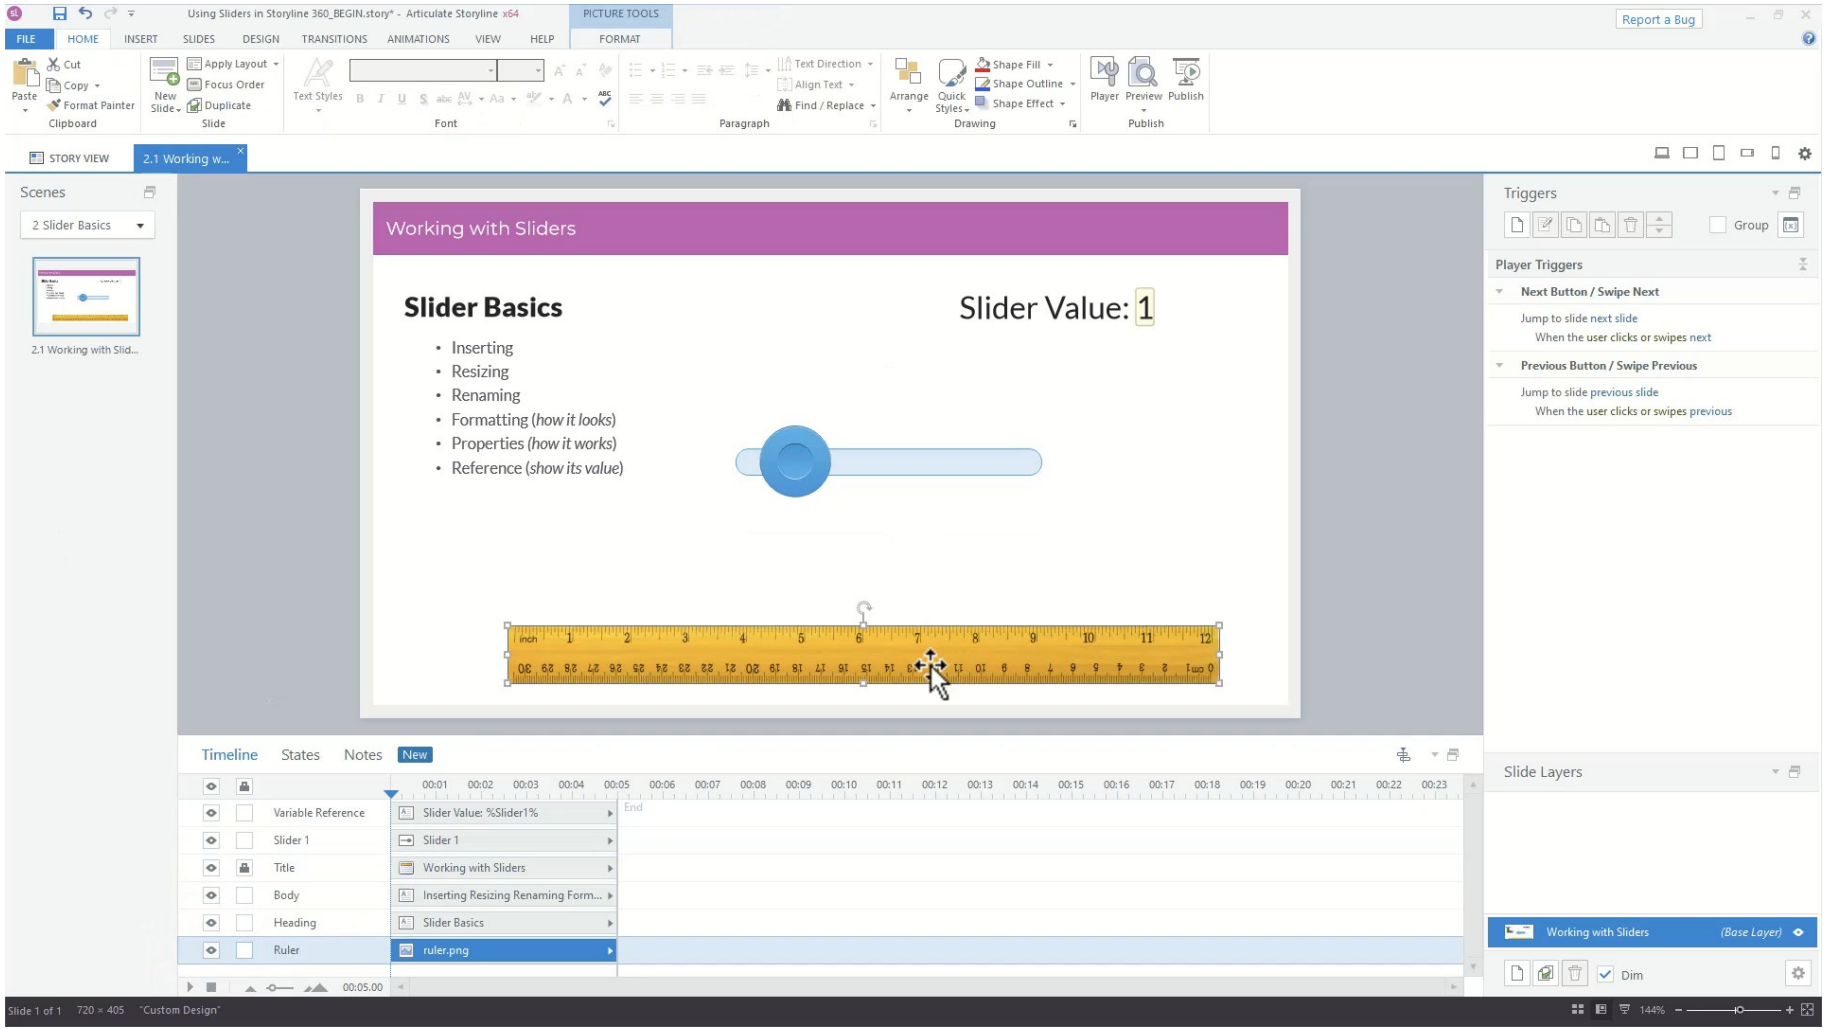

SET THESE CONTROLS	**C1=start · C2=end · C3=step · C4=variable · C5=state mapping**
REJECT WHEN	**unlabelled values or pointer-only input**
VERIFY READBACK	**arrow keys change the value and every value has a text equivalent**

Authentic Articulate interface reference · verify the named control

Slider risk control

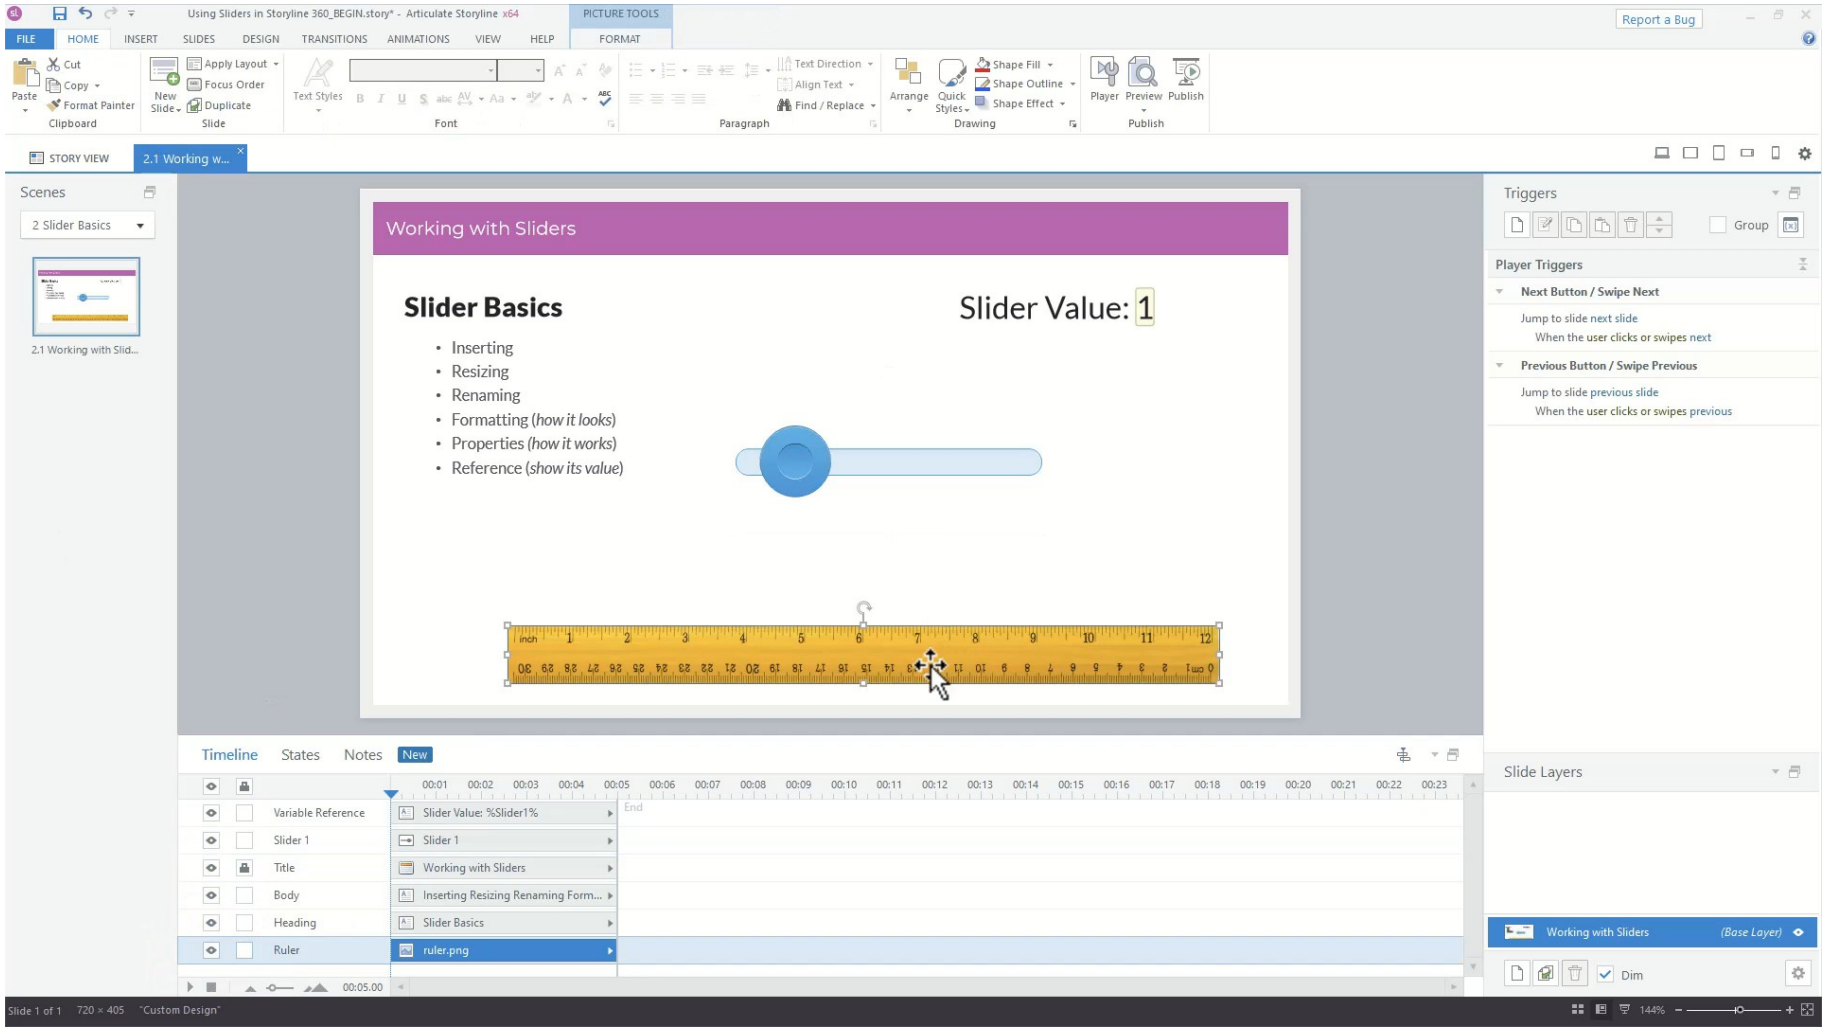


FAULTY OUTPUT (EXAMPLE) unlabelled values or pointer-only input

FIX IN NAMED PANEL start; end; step; variable; state mapping

EXPECTED AFTER FIX arrow keys change the value and every value has a text equivalent · verify…

Authentic Articulate interface reference · verify the named control


Dial inspection control

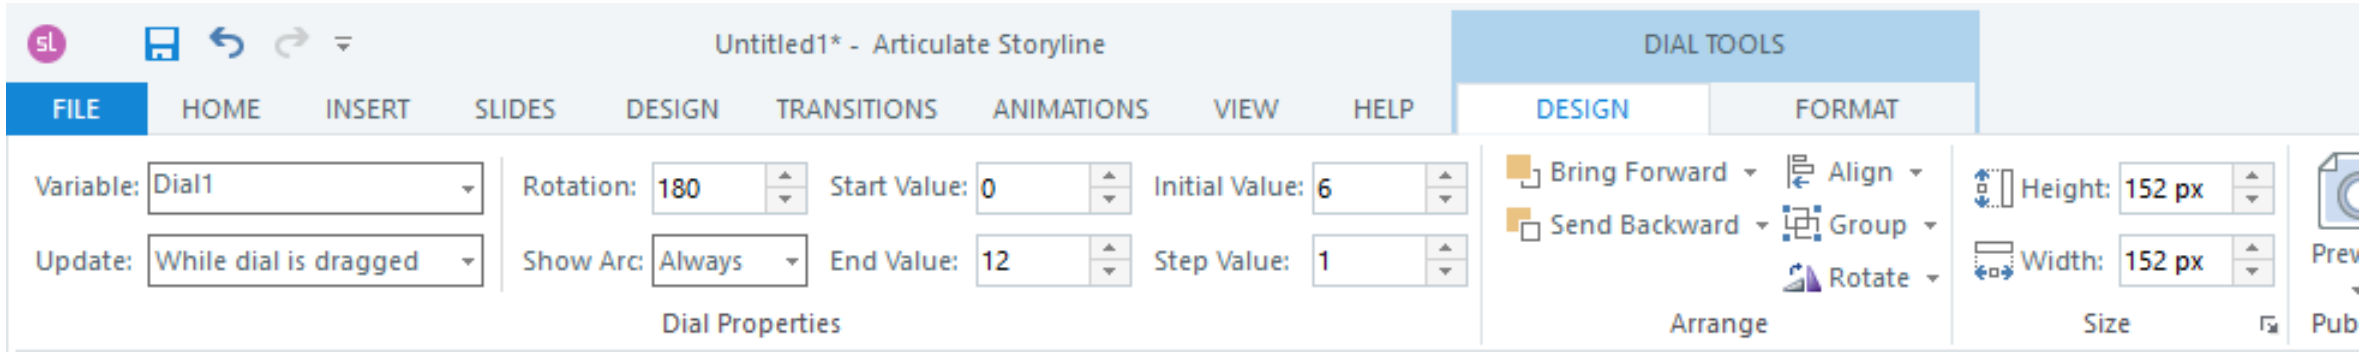

NAMED ARTIFACT	WSA-037-Dial-inspection-control
MECHANISM	A dial rotates through inspection zones and reveals the matching checklist…
EXPECTED	each detent selects exactly one named inspection zone

Authentic Articulate interface reference · verify the named control


Dial inspection control

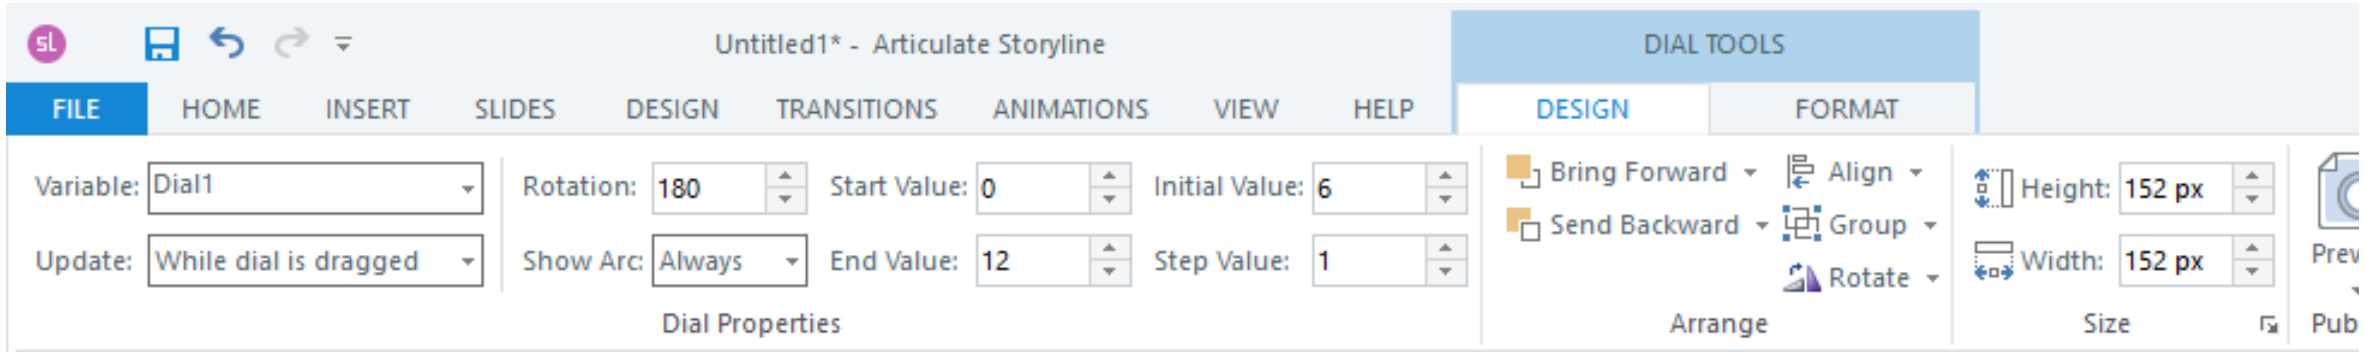

SET THESE CONTROLS	C1=steps · C2=start · C3=end · C4=variable · C5=trigger
REJECT WHEN	continuous values with unreachable layers
VERIFY READBACK	each detent selects exactly one named inspection zone

Authentic Articulate interface reference · verify the named control

Dial inspection control

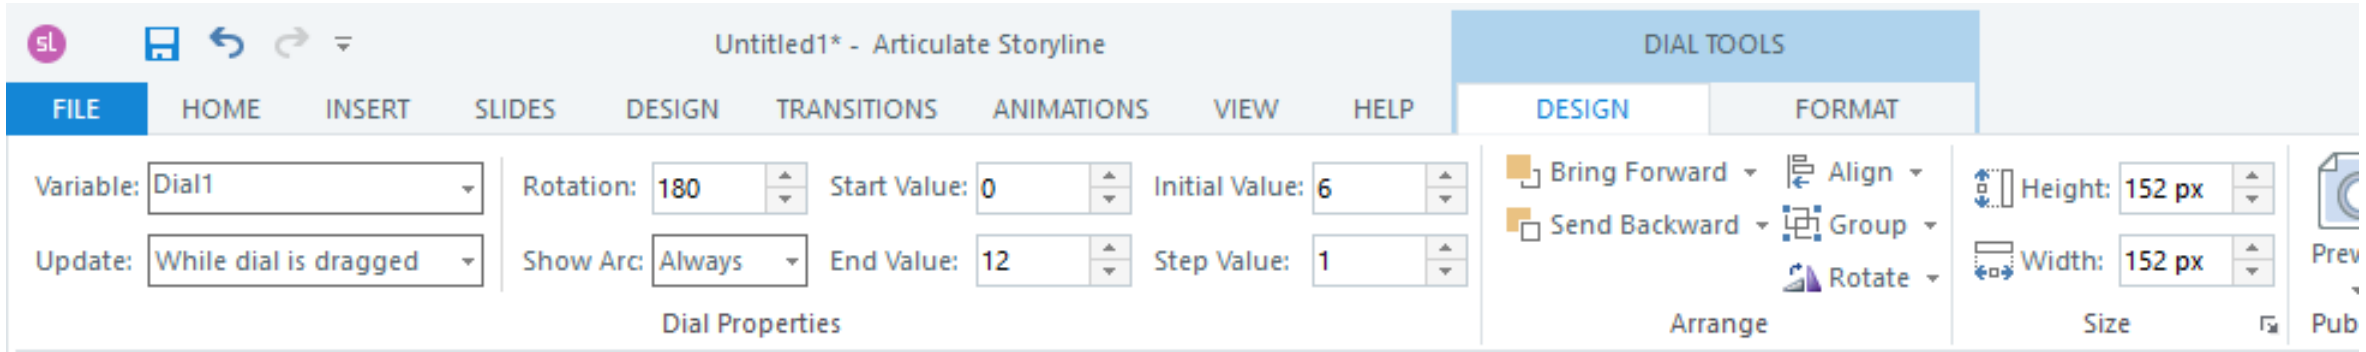

FAULTY OUTPUT (EXAMPLE)	continuous values with unreachable layers
FIX IN NAMED PANEL	steps; start; end; variable; trigger
EXPECTED AFTER FIX	each detent selects exactly one named inspection zone · verify in your own…

Authentic Articulate interface reference · verify the named control

Web object incident form

Named HarbourLink WSH artifact

WSA-038-Web-object-incident-form

Input / source state

WSA checkpoint plus index.html root; focus exit; fallback link; offline test

Runtime mechanism

Insert > Web Object embeds the supplied local incident-report simulation folder

Expected output

published output loads locally and keyboard users can enter and leave it

Rejected output

selecting a single HTML file or depending on external tracking

Evidence record

WSA-038-Web-object-incident-form: capture the configured control and the runtime readback.

EDITABLE CONFIGURATION MODEL

Web object incident form

SET THESE CONTROLS

C1=index.html root · C2=focus exit · C3=fallback link · C4=offline test

REJECT WHEN

selecting a single HTML file or depending on external tracking

VERIFY READBACK

published output loads locally and keyboard users can enter and leave it

Editable HarbourLink model · published output loads locally and keyboard users can enter and leave it

Web object incident form

FAULTY OUTPUT (EXAMPLE)

selecting a single HTML file or depending on external tracking

→

CORRECT THE RECORD

index.html root; focus exit; fallback link; offline test

→


EXPECTED AFTER FIX

published output loads locally and keyboard users can enter and leave it · verify in your own Preview

Editable HarbourLink model · published output loads locally and keyboard users can enter and leave it

© 2026 Tertiary Infotech Academy Pte Ltd · Mastering Articulate Storyline 360 for e-Learning Content Creation · TGS-2024042308


Screen recording preparation

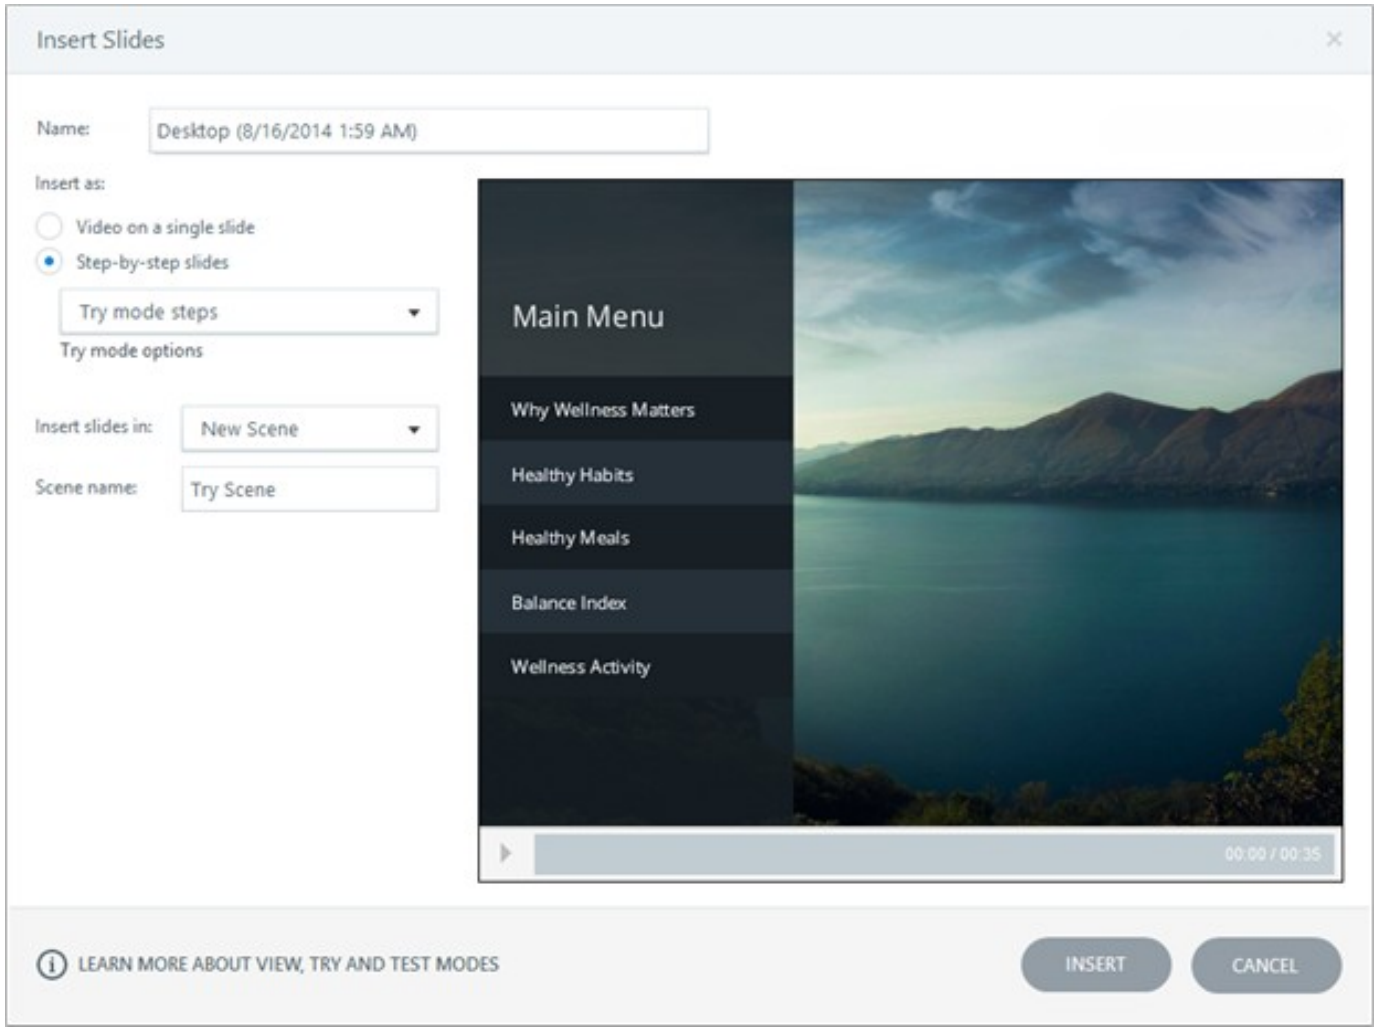

NAMED ARTIFACT	WSA-039-Screen-recording-preparation
MECHANISM	Slides > Record Screen captures a clean bounded application workflow with…
EXPECTED	test capture is readable and follows the scripted incident-report path

Authentic Articulate interface reference · verify the named control


Screen recording preparation

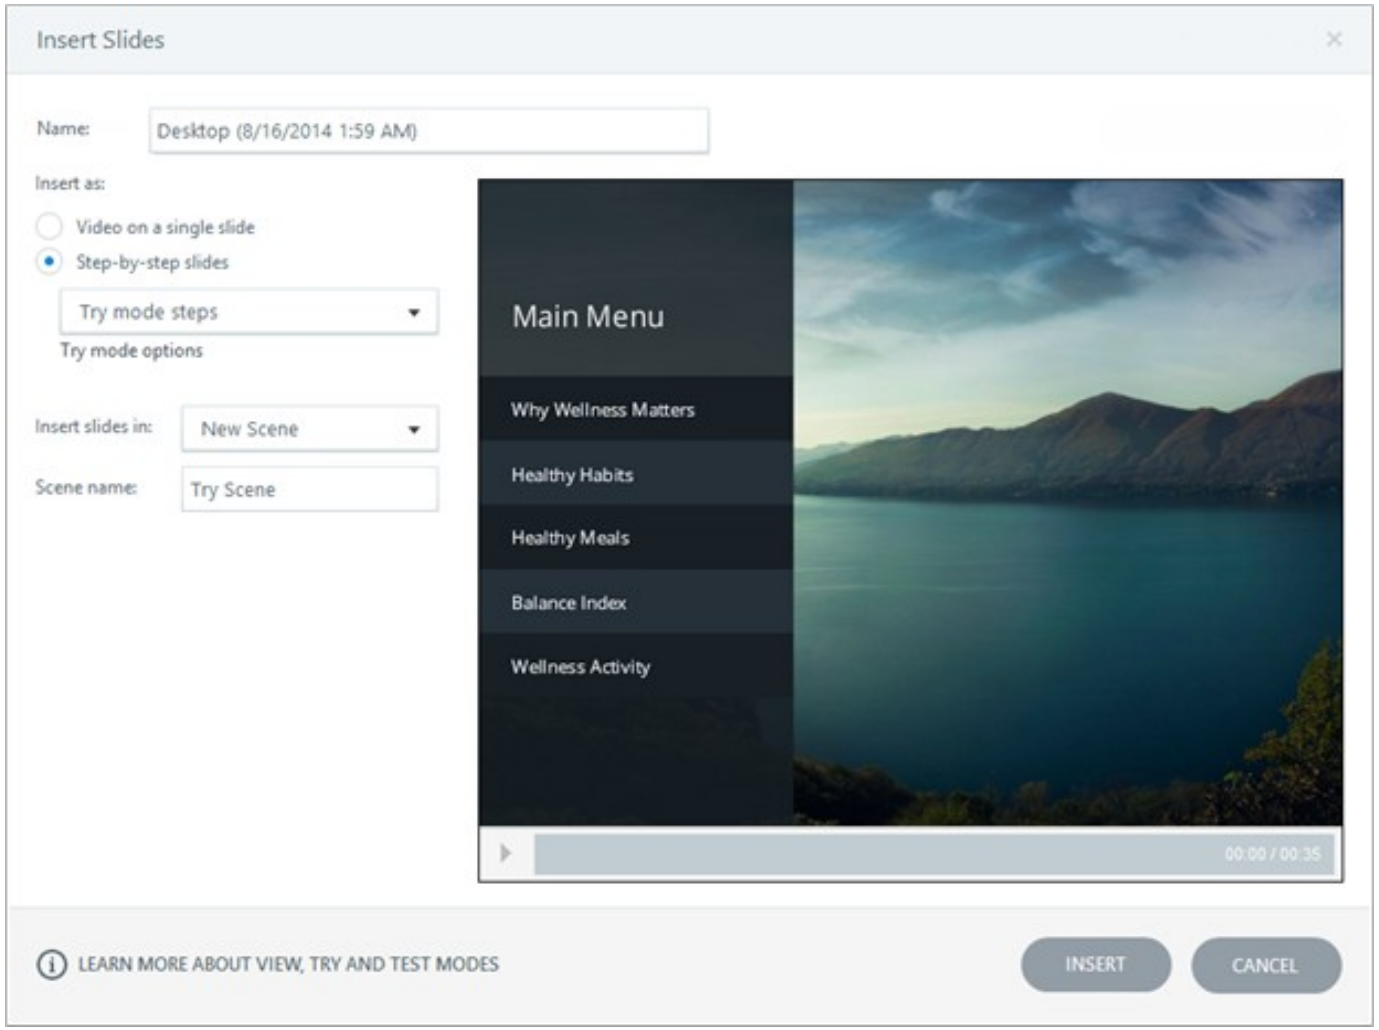

SET THESE CONTROLS	C1=recording region · C2=resolution · C3=notifications · C4=rehearsal
REJECT WHEN	tiny UI, exposed data or unplanned cursor search
VERIFY READBACK	test capture is readable and follows the scripted incident-report path

Authentic Articulate interface reference · verify the named control


Screen recording preparation

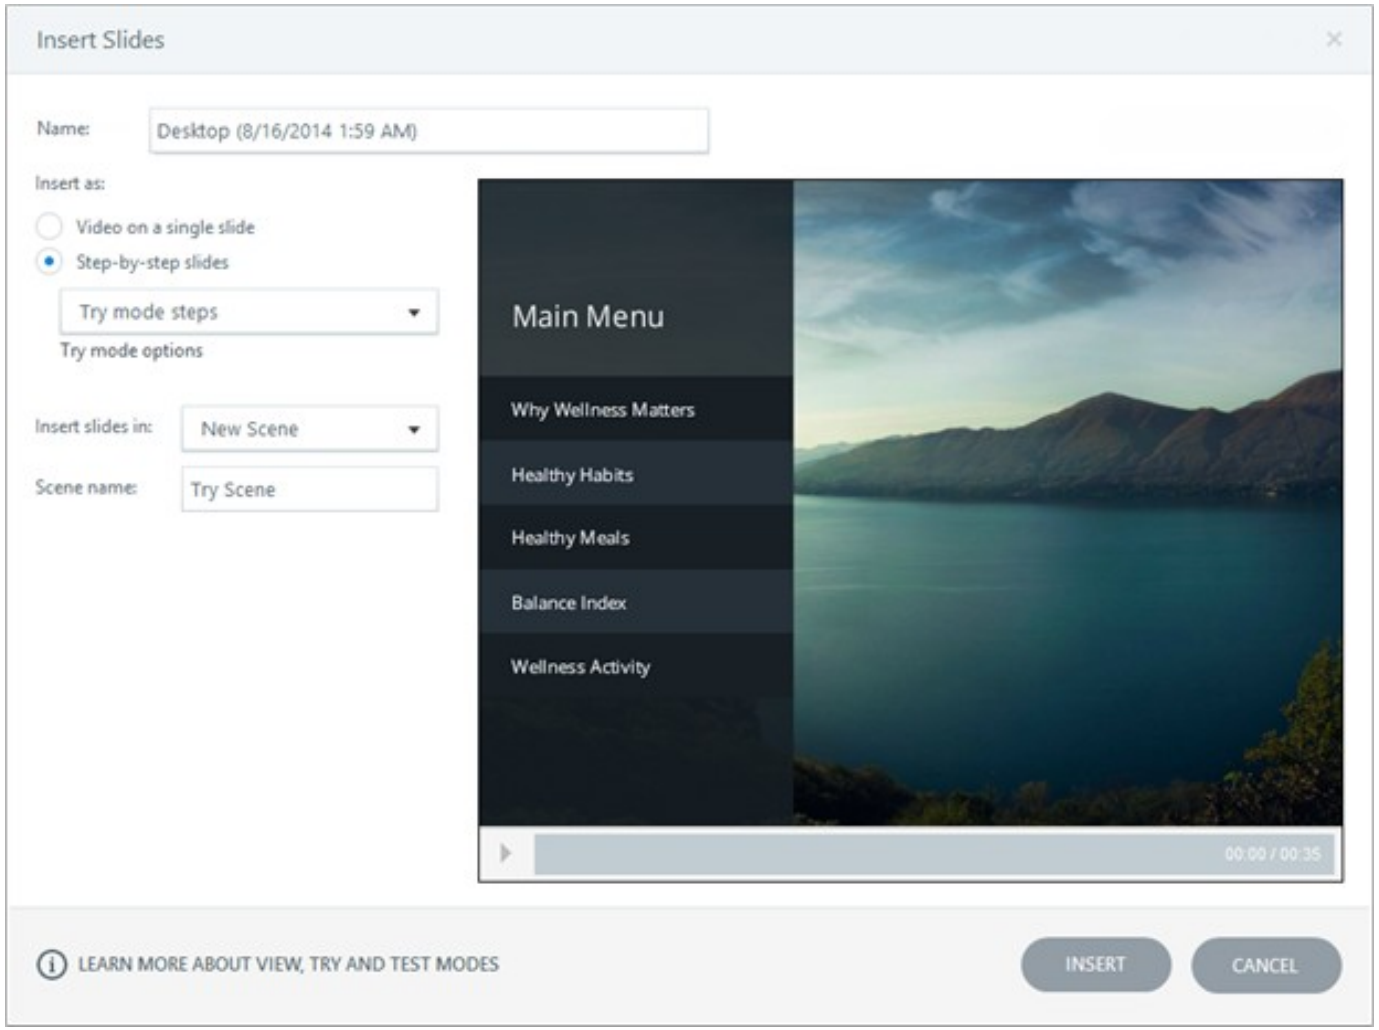

FAULTY OUTPUT (EXAMPLE)	tiny UI, exposed data or unplanned cursor search
FIX IN NAMED PANEL	recording region; resolution; notifications; rehearsal
EXPECTED AFTER FIX	test capture is readable and follows the scripted incident-report path ·…

Authentic Articulate interface reference · verify the named control


View mode screencast

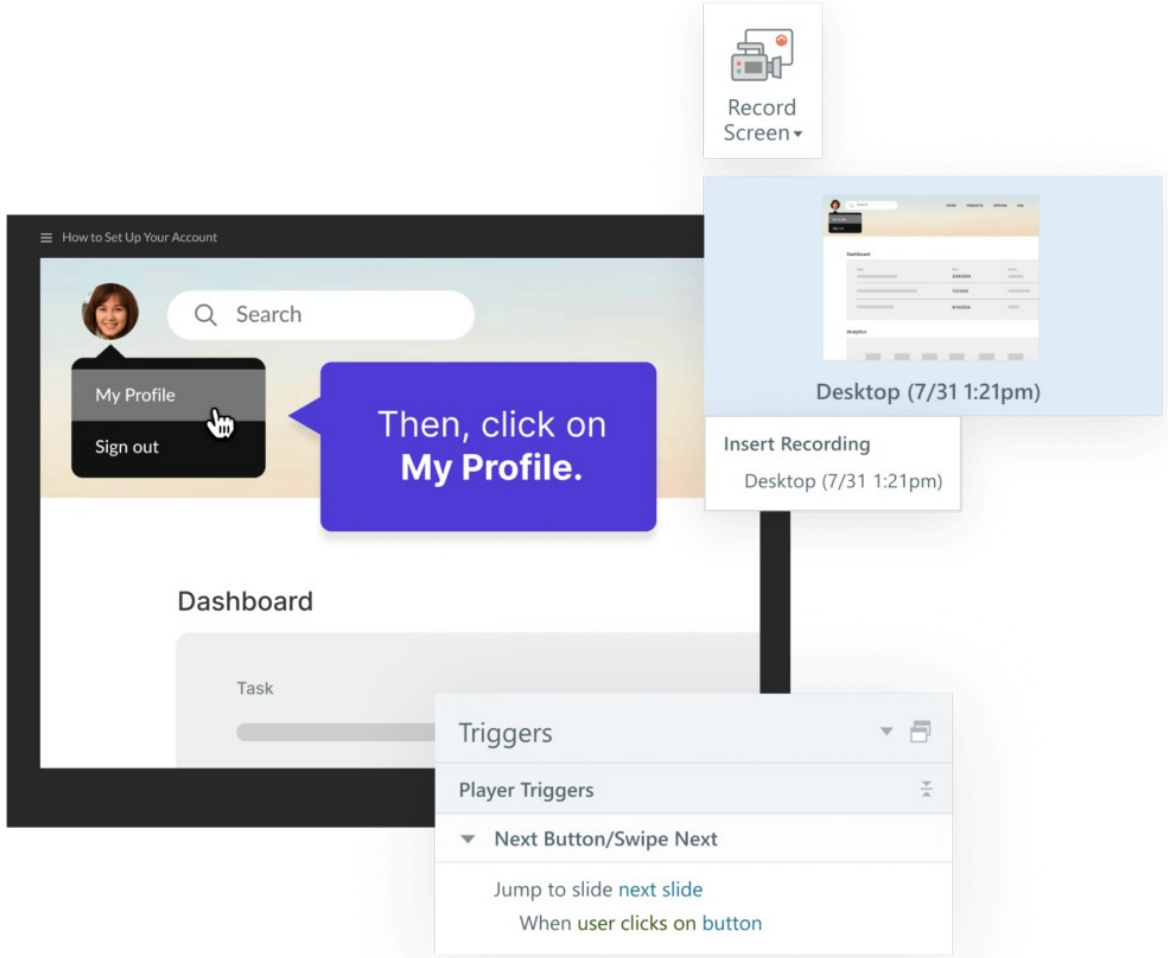

NAMED ARTIFACT	WSA-040-View-mode-screencast
MECHANISM	Insert recording as Video on a Single Slide for an uninterrupted demonstration
EXPECTED	learner can pause, seek and use captions/transcript

Authentic Articulate interface reference · verify the named control


View mode screencast

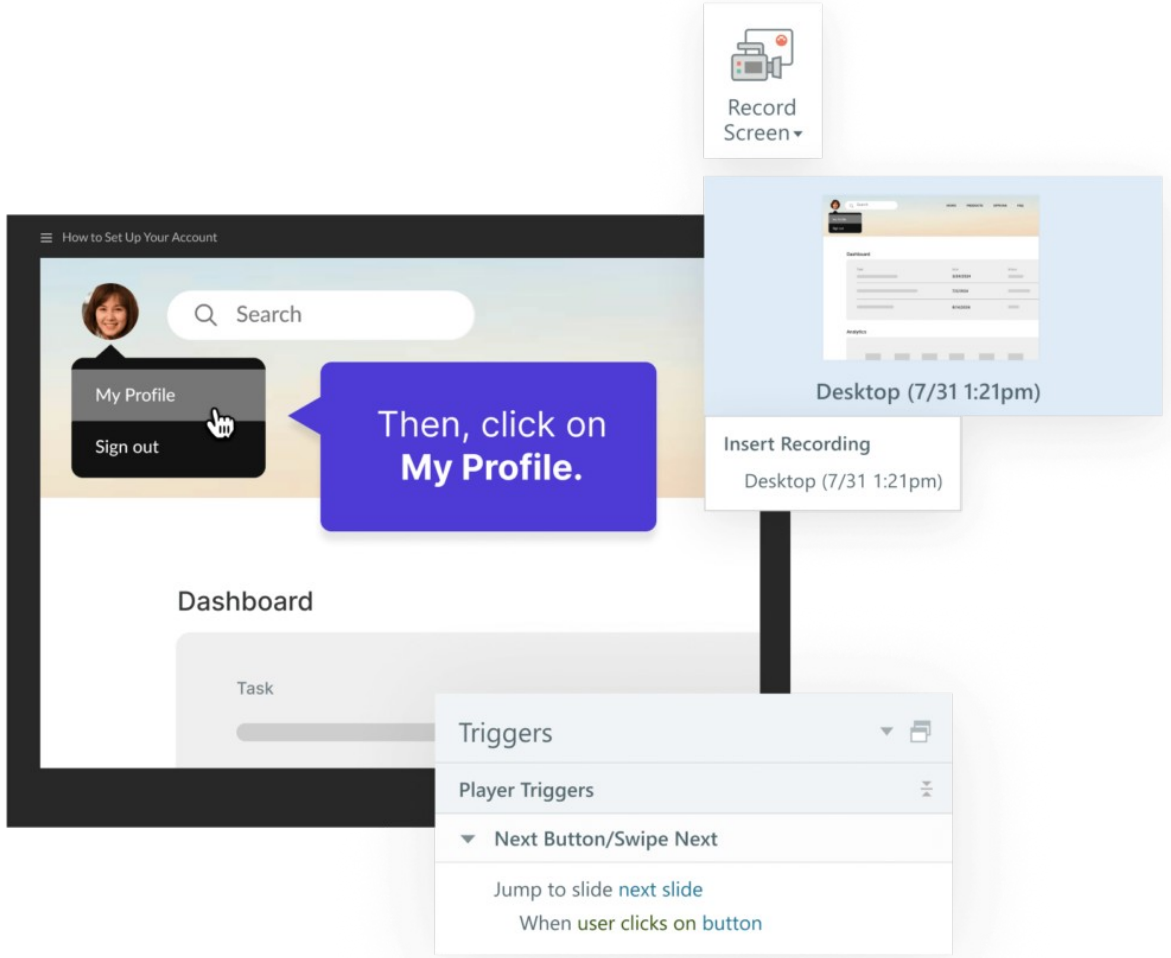

SET THESE CONTROLS	**C1=video controls · C2=captions · C3=trim · C4=poster frame**
REJECT WHEN	**autoplay sound or unreadable cursor detail**
VERIFY READBACK	**learner can pause, seek and use captions/transcript**

Authentic Articulate interface reference · verify the named control

View mode screencast

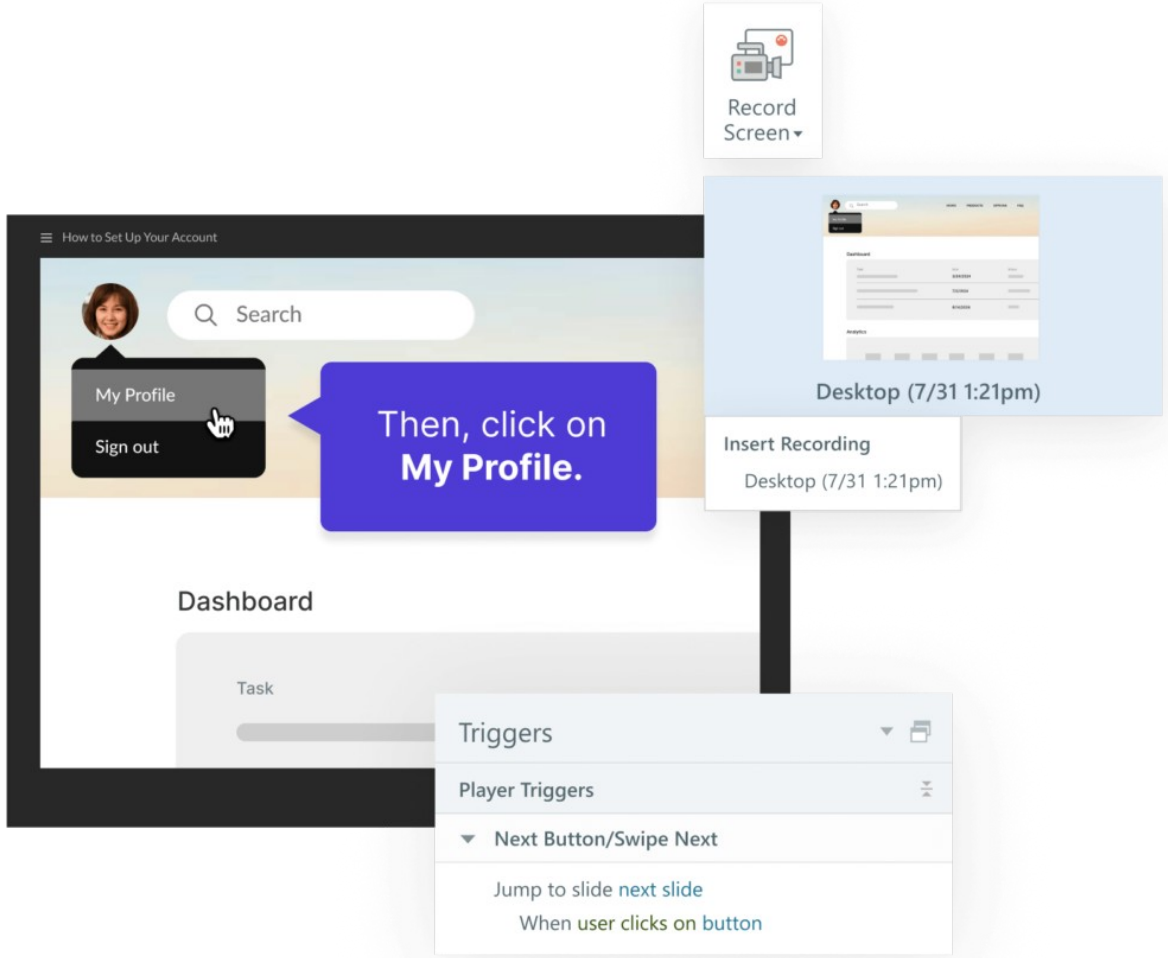


FAULTY OUTPUT (EXAMPLE) autoplay sound or unreadable cursor detail

FIX IN NAMED PANEL video controls; captions; trim; poster frame

EXPECTED AFTER FIX learner can pause, seek and use captions/transcript · verify in your own…

Authentic Articulate interface reference · verify the named control


Try mode simulation

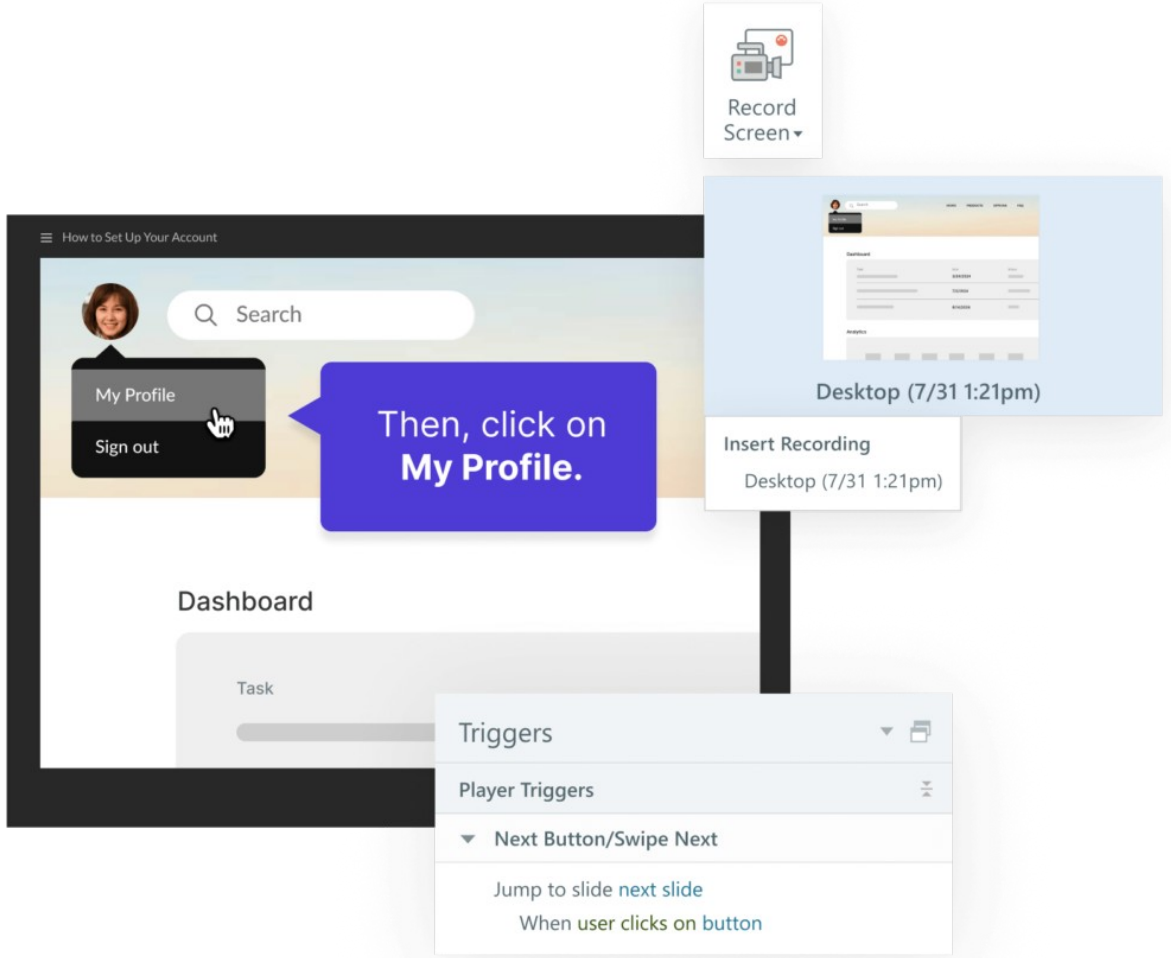

NAMED ARTIFACT	WSA-041-Try-mode-simulation
MECHANISM	Insert recording as Step-by-Step Slides > Try Mode adds coached…
EXPECTED	expected actions advance and wrong actions show actionable coaching

Authentic Articulate interface reference · verify the named control


Try mode simulation

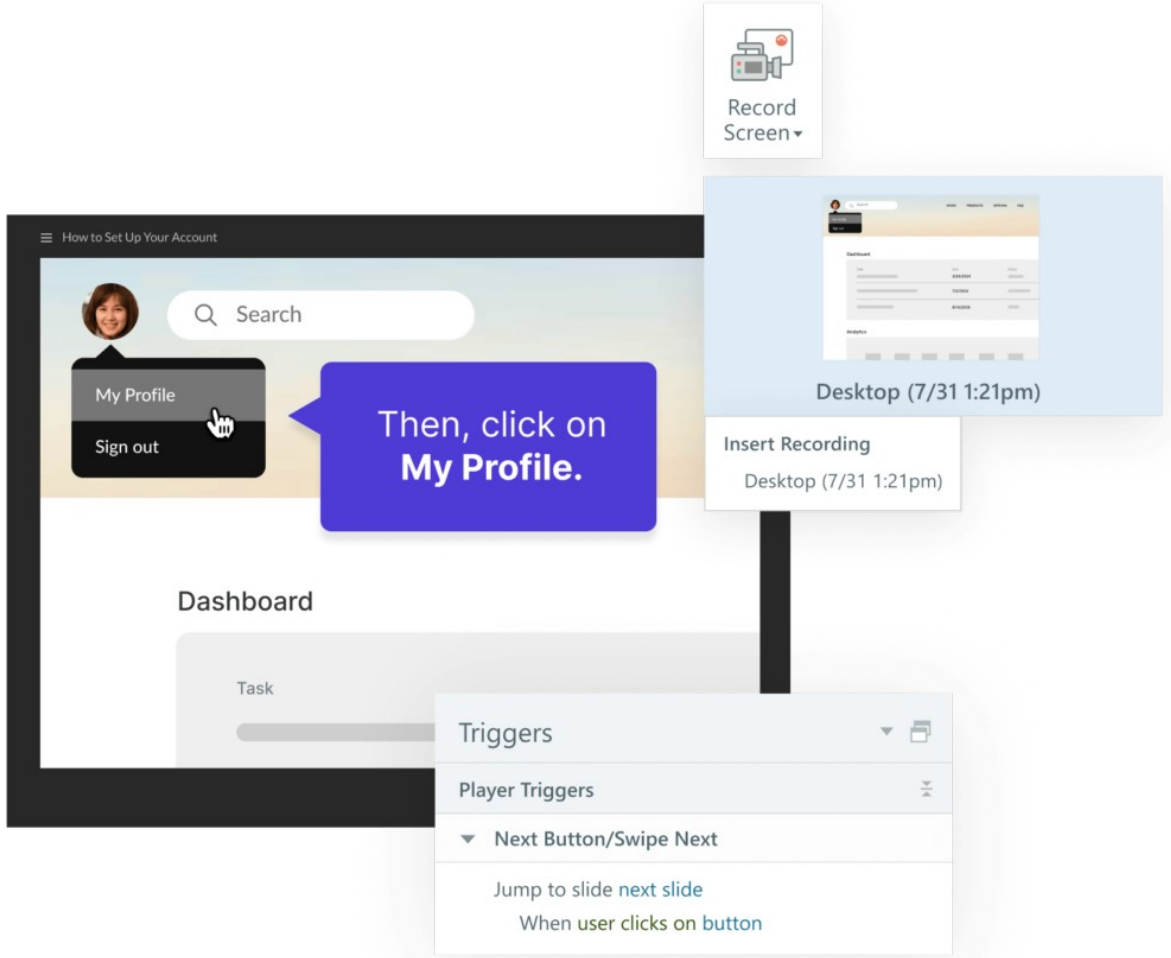

SET THESE CONTROLS	C1=hint caption · C2=hotspot · C3=failure layer · C4=attempts
REJECT WHEN	automatic steps accepting the wrong target
VERIFY READBACK	expected actions advance and wrong actions show actionable coaching

Authentic Articulate interface reference · verify the named control

Try mode simulation

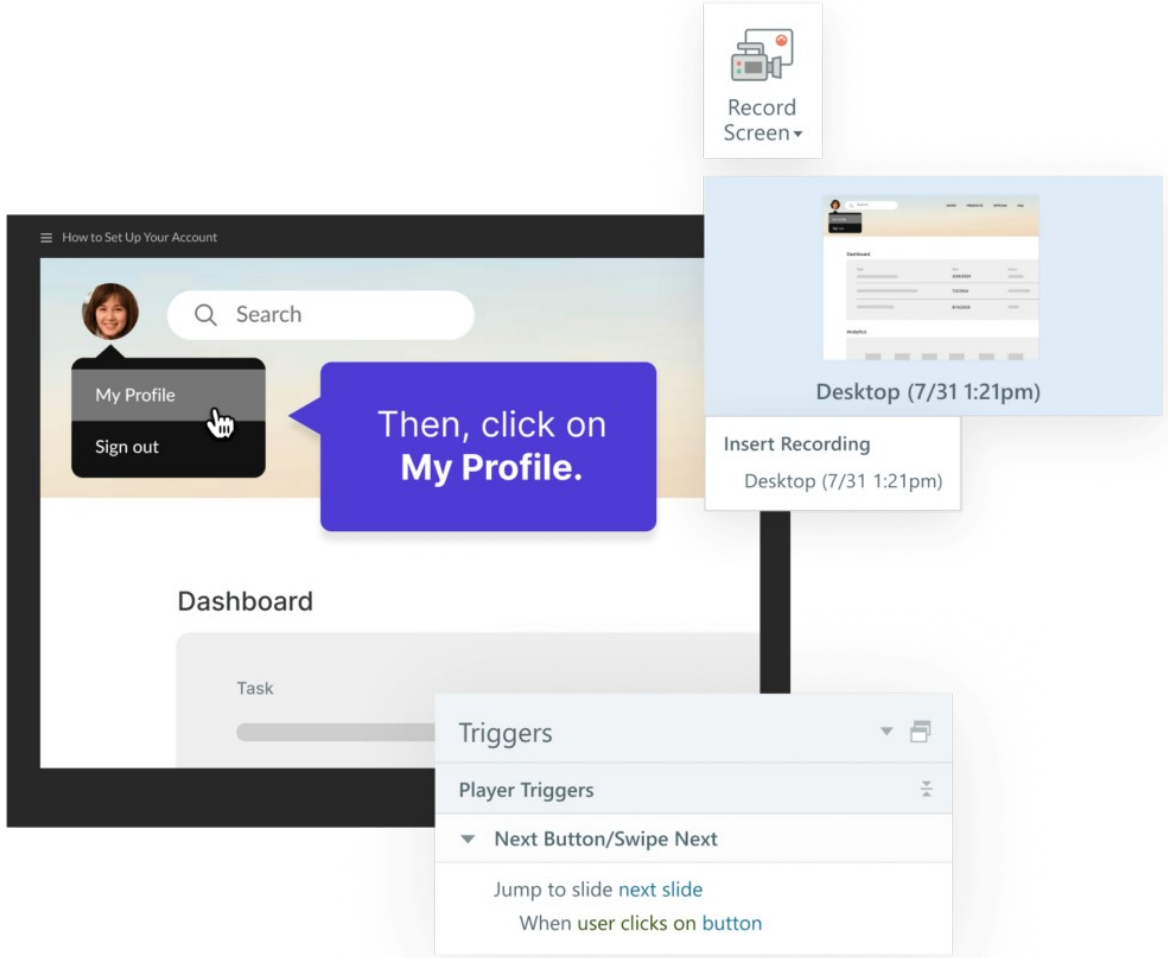


FAULTY OUTPUT (EXAMPLE) automatic steps accepting the wrong target

FIX IN NAMED PANEL hint caption; hotspot; failure layer; attempts

EXPECTED AFTER FIX expected actions advance and wrong actions show actionable coaching ·…

Authentic Articulate interface reference · verify the named control


Test mode simulation

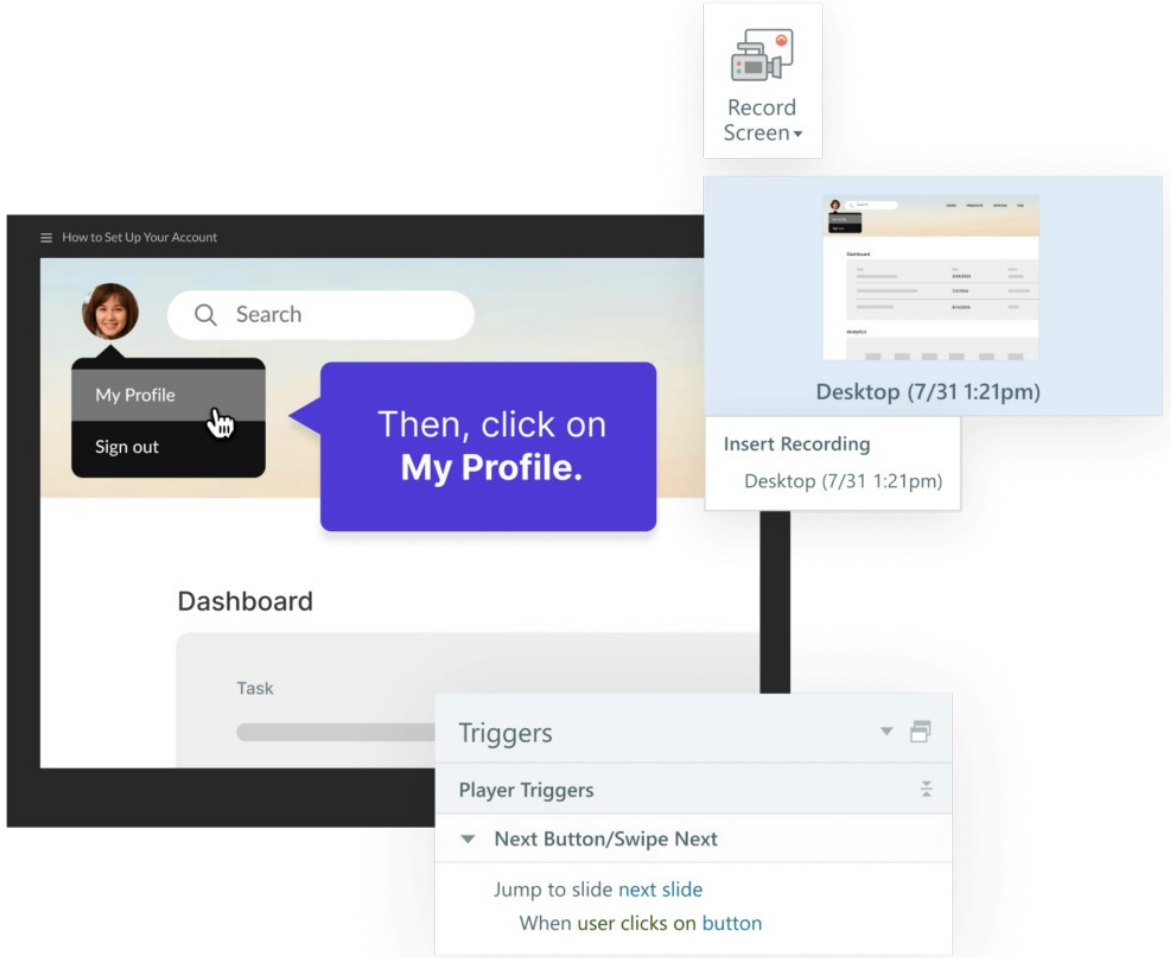

NAMED ARTIFACT	WSA-042-Test-mode-simulation
MECHANISM	Test Mode records scored actions without coaching and reports through a…
EXPECTED	correct and incorrect actions score according to the specification

Authentic Articulate interface reference · verify the named control


Test mode simulation

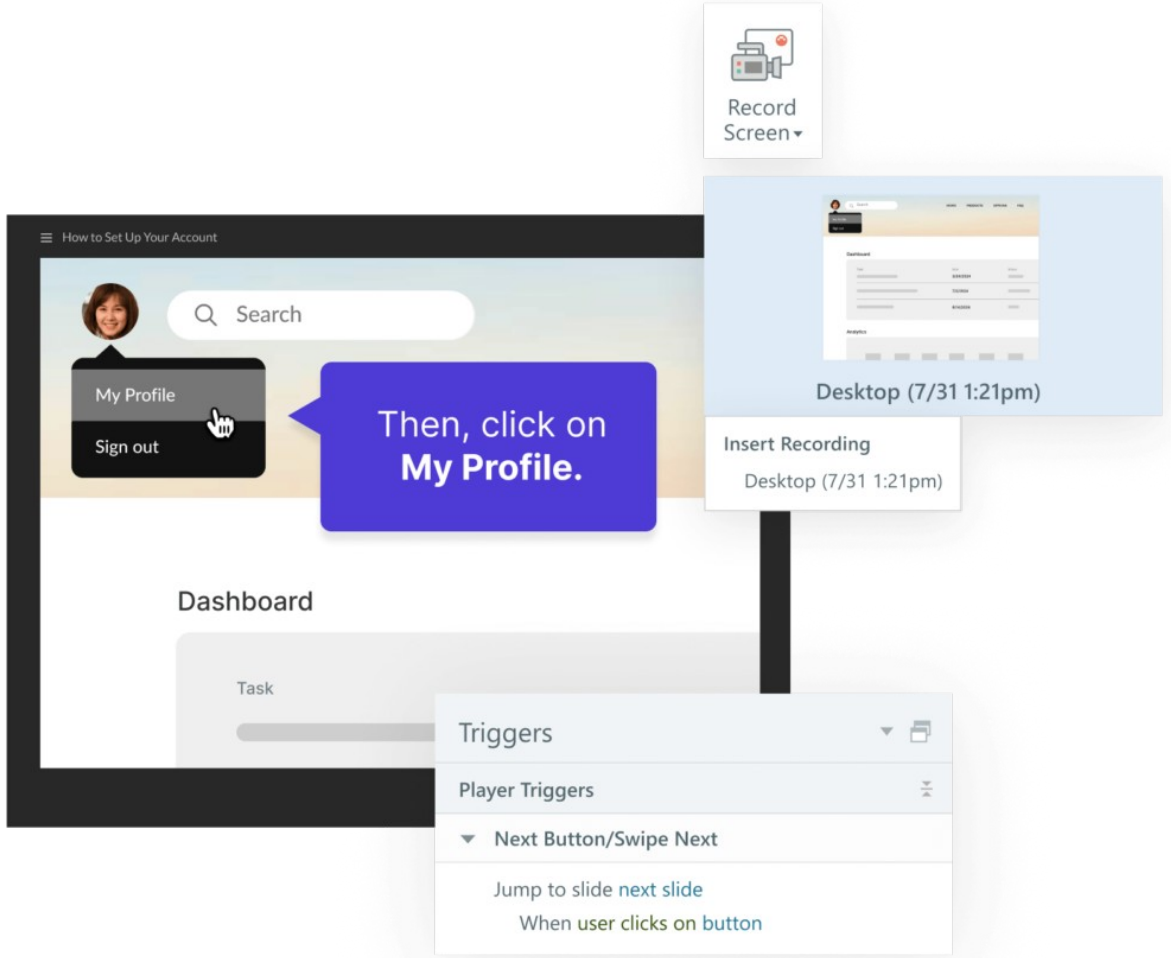

SET THESE CONTROLS	C1=score · C2=attempts · C3=feedback · C4=tracked result
REJECT WHEN	testing pixel precision instead of meaningful action
VERIFY READBACK	correct and incorrect actions score according to the specification

Authentic Articulate interface reference · verify the named control

Test mode simulation

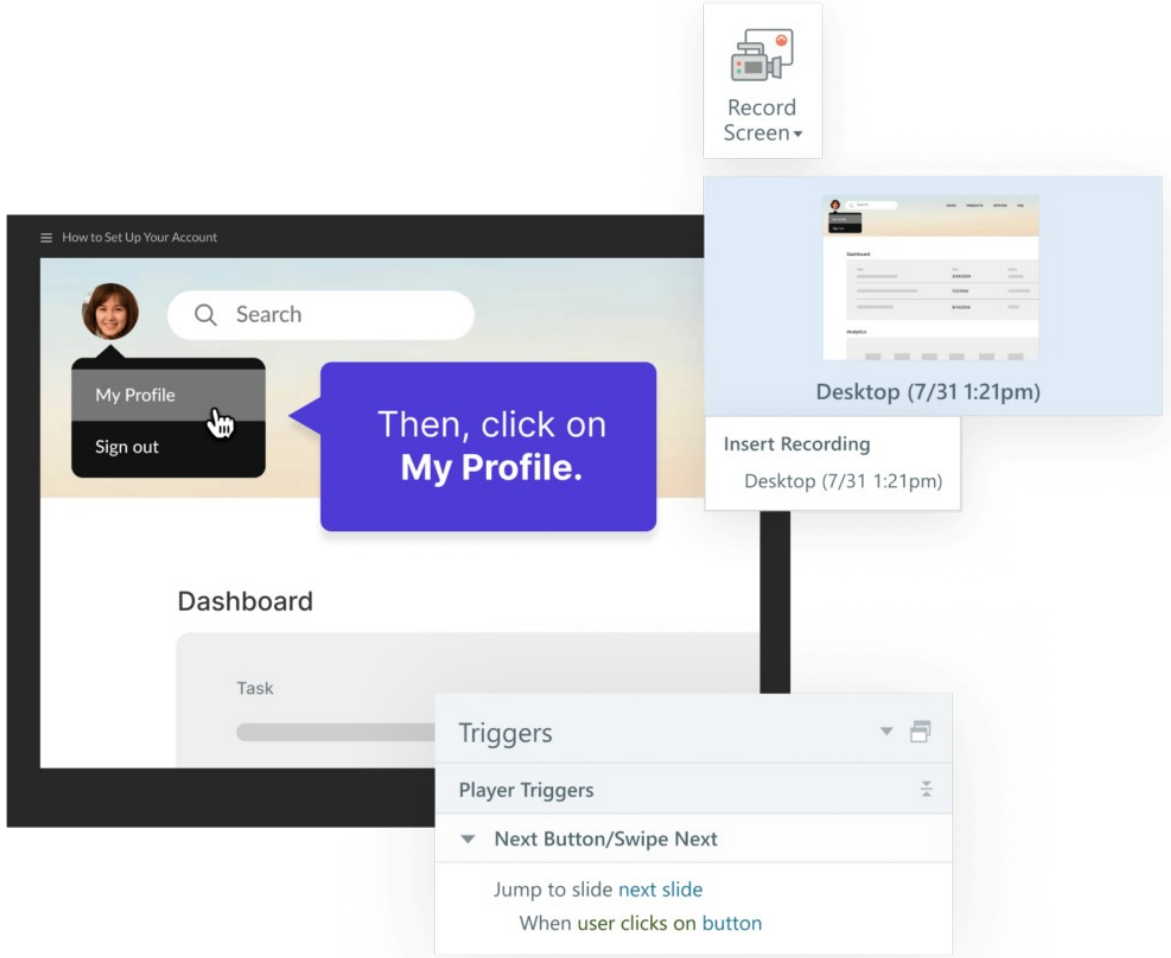


FAULTY OUTPUT (EXAMPLE) testing pixel precision instead of meaningful action

FIX IN NAMED PANEL score; attempts; feedback; tracked result

EXPECTED AFTER FIX correct and incorrect actions score according to the specification ·…

Authentic Articulate interface reference · verify the named control


Audio narration import

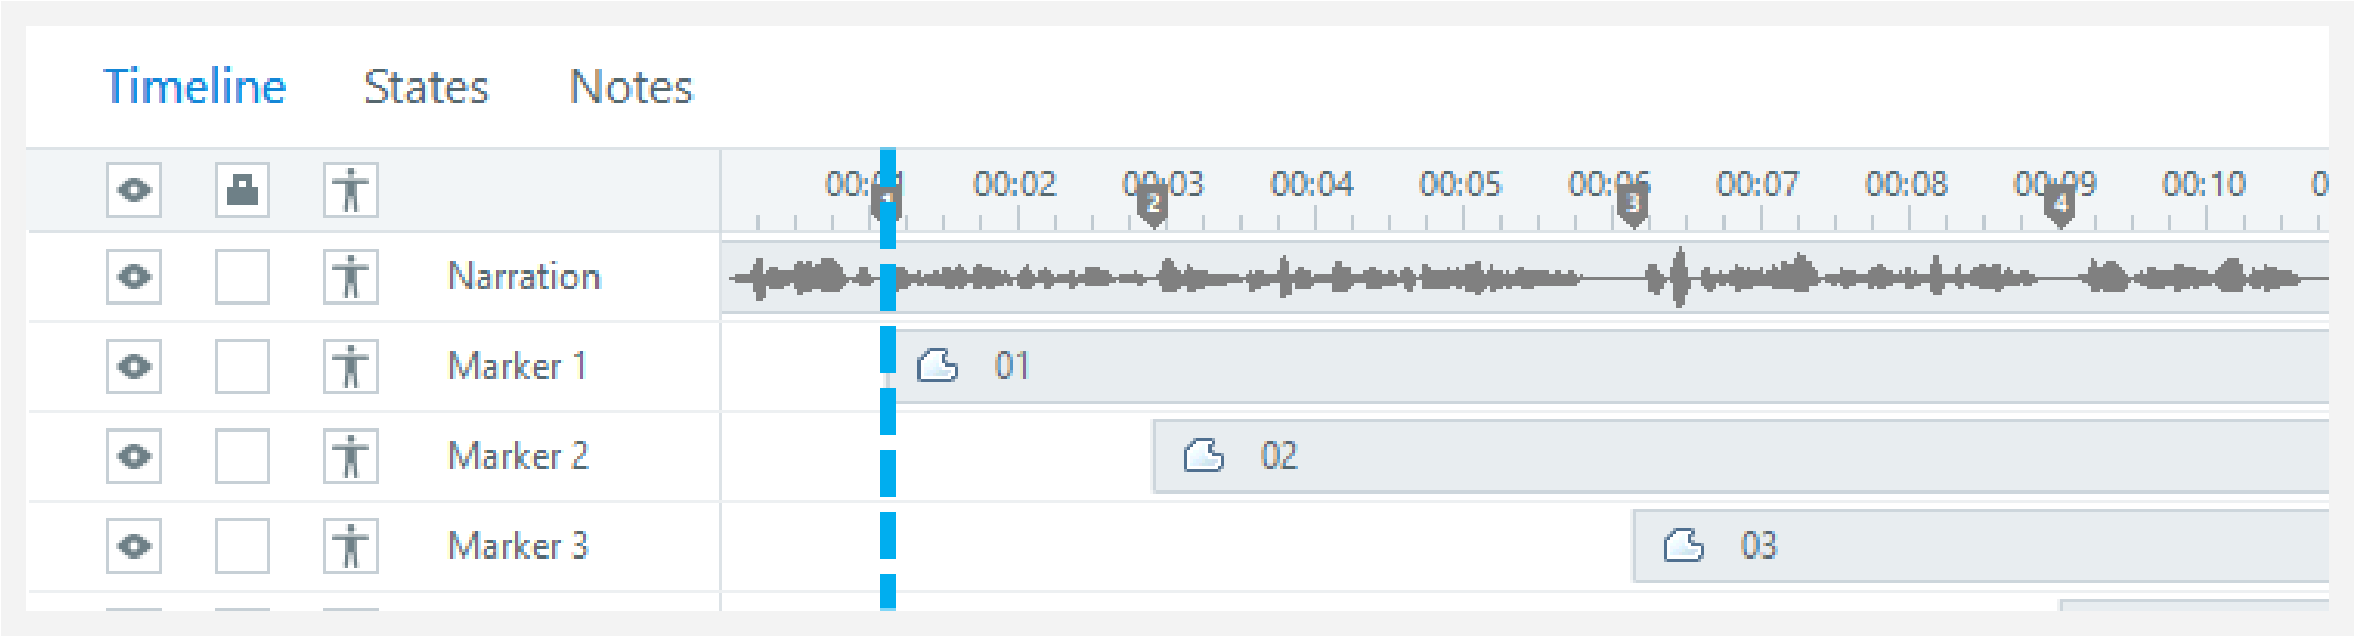

NAMED ARTIFACT	WSA-043-Audio-narration-import
MECHANISM	Insert > Audio > Audio from File places the supplied WAV/MP3 on the…
EXPECTED	one intelligible track plays and stops at the specified boundary

Authentic Articulate interface reference · verify the named control


Audio narration import

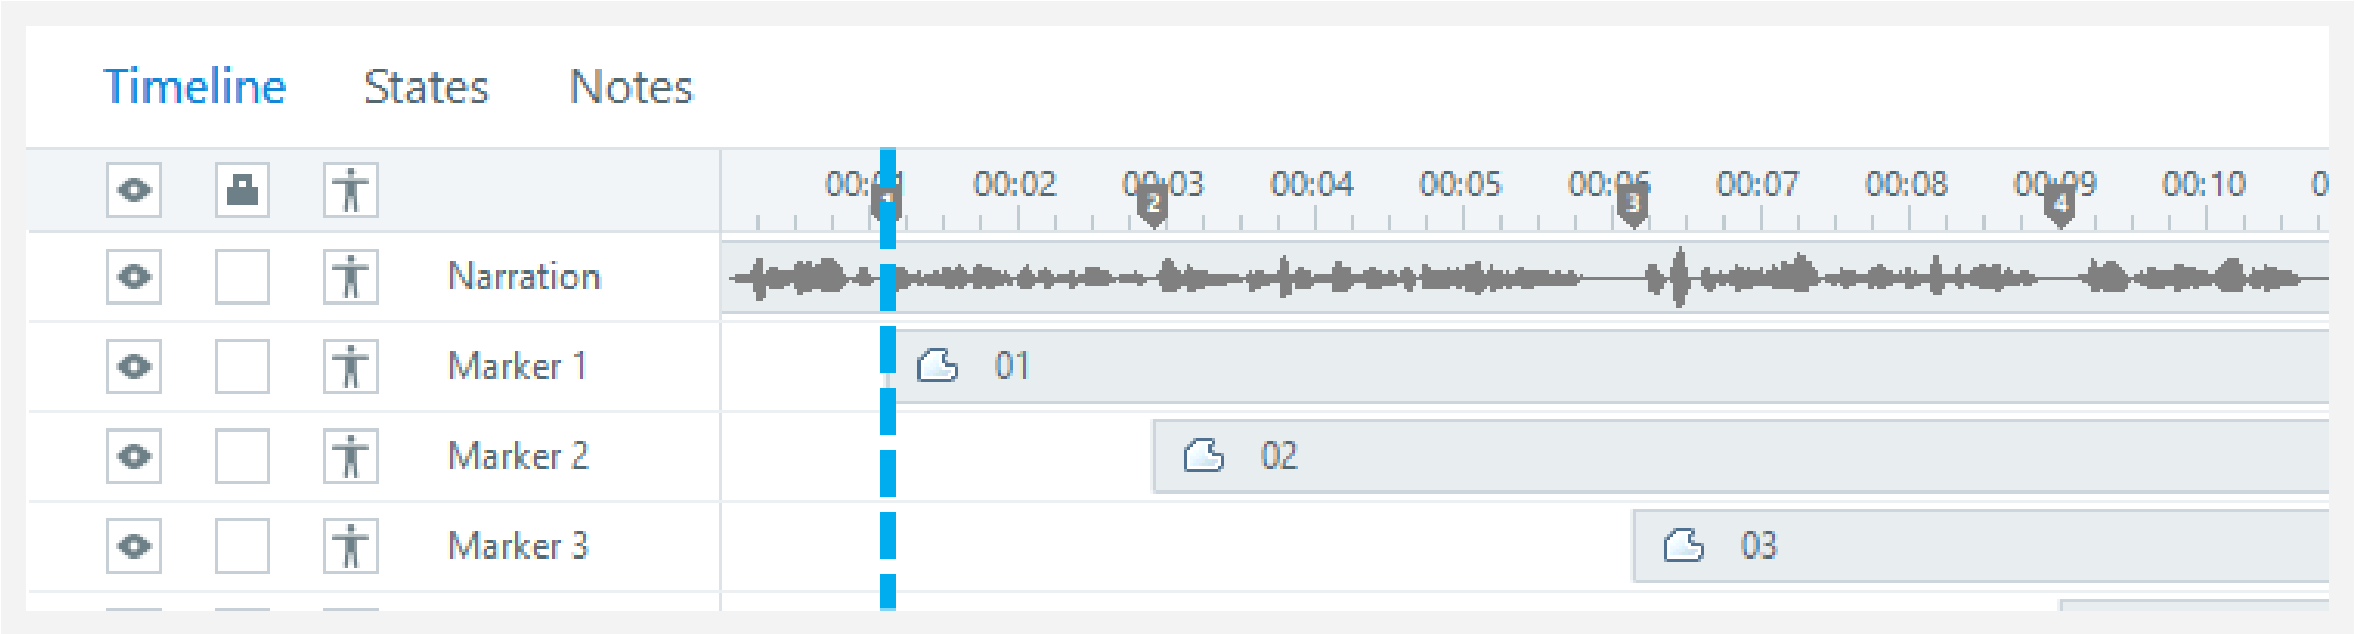

SET THESE CONTROLS	C1=timeline name · C2=trim · C3=volume · C4=fade · C5=playback
REJECT WHEN	multiple tracks overlapping on revisit
VERIFY READBACK	one intelligible track plays and stops at the specified boundary

Authentic Articulate interface reference · verify the named control


Audio narration import

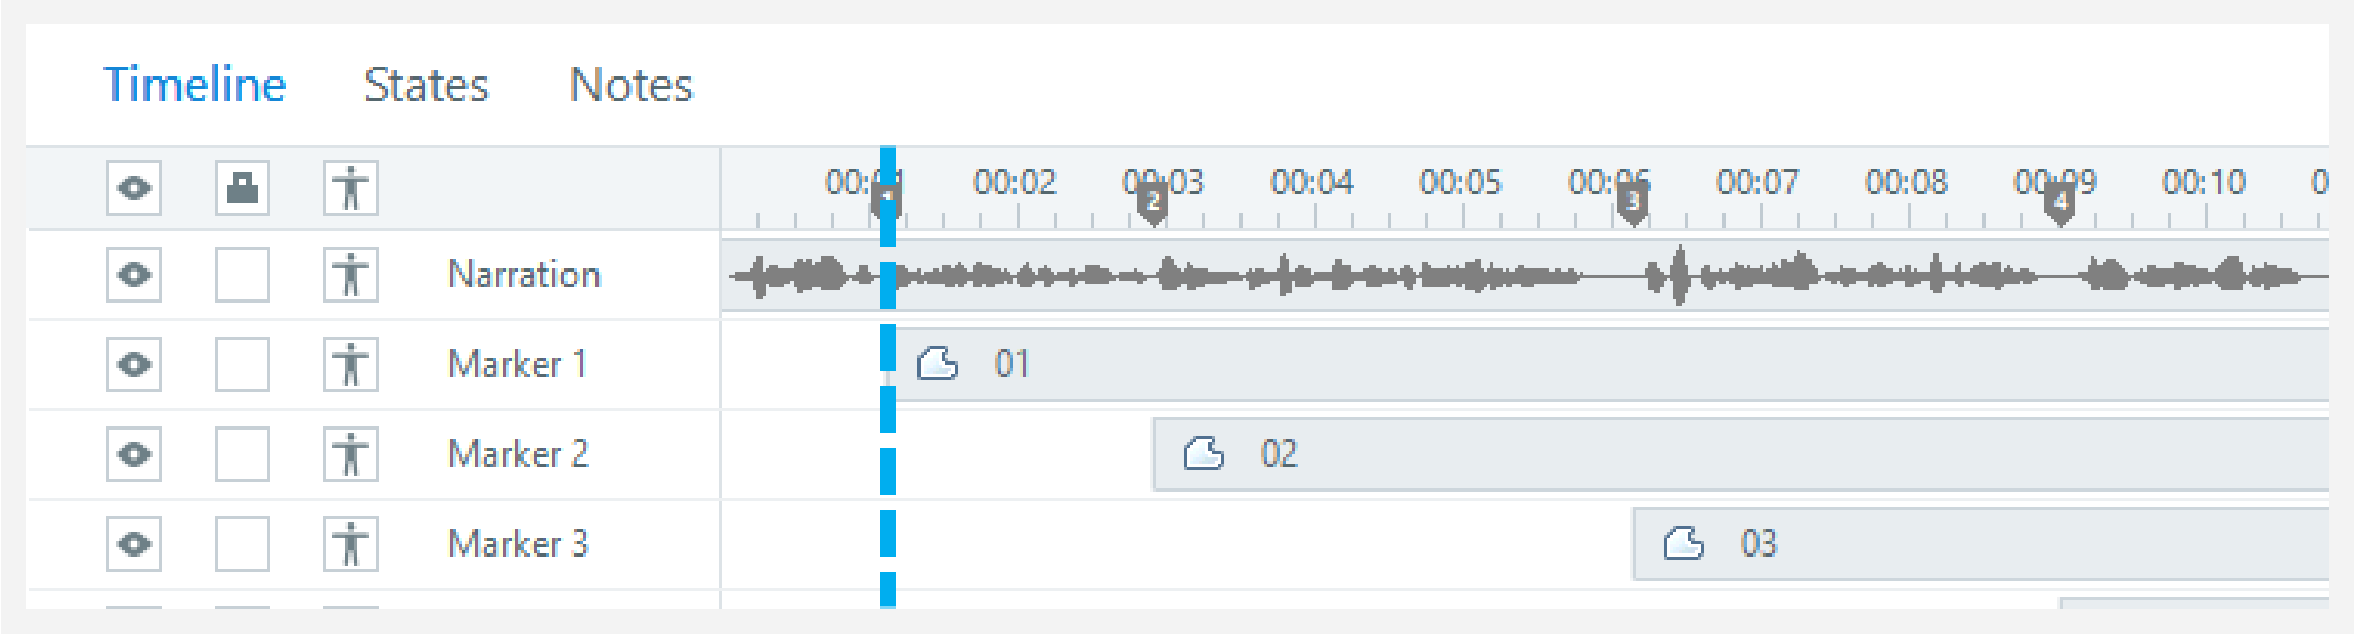

FAULTY OUTPUT (EXAMPLE)	multiple tracks overlapping on revisit
FIX IN NAMED PANEL	timeline name; trim; volume; fade; playback
EXPECTED AFTER FIX	one intelligible track plays and stops at the specified boundary · verify…

Authentic Articulate interface reference · verify the named control


Caption import

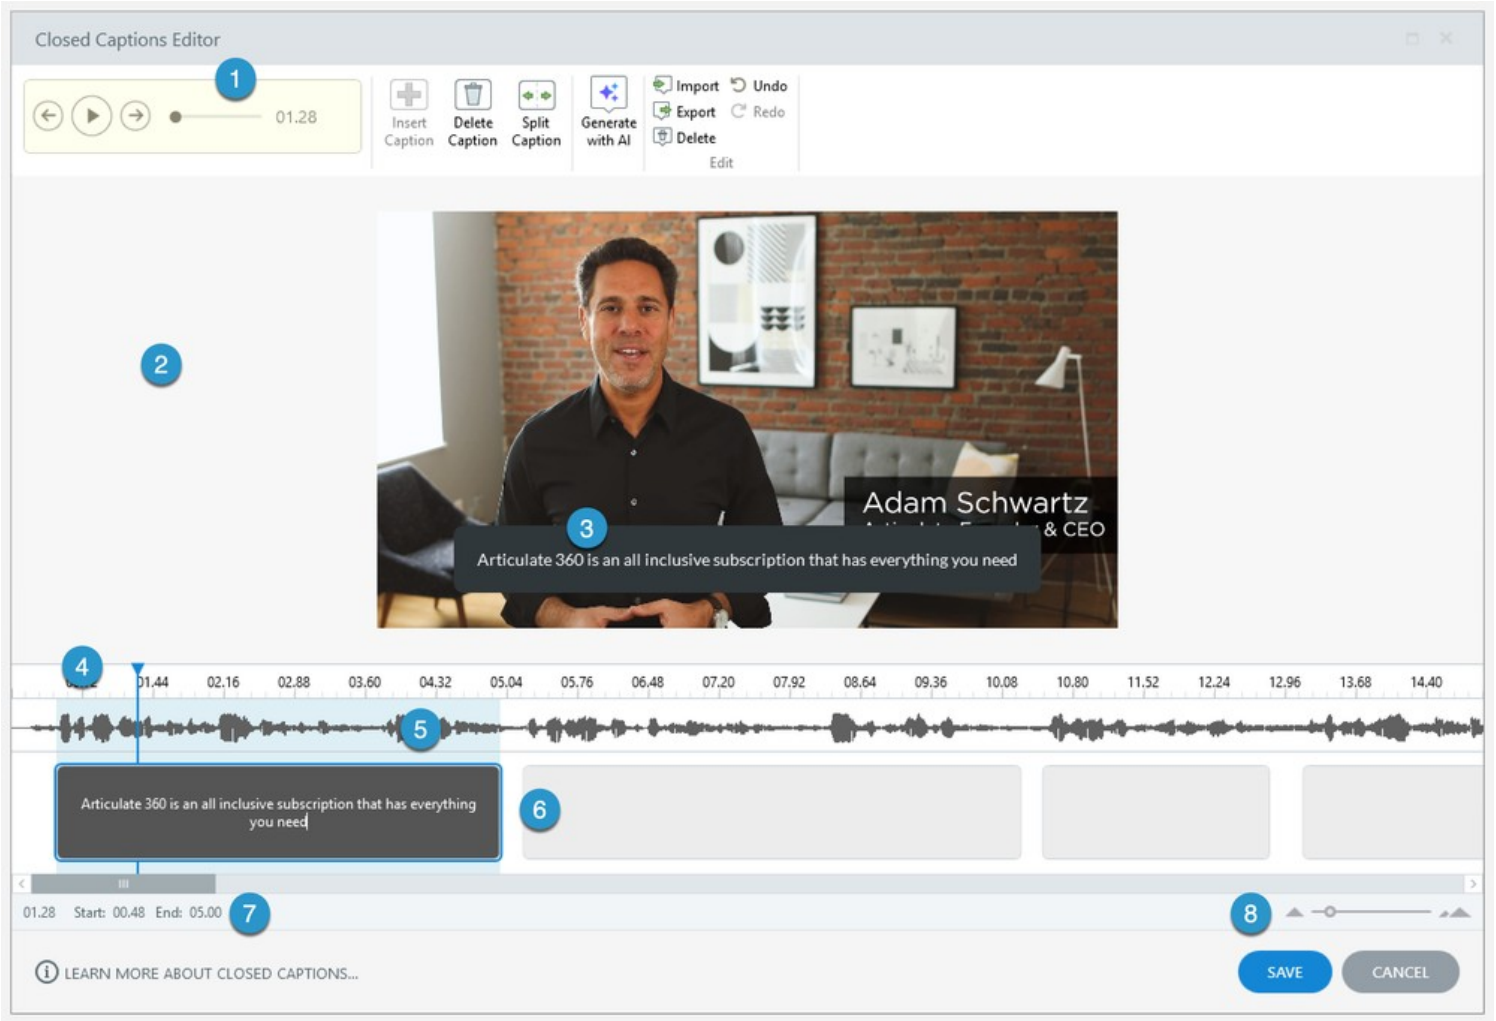

NAMED ARTIFACT	**WSA-044-Caption-import**
MECHANISM	**Select the audio, then Options > Import (or Accessibility > Import CC)…**
EXPECTED	**caption spot-check matches narration at start, middle and end**

Authentic Articulate interface reference · verify the named control


Caption import

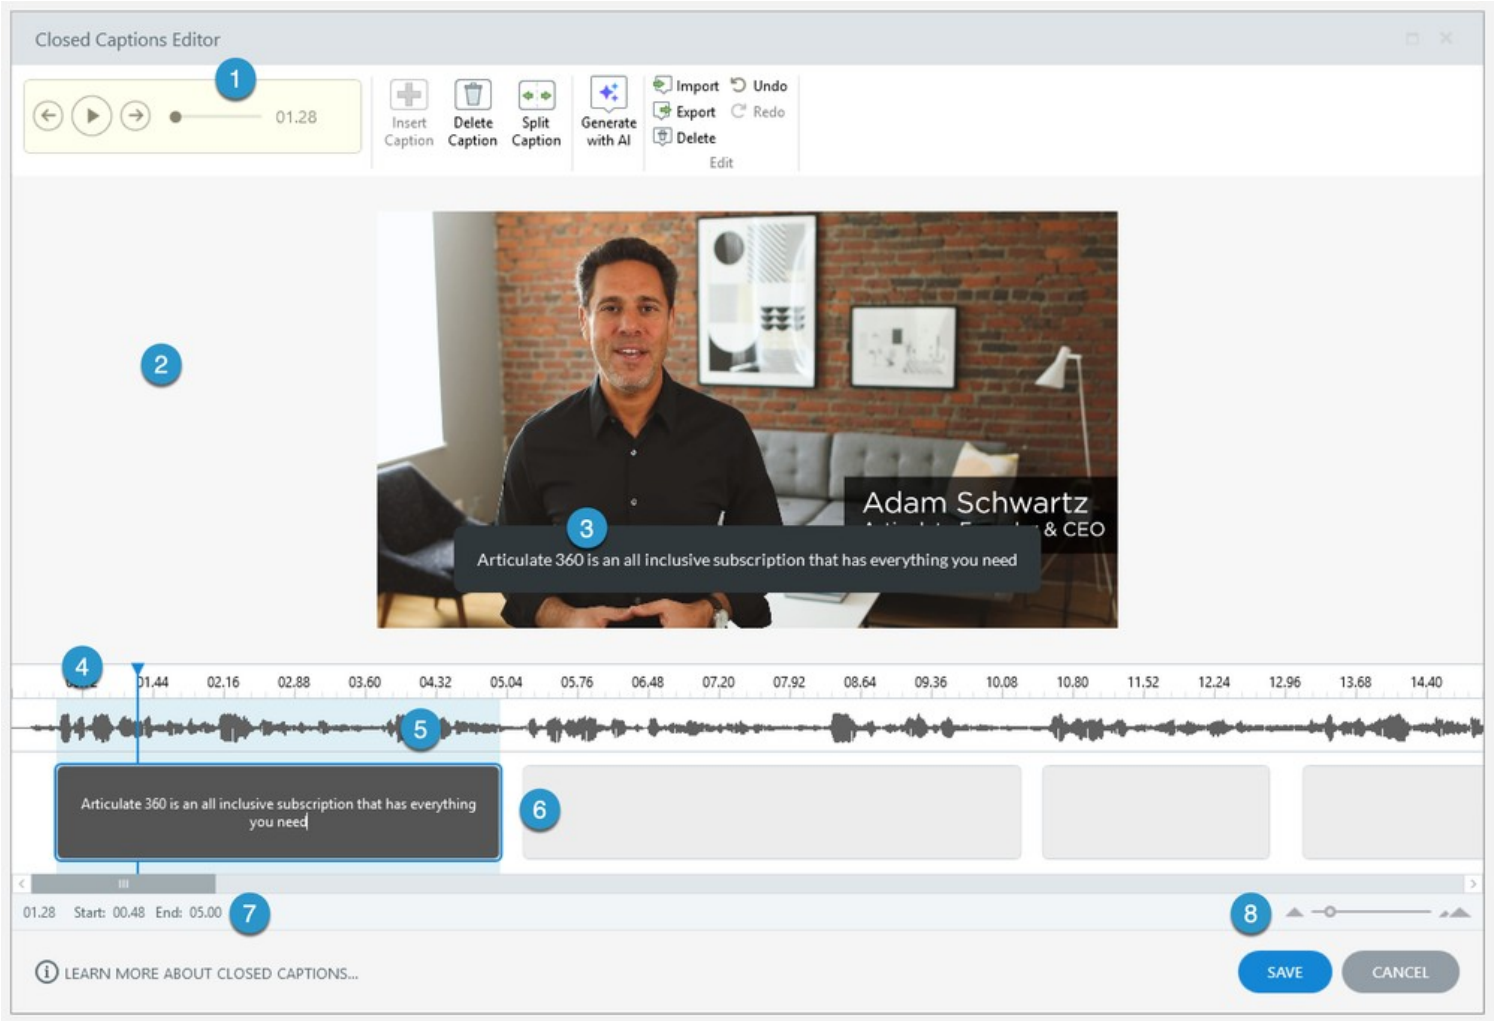

SET THESE CONTROLS	**C1=VTT timing · C2=speaker labels · C3=meaningful sound · C4=position**
REJECT WHEN	**captions drifting or covering controls**
VERIFY READBACK	**caption spot-check matches narration at start, middle and end**

Authentic Articulate interface reference · verify the named control

Caption import

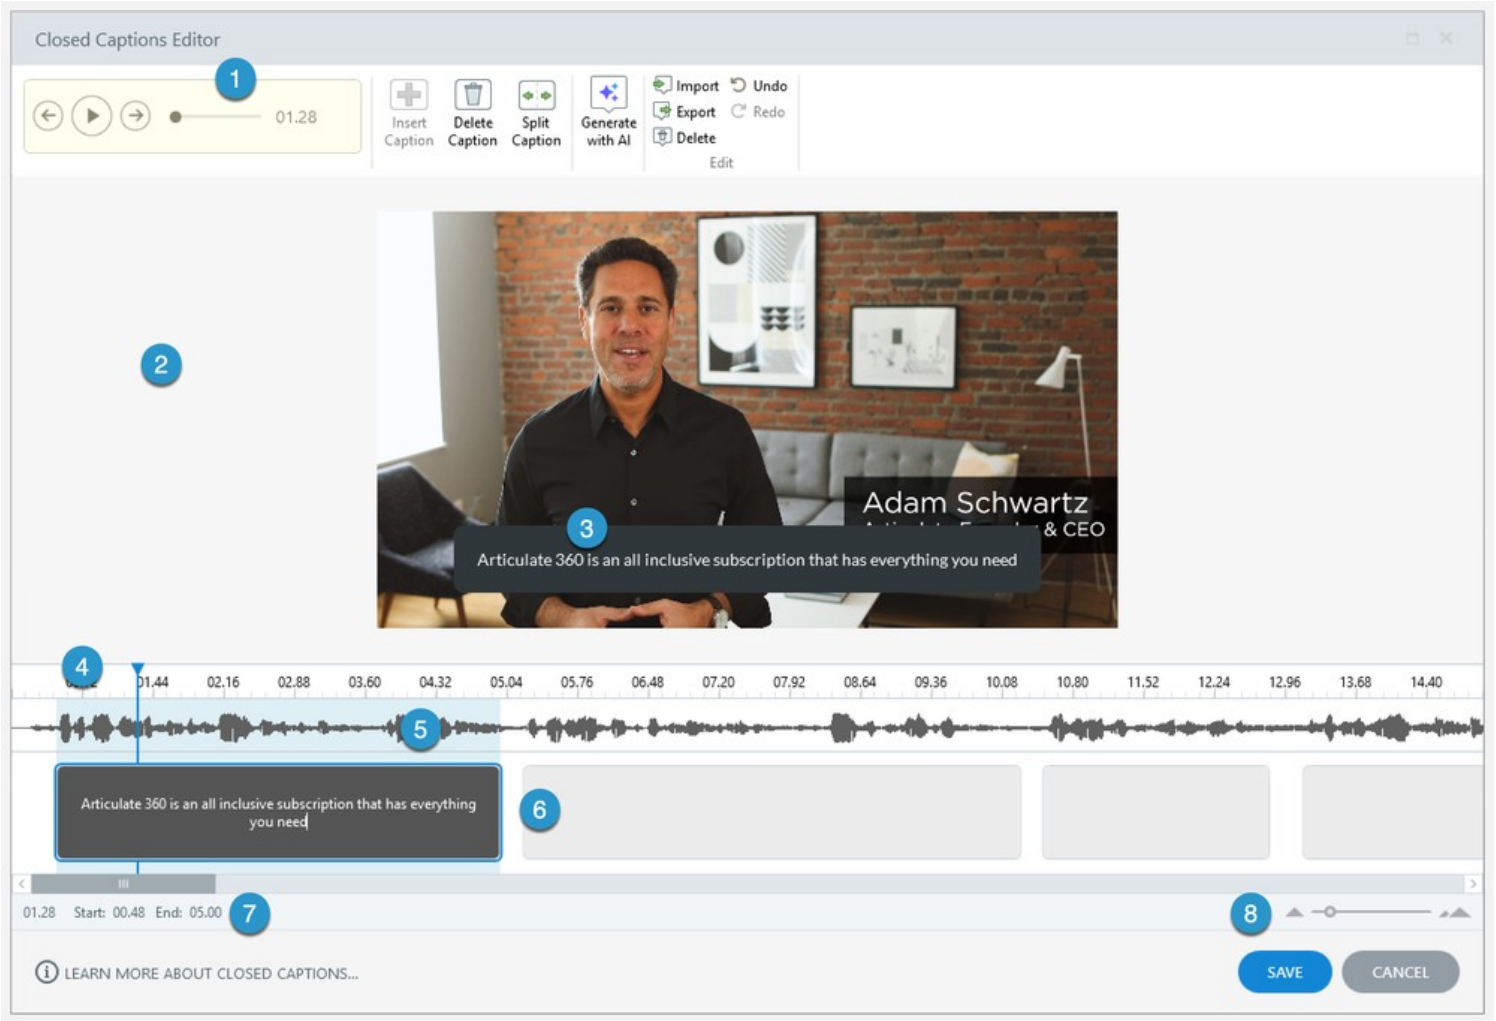

FAULTY OUTPUT (EXAMPLE)	captions drifting or covering controls
FIX IN NAMED PANEL	VTT timing; speaker labels; meaningful sound; position
EXPECTED AFTER FIX	caption spot-check matches narration at start, middle and end · verify in…

Authentic Articulate interface reference · verify the named control

Transcript equivalent

Named HarbourLink WSH artifact

WSA-045-Transcript-equivalent

Input / source state

WSA checkpoint plus equivalent meaning; reading order; download link

Runtime mechanism

Resources or an accessible text layer supplies narration plus relevant visual actions

Expected output

learner can complete the objective without hearing the audio

Rejected output

verbatim transcript omitting visual hazards

Evidence record

WSA-045-Transcript-equivalent: capture the configured control and the runtime readback.

EDITABLE CONFIGURATION MODEL

Transcript equivalent

SET THESE CONTROLS

C1=equivalent meaning · C2=reading order · C3=download link

REJECT WHEN

verbatim transcript omitting visual hazards

VERIFY READBACK

learner can complete the objective without hearing the audio

Editable HarbourLink model · learner can complete the objective without hearing the audio

Transcript equivalent

FAULTY OUTPUT (EXAMPLE)

verbatim transcript omitting visual hazards

→

CORRECT THE RECORD

equivalent meaning; reading order; download link

→

EXPECTED AFTER FIX

learner can complete the objective without hearing the audio · verify in your own Preview

Editable HarbourLink model · learner can complete the objective without hearing the audio

© 2026 Tertiary Infotech Academy Pte Ltd · Mastering Articulate Storyline 360 for e-Learning Content Creation · TGS-2024042308

Focus order panel

Named HarbourLink WSH artifact

WSA-046-Focus-order-panel

Input / source state

WSA checkpoint plus object visibility; order; names; layer focus

Runtime mechanism

Home > Focus Order removes decorative objects and sequences interactive content logically

Expected output

Tab/Shift+Tab follows the intended task sequence

Rejected output

timeline order mistaken for reading order

Evidence record

WSA-046-Focus-order-panel: capture the configured control and the runtime readback.

Focus order panel

SET THESE CONTROLS

C1=object visibility · C2=order · C3=names · C4=layer focus

→

REJECT WHEN

timeline order mistaken for reading order

→

VERIFY READBACK

Tab/Shift+Tab follows the intended task sequence

Editable HarbourLink model · Tab/Shift+Tab follows the intended task sequence

Focus order panel

FAULTY OUTPUT (EXAMPLE)

timeline order mistaken for reading order

→

CORRECT THE RECORD

object visibility; order; names; layer focus

→

EXPECTED AFTER FIX

Tab/Shift+Tab follows the intended task sequence · verify in your own Preview

Editable HarbourLink model · Tab/Shift+Tab follows the intended task sequence

© 2026 Tertiary Infotech Academy Pte Ltd · Mastering Articulate Storyline 360 for e-Learning Content Creation · TGS-2024042308

Alternative text

Named HarbourLink WSH artifact

WSA-047-Alternative-text

Input / source state

WSA checkpoint plus concise purpose; decorative blank; no filename

Runtime mechanism

Size and Position > Accessibility names meaningful images and controls

Expected output

screen-reader output conveys the hazard and available action

Rejected output

describing appearance but omitting instructional meaning

Evidence record

WSA-047-Alternative-text: capture the configured control and the runtime readback.

EDITABLE CONFIGURATION MODEL

Alternative text

SET THESE CONTROLS

C1=concise purpose · C2=decorative blank · C3=no filename

→

REJECT WHEN

describing appearance but omitting instructional meaning

→

VERIFY READBACK

screen-reader output conveys the hazard and available action

Editable HarbourLink model · screen-reader output conveys the hazard and available action

Alternative text

FAULTY OUTPUT (EXAMPLE)

describing appearance but omitting instructional meaning

→

CORRECT THE RECORD

concise purpose; decorative blank; no filename

→

EXPECTED AFTER FIX

screen-reader output conveys the hazard and available action · verify in your own Preview

Editable HarbourLink model · screen-reader output conveys the hazard and available action

© 2026 Tertiary Infotech Academy Pte Ltd · Mastering Articulate Storyline 360 for e-Learning Content Creation · TGS-2024042308

Accessible text styling

Named HarbourLink WSH artifact

WSA-048-Accessible-text-styling

Input / source state

WSA checkpoint plus font size; contrast; spacing; heading role

Runtime mechanism

Native text, sufficient contrast and restrained formatting preserve zoom and reflow usability

Expected output

content remains readable at 200% browser zoom

Rejected output

text baked into images or low-contrast overlays

Evidence record

WSA-048-Accessible-text-styling: capture the configured control and the runtime readback.

EDITABLE CONFIGURATION MODEL

Accessible text styling

SET THESE CONTROLS

C1=font size · C2=contrast · C3=spacing · C4=heading role

REJECT WHEN

text baked into images or low-contrast overlays

VERIFY READBACK

content remains readable at 200% browser zoom

Editable HarbourLink model · content remains readable at 200% browser zoom

Accessible text styling

FAULTY OUTPUT (EXAMPLE)

text baked into images or low-contrast overlays

→

CORRECT THE RECORD

font size; contrast; spacing; heading role

→

EXPECTED AFTER FIX

content remains readable at 200% browser zoom · verify in your own Preview

Editable HarbourLink model · content remains readable at 200% browser zoom

© 2026 Tertiary Infotech Academy Pte Ltd · Mastering Articulate Storyline 360 for e-Learning Content Creation · TGS-2024042308

Audience preference matrix

Named HarbourLink WSH artifact

WSA-049-Audience-preference-matrix

Input / source state

WSA checkpoint plus persona; context; device; language; accessibility; format; duration

Runtime mechanism

A worked matrix compares new warehouse staff, supervisors and mobile field staff by prior knowledge, language, device, bandwidth, session length and evidence need

Expected output

each audience difference changes a named media, interaction or delivery choice

Rejected output

using one content style because it is convenient for the author

Evidence record

WSA-049-Audience-preference-matrix: capture the configured control and the runtime readback.

EDITABLE CONFIGURATION MODEL

Audience preference matrix

SET THESE CONTROLS

C1=persona · C2=context · C3=device · C4=language · C5=accessibility · C6=format · C7=duration

REJECT WHEN

using one content style because it is convenient for the author

VERIFY READBACK

each audience difference changes a named media, interaction or delivery choice

Editable HarbourLink model · each audience difference changes a named media, interaction or delivery choice

Audience preference matrix

FAULTY OUTPUT (EXAMPLE)

using one content style because it is convenient for the author

→

CORRECT THE RECORD

persona; context; device; language; accessibility; format; duration

→

EXPECTED AFTER FIX

each audience difference changes a named media, interaction or delivery choice · verify in your own Preview

Editable HarbourLink model · each audience difference changes a named media, interaction or delivery choice

© 2026 Tertiary Infotech Academy Pte Ltd · Mastering Articulate Storyline 360 for e-Learning Content Creation · TGS-2024042308

Content type and style decision

Named HarbourLink WSH artifact

WSA-050-Content-type-and-style-decision

Input / source state

WSA checkpoint plus content type; style; mode; criterion; score; rationale

Runtime mechanism

A selection table scores narrated scenario, hotspot inspection, job aid and quiz against immediacy, practice, accessibility and tracking

Expected output

selected mix has a recorded criterion-level rationale and accessible equivalent

Rejected output

choosing novelty over performance need

Evidence record

WSA-050-Content-type-and-style-decision: capture the configured control and the runtime readback.

Content type and style decision

SET THESE CONTROLS

C1=content type · C2=style · C3=mode · C4=criterion · C5=score · C6=rationale

REJECT WHEN

choosing novelty over performance need

VERIFY READBACK

selected mix has a recorded criterion-level rationale and accessible equivalent

Editable HarbourLink model · selected mix has a recorded criterion-level rationale and accessible equivalent

Content type and style decision

FAULTY OUTPUT (EXAMPLE)

choosing novelty over performance need

→

CORRECT THE RECORD

content type; style; mode; criterion; score; rationale

→

EXPECTED AFTER FIX

selected mix has a recorded criterion-level rationale and accessible equivalent · verify in your own Preview

Editable HarbourLink model · selected mix has a recorded criterion-level rationale and accessible equivalent

© 2026 Tertiary Infotech Academy Pte Ltd · Mastering Articulate Storyline 360 for e-Learning Content Creation · TGS-2024042308

Safety content feature specification

Named HarbourLink WSH artifact

WSA-051-Safety-content-feature-specification

Input / source state

WSA checkpoint plus accuracy; relevance; clarity; interactivity; accessibility; provenance

Runtime mechanism

The specification defines concise copy, realistic hazards, consequence feedback, learner control, captions and persistent progress as mandatory features

Expected output

each feature has an owner, threshold and preview/publish test

Rejected output

describing features as broad benefits without acceptance values

Evidence record

WSA-051-Safety-content-feature-specification: capture the configured control and the runtime readback.

EDITABLE CONFIGURATION MODEL

Safety content feature specification

SET THESE CONTROLS

C1=accuracy · C2=relevance · C3=clarity · C4=interactivity · C5=accessibility · C6=provenance

REJECT WHEN

describing features as broad benefits without acceptance values

VERIFY READBACK

each feature has an owner, threshold and preview/publish test

Editable HarbourLink model · each feature has an owner, threshold and preview/publish test

Safety content feature specification

FAULTY OUTPUT (EXAMPLE)

describing features as broad benefits without acceptance values

→

CORRECT THE RECORD

accuracy; relevance; clarity; interactivity; accessibility; provenance

→

EXPECTED AFTER FIX

each feature has an owner, threshold and preview/publish test · verify in your own Preview

Editable HarbourLink model · each feature has an owner, threshold and preview/publish test

© 2026 Tertiary Infotech Academy Pte Ltd · Mastering Articulate Storyline 360 for e-Learning Content Creation · TGS-2024042308

Content Library 360 assets

Named HarbourLink WSH artifact

WSA-052-Content-Library-360-assets

Input / source state

WSA checkpoint plus asset type; search/filter; licence context; crop; alt text

Runtime mechanism

Insert > Content Library 360 adds a permitted template, character or media asset and records its use

Expected output

inserted asset is adapted to the WSA theme and has purpose, provenance and accessibility metadata

Rejected output

treating a template as finished instruction or mixing incompatible styles

Evidence record

WSA-052-Content-Library-360-assets: capture the configured control and the runtime readback.

Content Library 360 assets

SET THESE CONTROLS

C1=asset type · C2=search/filter · C3=licence context · C4=crop · C5=alt text

→

REJECT WHEN

treating a template as finished instruction or mixing incompatible styles

→

VERIFY READBACK

inserted asset is adapted to the WSA theme and has purpose, provenance and accessibility metadata

Editable HarbourLink model · inserted asset is adapted to the WSA theme and has purpose, provenance and accessibility metadata

Content Library 360 assets

FAULTY OUTPUT (EXAMPLE)

treating a template as finished instruction or mixing incompatible styles

→

CORRECT THE RECORD

asset type; search/filter; licence context; crop; alt text

→

EXPECTED AFTER FIX

inserted asset is adapted to the WSA theme and has purpose, provenance and accessibility metadata · verify in your own Preview

Editable HarbourLink model · inserted asset is adapted to the WSA theme and has purpose, provenance and accessibility metadata

© 2026 Tertiary Infotech Academy Pte Ltd · Mastering Articulate Storyline 360 for e-Learning Content Creation · TGS-2024042308

360-degree image interaction

Named HarbourLink WSH artifact

WSA-053-360-degree-image-interaction

Input / source state

WSA checkpoint plus initial view; marker label; hotspot target; accessible alternative; completion cue

Runtime mechanism

Insert > 360° Image adds an explorable warehouse view with labelled markers and hotspots

Expected output

all required locations are discoverable with an equivalent keyboard-accessible list and clear completion state

Rejected output

hidden required targets, motion discomfort or mouse-only exploration

Evidence record

WSA-053-360-degree-image-interaction: capture the configured control and the runtime readback.

EDITABLE CONFIGURATION MODEL

360-degree image interaction

SET THESE CONTROLS

C1=initial view · C2=marker label · C3=hotspot target · C4=accessible alternative · C5=completion cue

→

REJECT WHEN

hidden required targets, motion discomfort or mouse-only exploration

→

VERIFY READBACK

all required locations are discoverable with an equivalent keyboard-accessible list and clear completion state

Editable HarbourLink model · all required locations are discoverable with an equivalent keyboard-accessible list and clear completion state

360-degree image interaction

FAULTY OUTPUT (EXAMPLE)

hidden required targets, motion discomfort or mouse-only exploration

→

CORRECT THE RECORD

initial view; marker label; hotspot target; accessible alternative; completion cue

→


EXPECTED AFTER FIX

all required locations are discoverable with an equivalent keyboard-accessible list and clear completion state · verify in your own Preview

Editable HarbourLink model · all required locations are discoverable with an equivalent keyboard-accessible list and clear completion state

© 2026 Tertiary Infotech Academy Pte Ltd · Mastering Articulate Storyline 360 for e-Learning Content Creation · TGS-2024042308


Video insert and edit

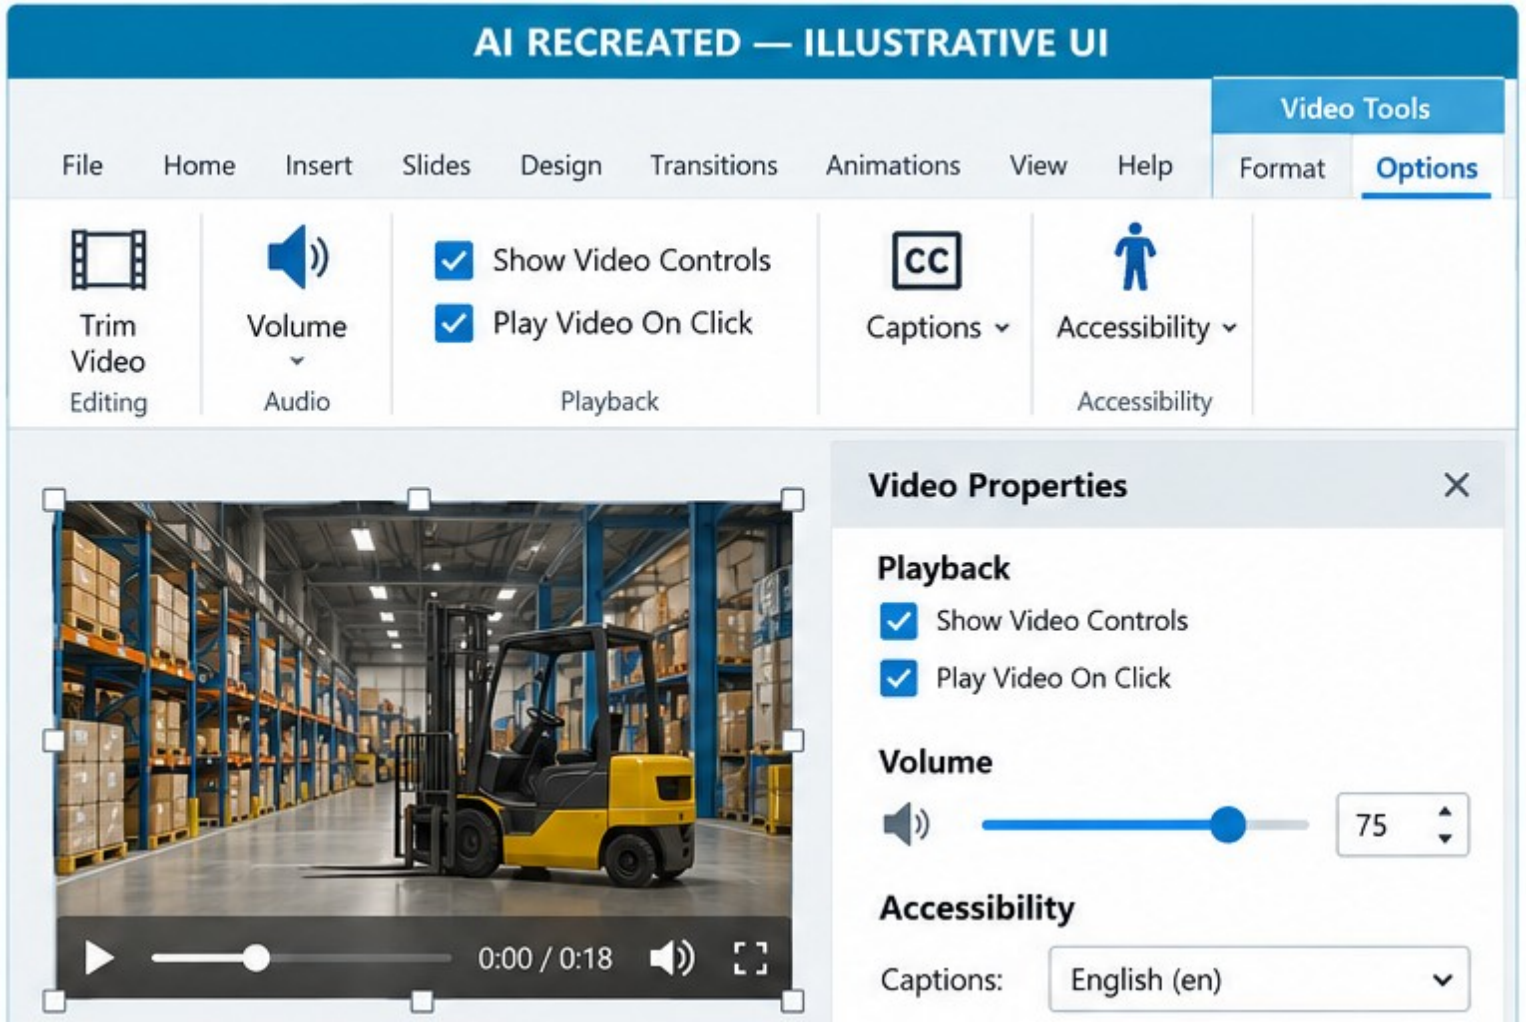

NAMED ARTIFACT	WSA-054-Video-insert-and-edit
MECHANISM	Insert > Video adds a safety demonstration; Video Tools configures trim,…
EXPECTED	learner can pause/seek and obtain equivalent meaning through captions and…

AI RECREATED — ILLUSTRATIVE UI · verify the named control


Video insert and edit

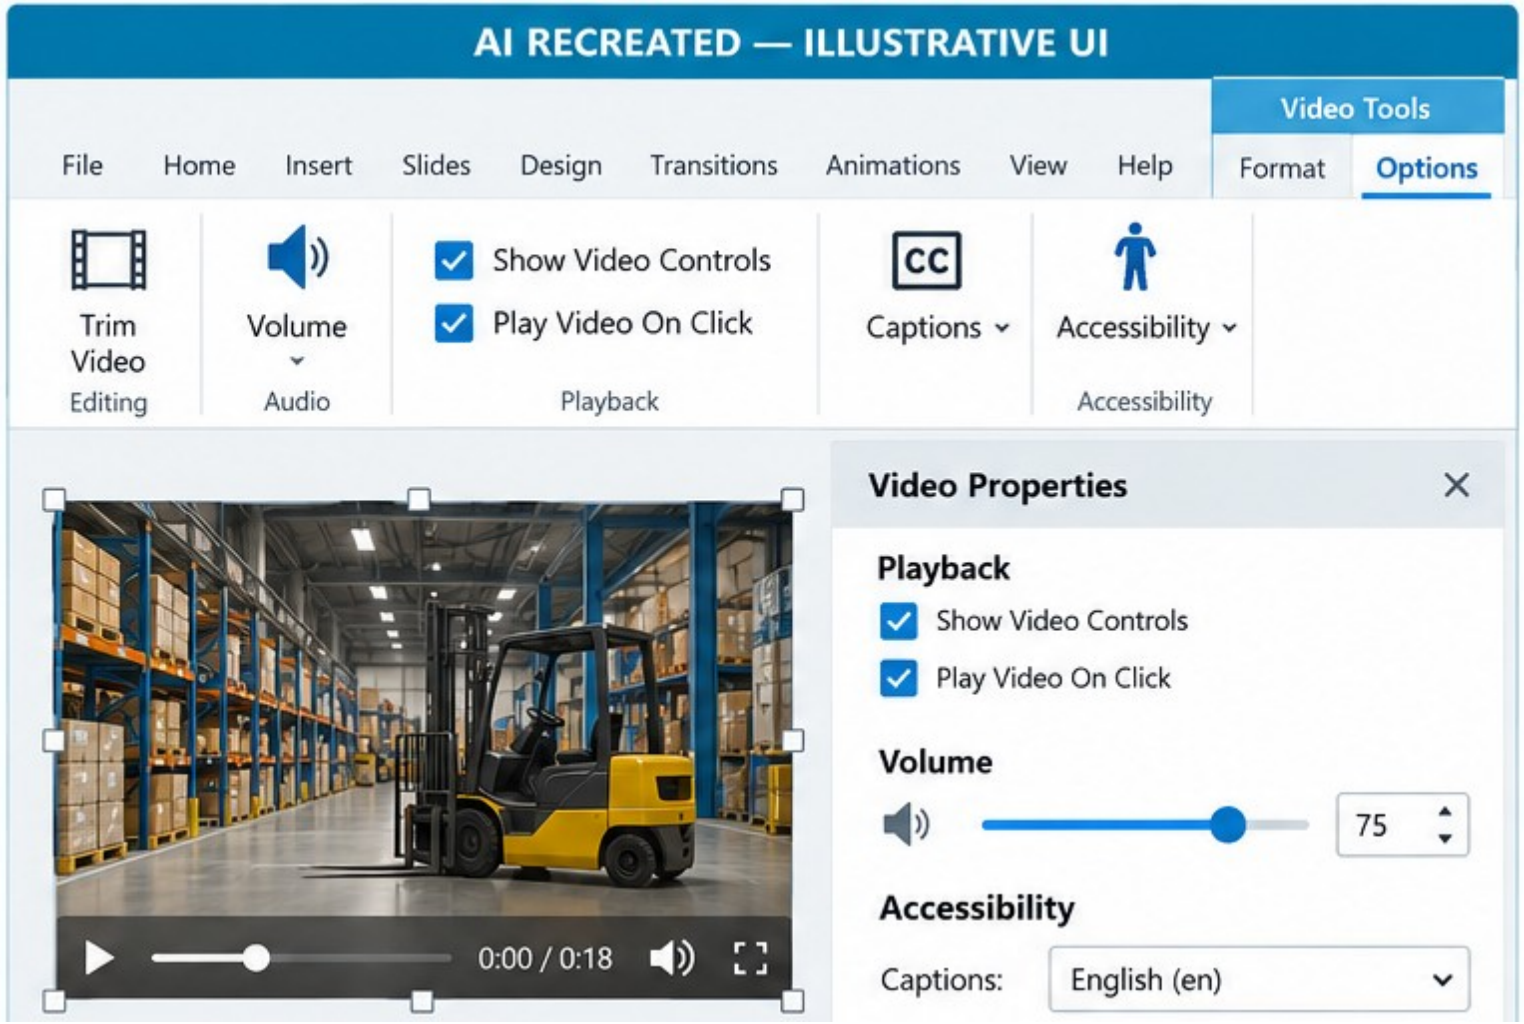

SET THESE CONTROLS	C1=source · C2=trim in/out · C3=playback · C4=compression · C5=captions ·…
REJECT WHEN	autoplay with sound, unreadable detail or captions covering controls
VERIFY READBACK	learner can pause/seek and obtain equivalent meaning through captions and…

AI RECREATED — ILLUSTRATIVE UI · verify the named control

Video insert and edit

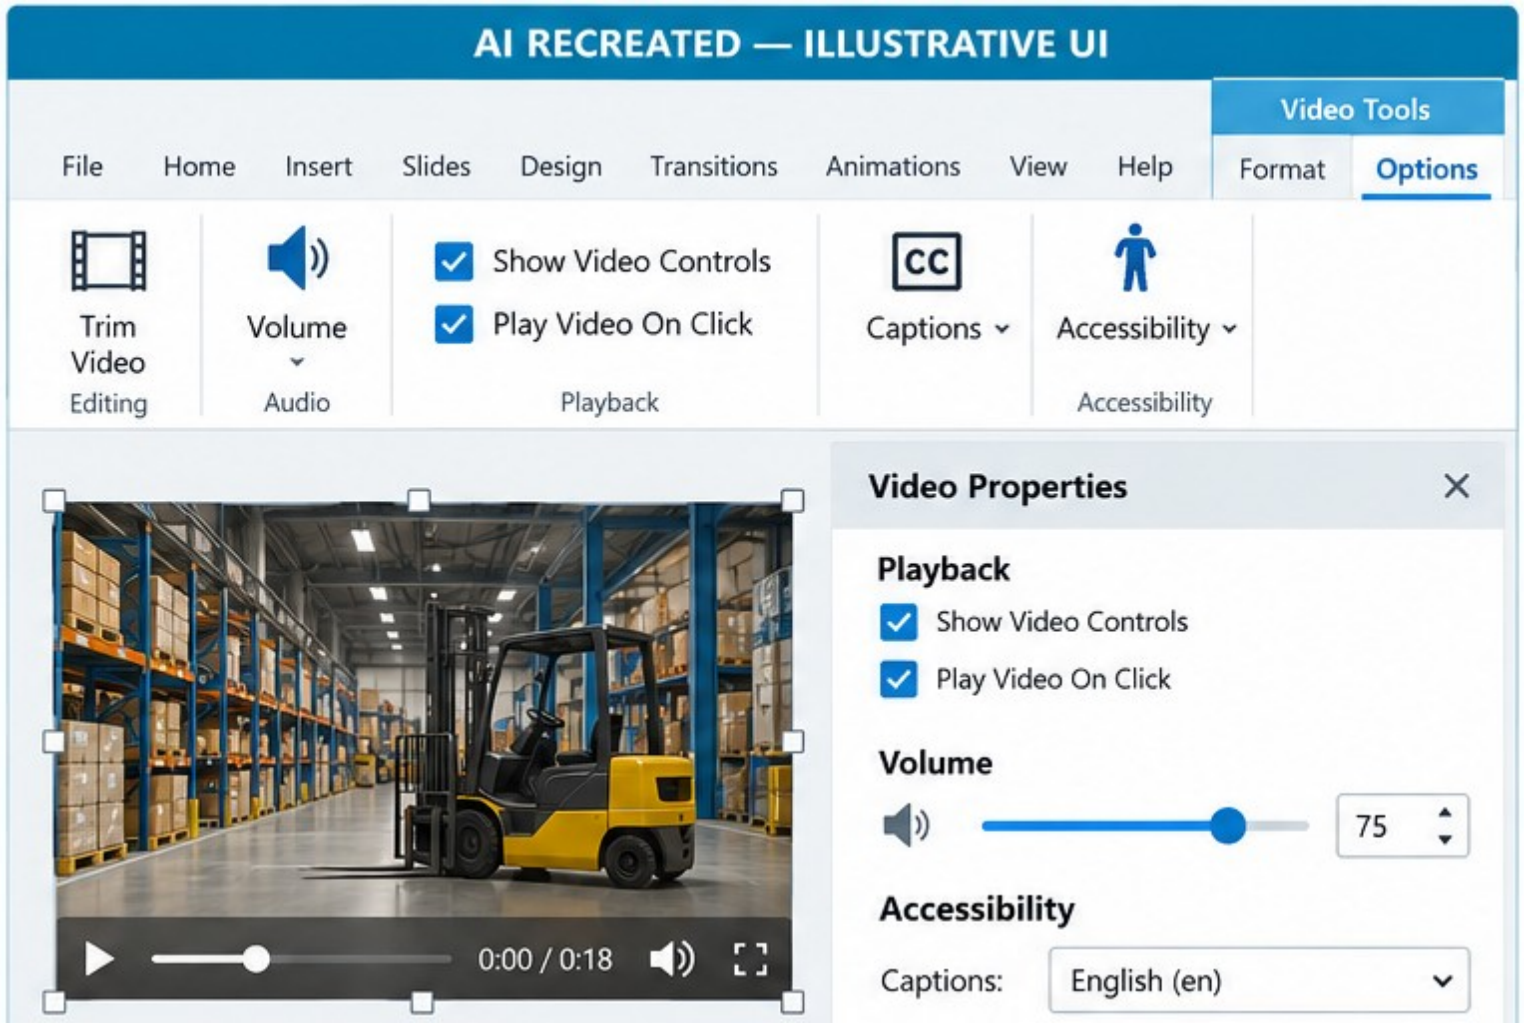

FAULTY OUTPUT (EXAMPLE)	autoplay with sound, unreadable detail or captions covering controls
FIX IN NAMED PANEL	source; trim in/out; playback; compression; captions; transcript
EXPECTED AFTER FIX	learner can pause/seek and obtain equivalent meaning through captions and…

AI RECREATED — ILLUSTRATIVE UI · verify the named control

Native text, shapes and tables

Named HarbourLink WSH artifact

WSA-055-Native-text-shapes-and-tables

Input / source state

WSA checkpoint plus heading hierarchy; margins; table headers; contrast; focus order

Runtime mechanism

Insert > Text Box, Shape and Table creates editable safety labels and a risk-control table

Expected output

content remains editable, readable at 200% zoom and ordered logically for assistive technology

Rejected output

text baked into images or tables used only for layout

Evidence record

WSA-055-Native-text-shapes-and-tables: capture the configured control and the runtime readback.

EDITABLE CONFIGURATION MODEL

Native text, shapes and tables

SET THESE CONTROLS

C1=heading hierarchy · C2=margins · C3=table headers · C4=contrast · C5=focus order

→

REJECT WHEN

text baked into images or tables used only for layout

→

VERIFY READBACK

content remains editable, readable at 200% zoom and ordered logically for assistive technology

Editable HarbourLink model · content remains editable, readable at 200% zoom and ordered logically for assistive technology

Native text, shapes and tables

FAULTY OUTPUT (EXAMPLE)

text baked into images or tables used only for layout

→

CORRECT THE RECORD

heading hierarchy; margins; table headers; contrast; focus order

→

EXPECTED AFTER FIX


content remains editable, readable at 200% zoom and ordered logically for assistive technology · verify in your own Preview

Editable HarbourLink model · content remains editable, readable at 200% zoom and ordered logically for assistive technology

© 2026 Tertiary Infotech Academy Pte Ltd · Mastering Articulate Storyline 360 for e-Learning Content Creation · TGS-2024042308

Activity 03 · Add Media and Hazard Scene

Construct the warehouse visual with rights-aware media and seven meaningful hazards.

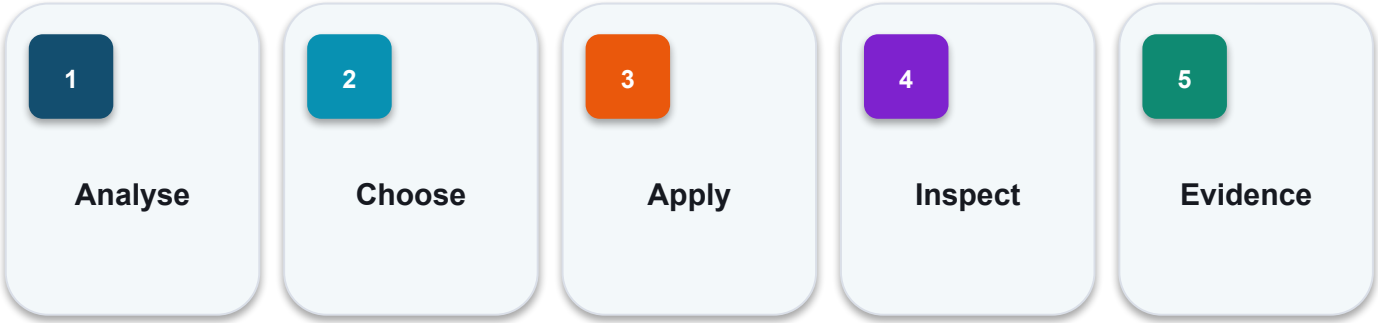


EVIDENCE

Retain the named .story checkpoint, the completed self-check table and one screenshot for each task showing the final state or setting that proves the acceptance criteria.

Full click-by-click procedure · Learner Guide / Activity 03

Activity 03 · Interface Reference

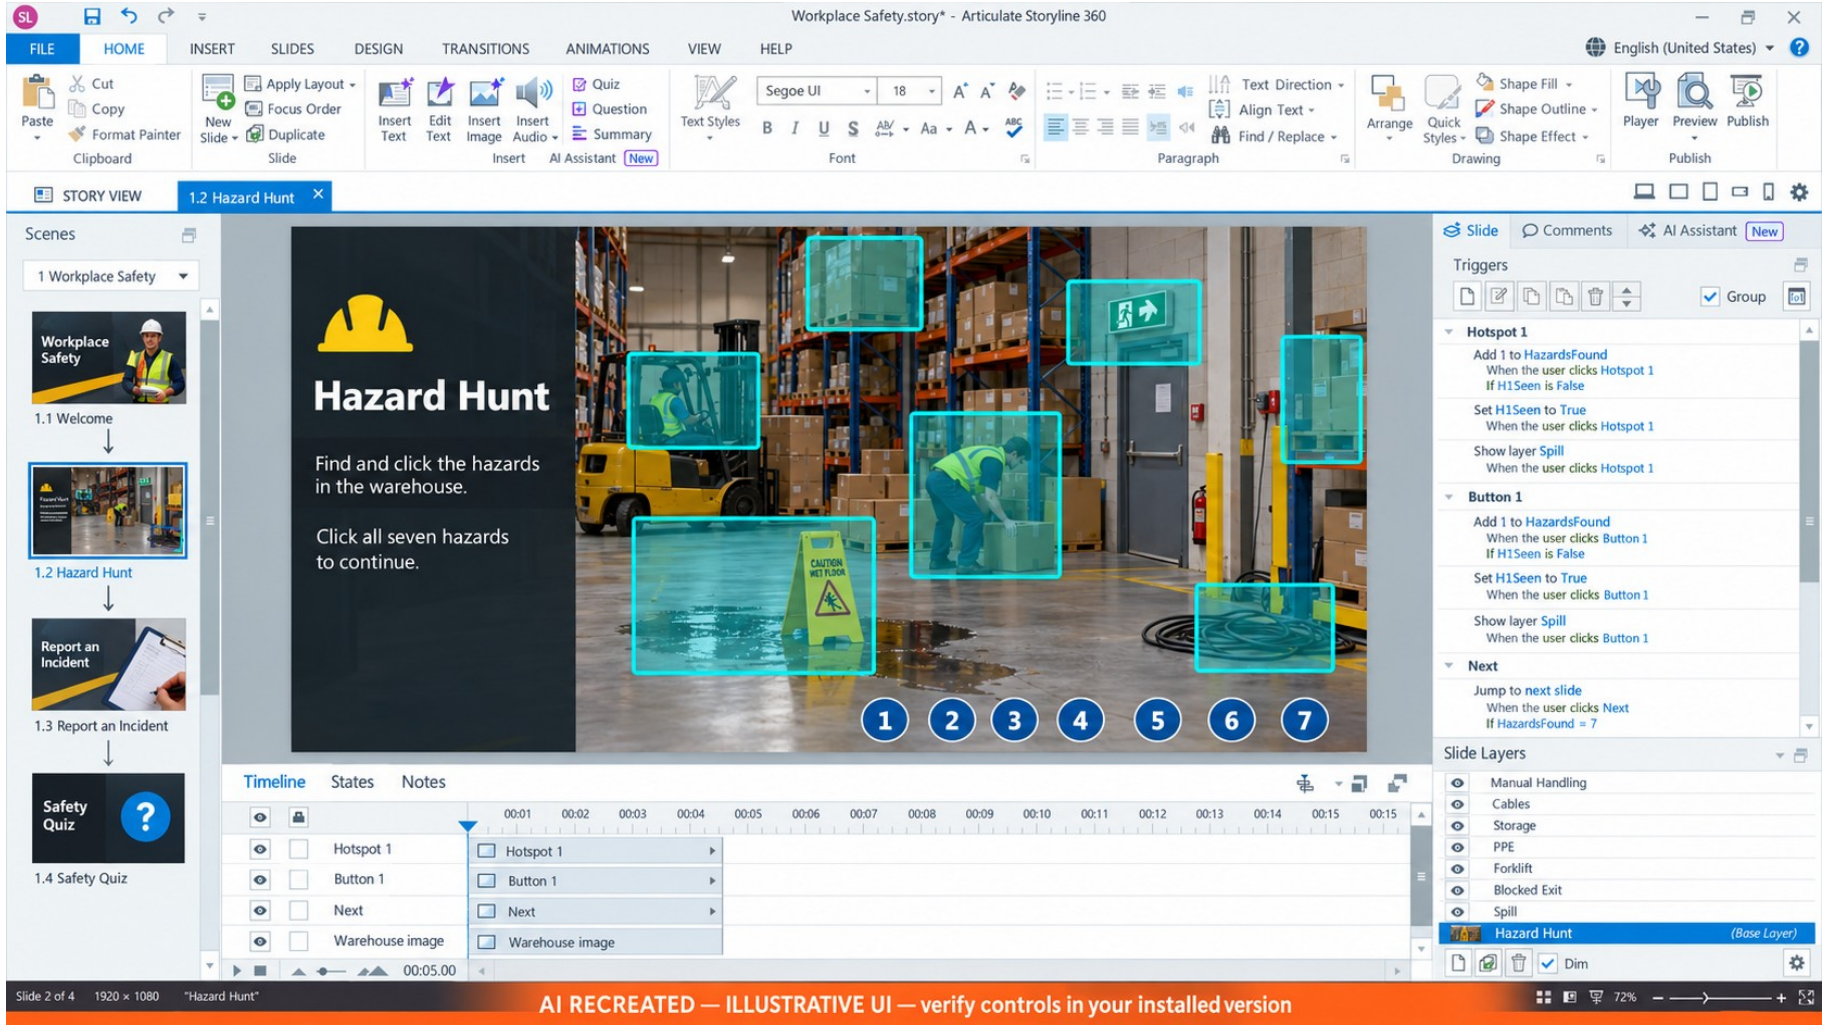

Locate	Use this authentic interface capture to find the named…
Set	In Slide View choose Insert > Picture, browse to…
Verify	Seven hazards are visually plausible.
Evidence	Capture one final-state screenshot for the task; this…

EDITABLE TECHNICAL MODEL

Activity 03 · Artifact Model

Artifact

HarbourLink-WSH-Checkpoint-03-YourName.story

Purpose

Construct the warehouse visual with rights-aware media and seven meaningful hazards.

Scenario input

HarbourLink annual WSH refresher; picture-first content, narration, captions, keyboard access and five-question 80% practice quiz.

Required output

Seven hazards are visually plausible.

Control point

Media retains aspect ratio and provenance.

Readback

Retain the named .story checkpoint, the completed self-check table and one screenshot for each task showing the final state or setting that proves the acceptance criteria.

EDITABLE TECHNICAL MODEL

Activity 03 · Runtime State Trace

Initial state

Open with declared defaults and no prior test residue.

Input

Use the named WSA asset, learner decision or publish setting.

Control

Seven hazards are visually plausible.

Stored state

Media retains aspect ratio and provenance.

Runtime output

Hotspots do not overlap.

Boundary

Visible keyboard alternatives map one-to-one.

EDITABLE TECHNICAL MODEL

Activity 03 · Worked Failure Case

Expected

Seven hazards are visually plausible.

Incomplete

Fail when: Media retains aspect ratio and provenance. is not demonstrated.

Repeat

Repeat/revisit must preserve: Hotspots do not overlap.

Access

Visible keyboard alternatives map one-to-one.

Recovery

Correct the named setting in the next checkpoint, then rerun the same case.

Log

Record expected, actual, pass/fail and corrected version.

EDITABLE TECHNICAL MODEL

Activity 03 · Evidence Record

Source

HarbourLink-WSH-Checkpoint-03-YourName.story

Evidence rule

One decisive learner screenshot per task.

Setting evidence

Seven hazards are visually plausible.

Runtime evidence

Media retains aspect ratio and provenance.


Regression evidence

Visible keyboard alternatives map one-to-one.

Retention

Retain the named .story checkpoint, the completed self-check table and one screenshot for each task showing the final state or setting that proves the acceptance criteria.

Activity 03 · Verify the Panel

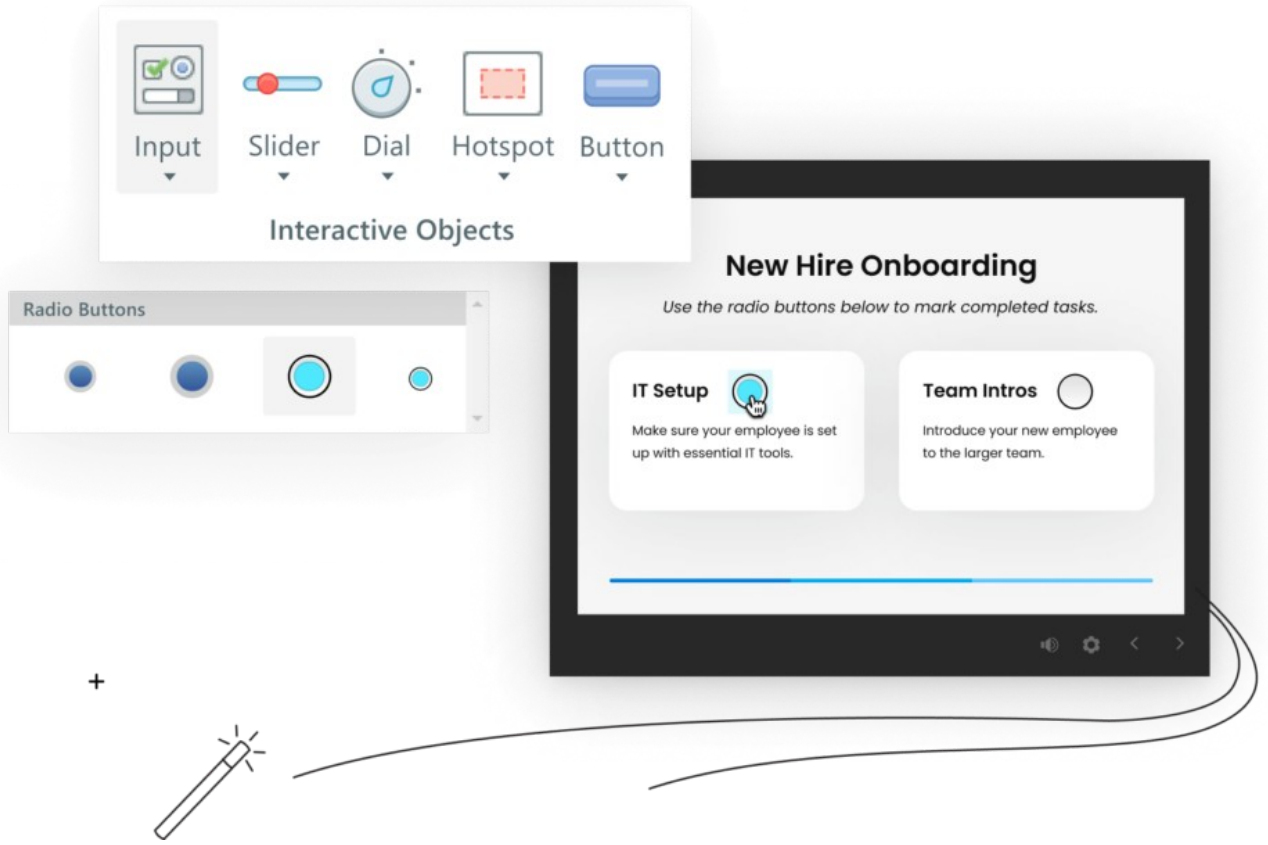

Named setting	**Choose Picture Tools — Format > Crop; drag the crop…**
Expected output	**Seven hazards are visually plausible.**
Boundary	**Visible keyboard alternatives map one-to-one.**
Own evidence	**Show the learner-created checkpoint and final setting, not…**

EXPECTED VERSUS ACTUAL

Activity 03 · Test Matrix

Case 1

Seven hazards are visually plausible.

Case 2

Media retains aspect ratio and provenance.

Case 3

Hotspots do not overlap.

Case 4

Visible keyboard alternatives map one-to-one.

Revisit


Navigate away and back; compare actual state with the specified revisit rule.

Record

Log expected, actual, pass/fail, defect owner and corrected checkpoint filename.

Activity 04 · Add Layers, States, Variables and Gate

Make hazard discovery accessible, persistent and completion-gated.

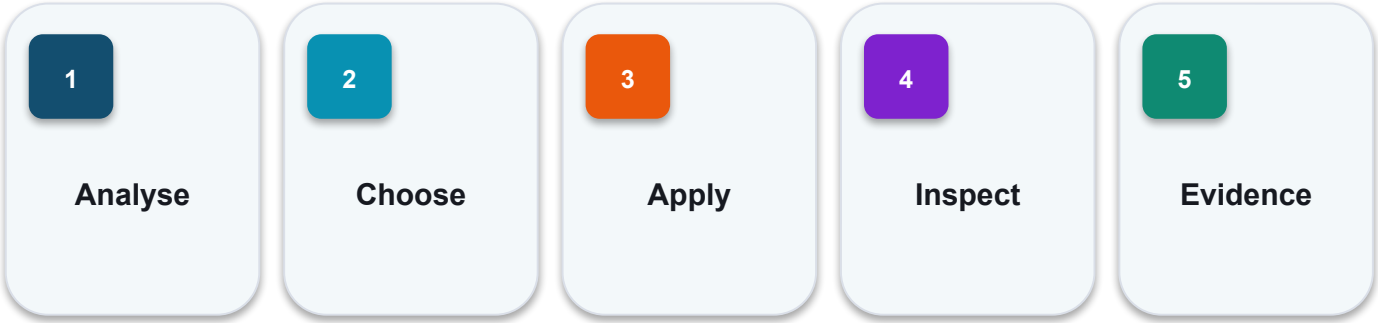


EVIDENCE

Retain the named .story checkpoint, the completed self-check table and one screenshot for each task showing the final state or setting that proves the acceptance criteria.

Full click-by-click procedure · Learner Guide / Activity 04

© 2026 Tertiary Infotech Academy Pte Ltd · Mastering Articulate Storyline 360 for e-Learning Content Creation · TGS-2024042308

Activity 04 · Interface Reference

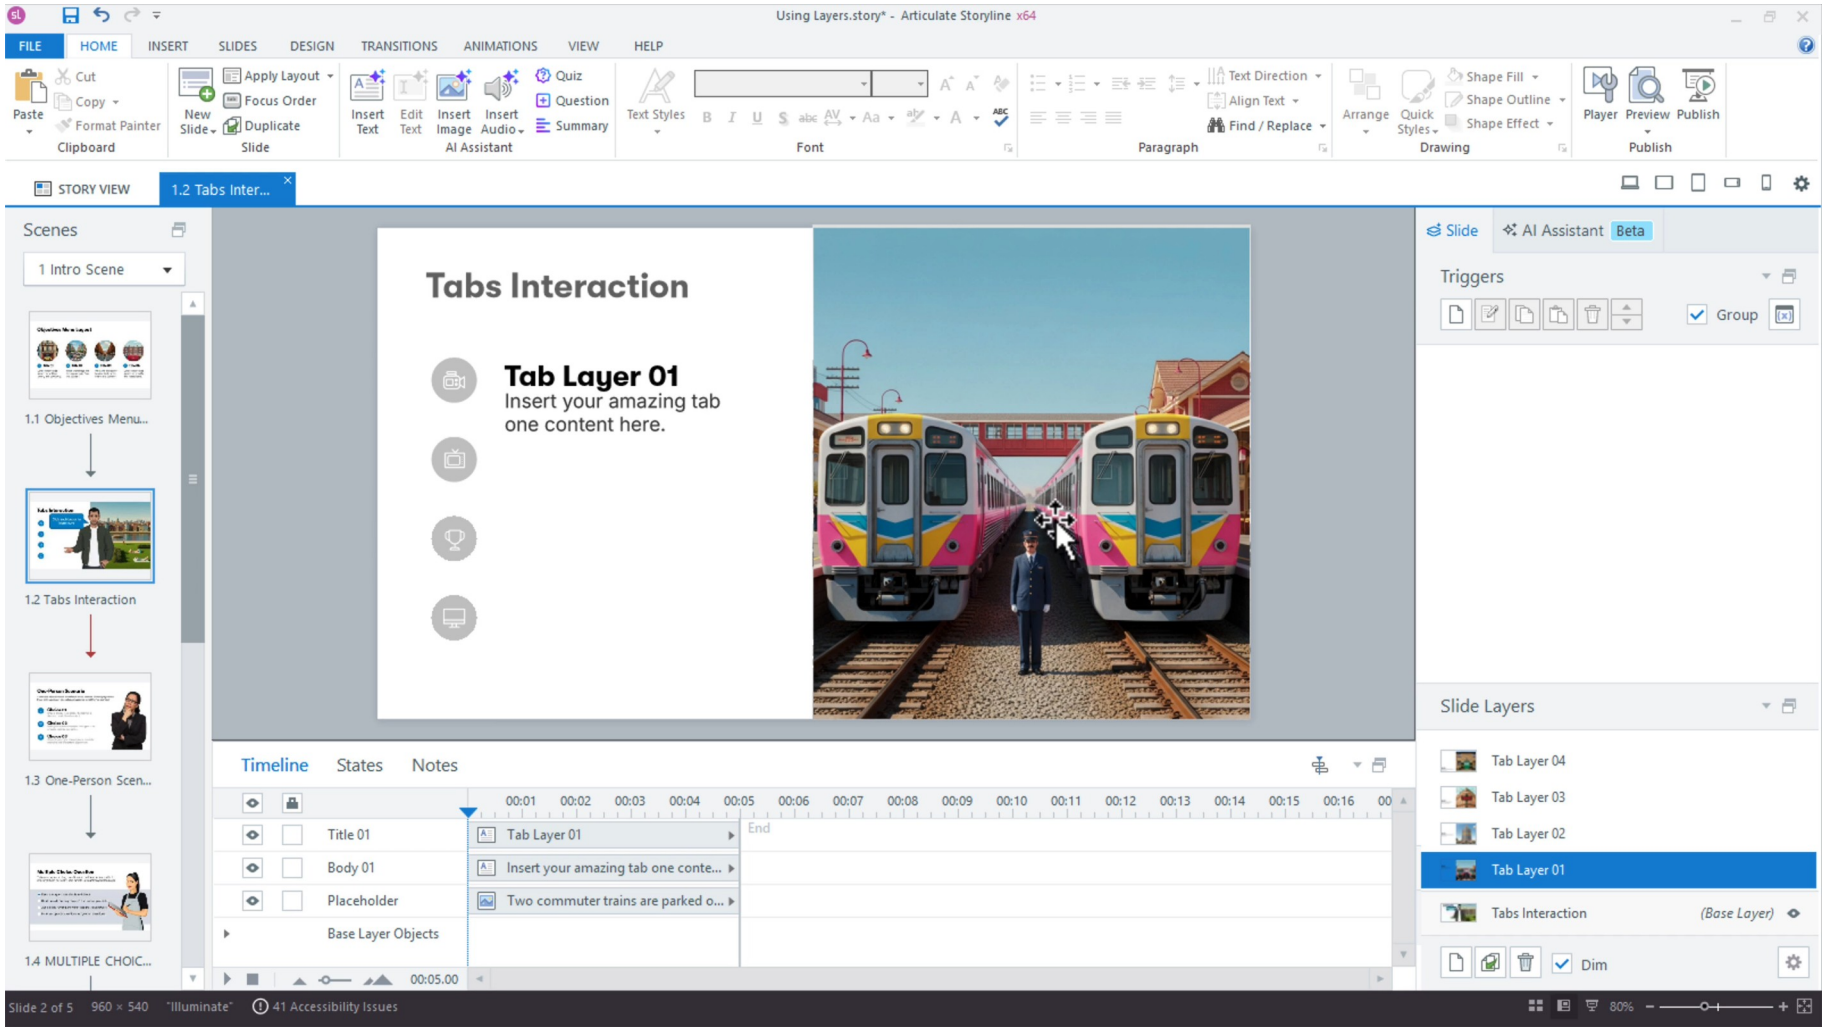

Locate	Use this authentic interface capture to find the named…	**Set**	Create True/False variables `Hazard01Found` through…	**Verify**	Counter never exceeds seven.	**Evidence**	Capture one final-state screenshot for the task; this…

EDITABLE TECHNICAL MODEL

Activity 04 · Artifact Model

Artifact

HarbourLink-WSH-Checkpoint-04-YourName.story

Purpose

Make hazard discovery accessible, persistent and completion-gated.

Scenario input

HarbourLink annual WSH refresher; picture-first content, narration, captions, keyboard access and five-question 80% practice quiz.

Required output

Counter never exceeds seven.

Control point

Repeated selections do not inflate progress.

Readback

Retain the named .story checkpoint, the completed self-check table and one screenshot for each task showing the final state or setting that proves the acceptance criteria.

EDITABLE TECHNICAL MODEL

Activity 04 · Runtime State Trace

Initial state

Open with declared defaults and no prior test residue.

Input

Use the named WSA asset, learner decision or publish setting.

Control

Counter never exceeds seven.

Stored state

Repeated selections do not inflate progress.

Runtime output

Six hazards block and seven permit progression.

Boundary

Pointer and keyboard paths show identical content.

EDITABLE TECHNICAL MODEL

Activity 04 · Worked Failure Case

Expected

Counter never exceeds seven.

Incomplete

Fail when: Repeated selections do not inflate progress. is not demonstrated.

Repeat

Repeat/revisit must preserve: Six hazards block and seven permit progression.

Access

Pointer and keyboard paths show identical content.

Recovery

Correct the named setting in the next checkpoint, then rerun the same case.

Log

Record expected, actual, pass/fail and corrected version.

EDITABLE TECHNICAL MODEL

Activity 04 · Evidence Record

Source

HarbourLink-WSH-Checkpoint-04-YourName.story

Evidence rule

One decisive learner screenshot per task.

Setting evidence

Counter never exceeds seven.

Runtime evidence

Repeated selections do not inflate progress.


Regression evidence

Pointer and keyboard paths show identical content.

Retention

Retain the named .story checkpoint, the completed self-check table and one screenshot for each task showing the final state or setting that proves the acceptance criteria.

Activity 04 · Verify the Panel

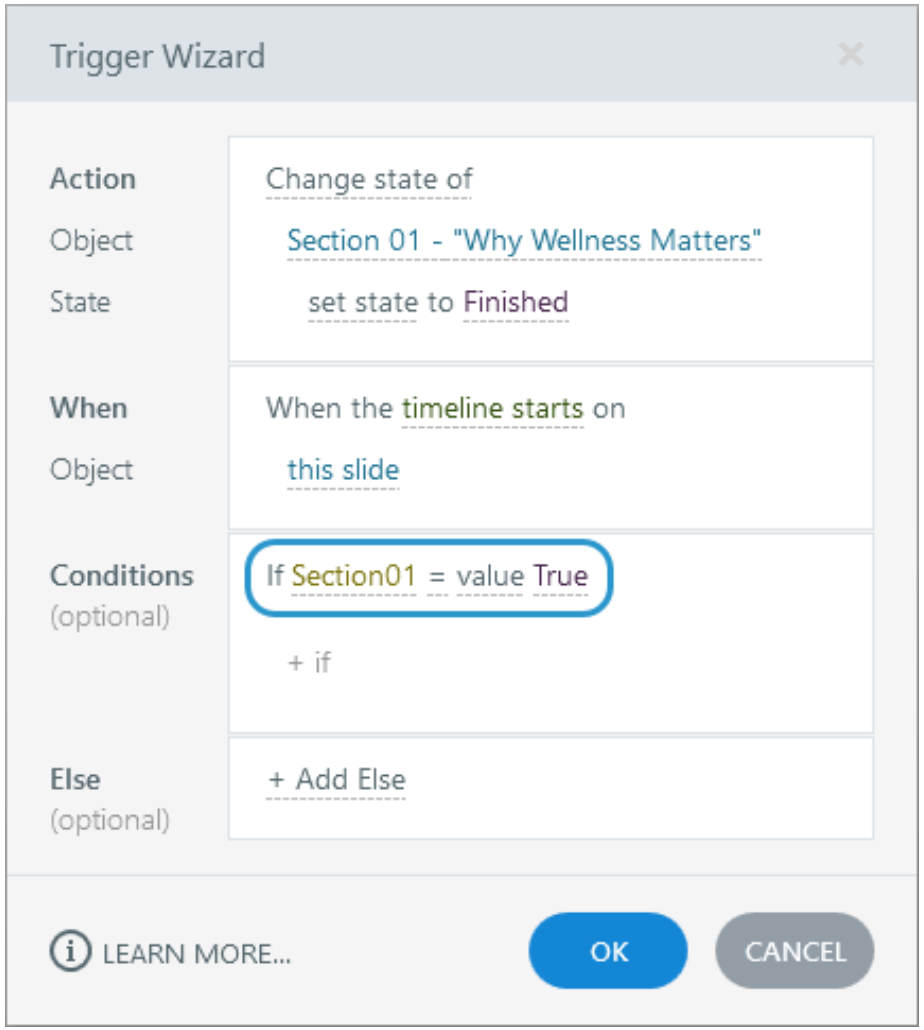

Named setting	Open Slide Layers > New Layer; create `lyr_Hazard01`…
Expected output	Counter never exceeds seven.
Boundary	Pointer and keyboard paths show identical content.
Own evidence	Show the learner-created checkpoint and final setting, not…

EXPECTED VERSUS ACTUAL

Activity 04 · Test Matrix

Case 1

Counter never exceeds seven.

Case 2

Repeated selections do not inflate progress.

Case 3

Six hazards block and seven permit progression.

Case 4

Pointer and keyboard paths show identical content.

Revisit


Navigate away and back; compare actual state with the specified revisit rule.

Record

Log expected, actual, pass/fail, defect owner and corrected checkpoint filename.

Activity 05 · Build Motion, Slider and Dial Controls

Use motion and data controls to explain dynamic workplace risk.

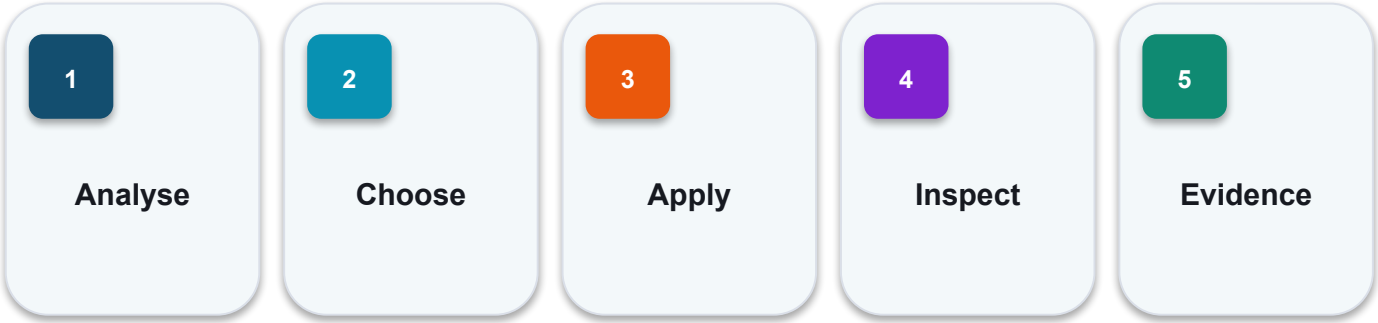


EVIDENCE

Retain the named .story checkpoint, the completed self-check table and one screenshot for each task showing the final state or setting that proves the acceptance criteria.

Full click-by-click procedure · Learner Guide / Activity 05

© 2026 Tertiary Infotech Academy Pte Ltd · Mastering Articulate Storyline 360 for e-Learning Content Creation · TGS-2024042308

Activity 05 · Interface Reference

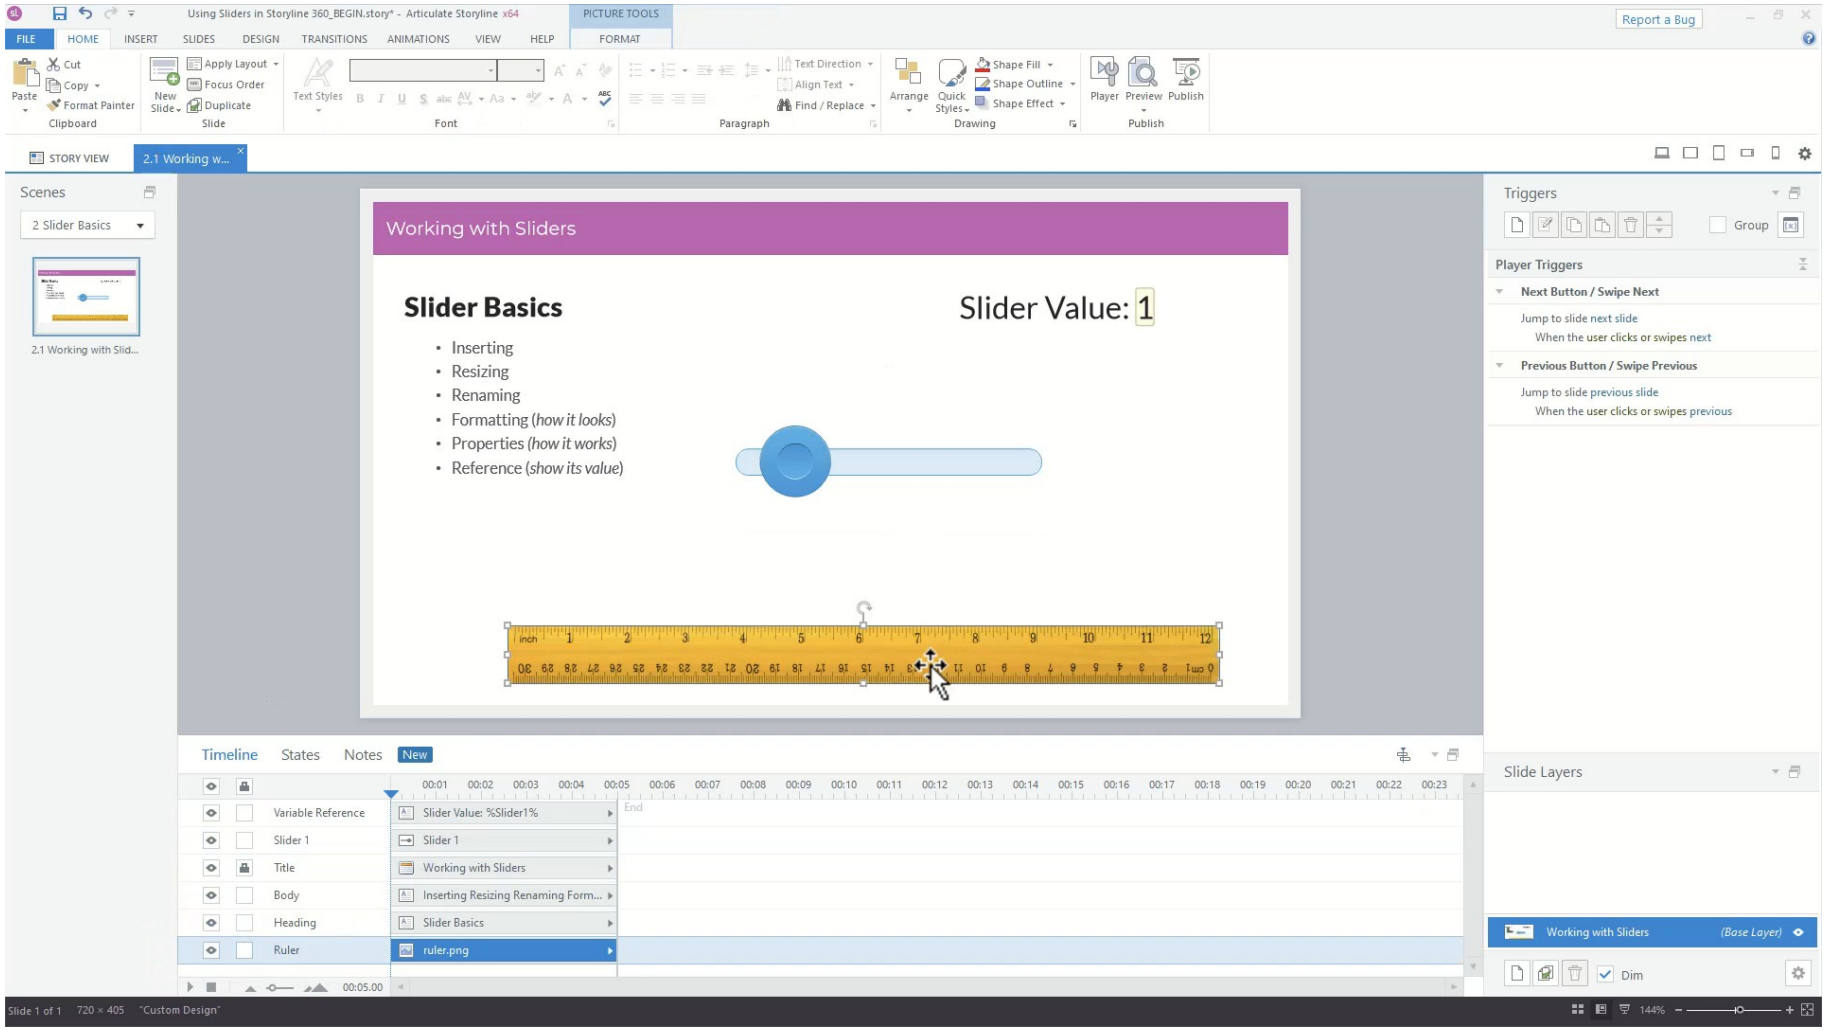

Locate	Use this authentic interface capture to find the named…
Set	Insert a slider on the risk screen; select Slider Tools —…
Verify	Motion is learner-controlled.
Evidence	Capture one final-state screenshot for the task; this…

EDITABLE TECHNICAL MODEL

Activity 05 · Artifact Model

Artifact

HarbourLink-WSH-Checkpoint-05-YourName.story

Purpose

Use motion and data controls to explain dynamic workplace risk.

Scenario input

HarbourLink annual WSH refresher; picture-first content, narration, captions, keyboard access and five-question 80% practice quiz.

Required output

Motion is learner-controlled.

Control point

All slider values have text equivalents.

Readback

Retain the named .story checkpoint, the completed self-check table and one screenshot for each task showing the final state or setting that proves the acceptance criteria.

EDITABLE TECHNICAL MODEL

Activity 05 · Runtime State Trace

Initial state

Open with declared defaults and no prior test residue.

Input

Use the named WSA asset, learner decision or publish setting.

Control

Motion is learner-controlled.

Stored state

All slider values have text equivalents.

Runtime output

Every dial detent maps to one zone.

Boundary

Revisit matches the specification.

EDITABLE TECHNICAL MODEL

Activity 05 · Worked Failure Case

Expected

Motion is learner-controlled.

Incomplete

Fail when: All slider values have text equivalents. is not demonstrated.

Repeat

Repeat/revisit must preserve: Every dial detent maps to one zone.

Access

Revisit matches the specification.

Recovery

Correct the named setting in the next checkpoint, then rerun the same case.

Log

Record expected, actual, pass/fail and corrected version.

EDITABLE TECHNICAL MODEL

Activity 05 · Evidence Record

Source

HarbourLink-WSH-Checkpoint-05-YourName.story

Evidence rule

One decisive learner screenshot per task.

Setting evidence

Motion is learner-controlled.

Runtime evidence

All slider values have text equivalents.


Regression evidence

Revisit matches the specification.

Retention

Retain the named .story checkpoint, the completed self-check table and one screenshot for each task showing the final state or setting that proves the acceptance criteria.

Activity 05 · Verify the Panel

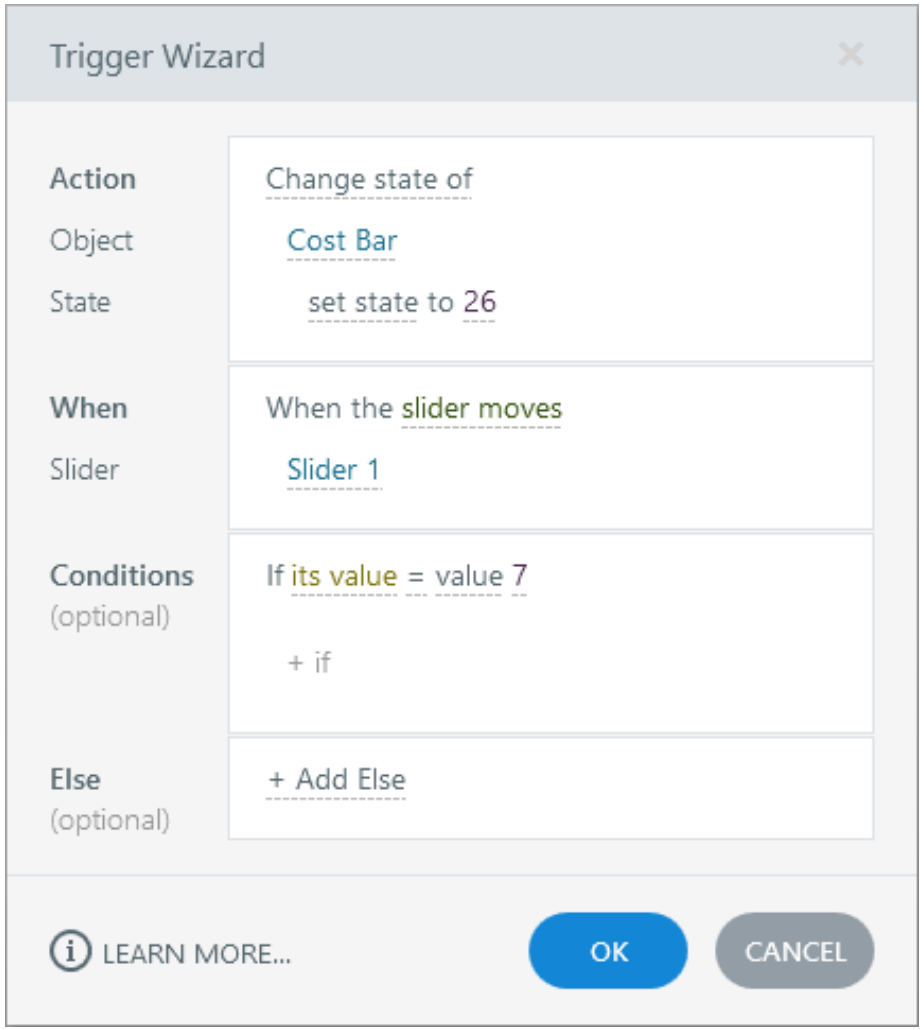

Named setting	**In Slider Tools — Design > Variable bind the slider to…**
Expected output	**Motion is learner-controlled.**
Boundary	**Revisit matches the specification.**
Own evidence	**Show the learner-created checkpoint and final setting, not…**

EXPECTED VERSUS ACTUAL

Activity 05 · Test Matrix

Case 1

Motion is learner-controlled.

Case 2

All slider values have text equivalents.

Case 3

Every dial detent maps to one zone.

Case 4

Revisit matches the specification.

Revisit


Navigate away and back; compare actual state with the specified revisit rule.

Record

Log expected, actual, pass/fail, defect owner and corrected checkpoint filename.

Activity 06 · Create View, Try and Test Simulations

Capture and deploy the supplied incident-report simulation in three Storyline modes.

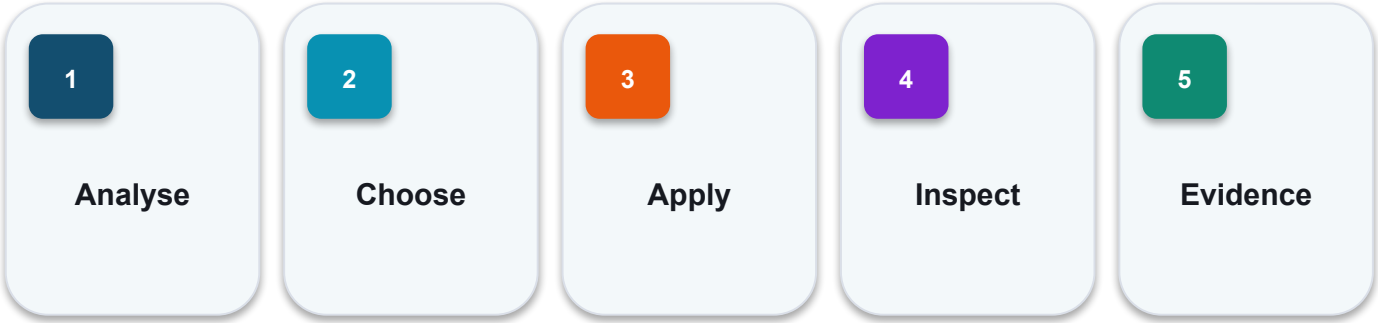


EVIDENCE

Retain the named .story checkpoint, the completed self-check table and one screenshot for each task showing the final state or setting that proves the acceptance criteria.

Full click-by-click procedure · Learner Guide / Activity 06

© 2026 Tertiary Infotech Academy Pte Ltd · Mastering Articulate Storyline 360 for e-Learning Content Creation · TGS-2024042308

Activity 06 · Interface Reference

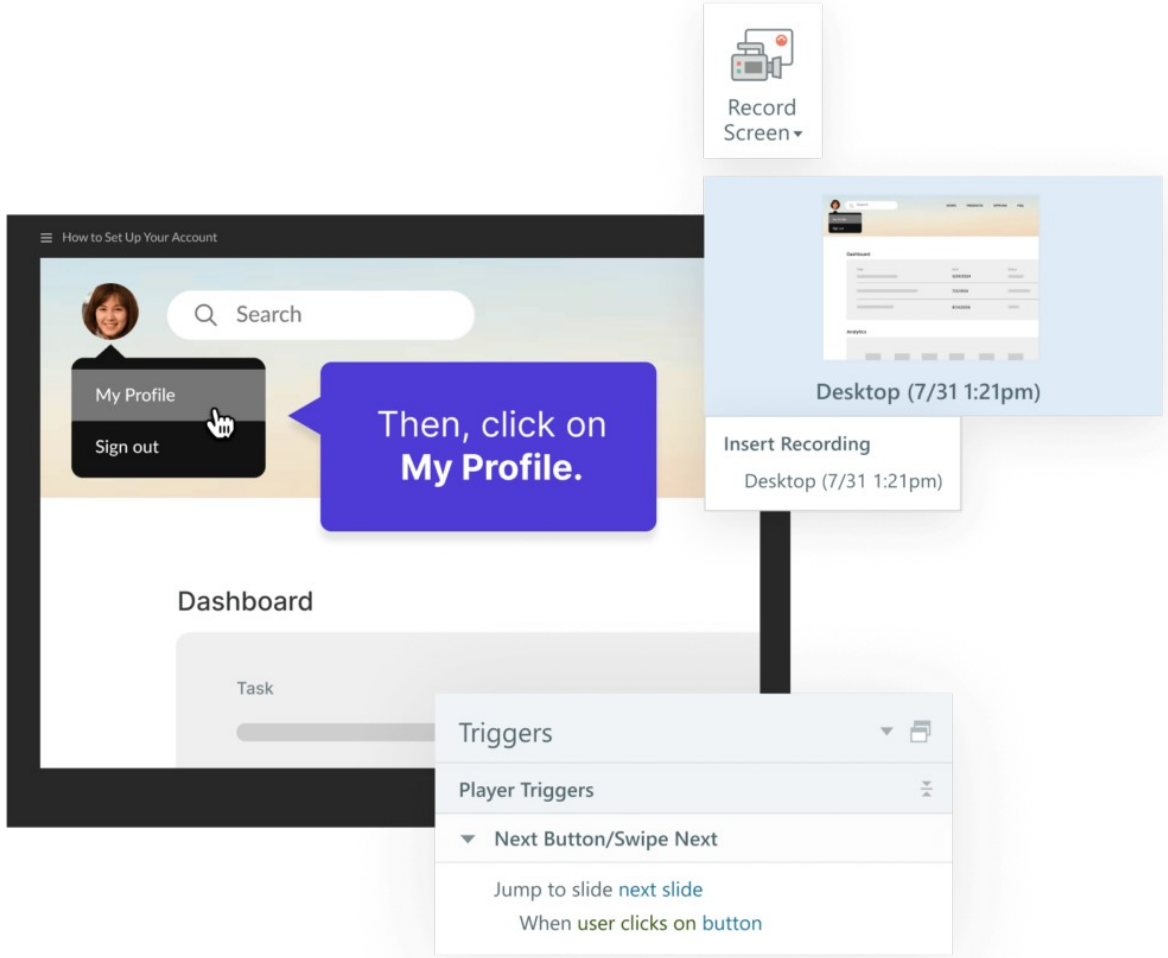

Locate	Use this authentic interface capture to find the named…
Set	Open `source/incident-report/index.html`, use fictional…
Verify	Recording exposes no private data.
Evidence	Capture one final-state screenshot for the task; this…

EDITABLE TECHNICAL MODEL

Activity 06 · Artifact Model

Artifact

HarbourLink-WSH-Checkpoint-06-YourName.story

Purpose

Capture and deploy the supplied incident-report simulation in three Storyline modes.

Scenario input

HarbourLink annual WSH refresher; picture-first content, narration, captions, keyboard access and five-question 80% practice quiz.

Required output

Recording exposes no private data.

Control point

View mode can pause and seek.

Readback

Retain the named .story checkpoint, the completed self-check table and one screenshot for each task showing the final state or setting that proves the acceptance criteria.

EDITABLE TECHNICAL MODEL

Activity 06 · Runtime State Trace

Initial state

Open with declared defaults and no prior test residue.

Input

Use the named WSA asset, learner decision or publish setting.

Control

Recording exposes no private data.

Stored state

View mode can pause and seek.

Runtime output

Try mode coaches wrong actions.

Boundary

Test mode scores specified actions.

EDITABLE TECHNICAL MODEL

Activity 06 · Worked Failure Case

Expected

Recording exposes no private data.

Incomplete

Fail when: View mode can pause and seek. is not demonstrated.

Repeat

Repeat/revisit must preserve: Try mode coaches wrong actions.

Access

Test mode scores specified actions.

Recovery

Correct the named setting in the next checkpoint, then rerun the same case.

Log

Record expected, actual, pass/fail and corrected version.

EDITABLE TECHNICAL MODEL

Activity 06 · Evidence Record

Source

HarbourLink-WSH-Checkpoint-06-YourName.story

Evidence rule

One decisive learner screenshot per task.

Setting evidence

Recording exposes no private data.

Runtime evidence

View mode can pause and seek.


Regression evidence

Test mode scores specified actions.

Retention

Retain the named .story checkpoint, the completed self-check table and one screenshot for each task showing the final state or setting that proves the acceptance criteria.

Activity 06 · Verify the Panel

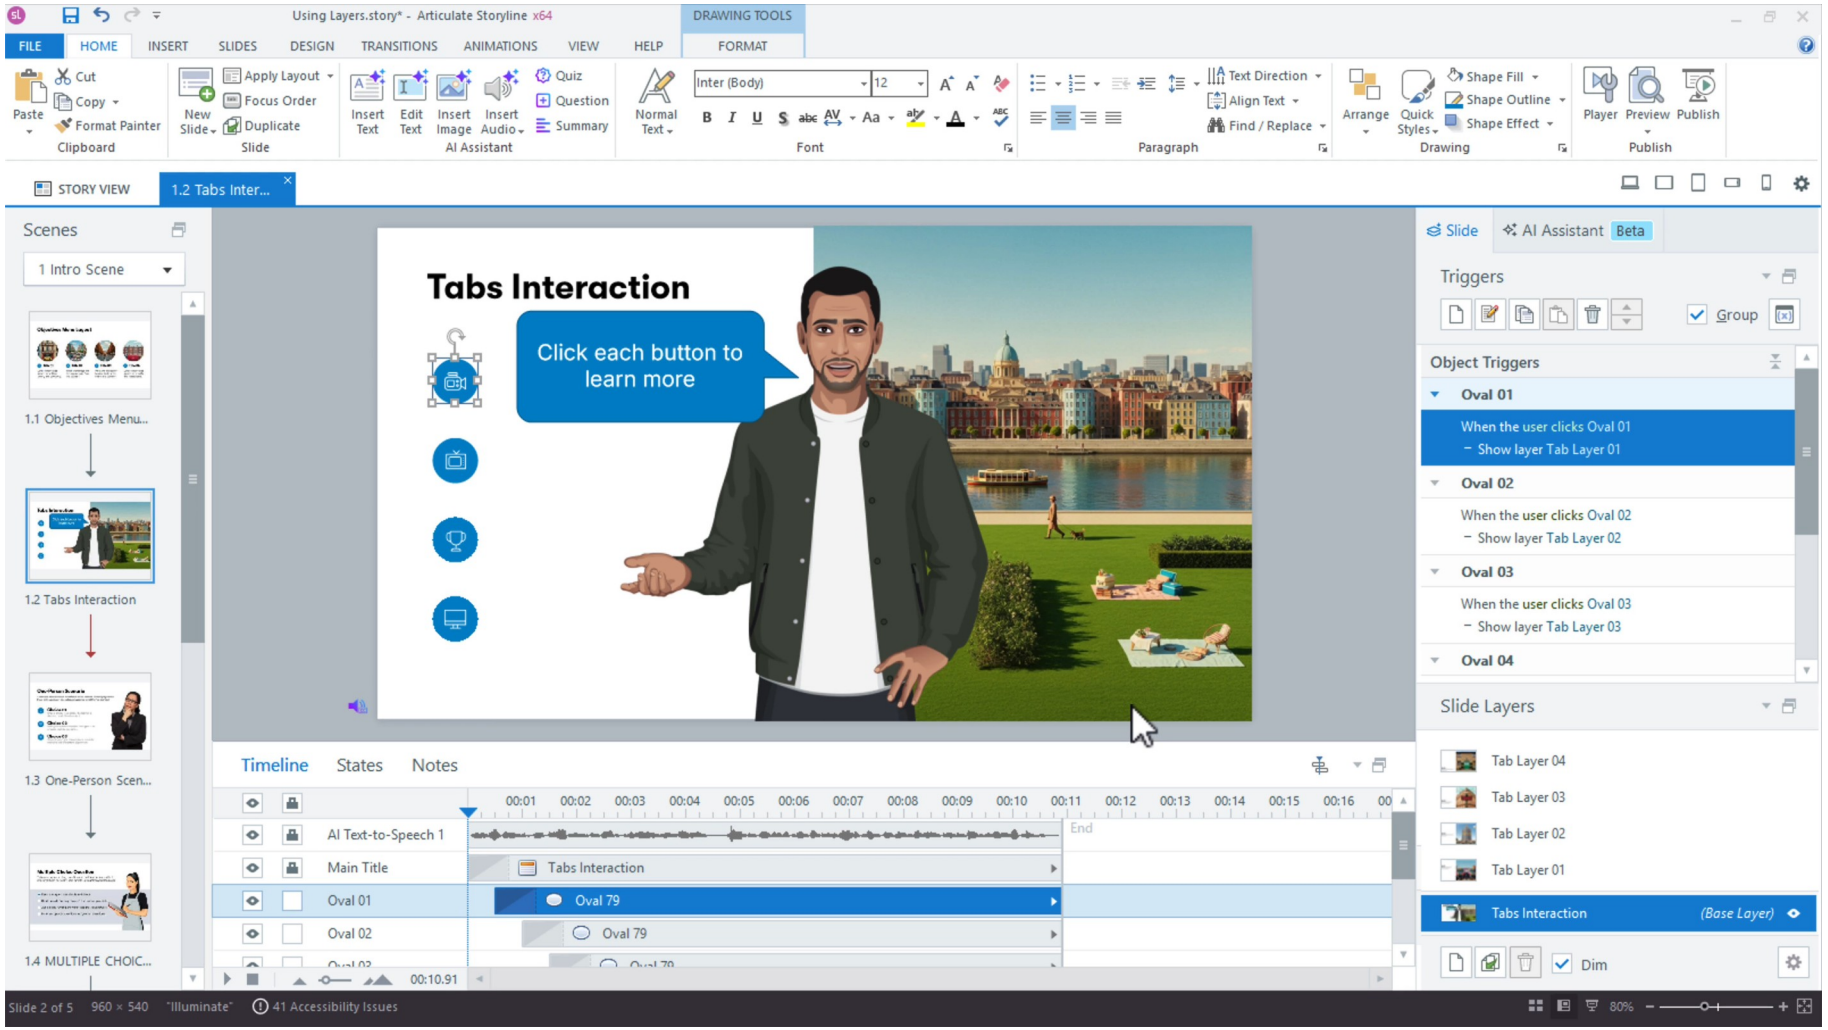

Named setting	Record a readable bounded region with Slides > Record Screen.
Expected output	Recording exposes no private data.
Boundary	Test mode scores specified actions.
Own evidence	Show the learner-created checkpoint and final setting, not…

EXPECTED VERSUS ACTUAL

Activity 06 · Test Matrix

Case 1

Recording exposes no private data.

Case 2

View mode can pause and seek.

Case 3

Try mode coaches wrong actions.

Case 4

Test mode scores specified actions.

Revisit


Navigate away and back; compare actual state with the specified revisit rule.

Record

Log expected, actual, pass/fail, defect owner and corrected checkpoint filename.

Activity 07 · Add Audio, Captions and Accessibility

Add the supplied eight-scene HarbourLink annual WSH narration with one matching MP3/VTT pair per screen, equivalent transcript and keyboard-operable Replay/Stop controls.

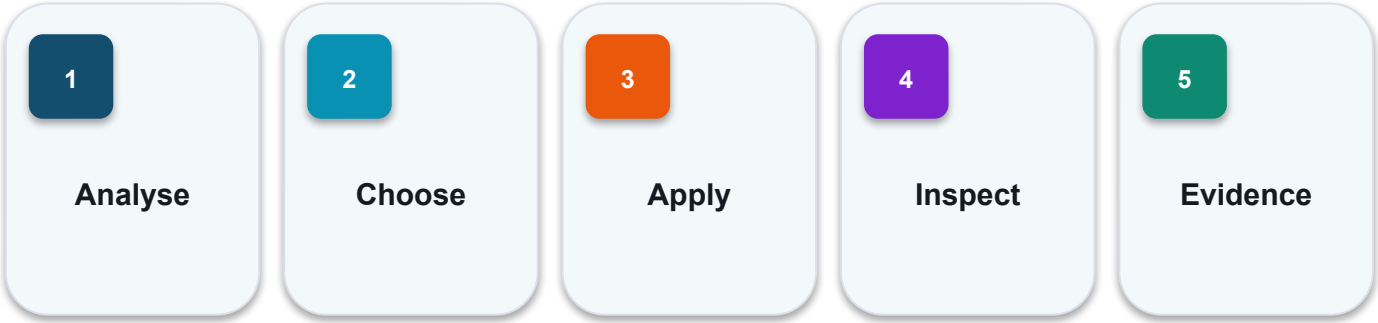


EVIDENCE

Retain the named .story checkpoint, the completed self-check table and one screenshot for each task showing the final state or setting that proves the acceptance criteria.

Full click-by-click procedure · Learner Guide / Activity 07

© 2026 Tertiary Infotech Academy Pte Ltd · Mastering Articulate Storyline 360 for e-Learning Content Creation · TGS-2024042308

Activity 07 · Interface Reference

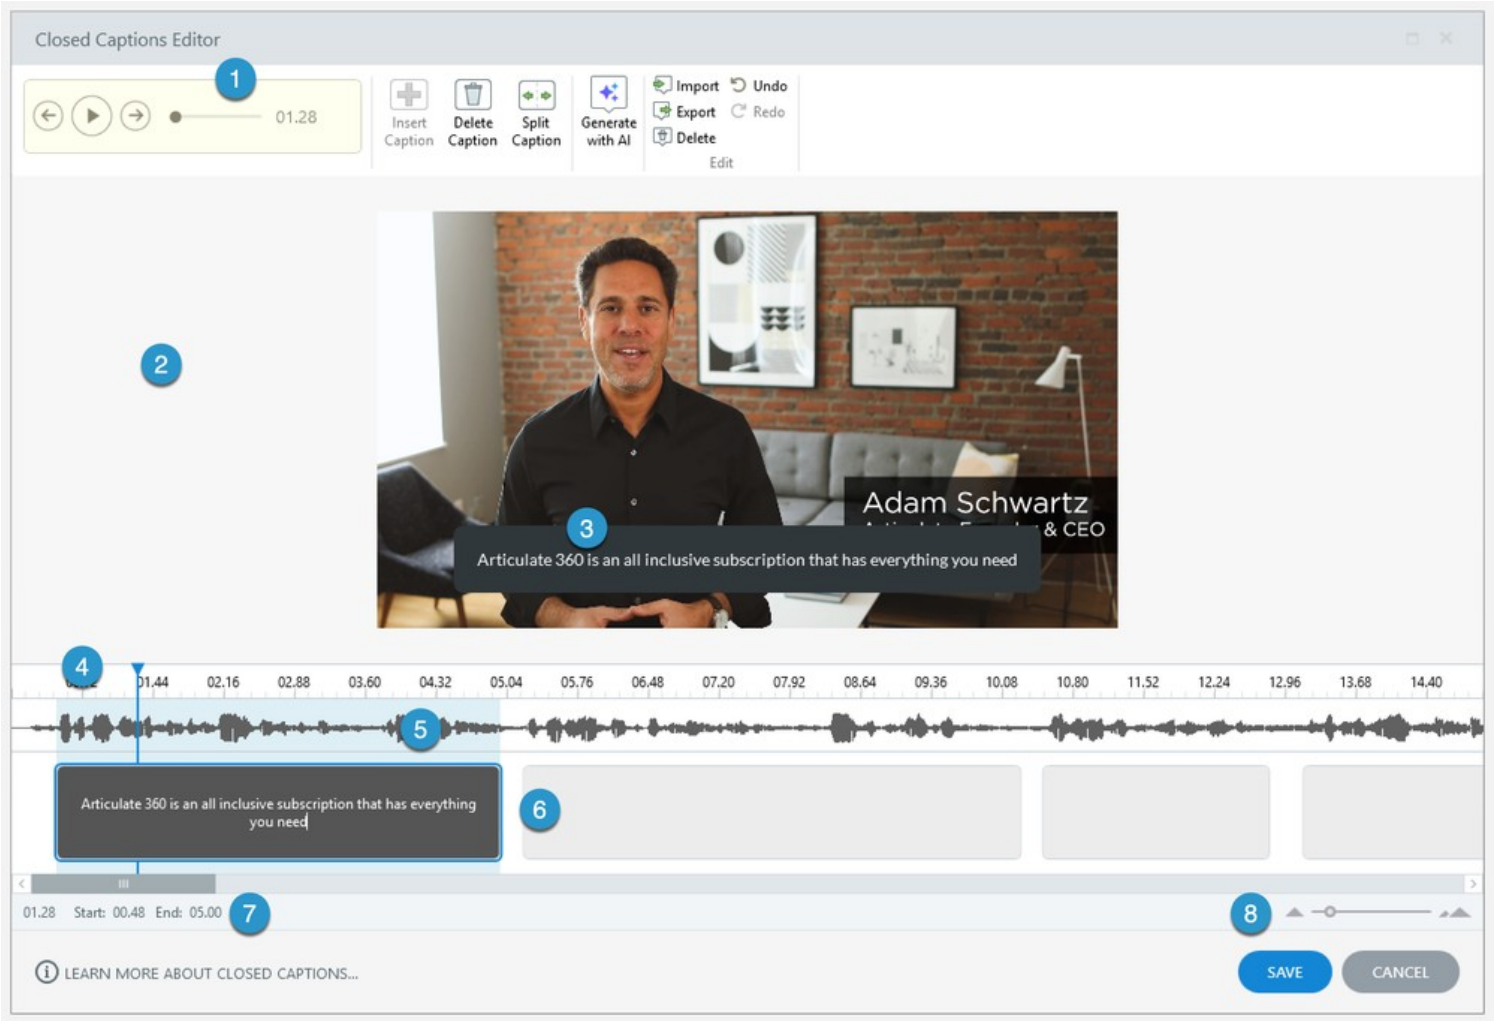

Locate	**Use this authentic interface capture to find the named…**
Set	**For each screen 01–08, choose Insert > Audio > Audio from…**
Verify	**Narration and captions synchronise.**
Evidence	**Capture one final-state screenshot for the task; this…**

EDITABLE TECHNICAL MODEL

Activity 07 · Artifact Model

Artifact

HarbourLink-WSH-Checkpoint-07-YourName.story

Purpose

Add the supplied eight-scene HarbourLink annual WSH narration with one matching MP3/VTT pair per screen, equivalent transcript and keyboard-operable Replay/Stop controls.

Scenario input

HarbourLink annual WSH refresher; picture-first content, narration, captions, keyboard access and five-question 80% practice quiz.

Required output

Narration and captions synchronise.

Control point

Transcript conveys equivalent visual meaning.

Readback

Retain the named .story checkpoint, the completed self-check table and one screenshot for each task showing the final state or setting that proves the acceptance criteria.

EDITABLE TECHNICAL MODEL

Activity 07 · Runtime State Trace

Initial state

Open with declared defaults and no prior test residue.

Input

Use the named WSA asset, learner decision or publish setting.

Control

Narration and captions synchronise.

Stored state

Transcript conveys equivalent visual meaning.

Runtime output

Focus order is logical.

Boundary

No task depends on hearing or precise pointer input.

EDITABLE TECHNICAL MODEL

Activity 07 · Worked Failure Case

Expected

Narration and captions synchronise.

Incomplete

Fail when: Transcript conveys equivalent visual meaning. is not demonstrated.

Repeat

Repeat/revisit must preserve: Focus order is logical.

Access

No task depends on hearing or precise pointer input.

Recovery

Correct the named setting in the next checkpoint, then rerun the same case.

Log

Record expected, actual, pass/fail and corrected version.

EDITABLE TECHNICAL MODEL

Activity 07 · Evidence Record

Source

HarbourLink-WSH-Checkpoint-07-YourName.story

Evidence rule

One decisive learner screenshot per task.

Setting evidence

Narration and captions synchronise.

Runtime evidence

Transcript conveys equivalent visual meaning.


Regression evidence

No task depends on hearing or precise pointer input.

Retention

Retain the named .story checkpoint, the completed self-check table and one screenshot for each task showing the final state or setting that proves the acceptance criteria.

Activity 07 · Verify the Panel

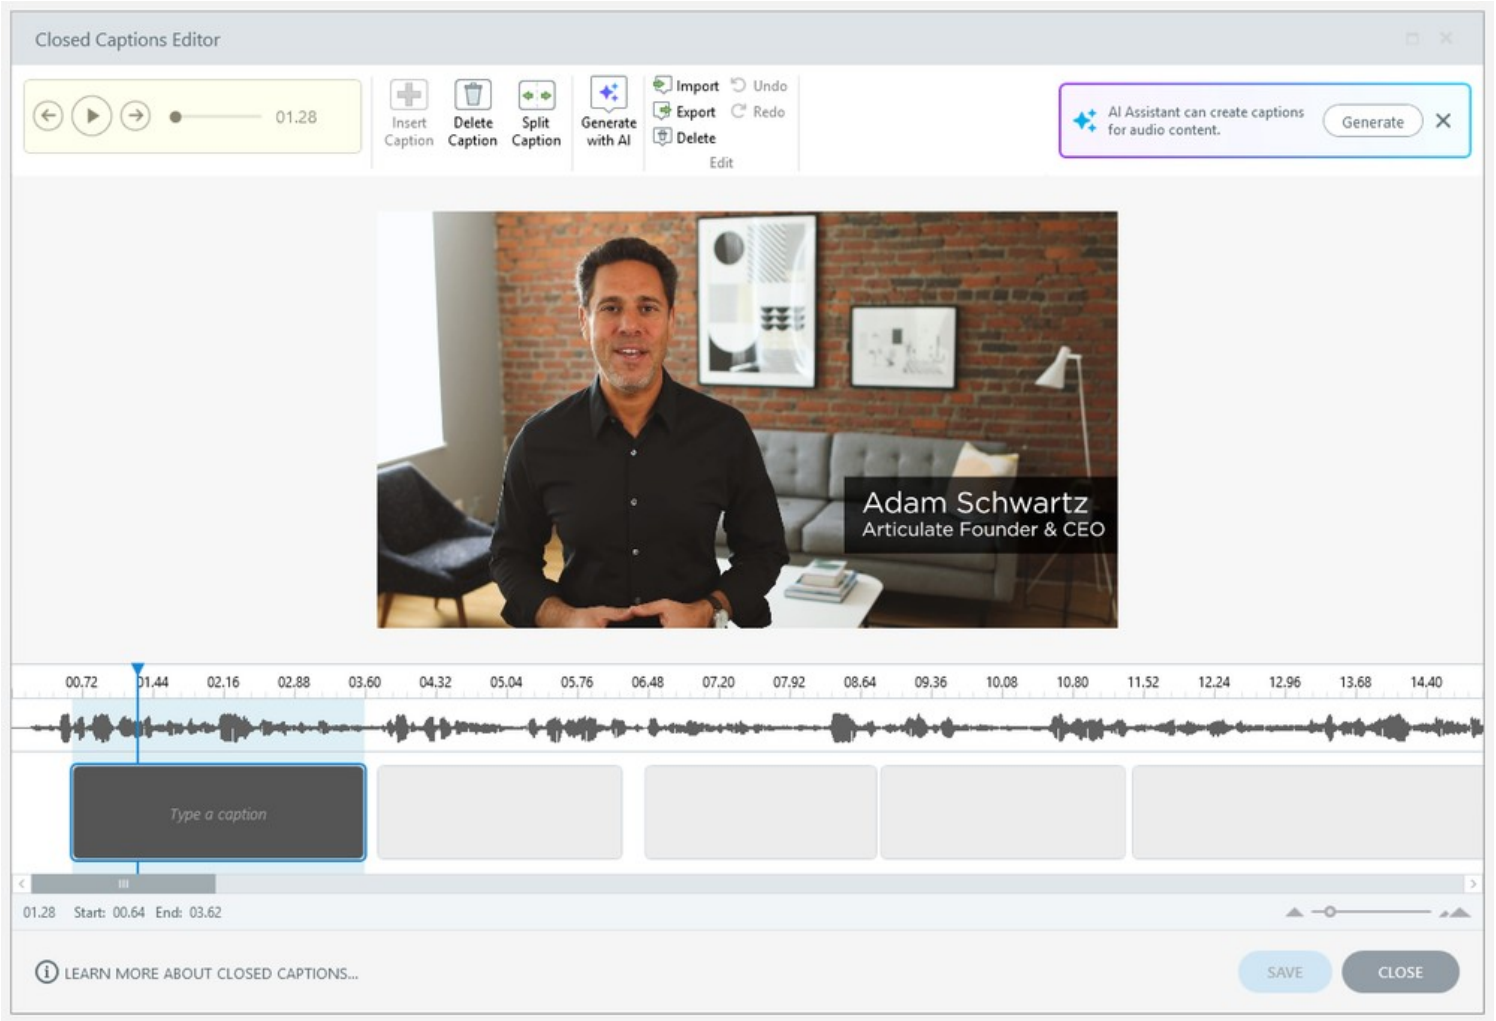

Named setting	Rename each Timeline audio object `aud_HLL_01` through…
Expected output	Narration and captions synchronise.
Boundary	No task depends on hearing or precise pointer input.
Own evidence	Show the learner-created checkpoint and final setting, not…

EXPECTED VERSUS ACTUAL

Activity 07 · Test Matrix

Case 1

Narration and captions synchronise.

Case 2

Transcript conveys equivalent visual meaning.

Case 3

Focus order is logical.

Case 4

No task depends on hearing or precise pointer input.

Revisit

Navigate away and back; compare actual state with the specified revisit rule.

Record

Log expected, actual, pass/fail, defect owner and corrected checkpoint filename.

Topic 2 Checkpoint

Source

HarbourLink-WSH-Checkpoint-07-YourName.story

Hazards

Seven unique targets; duplicate clicks do not increment

Dialog

Named layer, focus trap, Close/return focus

Media

9 s mock narration + matching VTT + transcript

Simulation

View/Try/Test paths separated

Evidence

7-of-7 runtime and accessibility test

03


Branching, Questions and Results

Branching · freeform · feedback · question banks · result slide · retry · review · completion

LO3 · A6 · K6

EDITABLE QA-PLANNING CHART

Interaction Complexity Risk

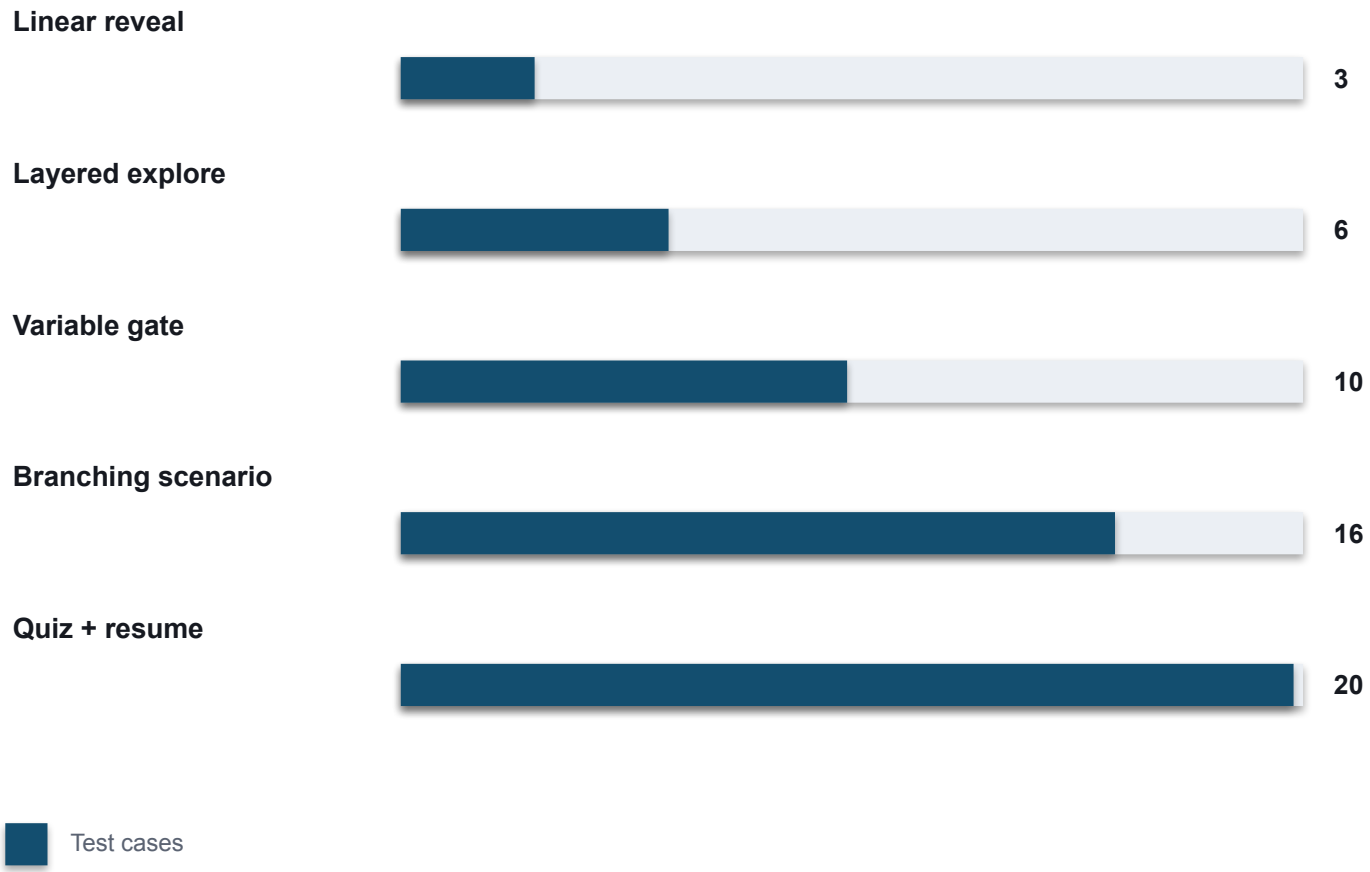


READ THE CHART

Illustrative test-case counts grow faster than the number of visible screens. Map trigger order, revisit, retry and accessibility before adding complexity.

Editable PowerPoint shape chart


Branching decision scene

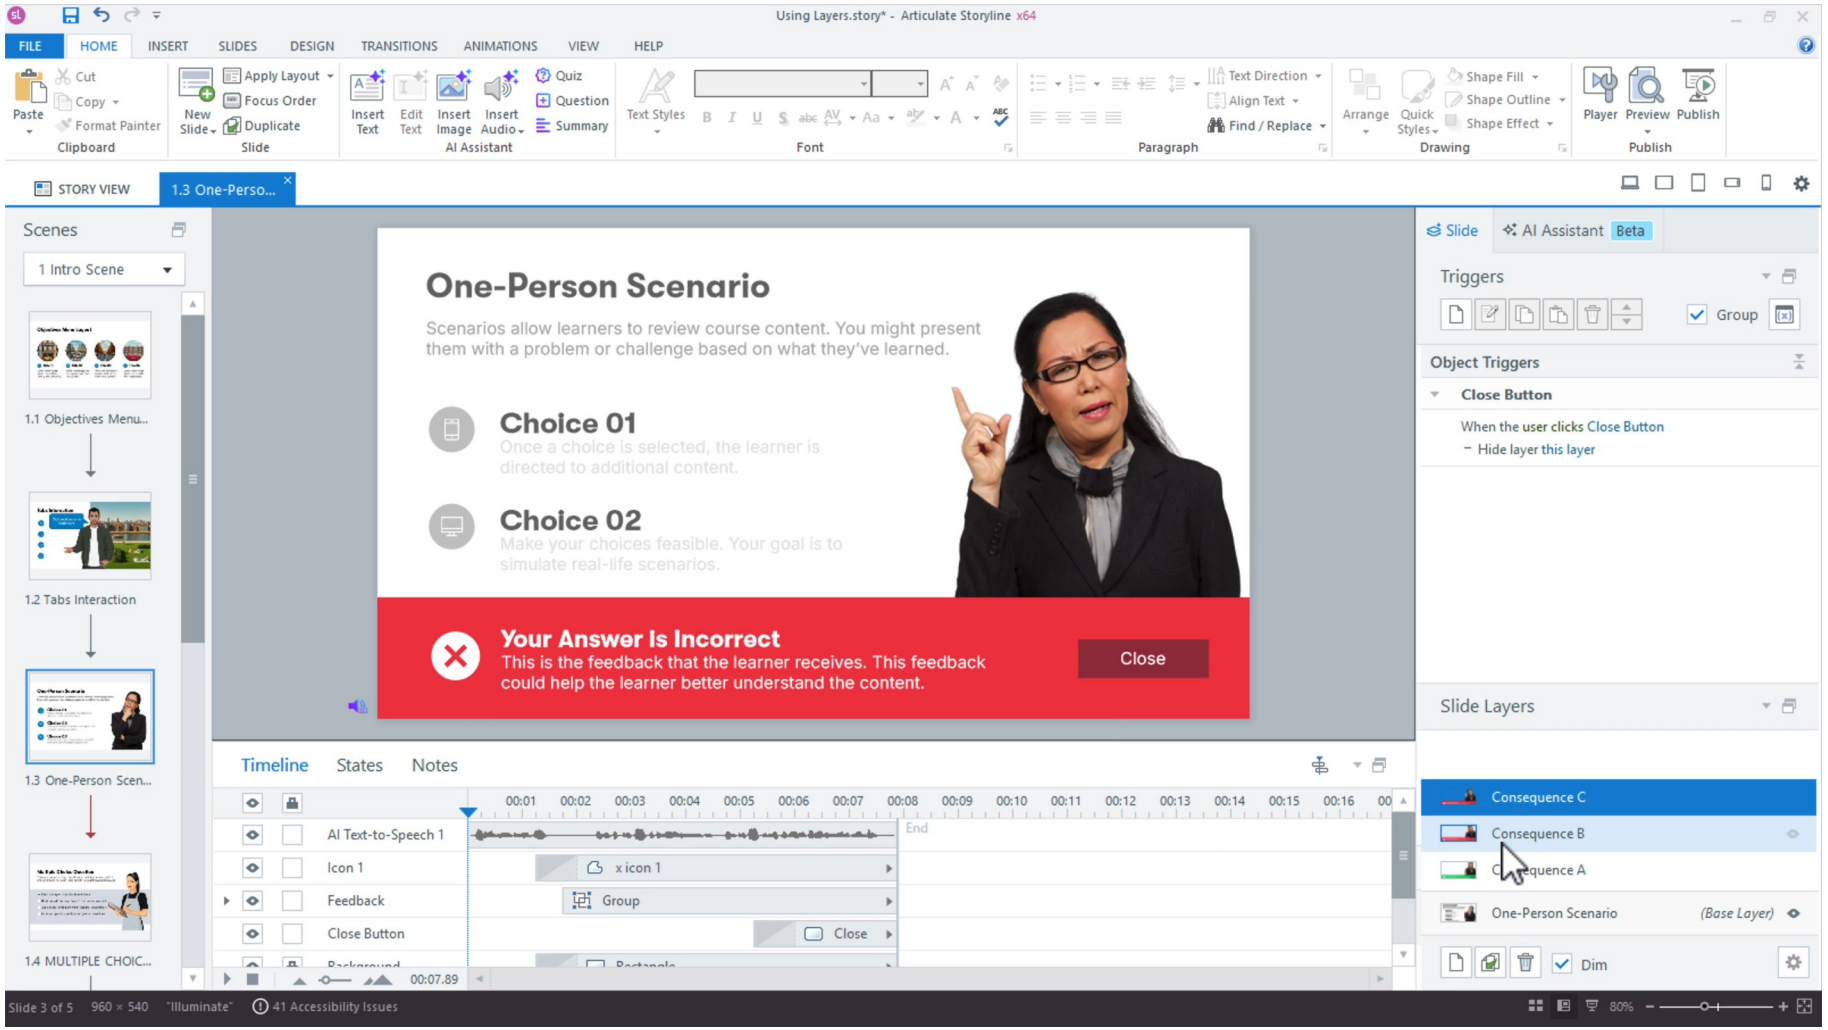

NAMED ARTIFACT	**WSA-056-Branching-decision-scene**
MECHANISM	**Three response choices route to consequence layers and reconverge deliberately**
EXPECTED	**every path reaches feedback and the specified continuation**

Authentic Articulate interface reference · verify the named control


Branching decision scene

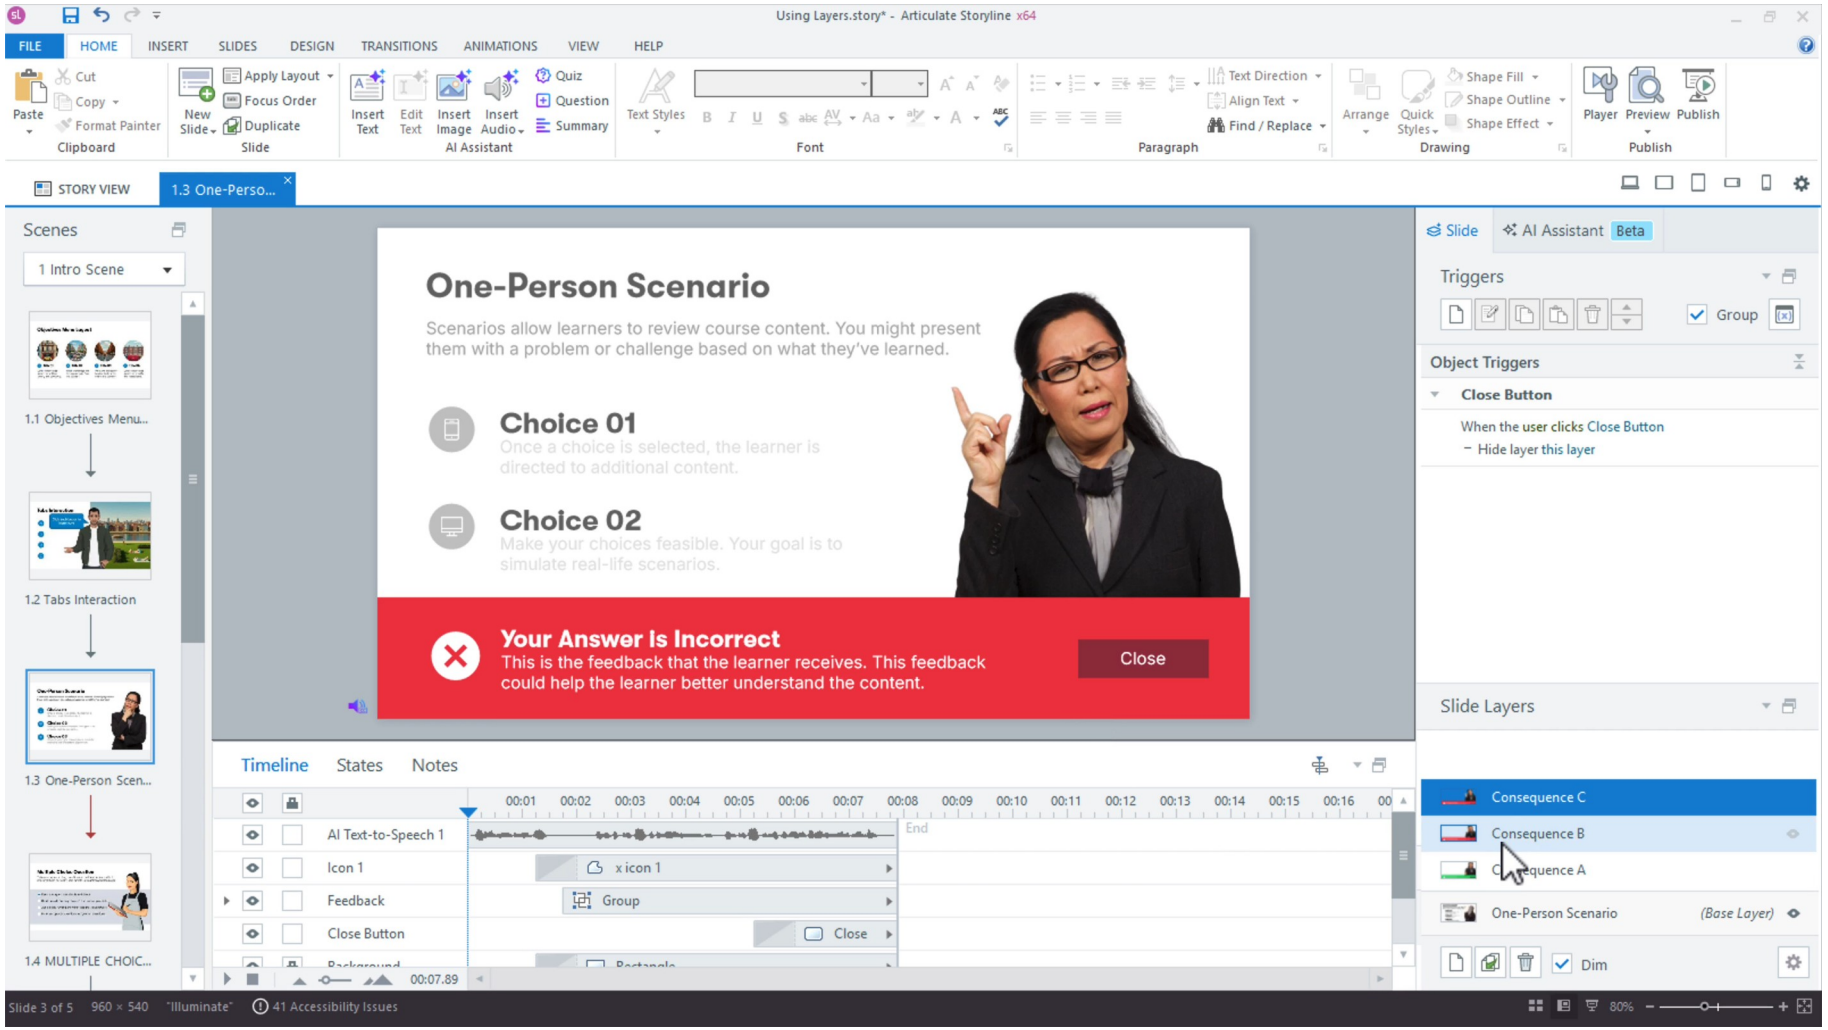

SET THESE CONTROLS	**C1=choice trigger · C2=consequence · C3=return · C4=state preservation**
REJECT WHEN	**branches with no return or unearned success**
VERIFY READBACK	**every path reaches feedback and the specified continuation**

Authentic Articulate interface reference · verify the named control


Branching decision scene

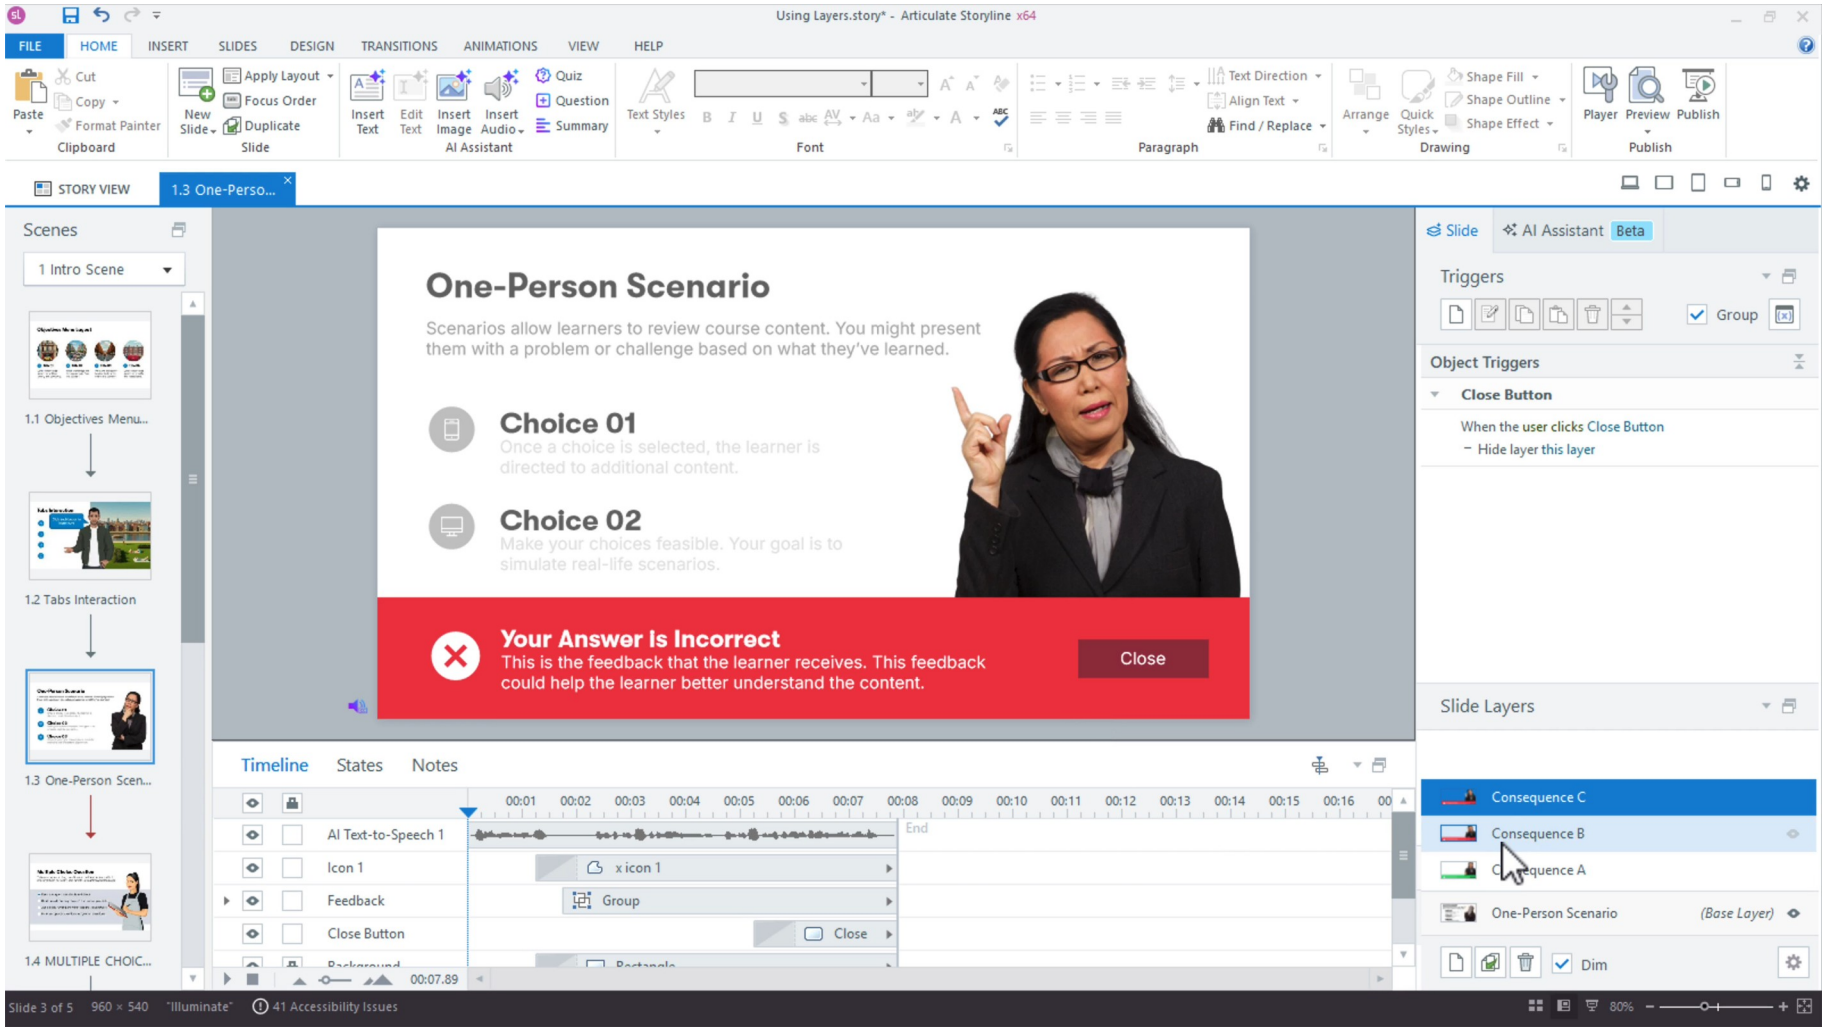

FAULTY OUTPUT (EXAMPLE)	branches with no return or unearned success
FIX IN NAMED PANEL	choice trigger; consequence; return; state preservation
EXPECTED AFTER FIX	every path reaches feedback and the specified continuation · verify in…

Authentic Articulate interface reference · verify the named control


Freeform pick-one conversion

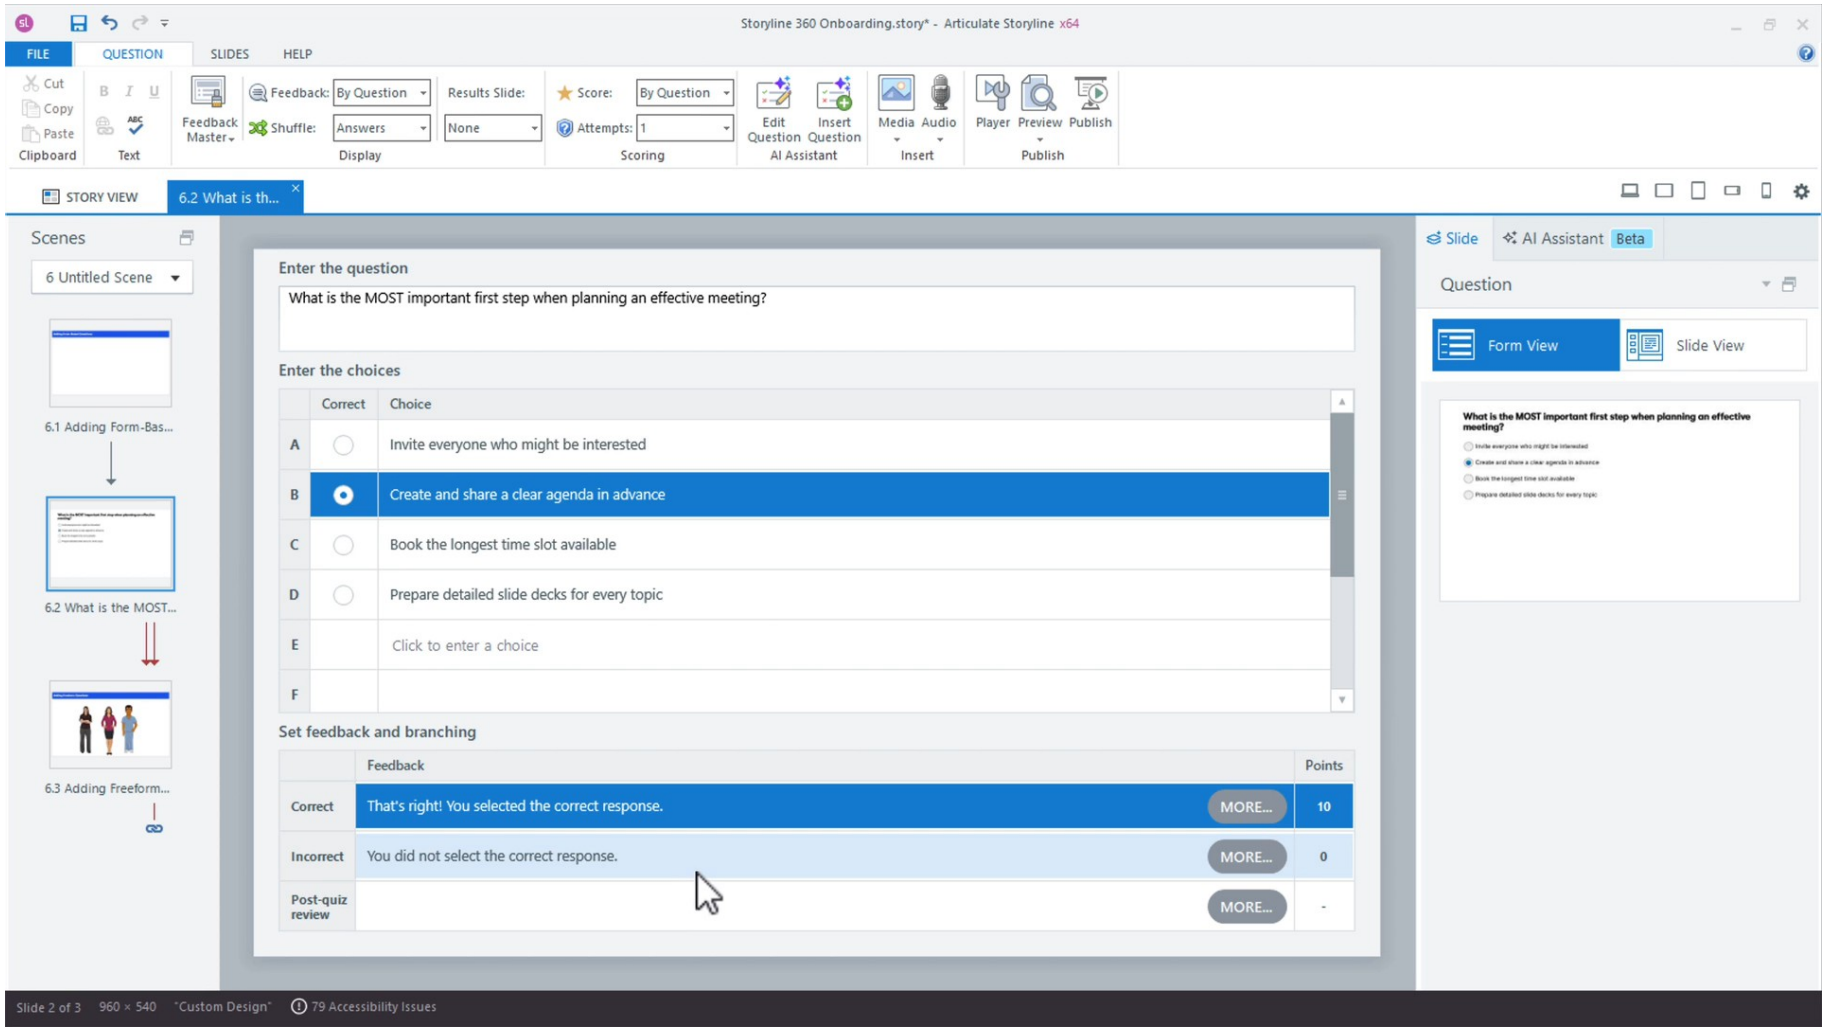

NAMED ARTIFACT	**WSA-057-Freeform-pick-one-conversion**
MECHANISM	**Insert > Convert to Freeform turns workplace objects into a scored…**
EXPECTED	**selection can be revised before Submit and scores correctly**

Authentic Articulate interface reference · verify the named control

Freeform pick-one conversion

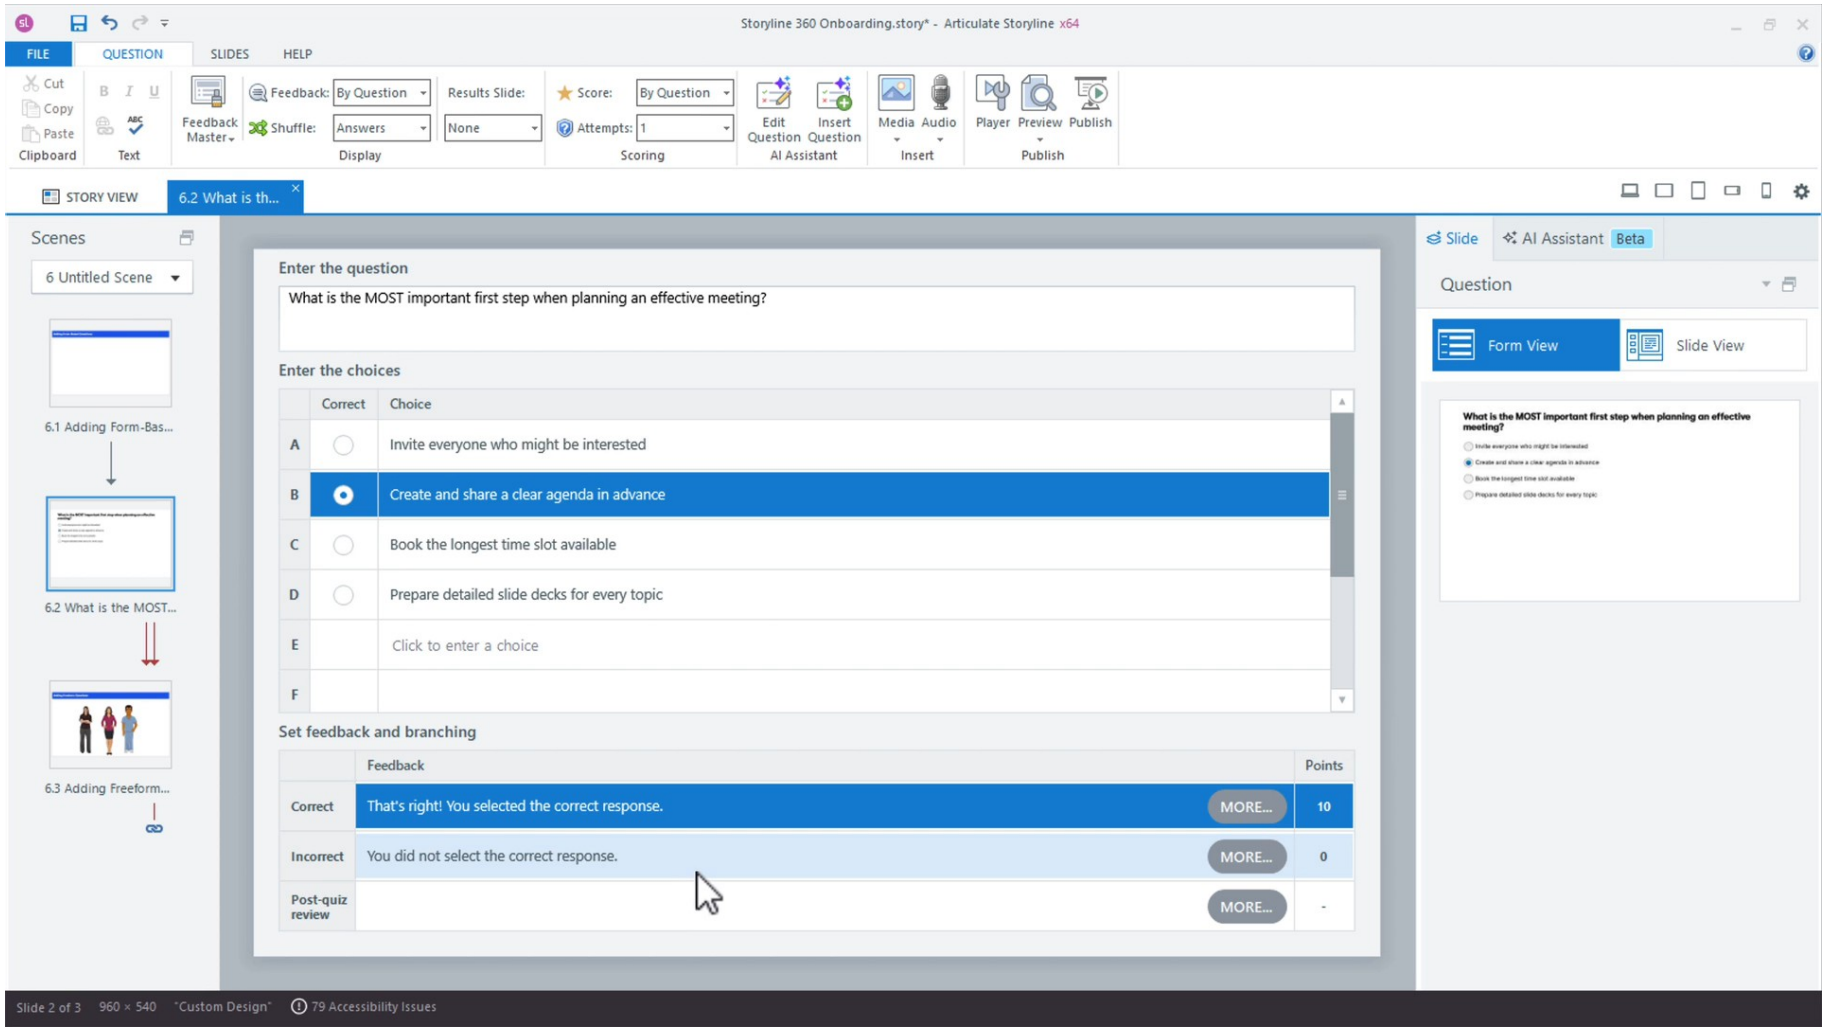


SET THESE CONTROLS C1=response set · C2=correct object · C3=states · C4=submit

REJECT WHEN visual ambiguity or automatic submission

VERIFY READBACK selection can be revised before Submit and scores correctly

Authentic Articulate interface reference · verify the named control

Freeform pick-one conversion

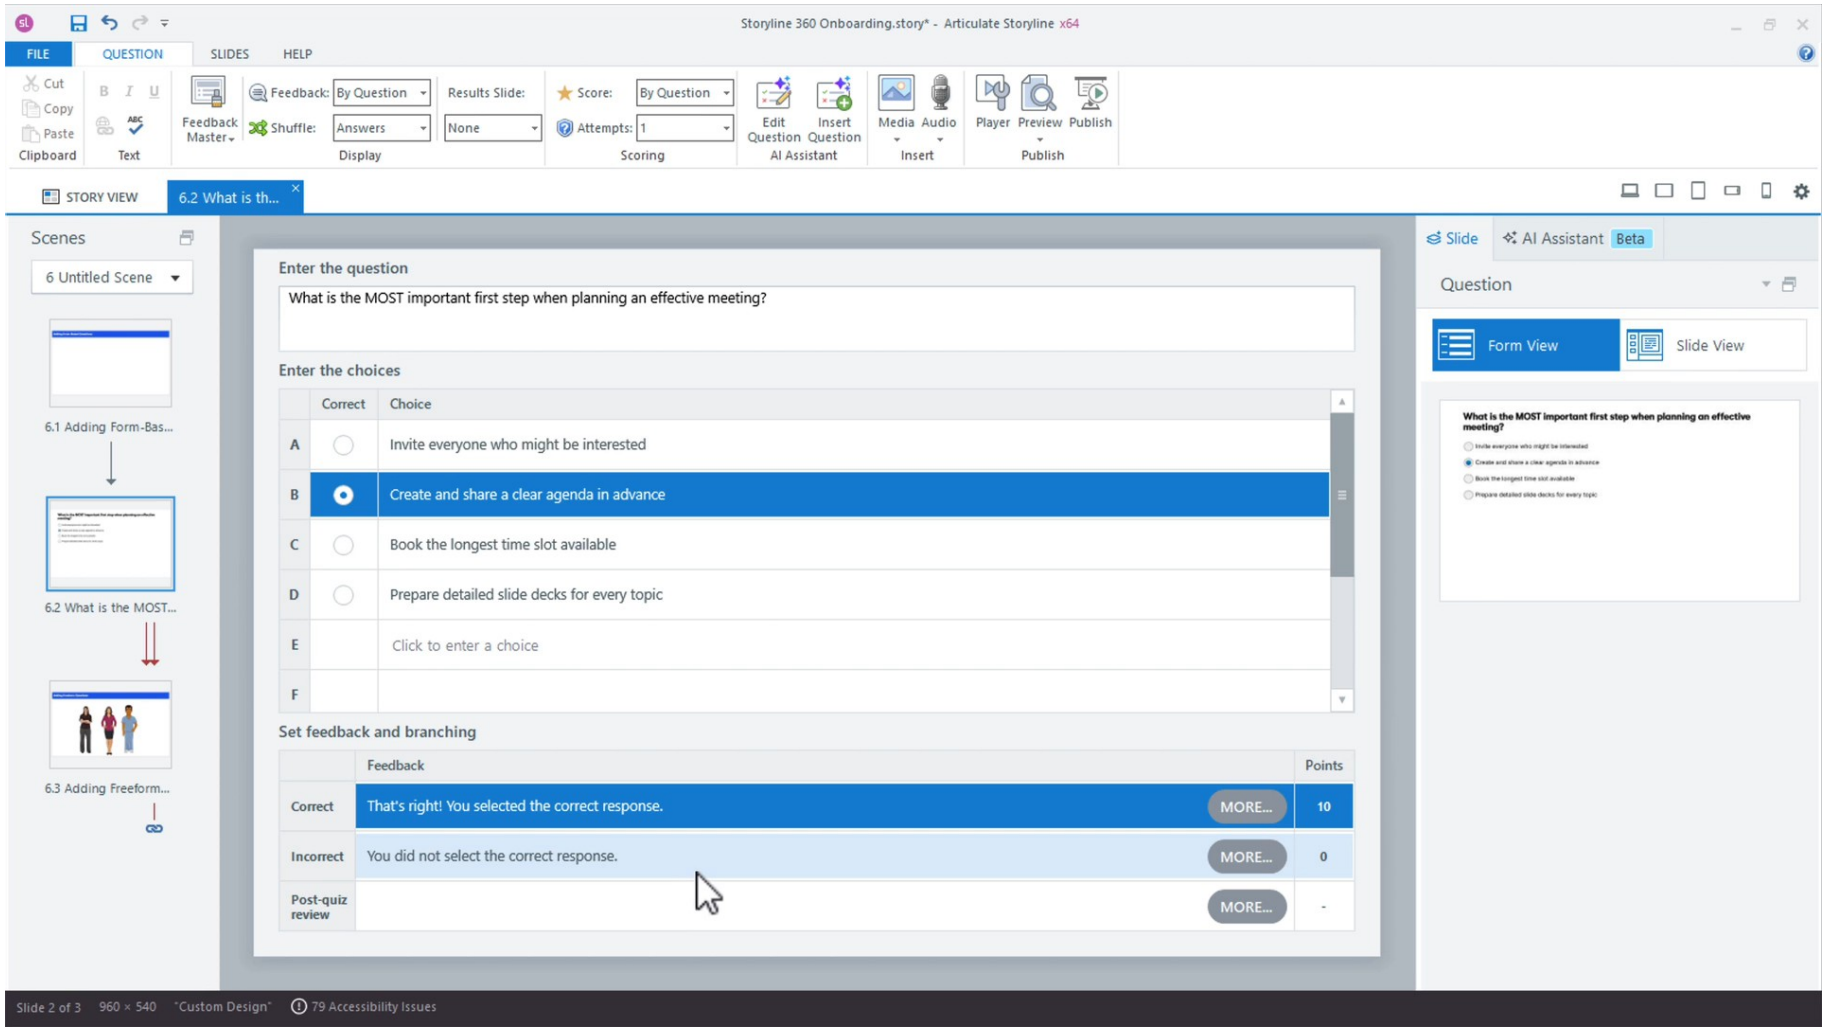

FAULTY OUTPUT (EXAMPLE) visual ambiguity or automatic submission

FIX IN NAMED PANEL response set; correct object; states; submit

EXPECTED AFTER FIX selection can be revised before Submit and scores correctly · verify in…

Authentic Articulate interface reference · verify the named control

Freeform hotspot question

Named HarbourLink WSH artifact

WSA-058-Freeform-hotspot-question

Input / source state

WSA checkpoint plus hotspot region; score; attempts; feedback

Runtime mechanism

A screenshot-based hazard question uses defined regions and consequence feedback

Expected output

an equivalent keyboard-operable response path is provided

Rejected output

mouse-only graded task

Evidence record

WSA-058-Freeform-hotspot-question: capture the configured control and the runtime readback.

EDITABLE CONFIGURATION MODEL

Freeform hotspot question

SET THESE CONTROLS

C1=hotspot region · C2=score · C3=attempts · C4=feedback

REJECT WHEN

mouse-only graded task

VERIFY READBACK

an equivalent keyboard-operable response path is provided

Editable HarbourLink model · an equivalent keyboard-operable response path is provided

Freeform hotspot question

FAULTY OUTPUT (EXAMPLE)

mouse-only graded task

→

CORRECT THE RECORD

hotspot region; score; attempts; feedback

→


EXPECTED AFTER FIX

an equivalent keyboard-operable response path is provided · verify in your own Preview

Editable HarbourLink model · an equivalent keyboard-operable response path is provided

© 2026 Tertiary Infotech Academy Pte Ltd · Mastering Articulate Storyline 360 for e-Learning Content Creation · TGS-2024042308


Drag-and-drop fallback

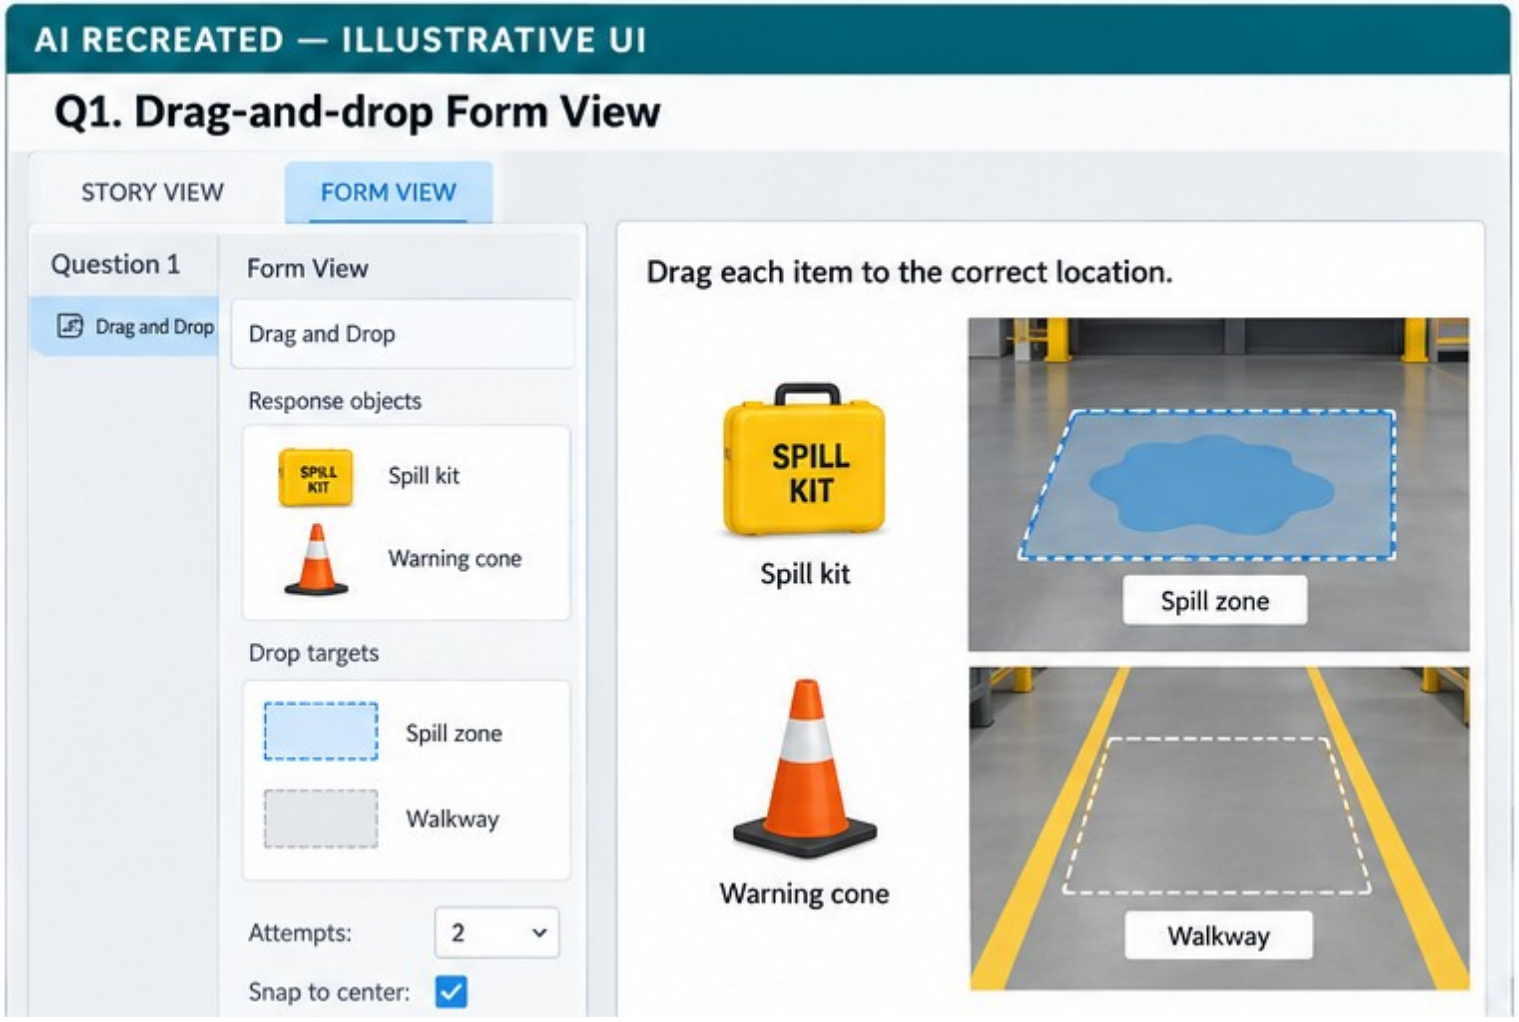

NAMED ARTIFACT	WSA-059-Drag-and-drop-fallback
MECHANISM	A sorting interaction includes keyboard-accessible buttons or an…
EXPECTED	both paths create the same instructional and scoring outcome

AI RECREATED — ILLUSTRATIVE UI · verify the named control


Drag-and-drop fallback

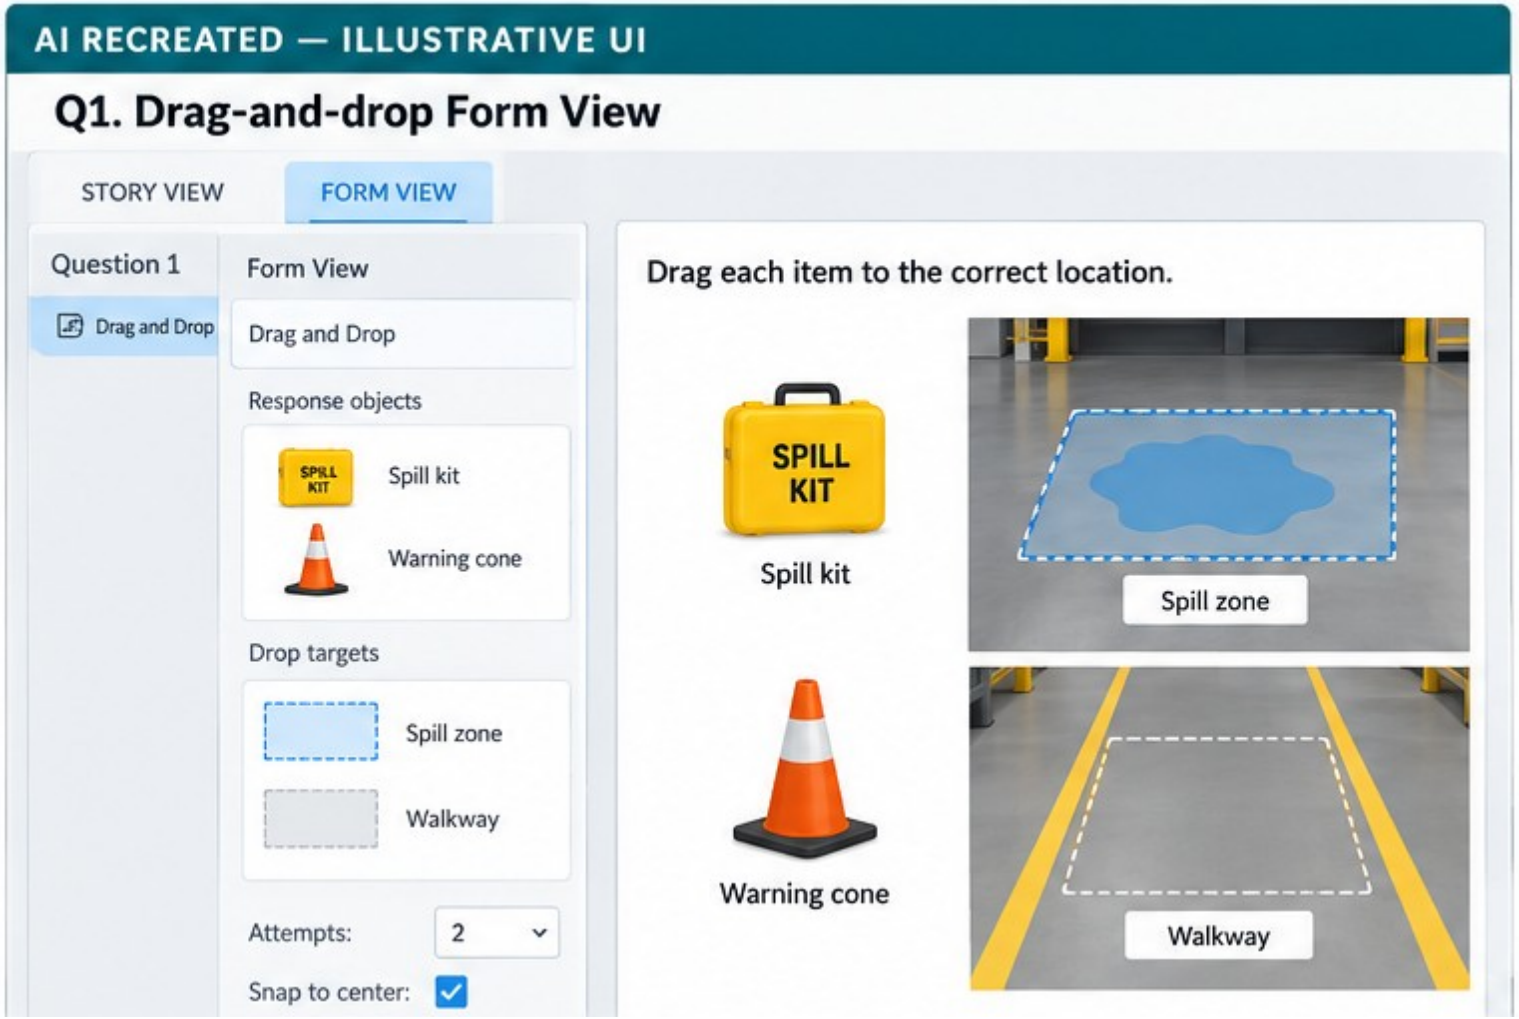

SET THESE CONTROLS	C1=drag item · C2=drop target · C3=snap · C4=reset · C5=fallback
REJECT WHEN	requiring precise dragging as the only route
VERIFY READBACK	both paths create the same instructional and scoring outcome

AI RECREATED — ILLUSTRATIVE UI · verify the named control

Drag-and-drop fallback

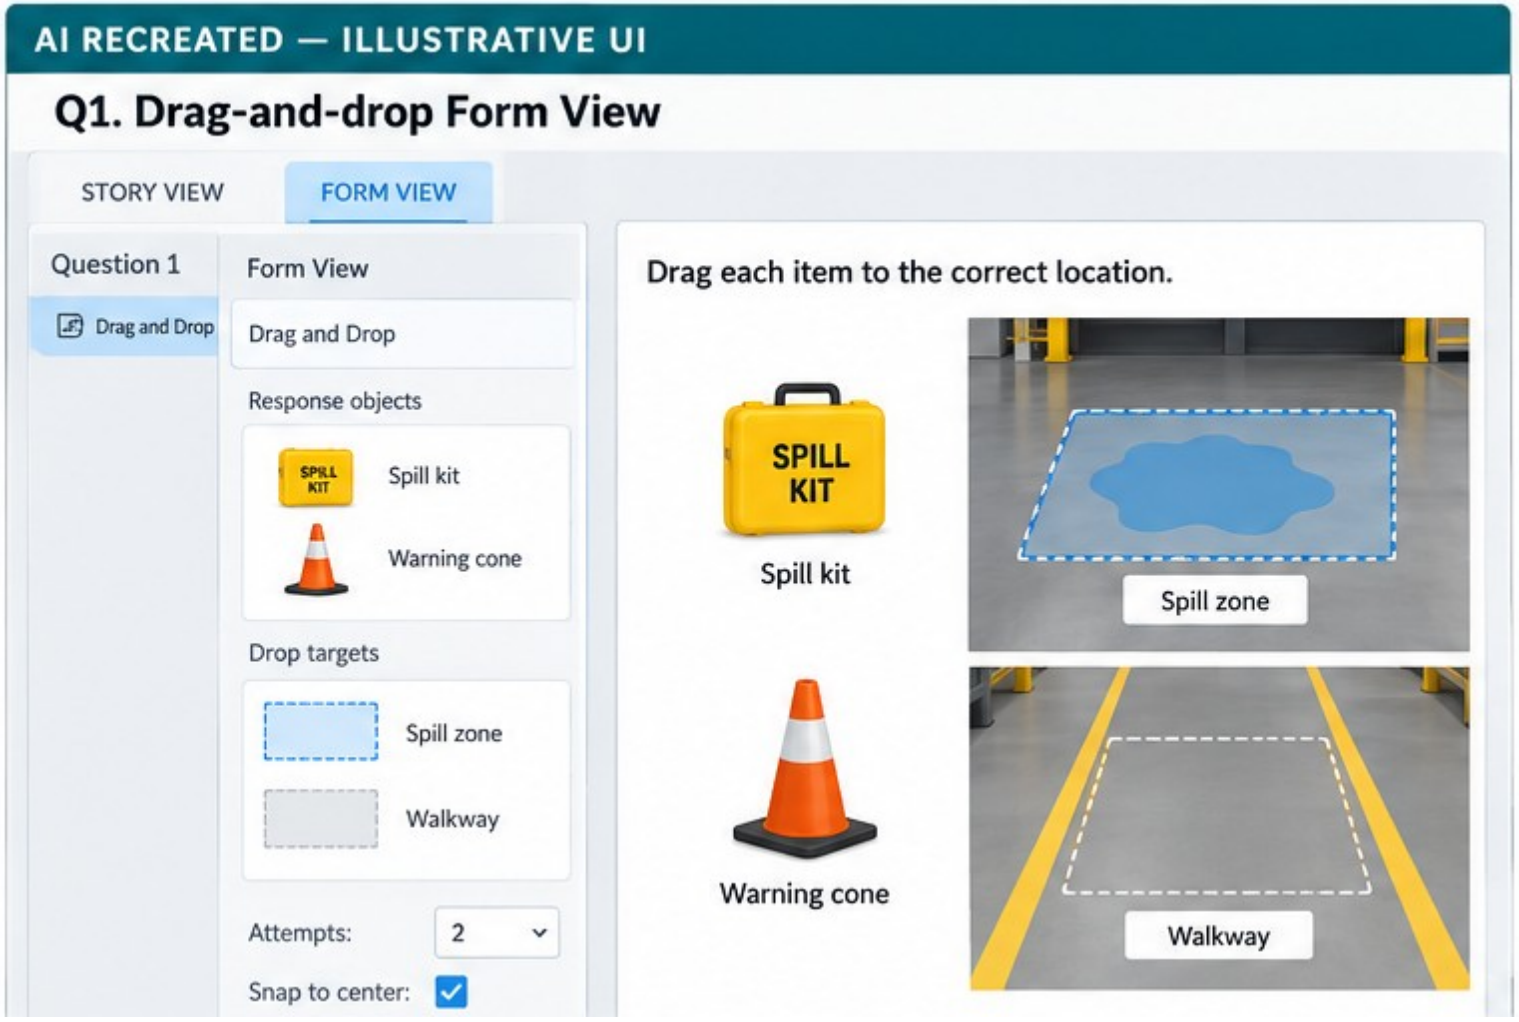


FAULTY OUTPUT (EXAMPLE) requiring precise dragging as the only route

FIX IN NAMED PANEL drag item; drop target; snap; reset; fallback

EXPECTED AFTER FIX both paths create the same instructional and scoring outcome · verify in…

AI RECREATED — ILLUSTRATIVE UI · verify the named control


Question form configuration

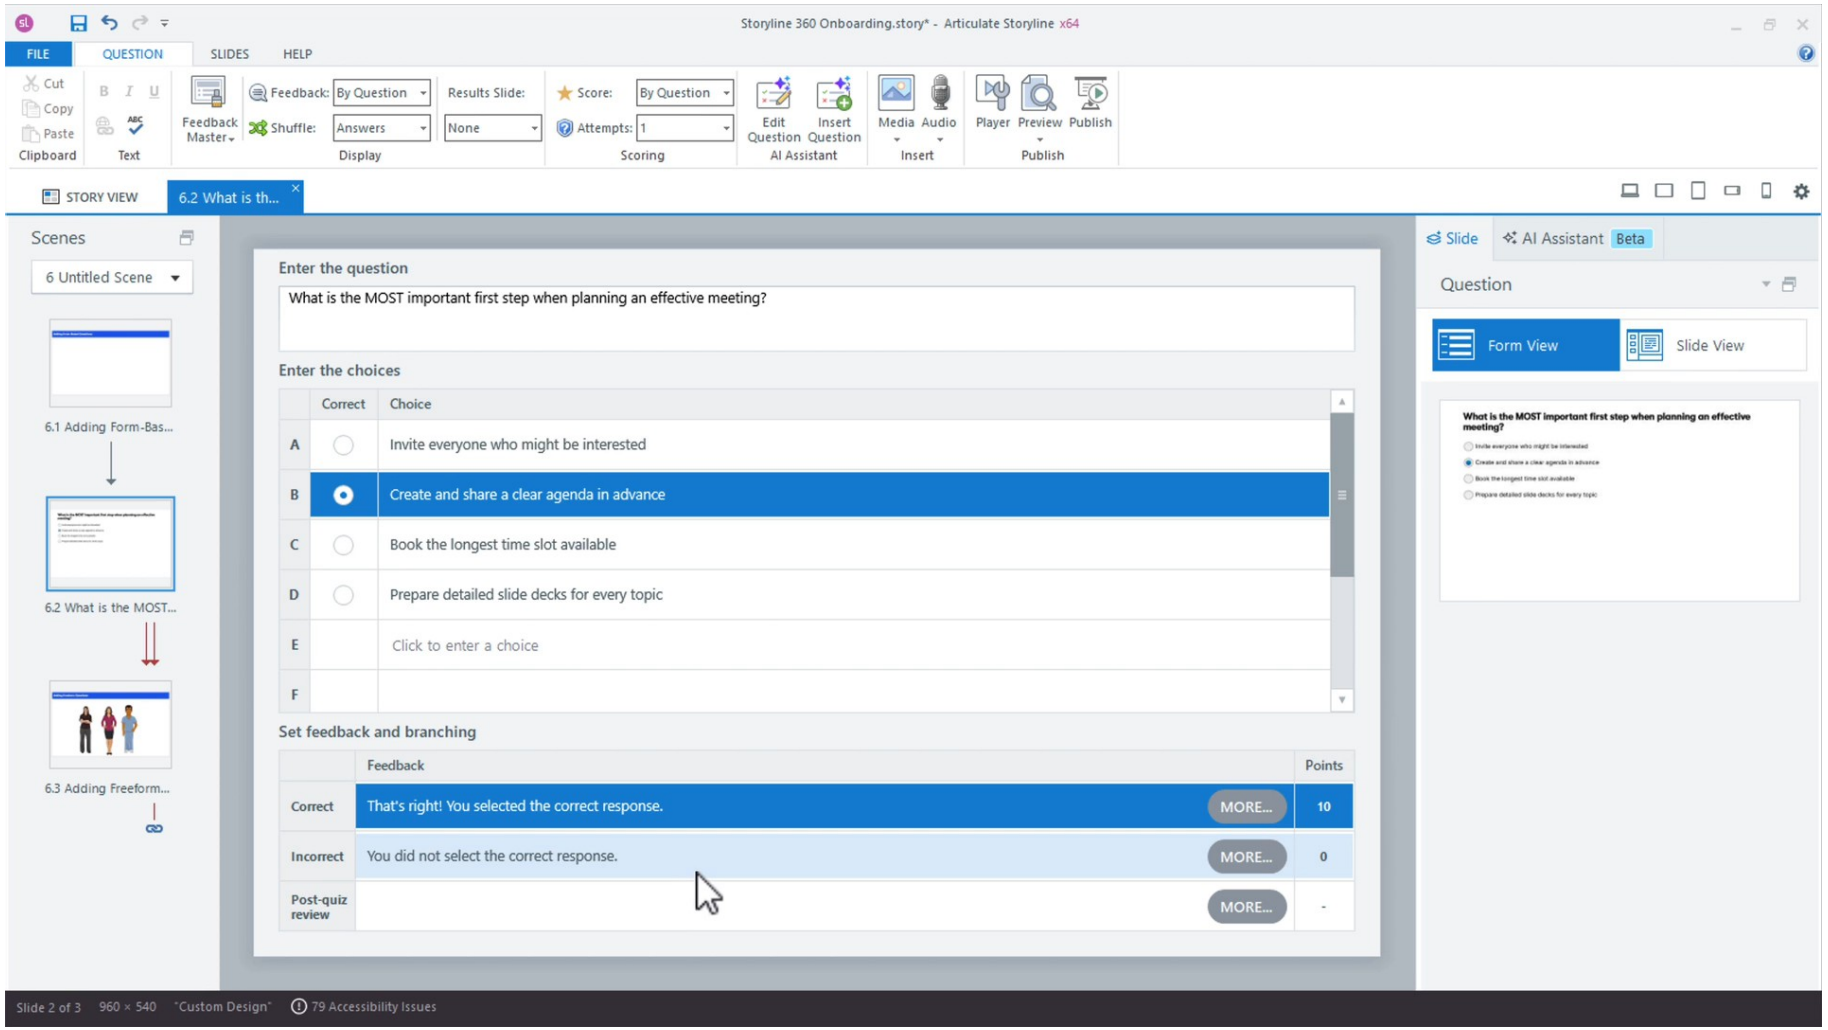

NAMED ARTIFACT	**WSA-060-Question-form-configuration**
MECHANISM	**Form View defines prompt, choices, score, attempts, shuffle and feedback…**
EXPECTED	**question specification matches runtime scoring**

Authentic Articulate interface reference · verify the named control

Question form configuration

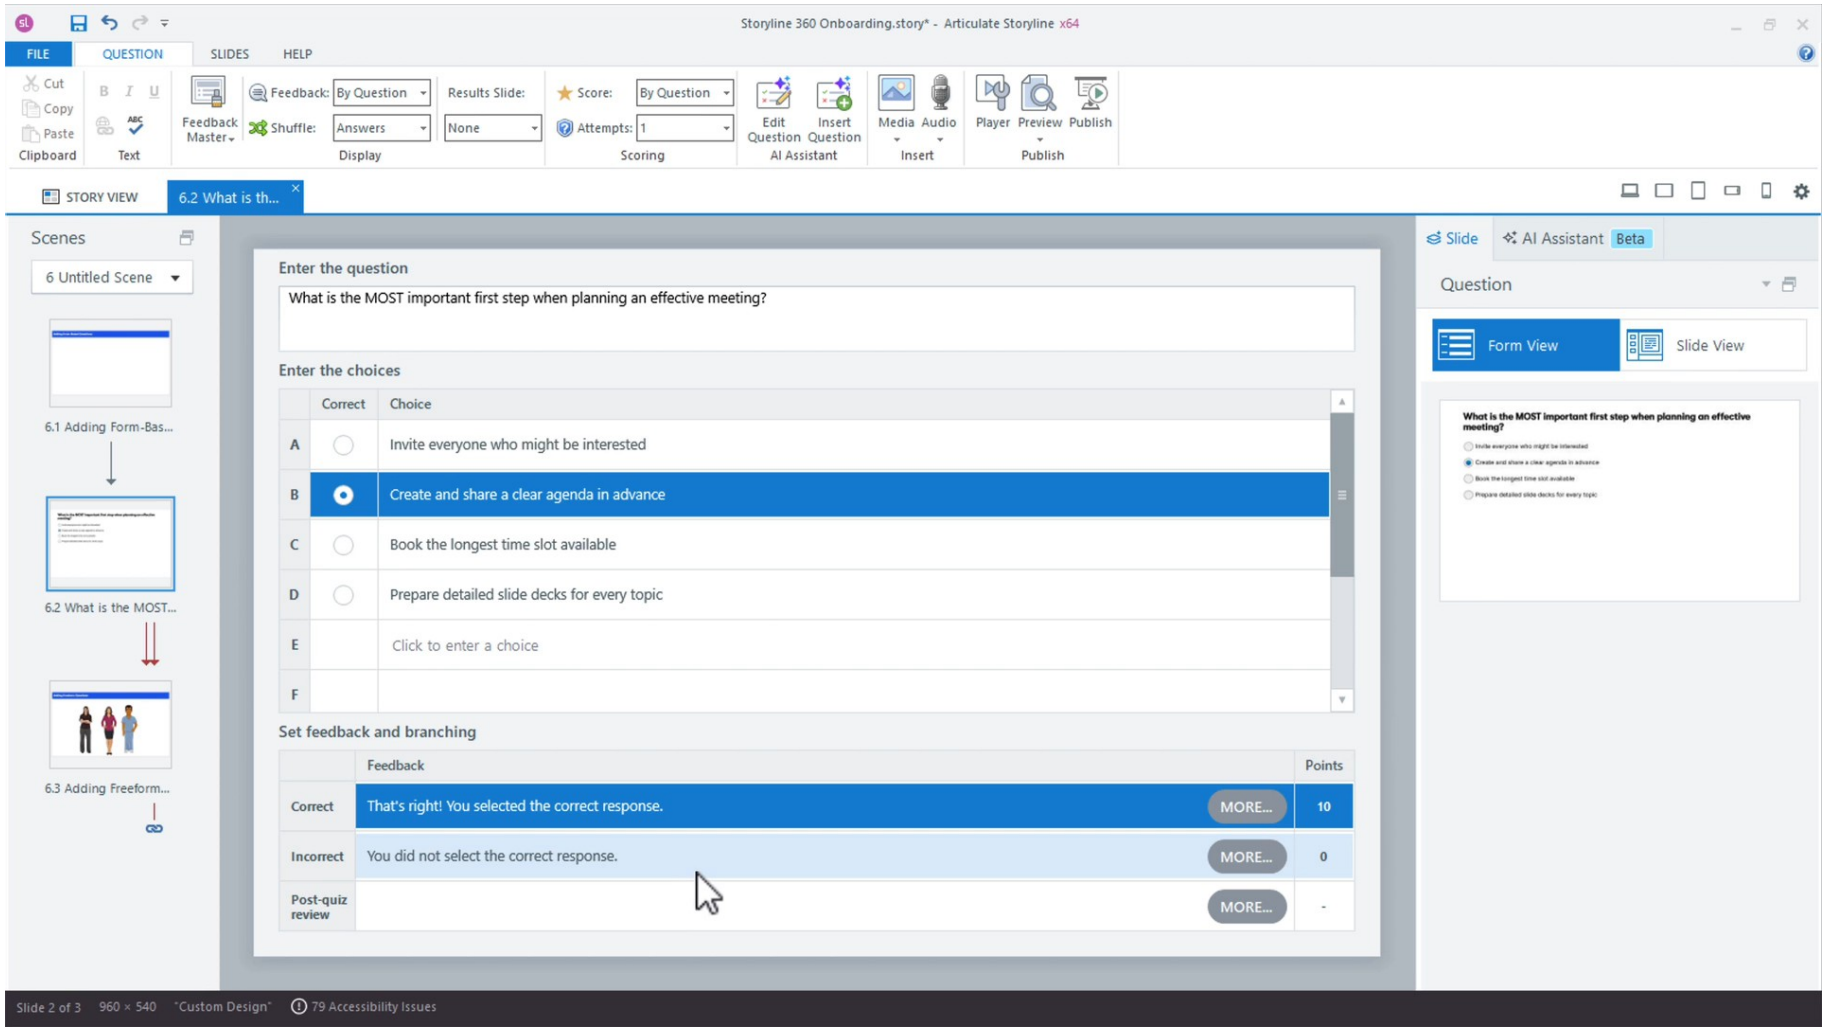


SET THESE CONTROLS C1=question type · C2=points · C3=required · C4=attempts

REJECT WHEN styling before the scoring model is stable

VERIFY READBACK question specification matches runtime scoring

Authentic Articulate interface reference · verify the named control

Question form configuration

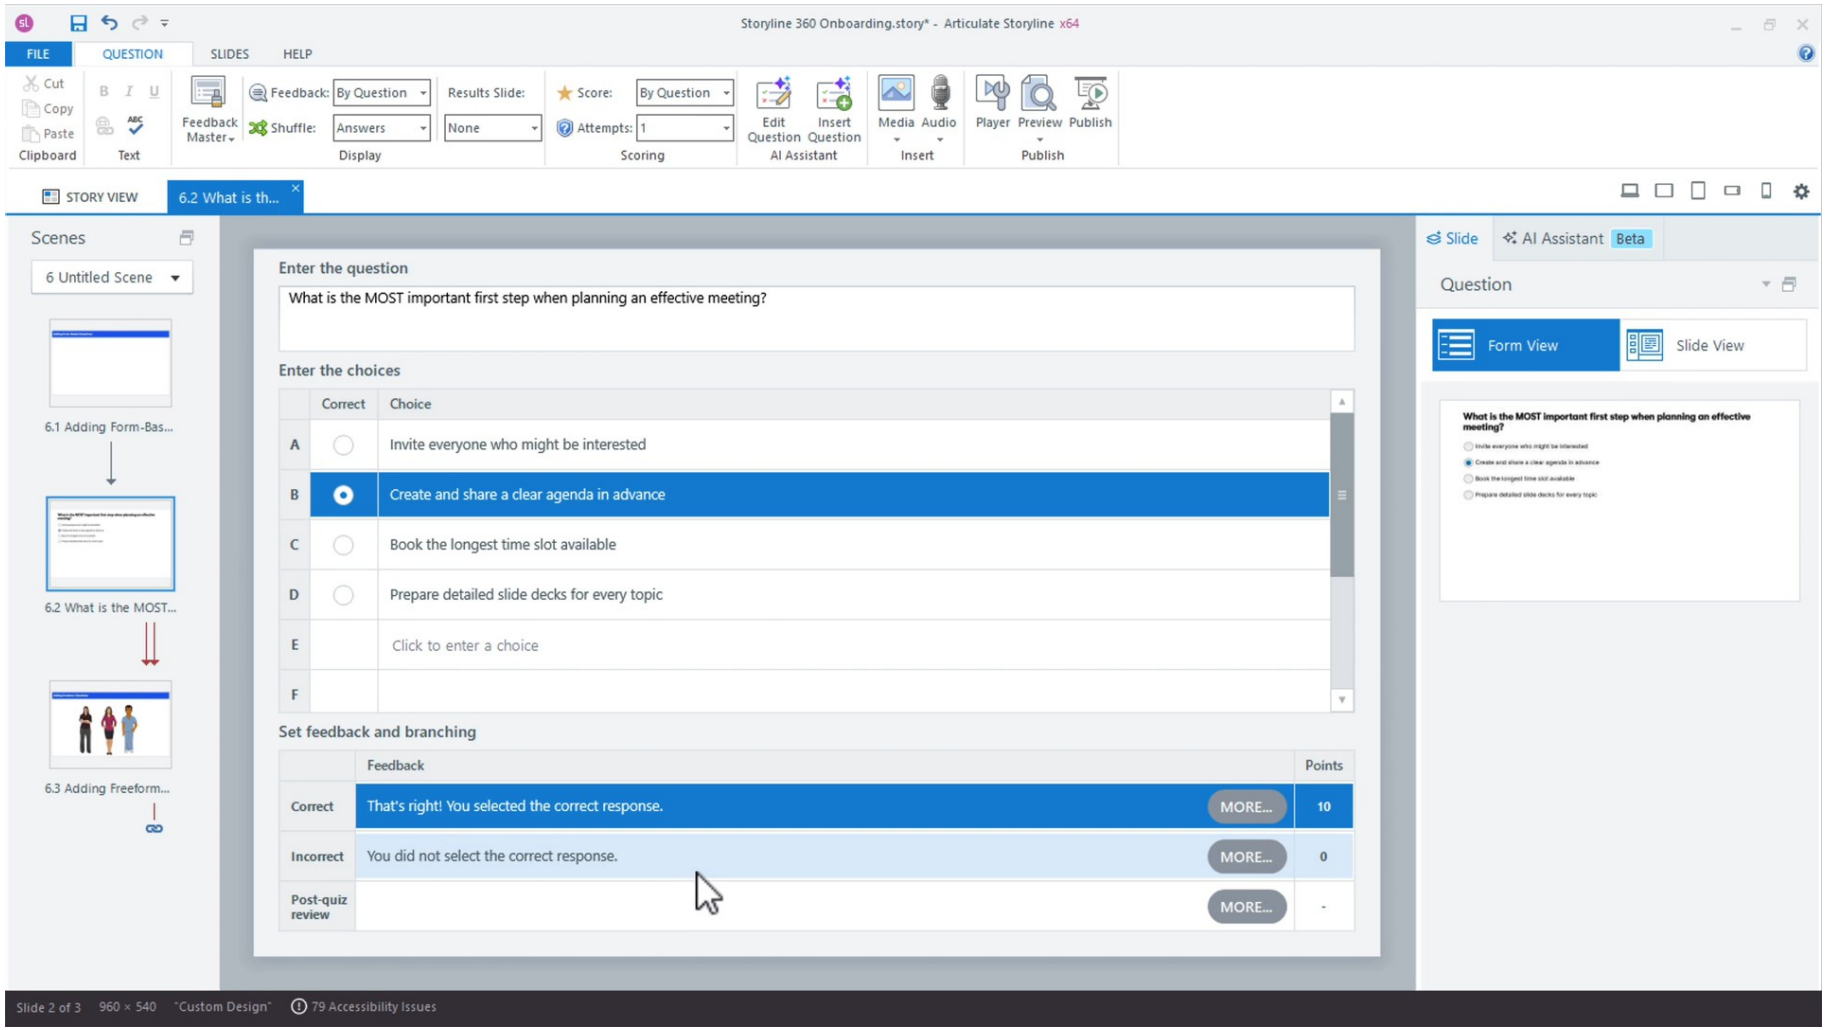


FAULTY OUTPUT (EXAMPLE) styling before the scoring model is stable

FIX IN NAMED PANEL question type; points; required; attempts

EXPECTED AFTER FIX question specification matches runtime scoring · verify in your own Preview

Authentic Articulate interface reference · verify the named control


Feedback layers

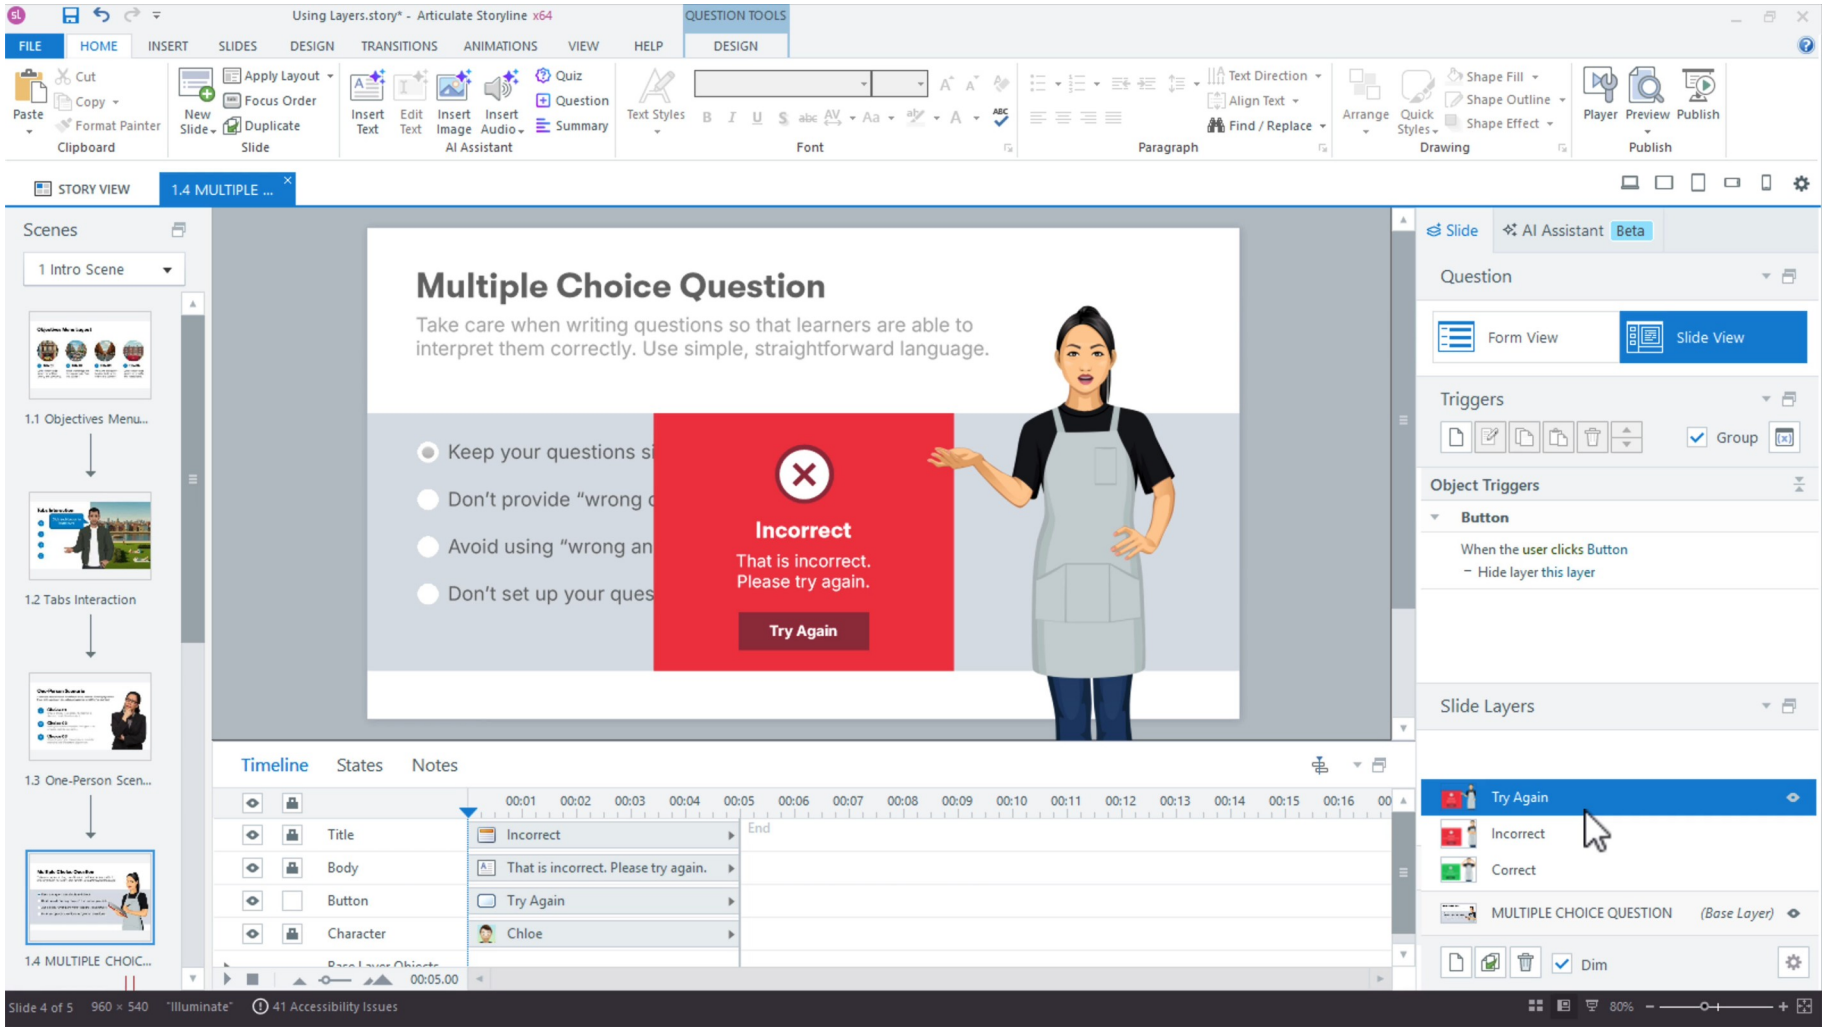

NAMED ARTIFACT	**WSA-061-Feedback-layers**
MECHANISM	**Correct, Incorrect and Try Again layers explain the safety consequence and…**
EXPECTED	**learner can state why the response changes risk**

Authentic Articulate interface reference · verify the named control


Feedback layers

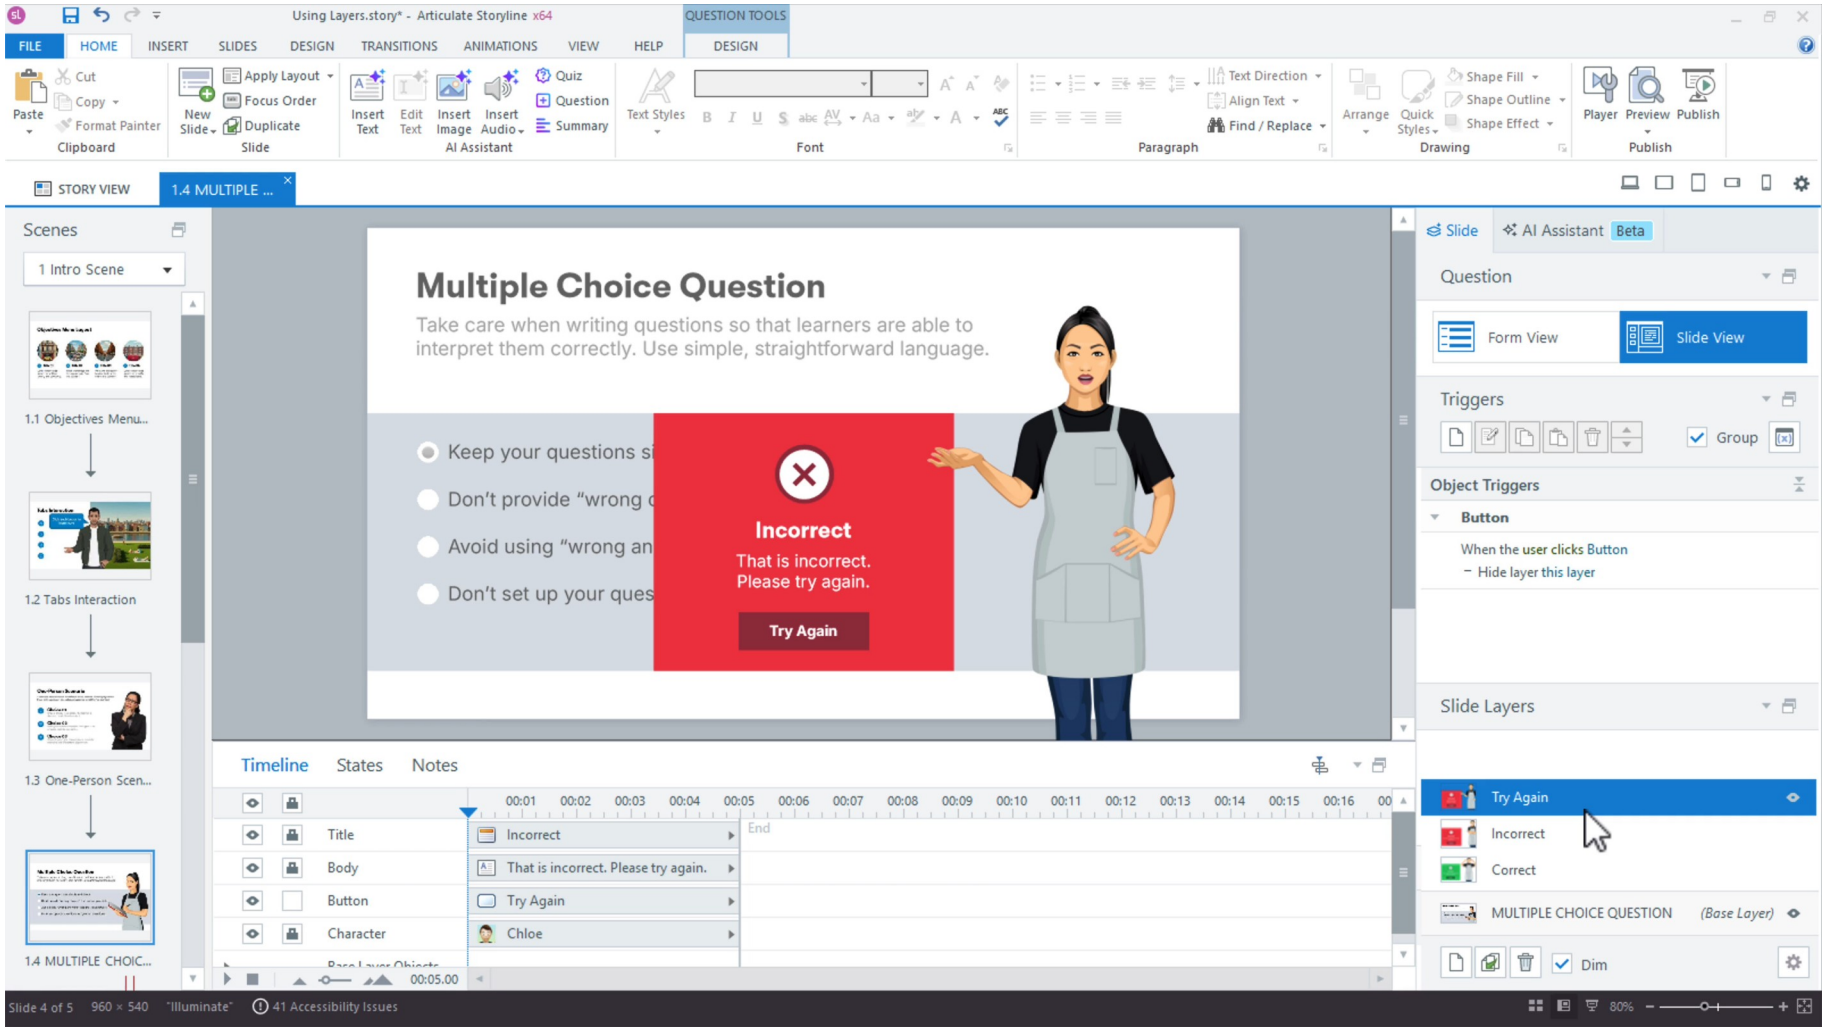

SET THESE CONTROLS	**C1=layer text · C2=continue · C3=focus · C4=attempts**
REJECT WHEN	**feedback saying only correct/incorrect**
VERIFY READBACK	**learner can state why the response changes risk**

Authentic Articulate interface reference · verify the named control

Feedback layers

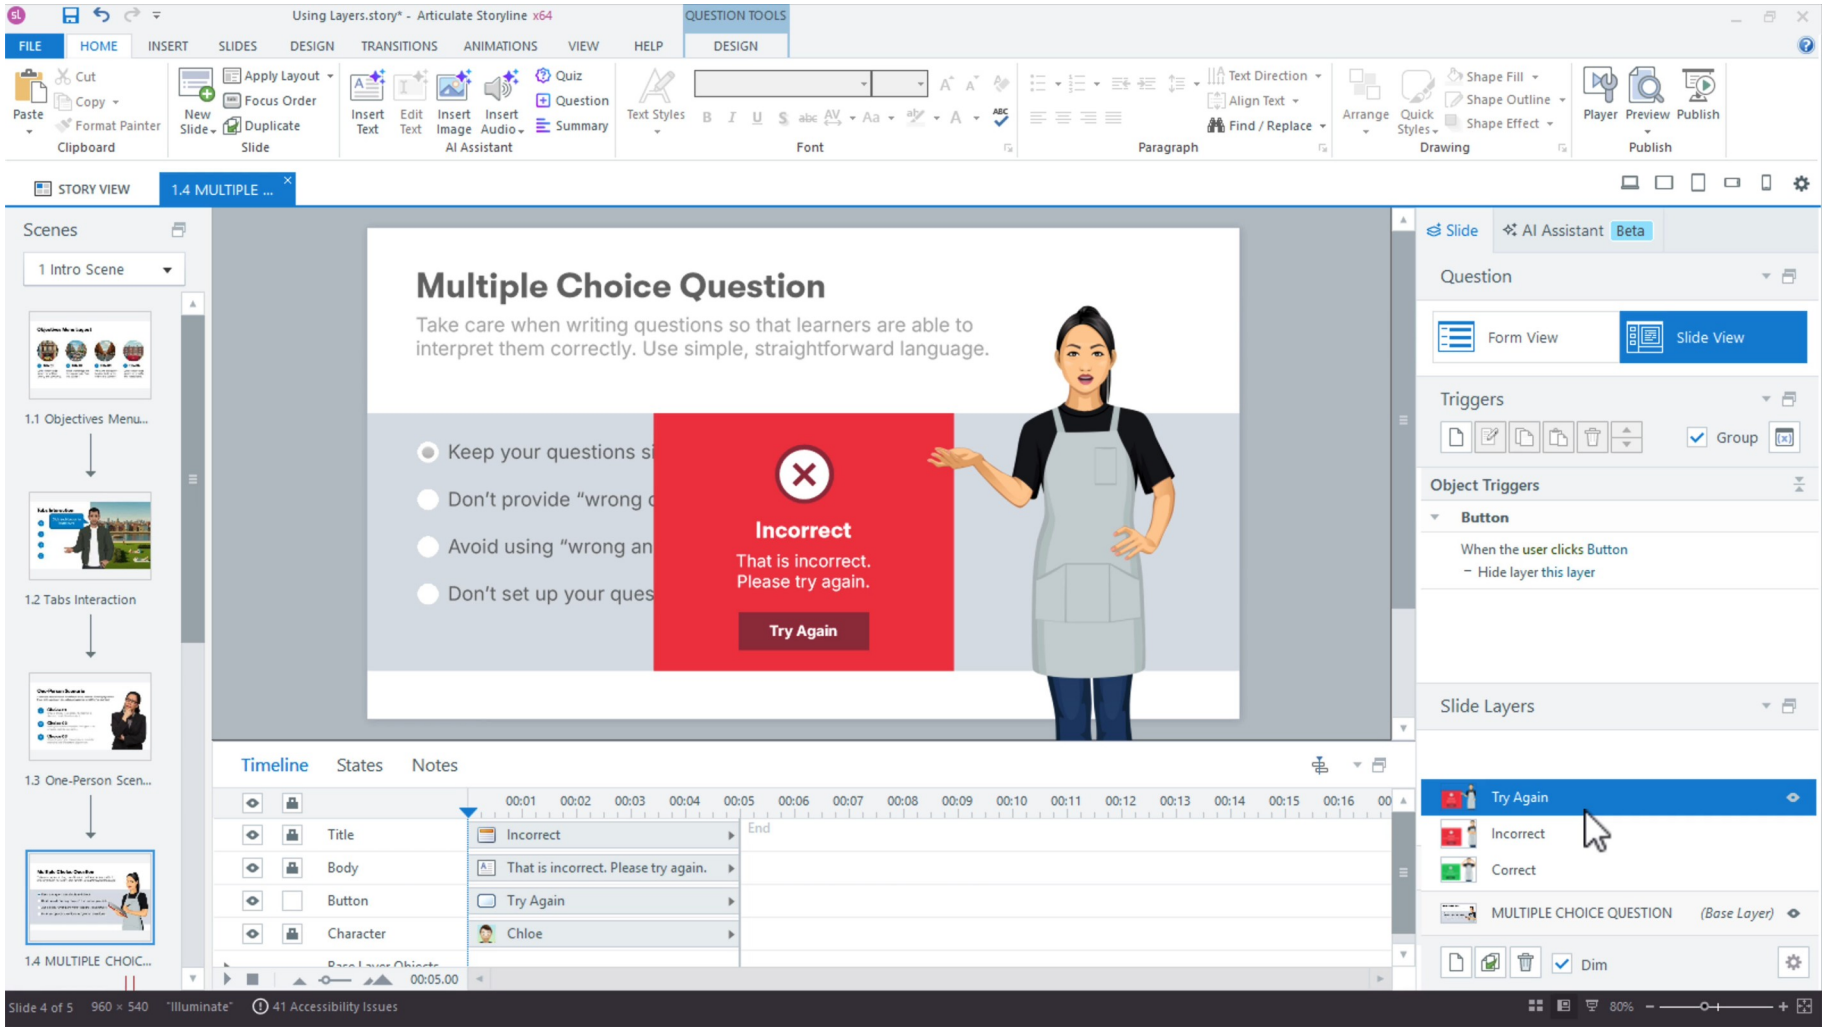


FAULTY OUTPUT (EXAMPLE) feedback saying only correct/incorrect

FIX IN NAMED PANEL layer text; continue; focus; attempts

EXPECTED AFTER FIX learner can state why the response changes risk · verify in your own Preview

Authentic Articulate interface reference · verify the named control


Question bank design

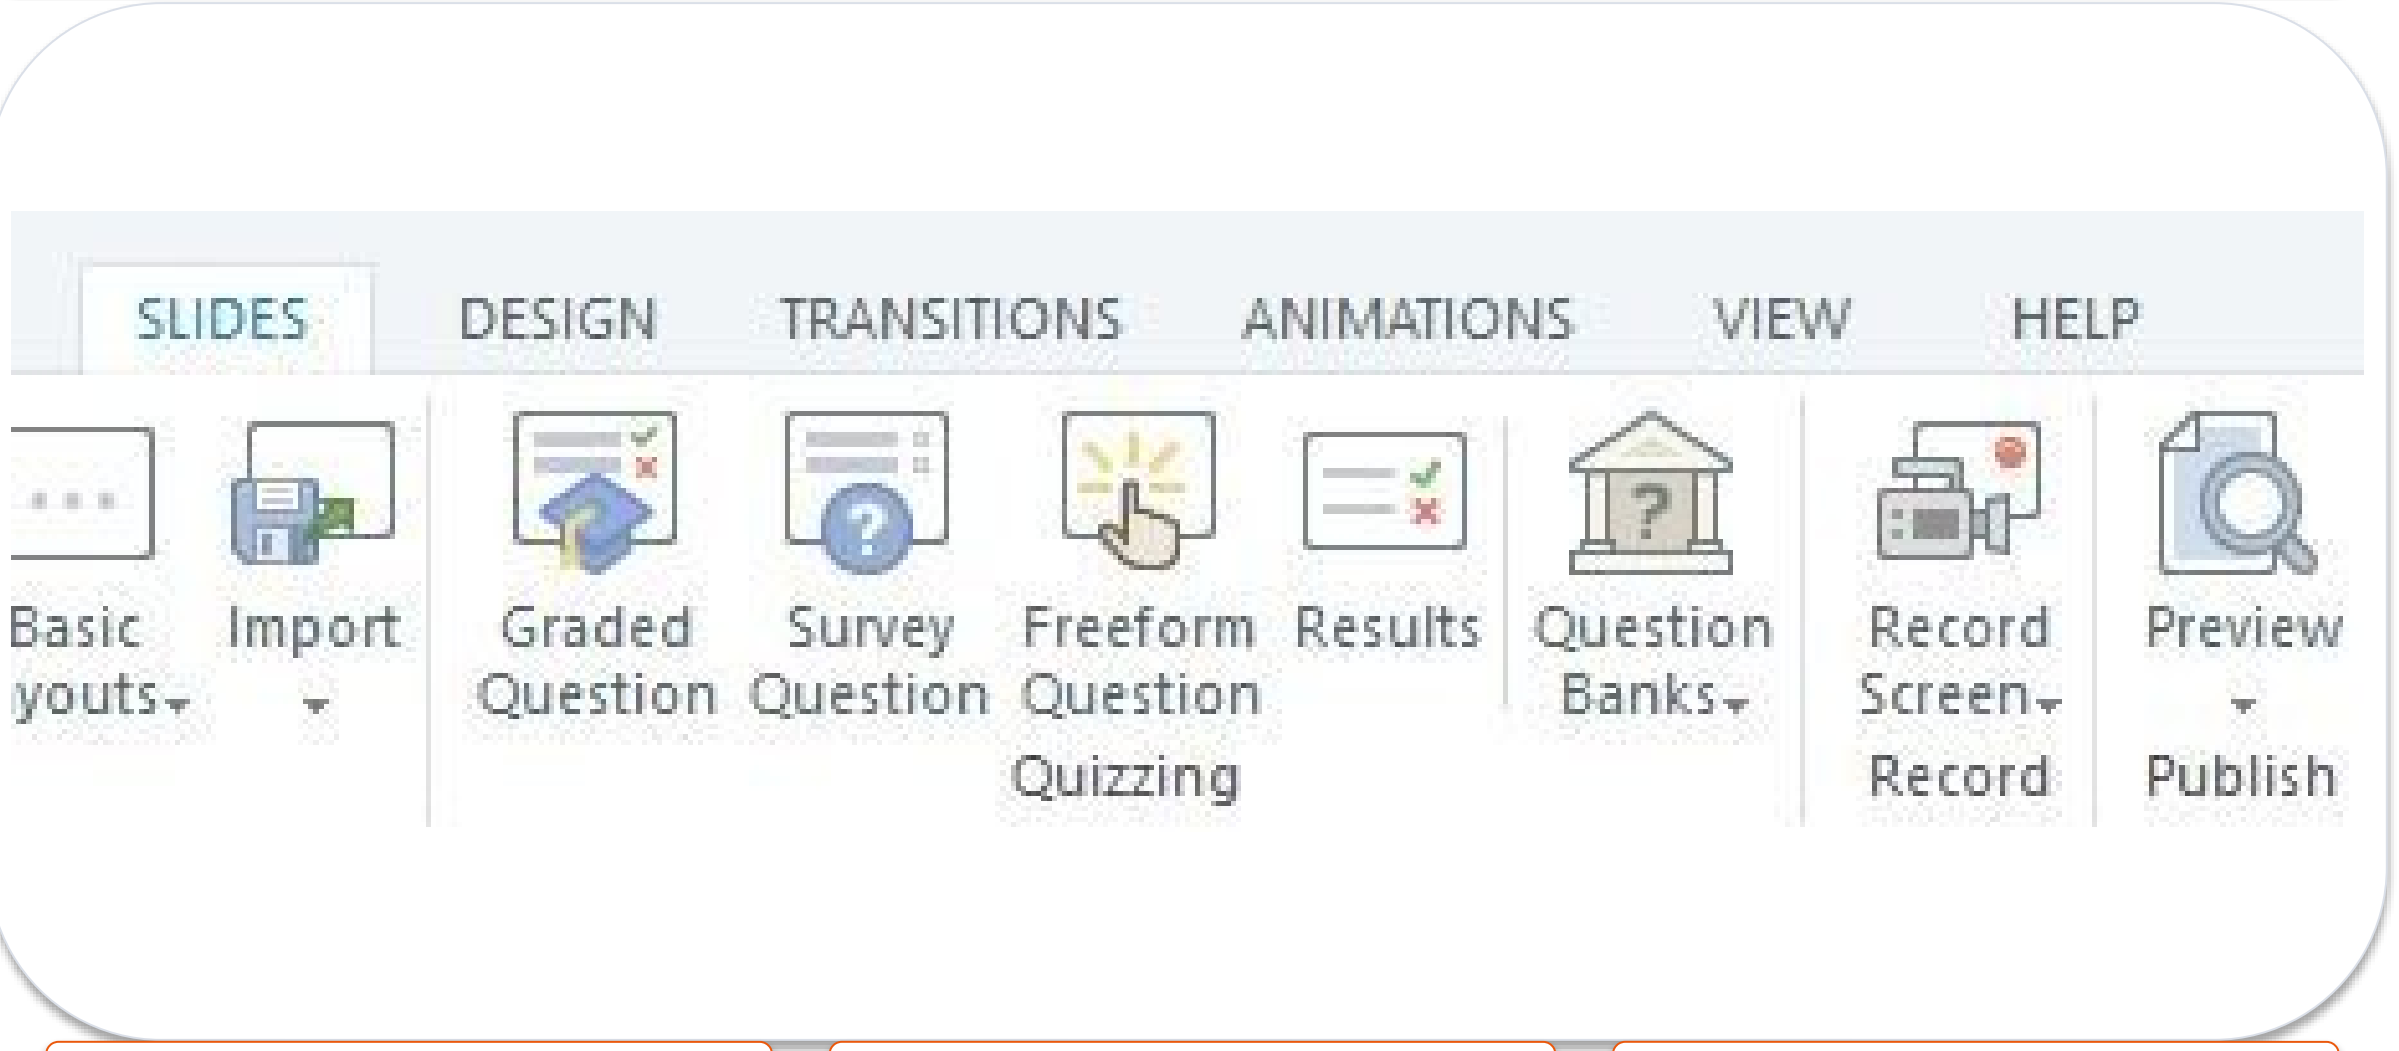

NAMED ARTIFACT	WSA-062-Question-bank-design
MECHANISM	A Safety Bank groups items by criterion and supports controlled random draws
EXPECTED	repeated draws preserve minimum content coverage

Authentic Articulate interface reference · verify the named control

Question bank design

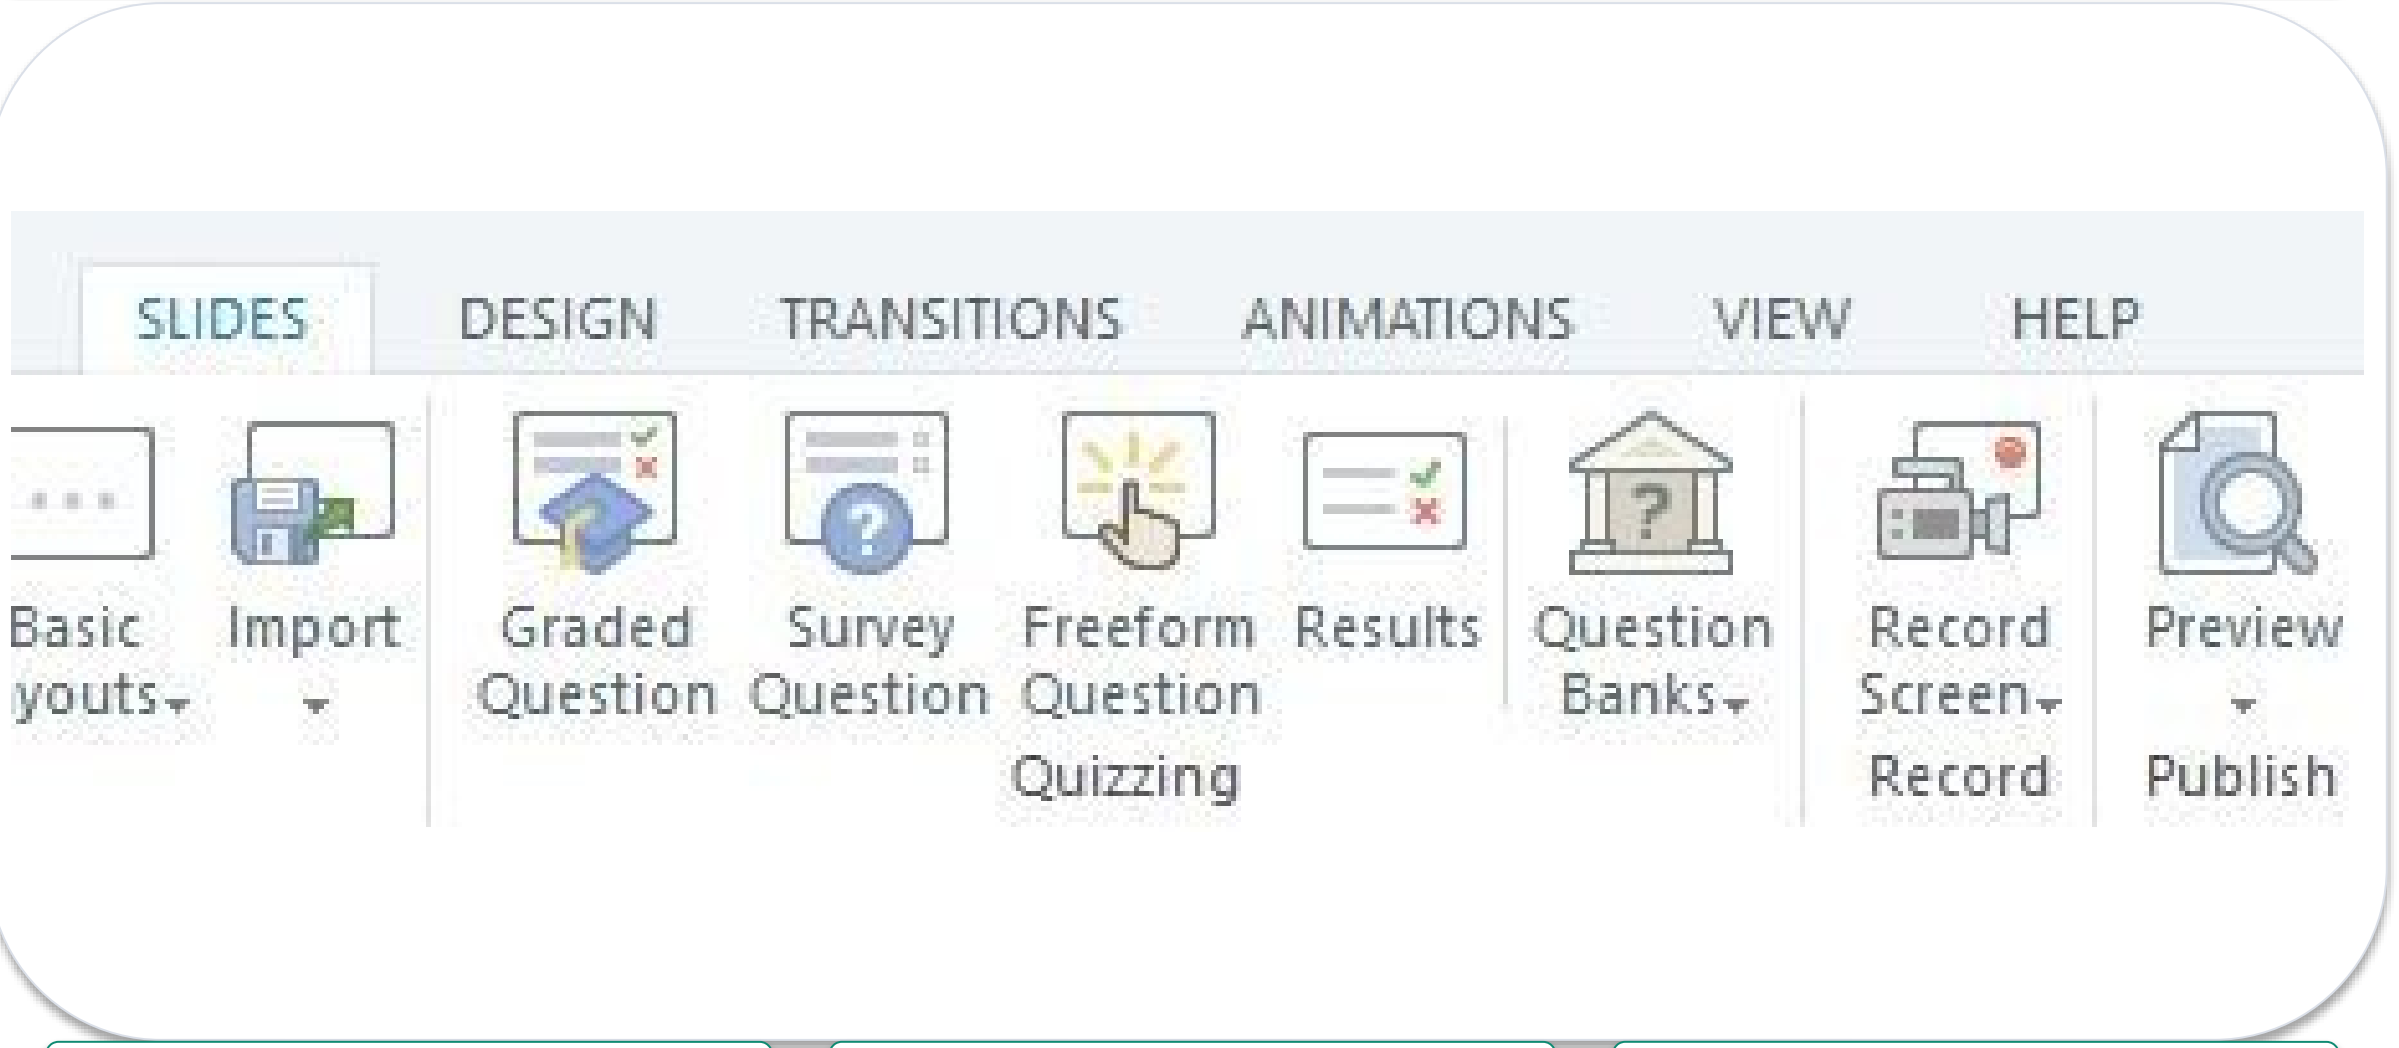

SET THESE CONTROLS	C1=bank name · C2=criterion tags · C3=draw count · C4=randomisation
REJECT WHEN	random draw missing a required criterion
VERIFY READBACK	repeated draws preserve minimum content coverage

Authentic Articulate interface reference · verify the named control


Question bank design



FAULTY OUTPUT (EXAMPLE)	random draw missing a required criterion	FIX IN NAMED PANEL	bank name; criterion tags; draw count; randomisation	EXPECTED AFTER FIX	repeated draws preserve minimum content coverage · verify in your own Preview

Authentic Articulate interface reference · verify the named control


Draw from question bank

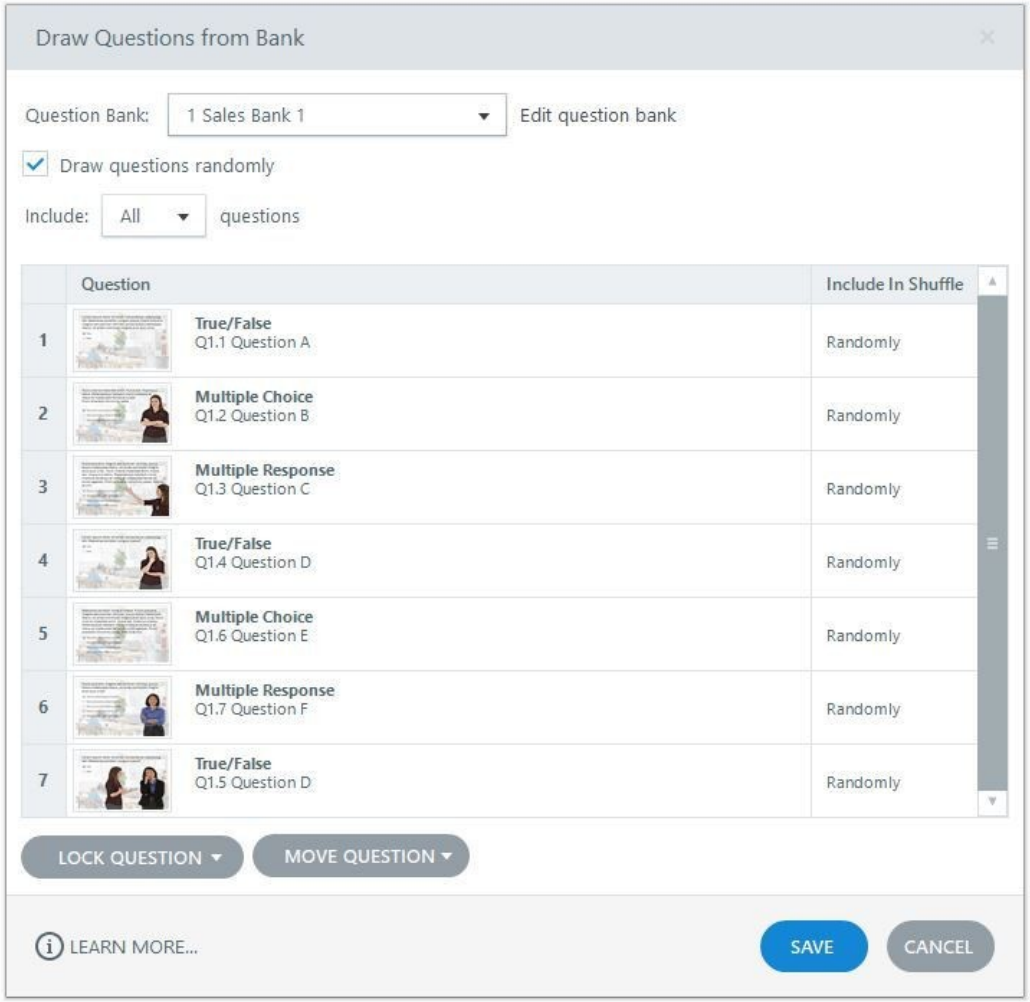

NAMED ARTIFACT	WSA-063-Draw-from-question-bank
MECHANISM	Slides > Question Banks > New Draw from Question Bank selects the intended…
EXPECTED	preview draws the configured count and result slide includes them

Authentic Articulate interface reference · verify the named control

Draw from question bank

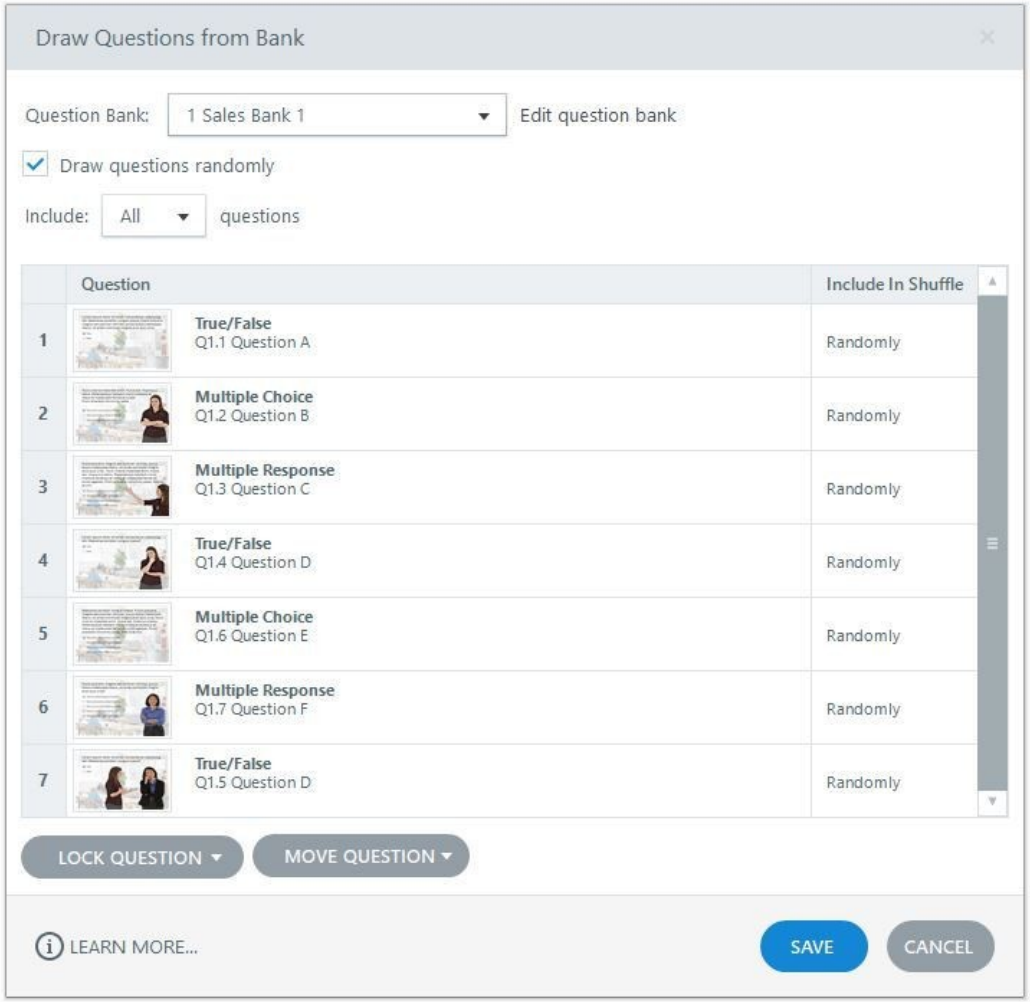


SET THESE CONTROLS C1=draw count · C2=include/exclude · C3=lock order

REJECT WHEN tracking the bank source instead of delivered questions

VERIFY READBACK preview draws the configured count and result slide includes them

Authentic Articulate interface reference · verify the named control

Draw from question bank

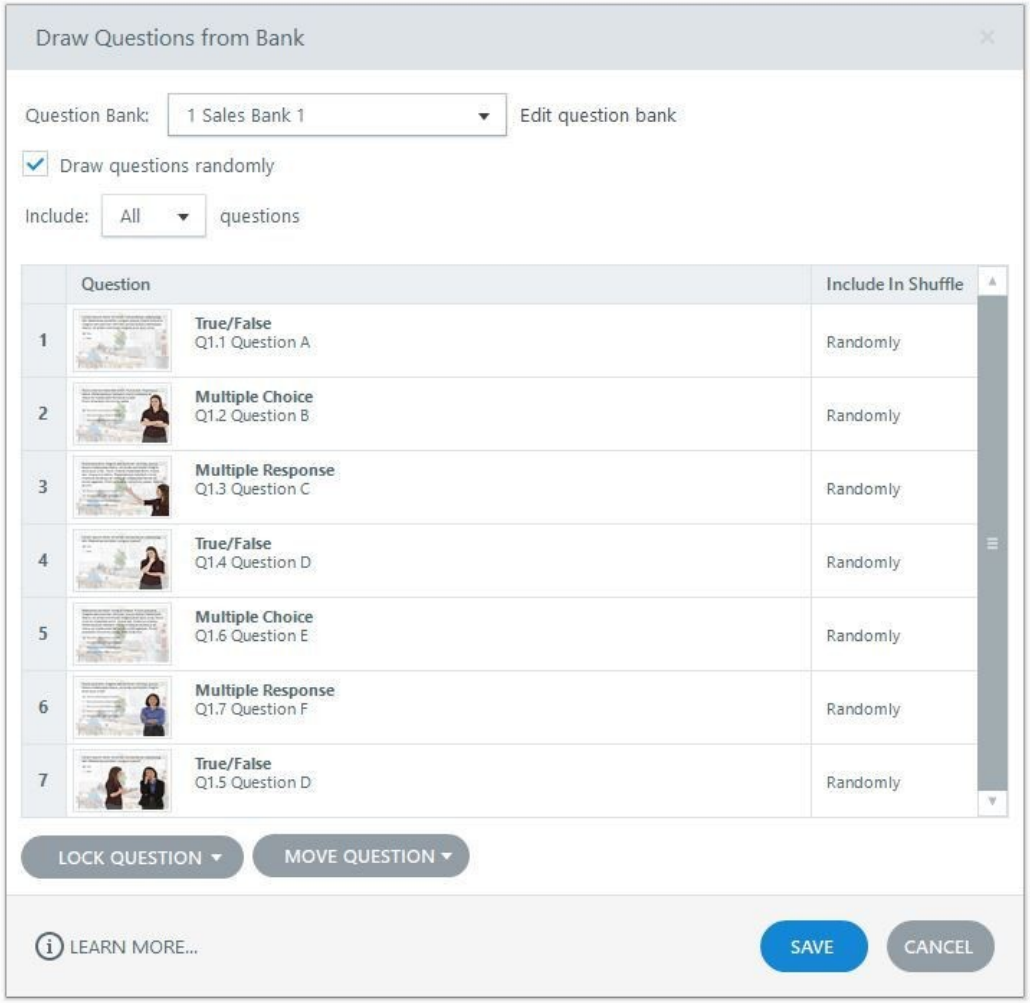


FAULTY OUTPUT (EXAMPLE) tracking the bank source instead of delivered questions

FIX IN NAMED PANEL draw count; include/exclude; lock order

EXPECTED AFTER FIX preview draws the configured count and result slide includes them · verify…

Authentic Articulate interface reference · verify the named control


Result slide tracking

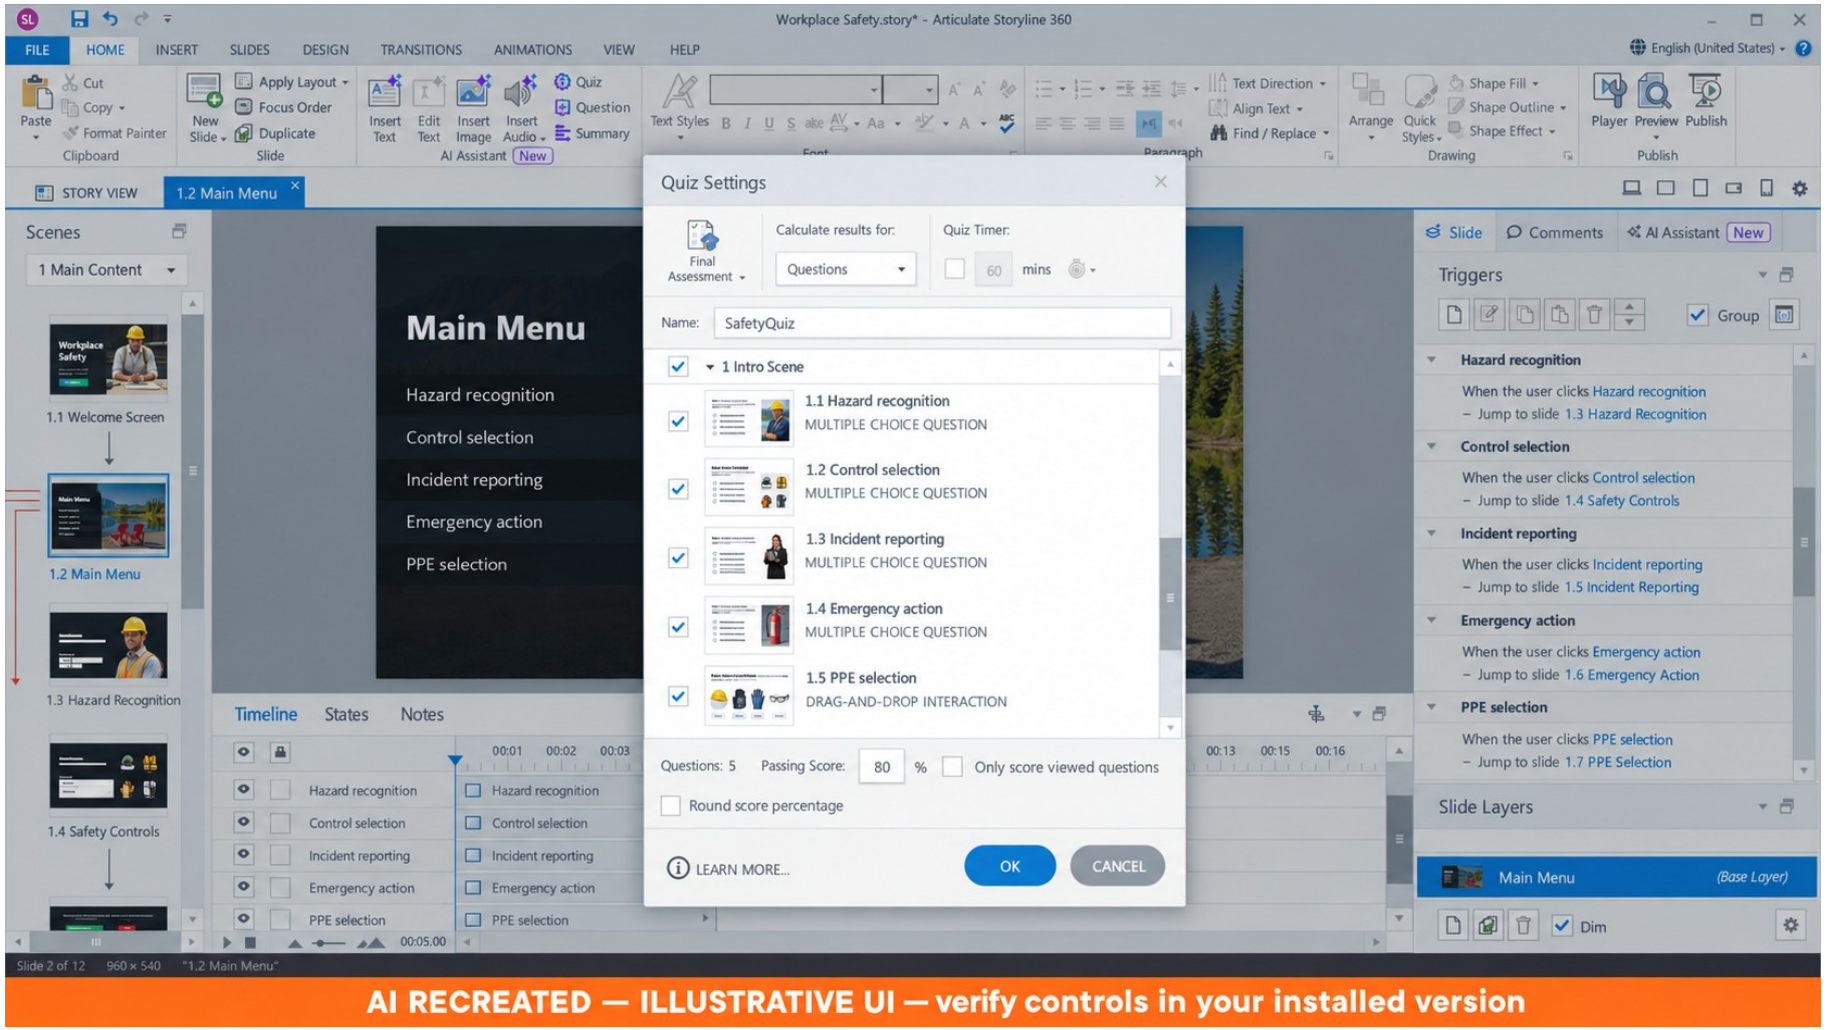

NAMED ARTIFACT	**WSA-064-Result-slide-tracking**
MECHANISM	**Insert > New Slide > Results tracks only the scored quiz and sets 80% pass**
EXPECTED	**known answer sets return expected percentage and pass/fail**

AI RECREATED — ILLUSTRATIVE UI · verify the named control


Result slide tracking

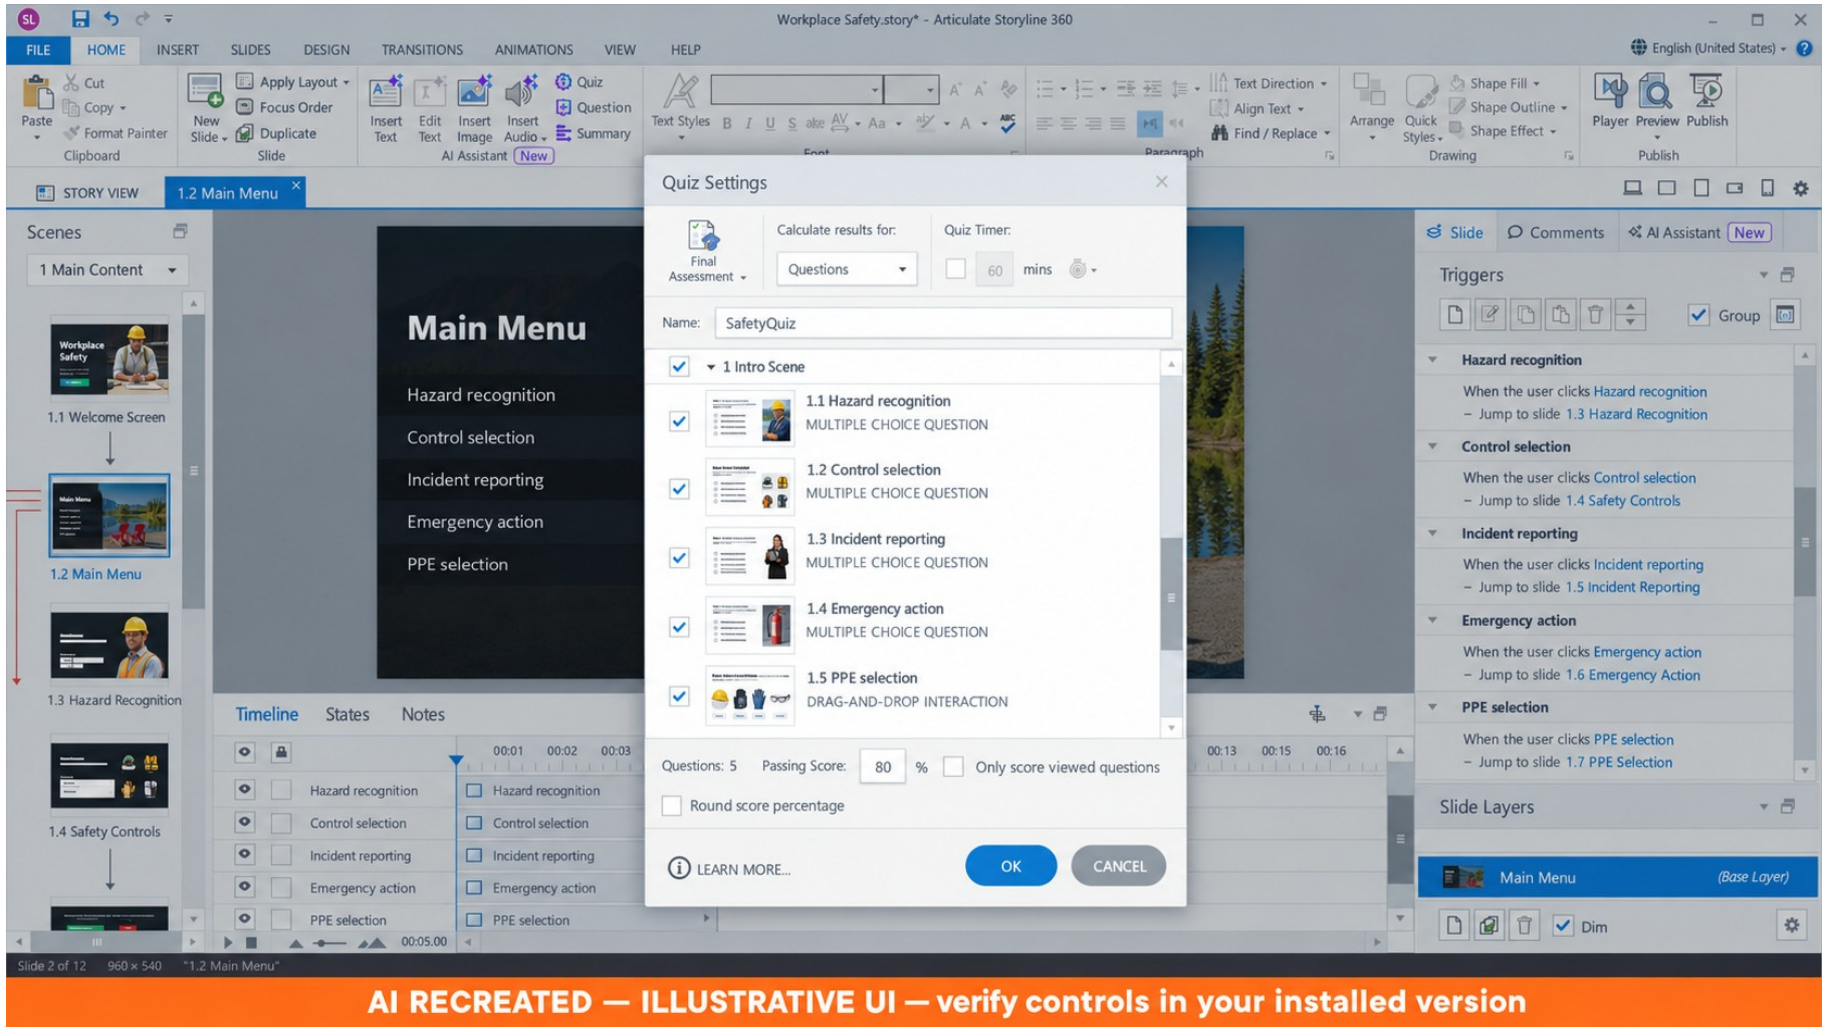

SET THESE CONTROLS	**C1=tracked questions · C2=passing score · C3=score display**
REJECT WHEN	**tracking the wrong questions or allowing slides-viewed bypass**
VERIFY READBACK	**known answer sets return expected percentage and pass/fail**

AI RECREATED — ILLUSTRATIVE UI · verify the named control

Result slide tracking

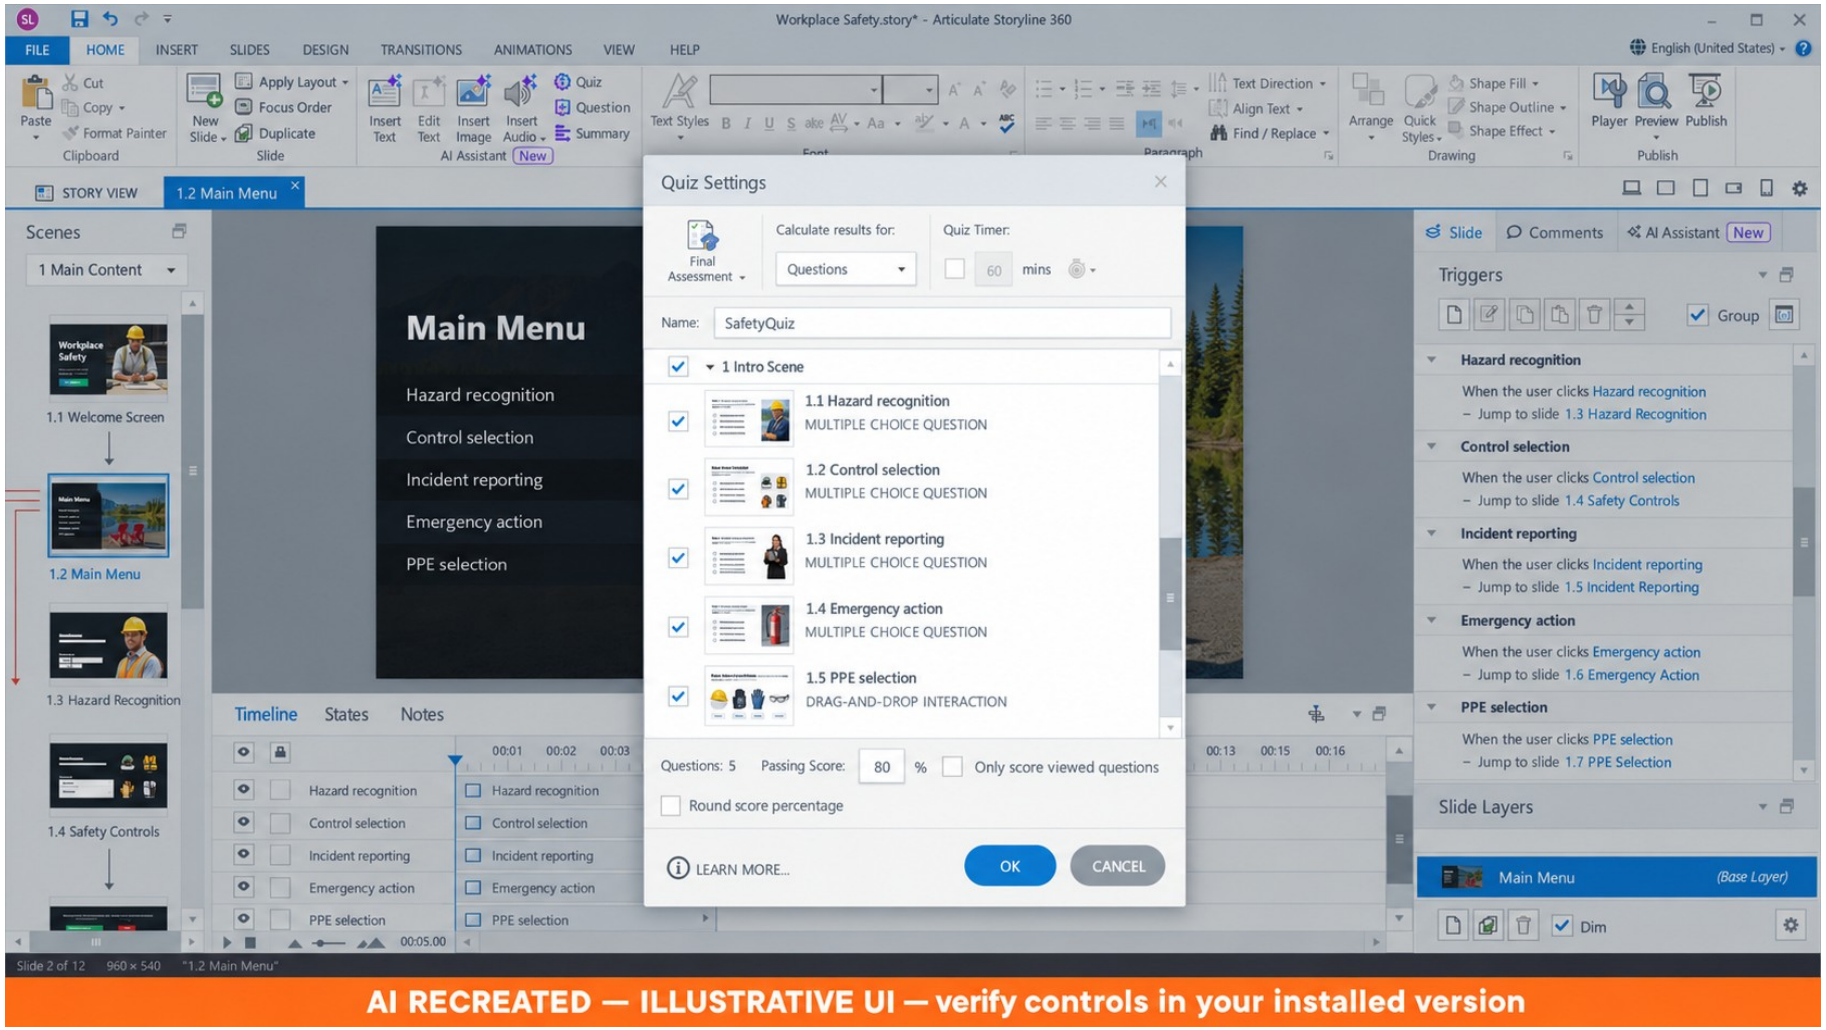

FAULTY OUTPUT (EXAMPLE)	**tracking the wrong questions or allowing slides-viewed bypass**
FIX IN NAMED PANEL	**tracked questions; passing score; score display**
EXPECTED AFTER FIX	**known answer sets return expected percentage and pass/fail · verify in…**

AI RECREATED — ILLUSTRATIVE UI · verify the named control

Retry quiz trigger

Named HarbourLink WSH artifact

WSA-065-Retry-quiz-trigger

Input / source state

WSA checkpoint plus reset results; destination; attempt count

Runtime mechanism

Retry Quiz resets tracked questions and relevant variables before returning to the quiz

Expected output

second attempt starts clean while permitted course progress remains

Rejected output

old answers or hazard variables contaminating retry

Evidence record

WSA-065-Retry-quiz-trigger: capture the configured control and the runtime readback.

EDITABLE CONFIGURATION MODEL

Retry quiz trigger

SET THESE CONTROLS

C1=reset results · C2=destination · C3=attempt count

→

REJECT WHEN

old answers or hazard variables contaminating retry

→

VERIFY READBACK

second attempt starts clean while permitted course progress remains

Editable HarbourLink model · second attempt starts clean while permitted course progress remains

Retry quiz trigger

FAULTY OUTPUT (EXAMPLE)

old answers or hazard variables contaminating retry

→

CORRECT THE RECORD

reset results; destination; attempt count

→

EXPECTED AFTER FIX

second attempt starts clean while permitted course progress remains · verify in your own Preview

Editable HarbourLink model · second attempt starts clean while permitted course progress remains

© 2026 Tertiary Infotech Academy Pte Ltd · Mastering Articulate Storyline 360 for e-Learning Content Creation · TGS-2024042308

Review quiz behaviour

Named HarbourLink WSH artifact

WSA-066-Review-quiz-behaviour

Input / source state

WSA checkpoint plus review state; correct-answer display; navigation

Runtime mechanism

Review Quiz shows submitted responses without exposing answers before completion

Expected output

review is unavailable until submission and then matches policy

Rejected output

answer leakage during the active attempt

Evidence record

WSA-066-Review-quiz-behaviour: capture the configured control and the runtime readback.

EDITABLE CONFIGURATION MODEL

Review quiz behaviour

SET THESE CONTROLS

C1=review state · C2=correct-answer display · C3=navigation

REJECT WHEN

answer leakage during the active attempt

VERIFY READBACK

review is unavailable until submission and then matches policy

Editable HarbourLink model · review is unavailable until submission and then matches policy

Review quiz behaviour

FAULTY OUTPUT (EXAMPLE)

answer leakage during the active attempt

→

CORRECT THE RECORD

review state; correct-answer display; navigation

→

EXPECTED AFTER FIX

review is unavailable until submission and then matches policy · verify in your own Preview

Editable HarbourLink model · review is unavailable until submission and then matches policy

© 2026 Tertiary Infotech Academy Pte Ltd · Mastering Articulate Storyline 360 for e-Learning Content Creation · TGS-2024042308

Submit-all interaction

Named HarbourLink WSH artifact

WSA-067-Submit-all-interaction

Input / source state

WSA checkpoint plus submit mode; confirmation; unanswered check

Runtime mechanism

Submit All Responses defers scoring when the design requires final review

Expected output

confirmation identifies unanswered items before final scoring

Rejected output

learner submits incomplete quiz accidentally

Evidence record

WSA-067-Submit-all-interaction: capture the configured control and the runtime readback.

EDITABLE CONFIGURATION MODEL

Submit-all interaction

SET THESE CONTROLS

C1=submit mode · C2=confirmation · C3=unanswered check

→

REJECT WHEN

learner submits incomplete quiz accidentally

→

VERIFY READBACK

confirmation identifies unanswered items before final scoring

Editable HarbourLink model · confirmation identifies unanswered items before final scoring

Submit-all interaction

FAULTY OUTPUT (EXAMPLE)

learner submits incomplete quiz accidentally

→

CORRECT THE RECORD

submit mode; confirmation; unanswered check

→


EXPECTED AFTER FIX

confirmation identifies unanswered items before final scoring · verify in your own Preview

Editable HarbourLink model · confirmation identifies unanswered items before final scoring

© 2026 Tertiary Infotech Academy Pte Ltd · Mastering Articulate Storyline 360 for e-Learning Content Creation · TGS-2024042308


Results variables

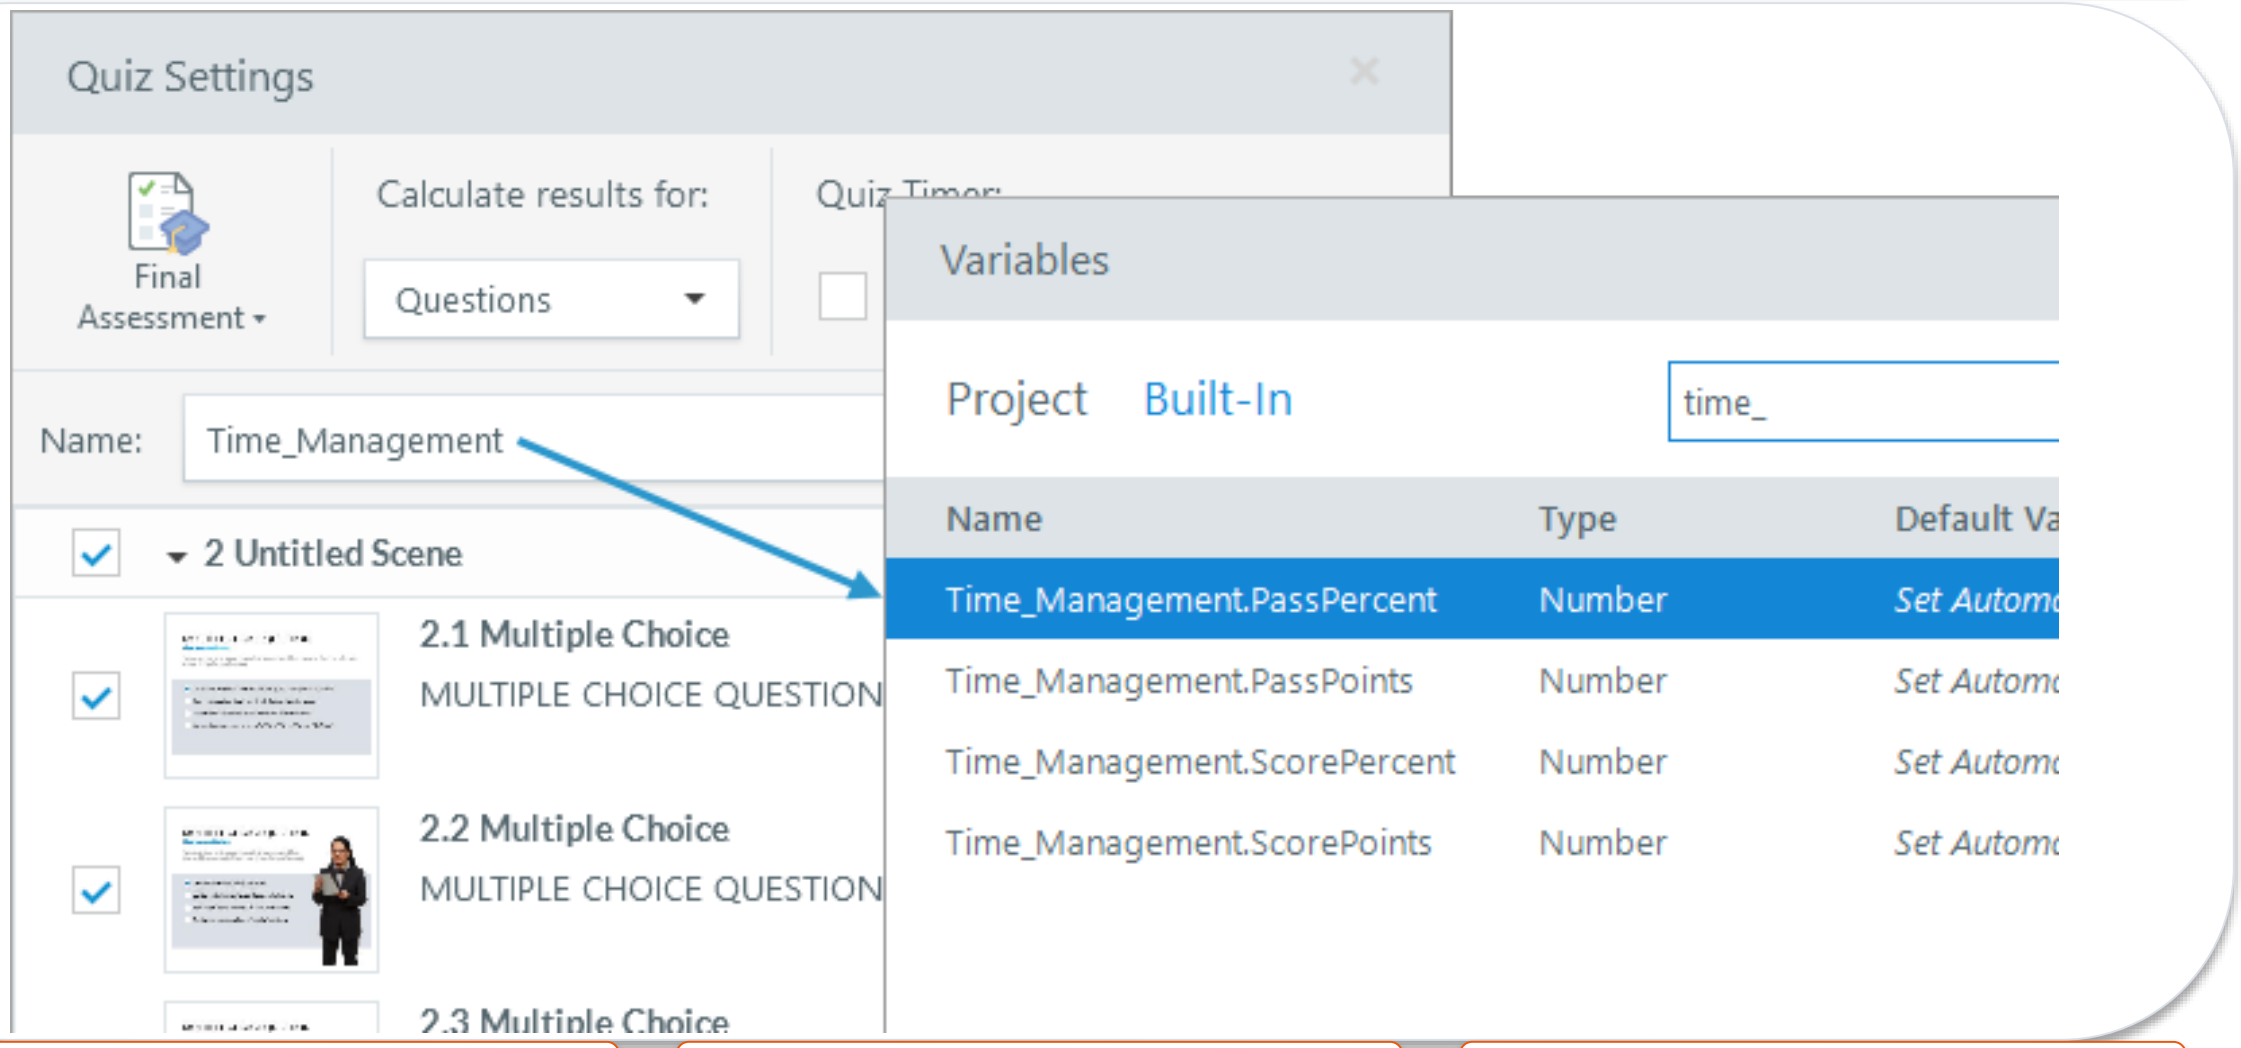

NAMED ARTIFACT	WSA-068-Results-variables
MECHANISM	Built-in SafetyQuiz.ScorePercent and SafetyQuiz.PassPercent support…
EXPECTED	displayed values match LMS debug data

Authentic Articulate interface reference · verify the named control


Results variables

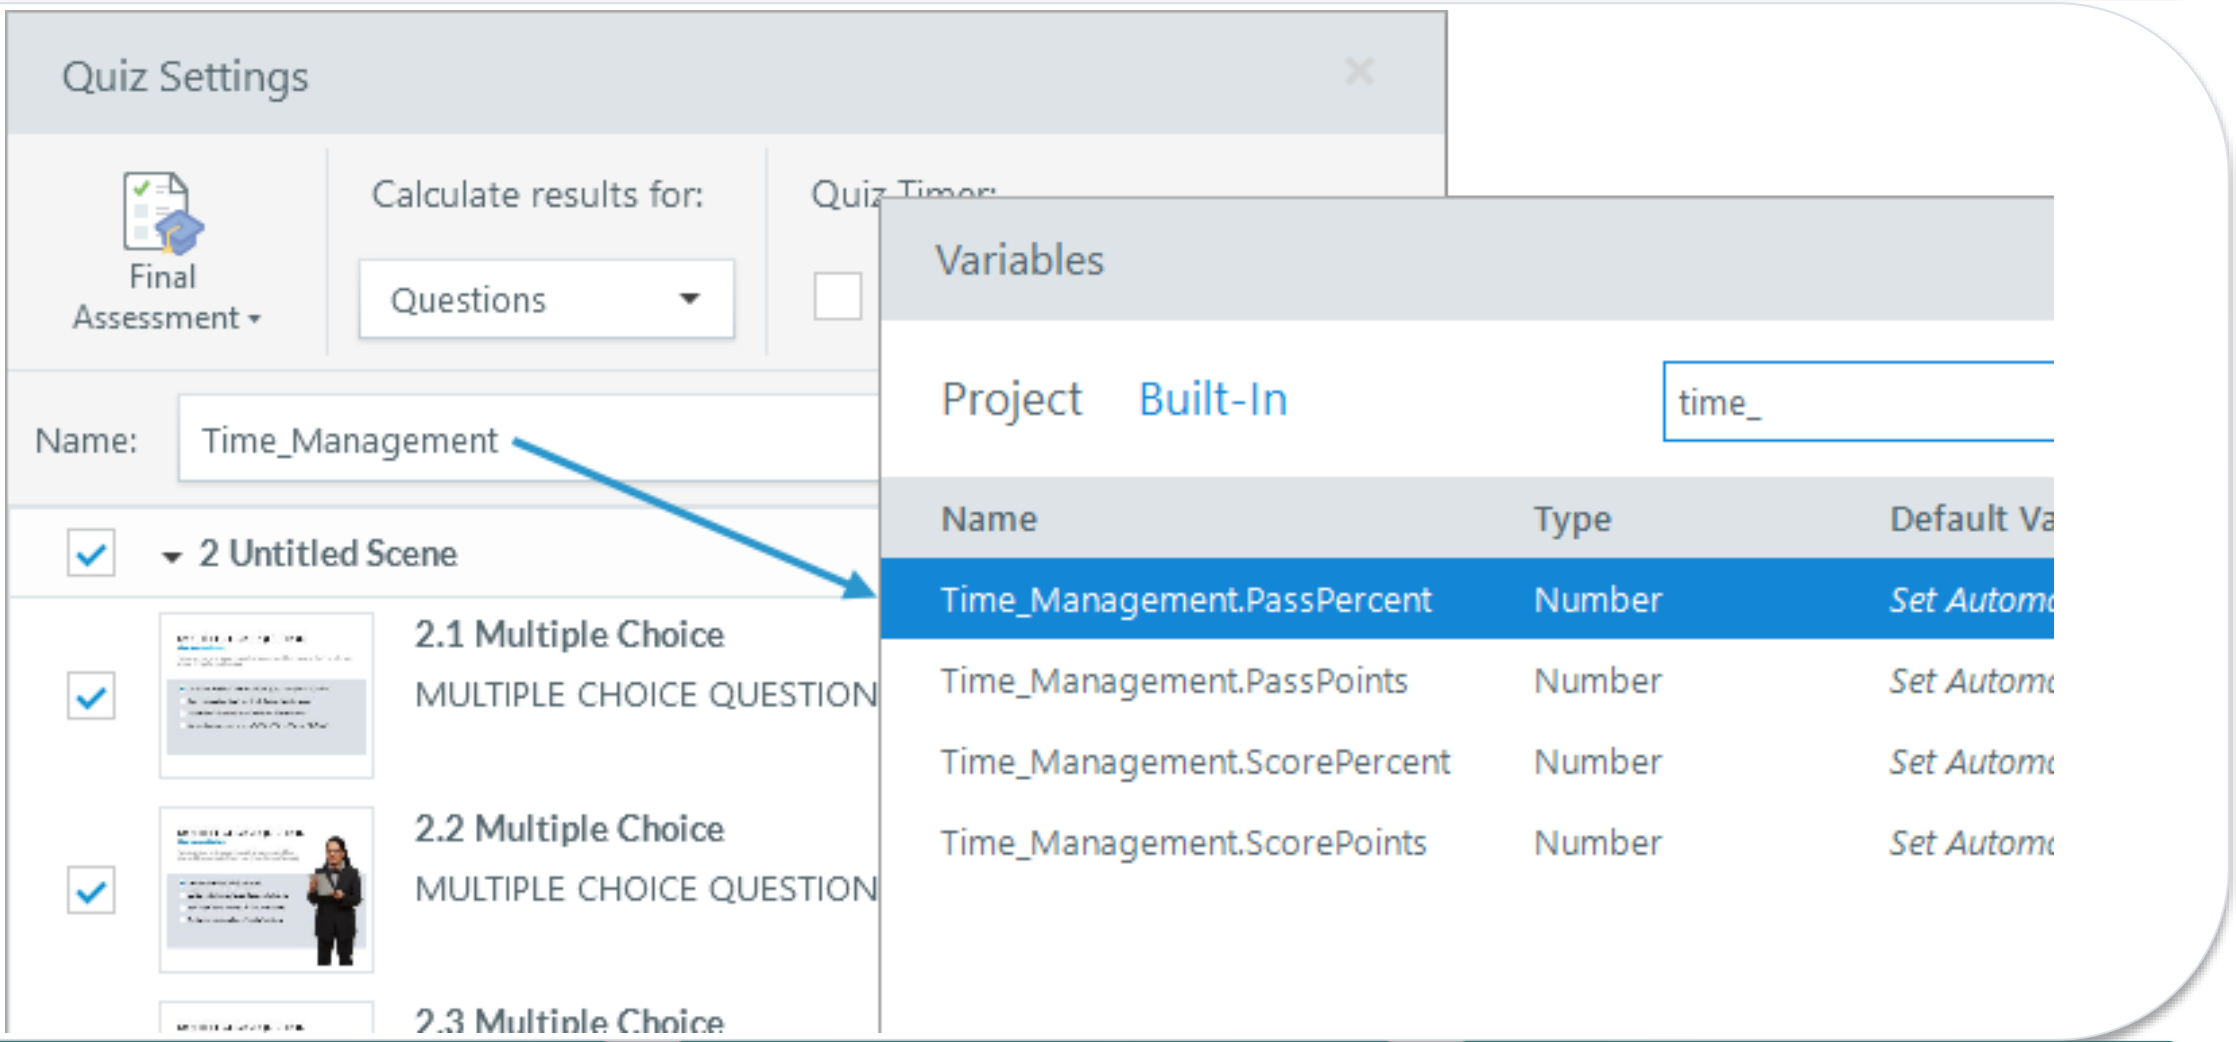

SET THESE CONTROLS	C1=variable reference · C2=rounding · C3=pass threshold
REJECT WHEN	manual score formulas drifting from Storyline results
VERIFY READBACK	displayed values match LMS debug data

Authentic Articulate interface reference · verify the named control

Results variables

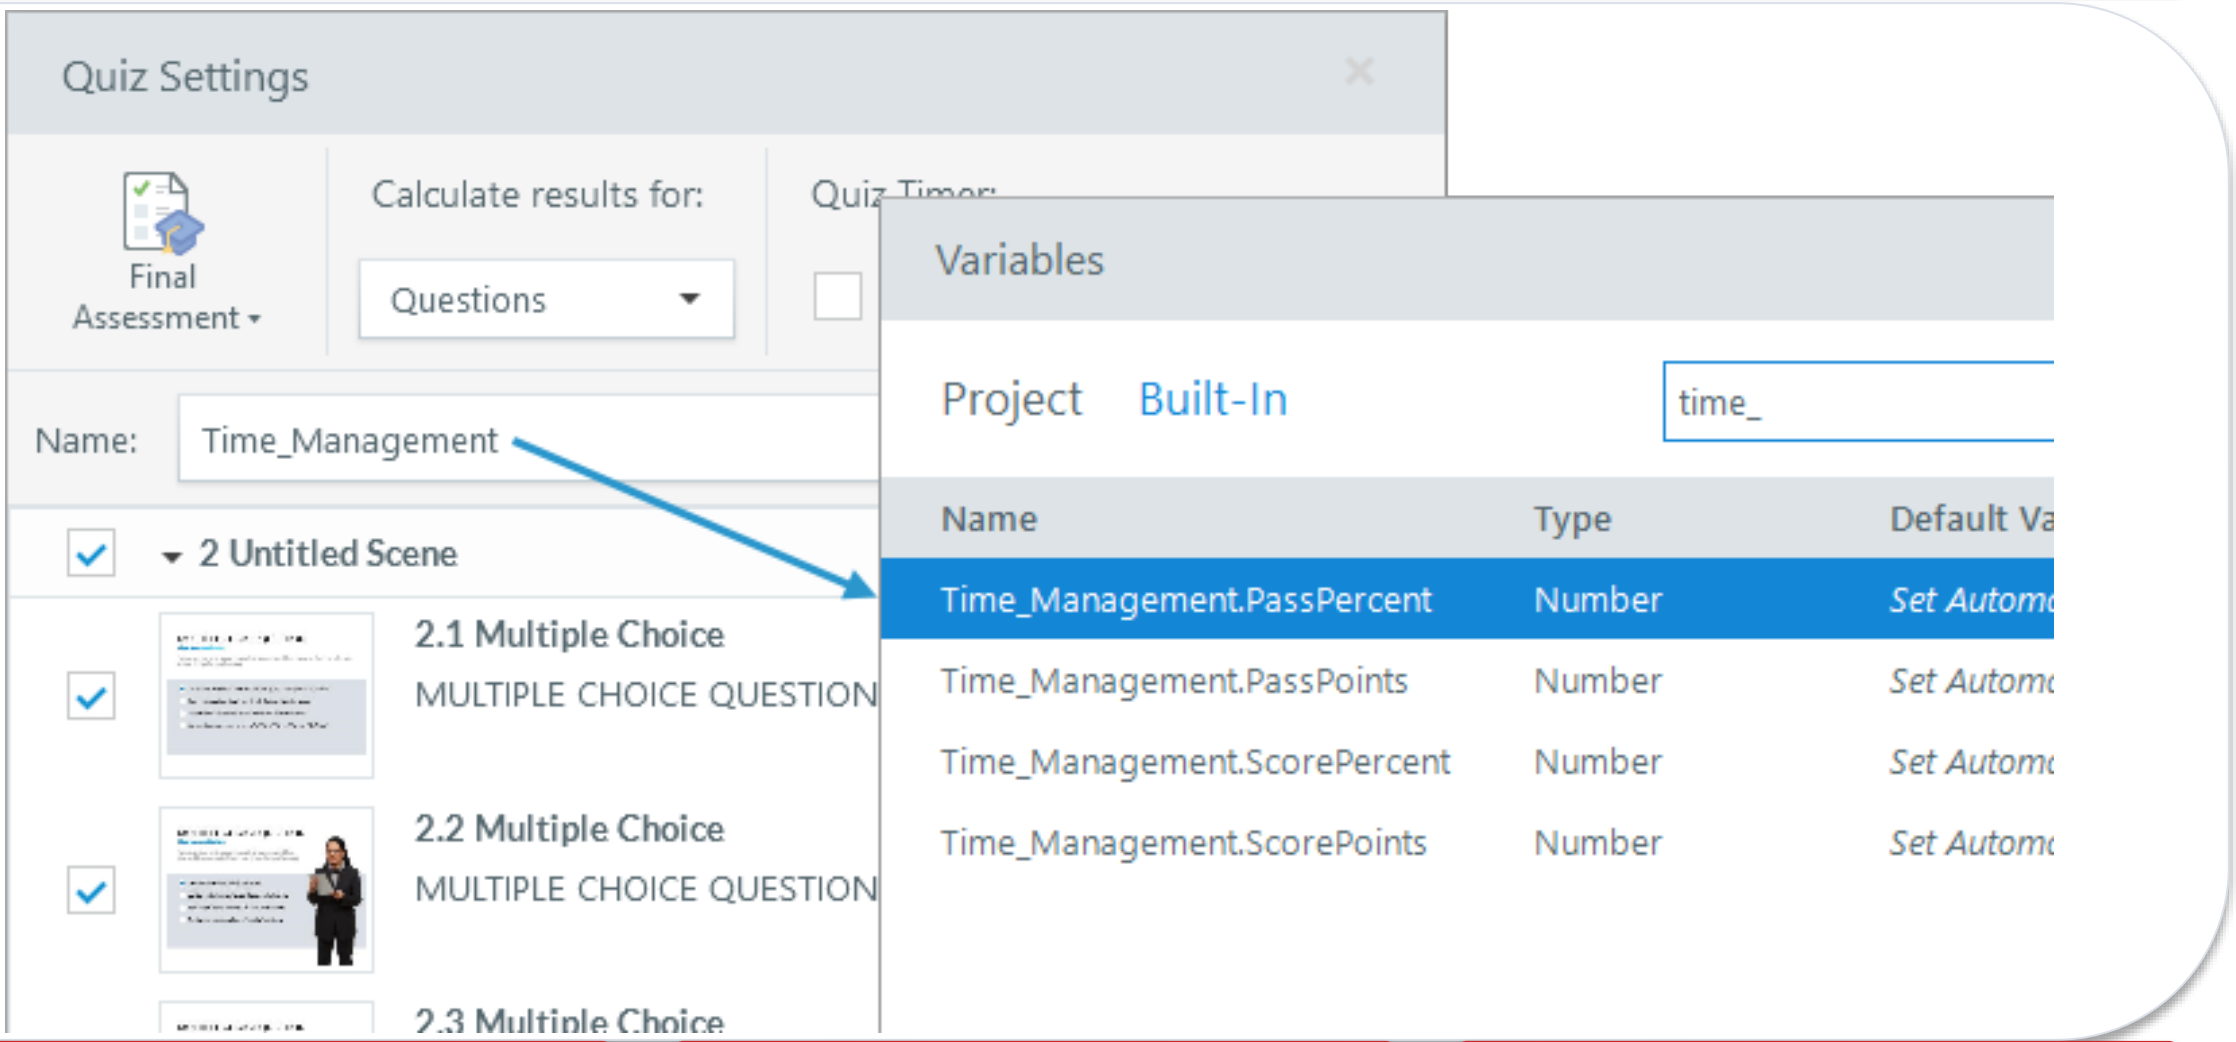


FAULTY OUTPUT (EXAMPLE) manual score formulas drifting from Storyline results

FIX IN NAMED PANEL variable reference; rounding; pass threshold

EXPECTED AFTER FIX displayed values match LMS debug data · verify in your own Preview

Authentic Articulate interface reference · verify the named control


Completion trigger

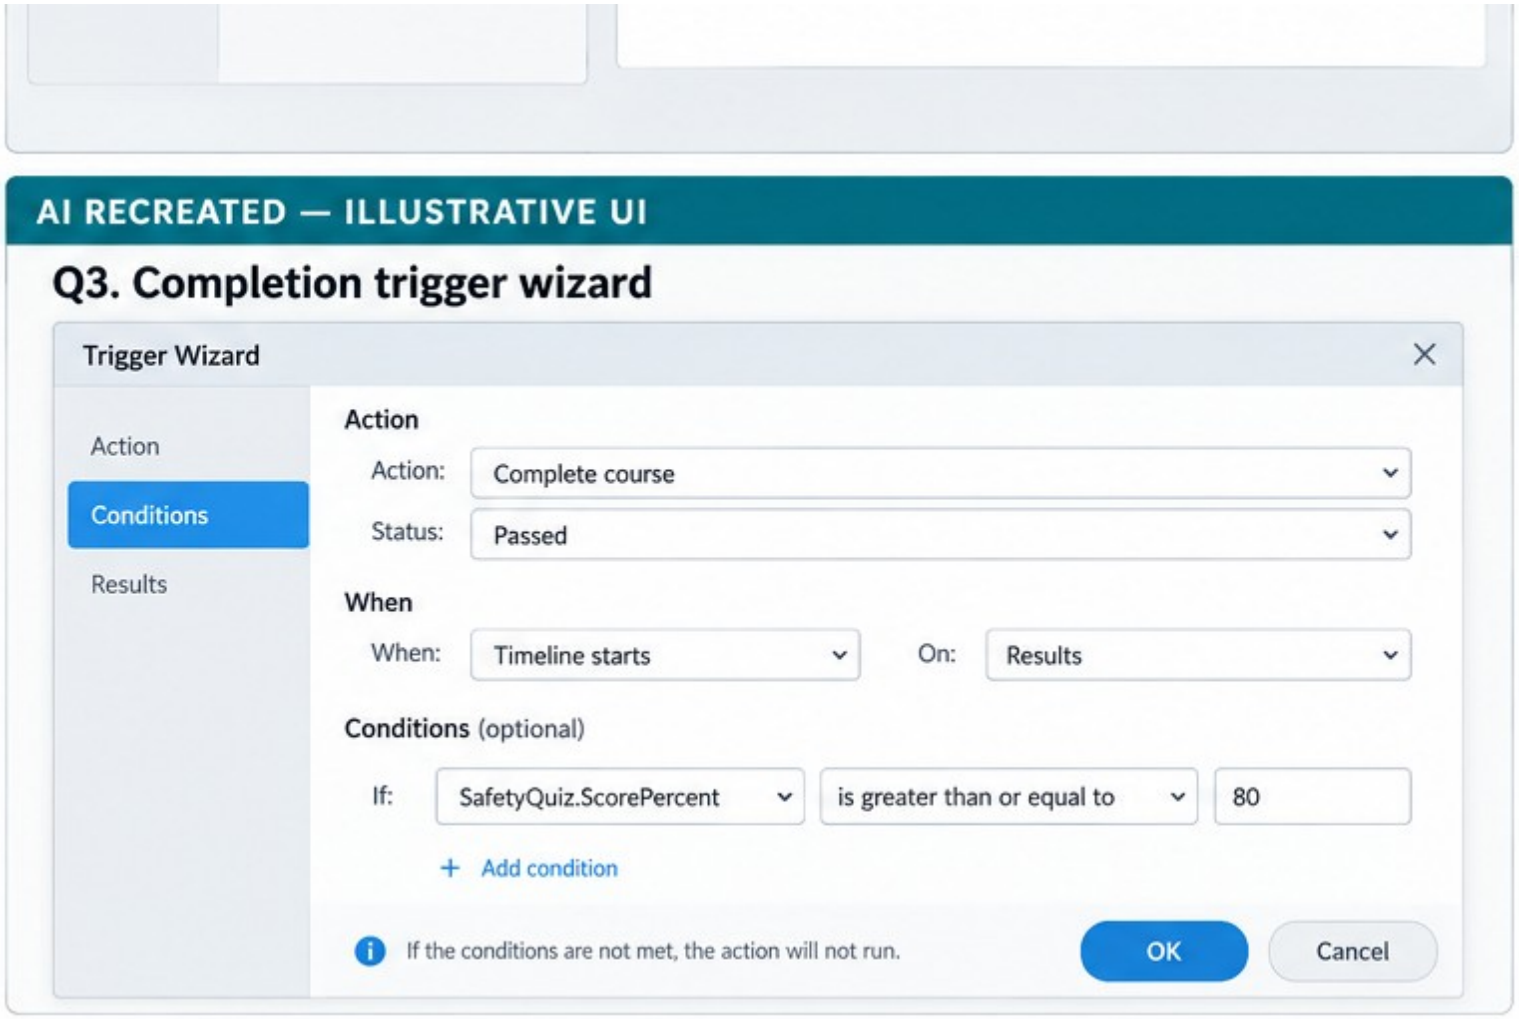

NAMED ARTIFACT	WSA-069-Completion-trigger
MECHANISM	Course completion reports from the selected quiz result, with no competing…
EXPECTED	viewing every slide without passing does not report successful completion

AI RECREATED — ILLUSTRATIVE UI · verify the named control


Completion trigger

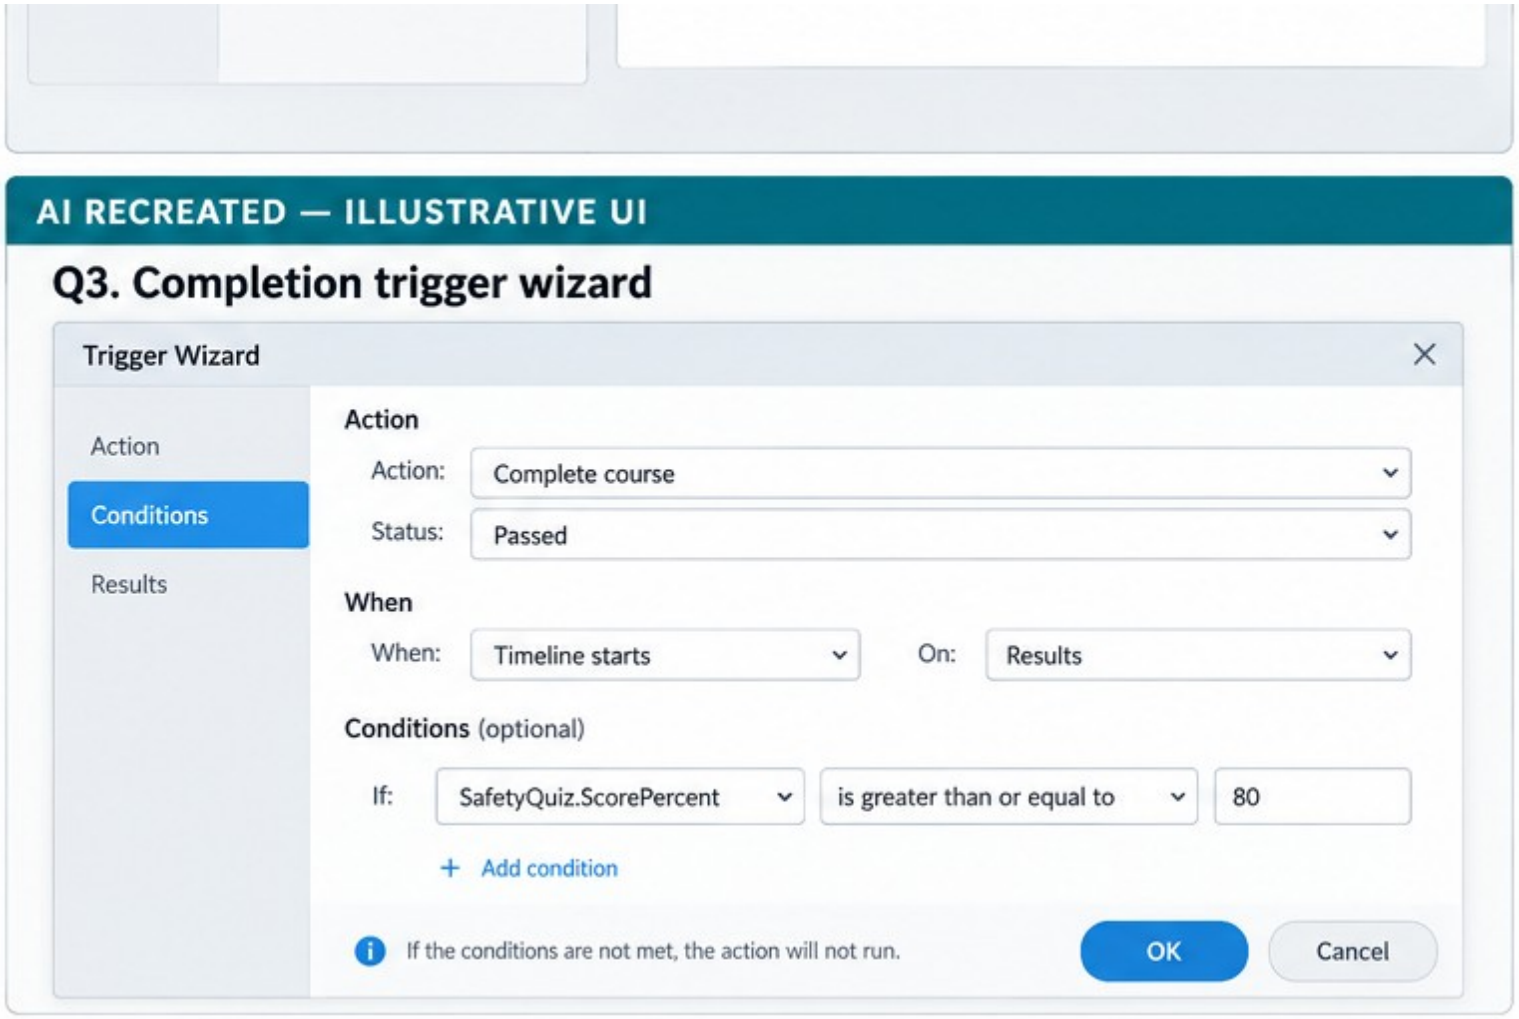

SET THESE CONTROLS	C1=complete/pass trigger · C2=result slide · C3=conditions
REJECT WHEN	multiple completion criteria using OR and bypassing the quiz
VERIFY READBACK	viewing every slide without passing does not report successful completion

AI RECREATED — ILLUSTRATIVE UI · verify the named control

Completion trigger

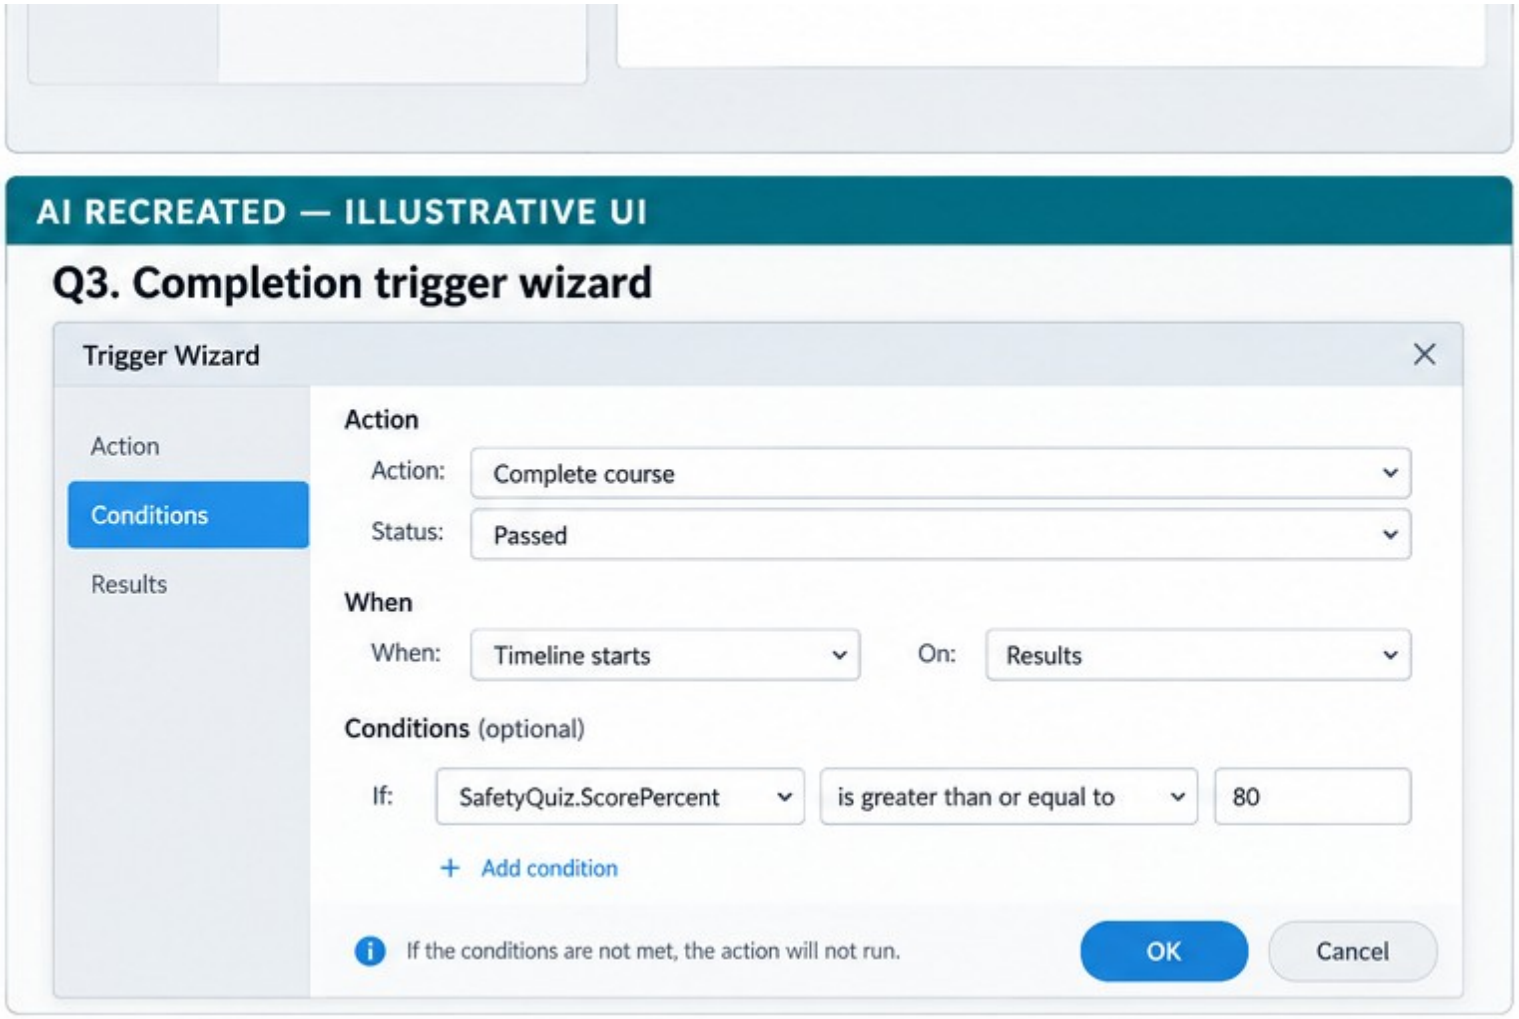

FAULTY OUTPUT (EXAMPLE) multiple completion criteria using OR and bypassing the quiz

FIX IN NAMED PANEL complete/pass trigger; result slide; conditions

EXPECTED AFTER FIX viewing every slide without passing does not report successful completion…

AI RECREATED — ILLUSTRATIVE UI · verify the named control

Branch and quiz test matrix

Named HarbourLink WSH artifact

WSA-070-Branch-and-quiz-test-matrix

Input / source state

WSA checkpoint plus expected state; actual state; evidence; defect owner

Runtime mechanism

A structured matrix covers correct, incorrect, incomplete, retry, review, revisit and resume

Expected output

all high-risk cases have recorded results and resolved defects

Rejected output

testing only the happy path

Evidence record

WSA-070-Branch-and-quiz-test-matrix: capture the configured control and the runtime readback.

Branch and quiz test matrix

SET THESE CONTROLS

C1=expected state · C2=actual state · C3=evidence · C4=defect owner

REJECT WHEN

testing only the happy path

VERIFY READBACK

all high-risk cases have recorded results and resolved defects

Editable HarbourLink model · all high-risk cases have recorded results and resolved defects

Branch and quiz test matrix

FAULTY OUTPUT (EXAMPLE)	CORRECT THE RECORD	EXPECTED AFTER FIX
testing only the happy path	expected state; actual state; evidence; defect owner	all high-risk cases have recorded results and resolved defects · verify in your own Preview

Editable HarbourLink model · all high-risk cases have recorded results and resolved defects

© 2026 Tertiary Infotech Academy Pte Ltd · Mastering Articulate Storyline 360 for e-Learning Content Creation · TGS-2024042308

Zoom region timing

Named HarbourLink WSH artifact

WSA-071-Zoom-region-timing

Input / source state

WSA checkpoint plus region bounds; timeline start/end; duration; return to normal

Runtime mechanism

Insert > Zoom Region enlarges a named detail only during the explanatory cue-point interval

Expected output

zoom begins at the named cue point, reveals the required detail and returns before the next task

Rejected output

decorative zoom or loss of context

Evidence record

WSA-071-Zoom-region-timing: capture the configured control and the runtime readback.

EDITABLE CONFIGURATION MODEL

Zoom region timing

SET THESE CONTROLS

C1=region bounds · C2=timeline start/end · C3=duration · C4=return to normal

REJECT WHEN

decorative zoom or loss of context

VERIFY READBACK

zoom begins at the named cue point, reveals the required detail and returns before the next task

Editable HarbourLink model · zoom begins at the named cue point, reveals the required detail and returns before the next task

Zoom region timing

FAULTY OUTPUT (EXAMPLE)

decorative zoom or loss of context

→

CORRECT THE RECORD

region bounds; timeline start/end; duration; return to normal

→

EXPECTED AFTER FIX

zoom begins at the named cue point, reveals the required detail and returns before the next task · verify in your own Preview

Editable HarbourLink model · zoom begins at the named cue point, reveals the required detail and returns before the next task

© 2026 Tertiary Infotech Academy Pte Ltd · Mastering Articulate Storyline 360 for e-Learning Content Creation · TGS-2024042308

Slide transitions

Named HarbourLink WSH artifact

WSA-072-Slide-transitions

Input / source state

WSA checkpoint plus transition type; duration; advance mode; reduced-motion alternative

Runtime mechanism

Transitions applies one restrained transition at scene boundaries and records timing

Expected output

scene change remains predictable and no essential meaning depends on motion

Rejected output

different transitions on every slide or automatic advance before content completes

Evidence record

WSA-072-Slide-transitions: capture the configured control and the runtime readback.

© 2026 Tertiary Infotech Academy Pte Ltd · Mastering Articulate Storyline 360 for e-Learning Content Creation · TGS-2024042308

EDITABLE CONFIGURATION MODEL

Slide transitions

SET THESE CONTROLS

C1=transition type · C2=duration · C3=advance mode · C4=reduced-motion alternative

REJECT WHEN

different transitions on every slide or automatic advance before content completes

VERIFY READBACK

scene change remains predictable and no essential meaning depends on motion

Editable HarbourLink model · scene change remains predictable and no essential meaning depends on motion

Slide transitions

FAULTY OUTPUT (EXAMPLE)

different transitions on every slide or automatic advance before content completes

→

CORRECT THE RECORD

transition type; duration; advance mode; reduced-motion alternative

→

EXPECTED AFTER FIX


scene change remains predictable and no essential meaning depends on motion · verify in your own Preview

Editable HarbourLink model · scene change remains predictable and no essential meaning depends on motion

© 2026 Tertiary Infotech Academy Pte Ltd · Mastering Articulate Storyline 360 for e-Learning Content Creation · TGS-2024042308

Activity 08 · Build Branching and Freeform Decisions

Create consequence-based decisions and an accessible freeform interaction.

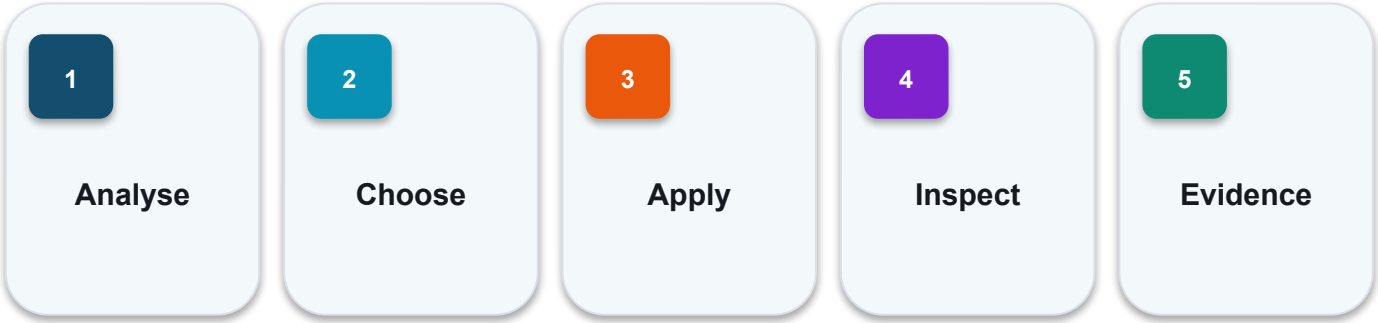


EVIDENCE

Retain the named .story checkpoint, the completed self-check table and one screenshot for each task showing the final state or setting that proves the acceptance criteria.

Full click-by-click procedure · Learner Guide / Activity 08

© 2026 Tertiary Infotech Academy Pte Ltd · Mastering Articulate Storyline 360 for e-Learning Content Creation · TGS-2024042308

Activity 08 · Interface Reference

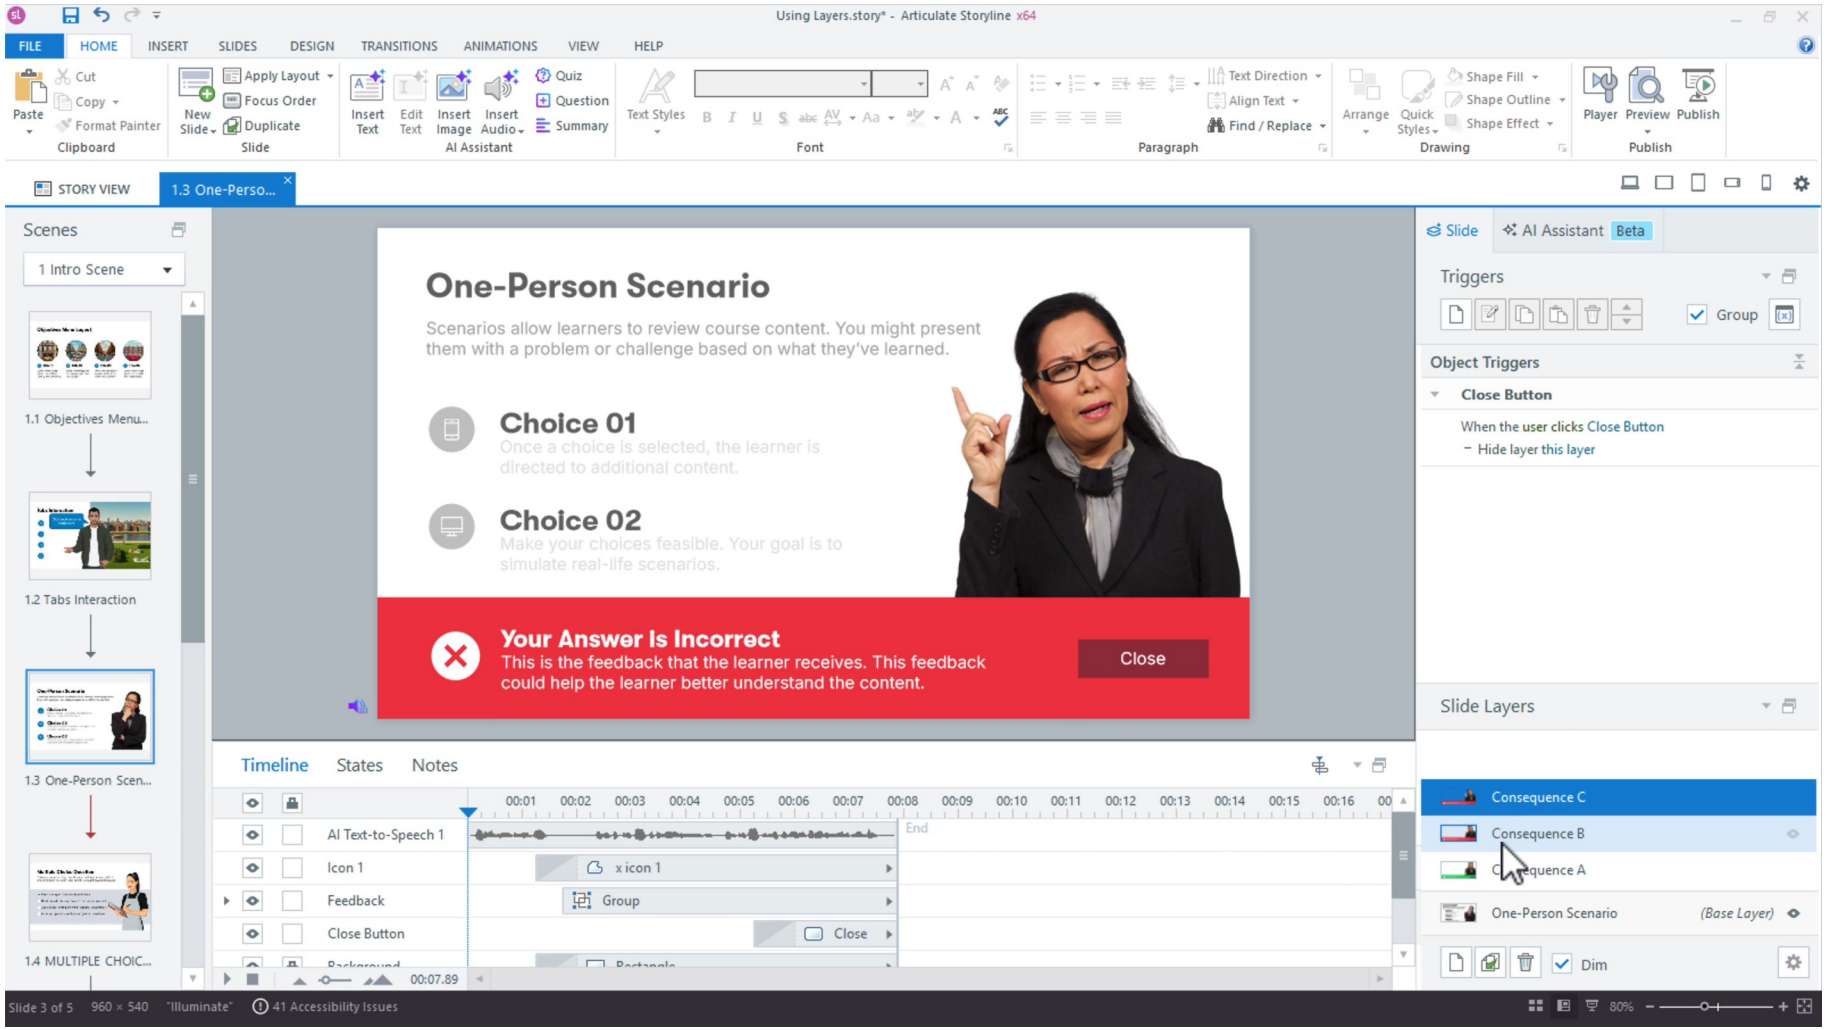

Locate	Use this authentic interface capture to find the named…	**Set**	Create three choice buttons and three Dialog consequence…	**Verify**	All branches reach feedback and continuation.	**Evidence**	Capture one final-state screenshot for the task; this…

EDITABLE TECHNICAL MODEL

Activity 08 · Artifact Model

Artifact

HarbourLink-WSH-Checkpoint-08-YourName.story

Purpose

Create consequence-based decisions and an accessible freeform interaction.

Scenario input

HarbourLink annual WSH refresher; picture-first content, narration, captions, keyboard access and five-question 80% practice quiz.

Required output

All branches reach feedback and continuation.

Control point

Freeform scoring matches the specification.

Readback

Retain the named .story checkpoint, the completed self-check table and one screenshot for each task showing the final state or setting that proves the acceptance criteria.

EDITABLE TECHNICAL MODEL

Activity 08 · Runtime State Trace

Initial state

Open with declared defaults and no prior test residue.

Input

Use the named WSA asset, learner decision or publish setting.

Control

All branches reach feedback and continuation.

Stored state

Freeform scoring matches the specification.

Runtime output

Feedback explains consequence.

Boundary

Equivalent keyboard route is complete.

EDITABLE TECHNICAL MODEL

Activity 08 · Worked Failure Case

Expected

All branches reach feedback and continuation.

Incomplete

Fail when: Freeform scoring matches the specification. is not demonstrated.

Repeat

Repeat/revisit must preserve: Feedback explains consequence.

Access

Equivalent keyboard route is complete.

Recovery

Correct the named setting in the next checkpoint, then rerun the same case.

Log

Record expected, actual, pass/fail and corrected version.

EDITABLE TECHNICAL MODEL

Activity 08 · Evidence Record

Source

HarbourLink-WSH-Checkpoint-08-YourName.story

Evidence rule

One decisive learner screenshot per task.

Setting evidence

All branches reach feedback and continuation.

Runtime evidence

Freeform scoring matches the specification.


Regression evidence

Equivalent keyboard route is complete.

Retention

Retain the named .story checkpoint, the completed self-check table and one screenshot for each task showing the final state or setting that proves the acceptance criteria.

Activity 08 · Verify the Panel

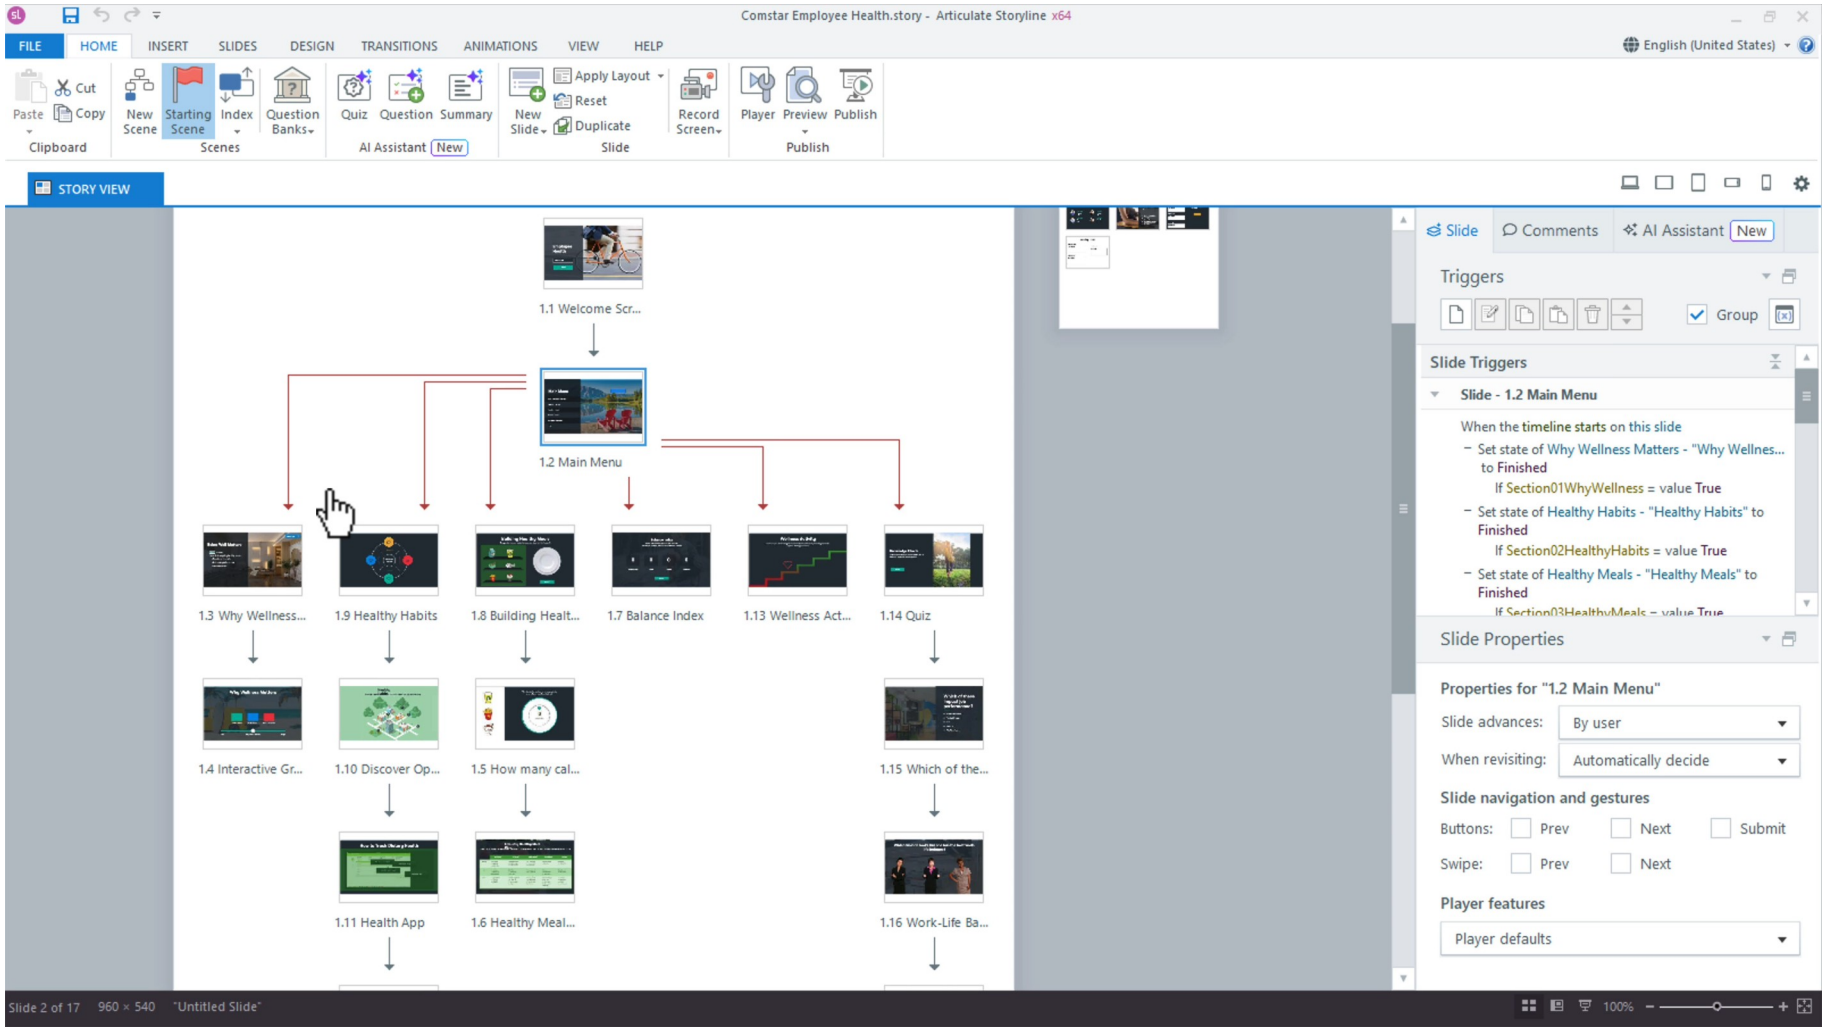

Named setting	Create or open placeholder `WSA-220 Reconvergence`; add…	**Expected output**	All branches reach feedback and continuation.	**Boundary**	Equivalent keyboard route is complete.	**Own evidence**	Show the learner-created checkpoint and final setting, not…

EXPECTED VERSUS ACTUAL

Activity 08 · Test Matrix

Case 1

All branches reach feedback and continuation.

Case 2

Freeform scoring matches the specification.

Case 3

Feedback explains consequence.

Case 4

Equivalent keyboard route is complete.

Revisit


Navigate away and back; compare actual state with the specified revisit rule.

Record

Log expected, actual, pass/fail, defect owner and corrected checkpoint filename.

Activity 09 · Build the Safety Question Bank and Quiz

Create a five-question graded quiz with controlled bank coverage and 80% pass.

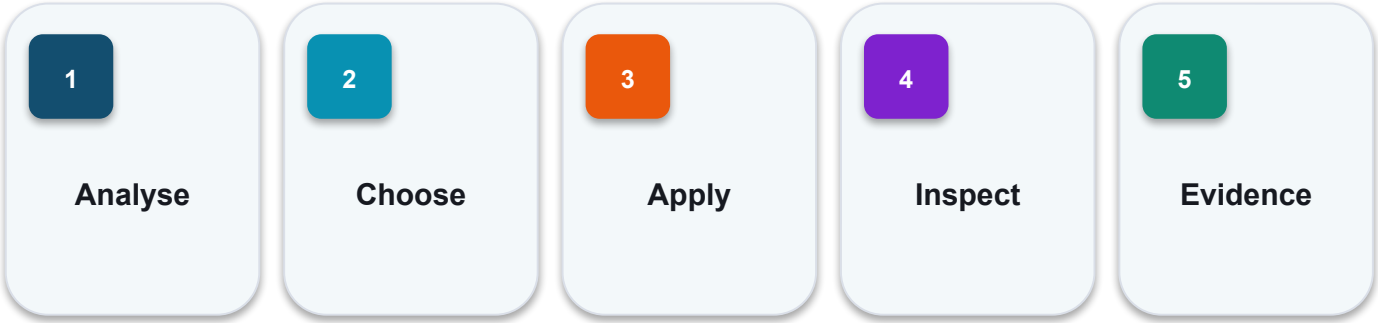


EVIDENCE

Retain the named .story checkpoint, the completed self-check table and one screenshot for each task showing the final state or setting that proves the acceptance criteria.

Full click-by-click procedure · Learner Guide / Activity 09

© 2026 Tertiary Infotech Academy Pte Ltd · Mastering Articulate Storyline 360 for e-Learning Content Creation · TGS-2024042308

Activity 09 · Interface Reference

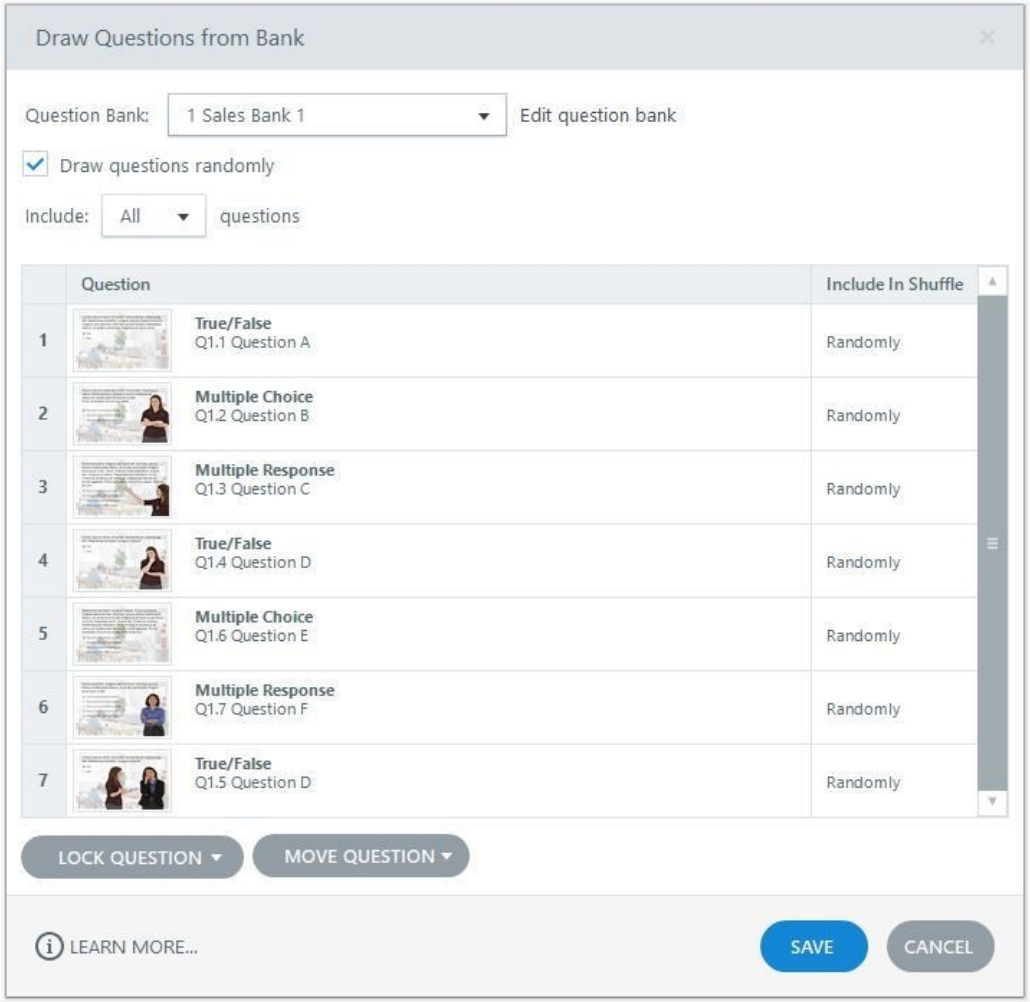

Locate	Use this authentic interface capture to find the named…	**Set**	Create five graded items: hazard recognition, control…
Verify	Five criteria are covered.	**Evidence**	Capture one final-state screenshot for the task; this…

EDITABLE TECHNICAL MODEL

Activity 09 · Artifact Model

Artifact

HarbourLink-WSH-Checkpoint-09-YourName.story

Purpose

Create a five-question graded quiz with controlled bank coverage and 80% pass.

Scenario input

HarbourLink annual WSH refresher; picture-first content, narration, captions, keyboard access and five-question 80% practice quiz.

Required output

Five criteria are covered.

Control point

Scoring is reproducible.

Readback

Retain the named .story checkpoint, the completed self-check table and one screenshot for each task showing the final state or setting that proves the acceptance criteria.

EDITABLE TECHNICAL MODEL

Activity 09 · Runtime State Trace

Initial state

Open with declared defaults and no prior test residue.

Input

Use the named WSA asset, learner decision or publish setting.

Control

Five criteria are covered.

Stored state

Scoring is reproducible.

Runtime output

Instructions and states are accessible.

Boundary

Answers are not leaked before submission.

EDITABLE TECHNICAL MODEL

Activity 09 · Worked Failure Case

Expected

Five criteria are covered.

Incomplete

Fail when: Scoring is reproducible. is not demonstrated.

Repeat

Repeat/revisit must preserve: Instructions and states are accessible.

Access

Answers are not leaked before submission.

Recovery

Correct the named setting in the next checkpoint, then rerun the same case.

Log

Record expected, actual, pass/fail and corrected version.

EDITABLE TECHNICAL MODEL

Activity 09 · Evidence Record

Source

HarbourLink-WSH-Checkpoint-09-YourName.story

Evidence rule

One decisive learner screenshot per task.

Setting evidence

Five criteria are covered.

Runtime evidence

Scoring is reproducible.


Regression evidence

Answers are not leaked before submission.

Retention

Retain the named .story checkpoint, the completed self-check table and one screenshot for each task showing the final state or setting that proves the acceptance criteria.

Activity 09 · Verify the Panel

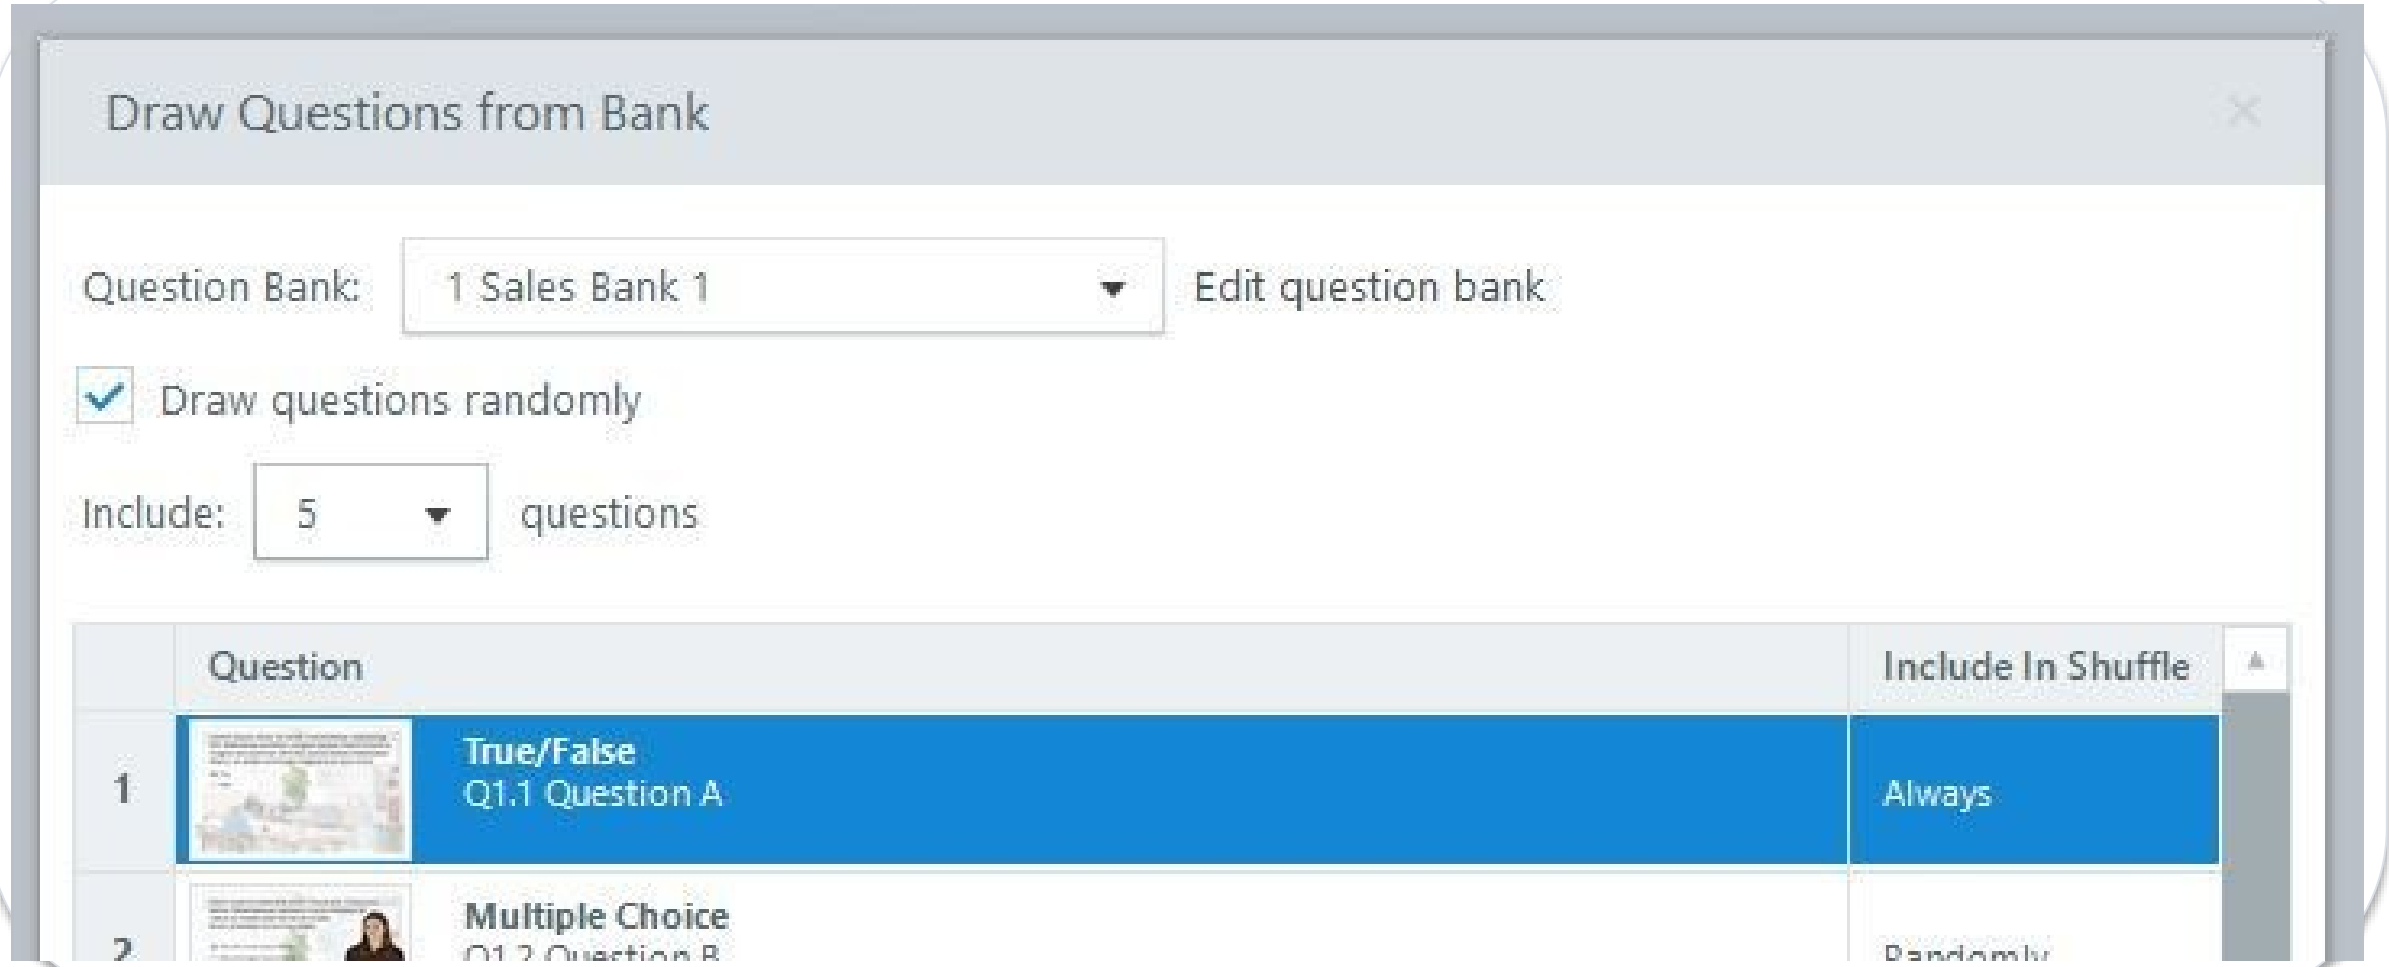

Named setting	For each item open Form View and enter the prompt, choices…	
Expected output	Five criteria are covered.	
Boundary	Answers are not leaked before submission.	
Own evidence	Show the learner-created checkpoint and final setting, not…	

EXPECTED VERSUS ACTUAL

Activity 09 · Test Matrix

Case 1

Five criteria are covered.

Case 2

Scoring is reproducible.

Case 3

Instructions and states are accessible.

Case 4

Answers are not leaked before submission.

Revisit


Navigate away and back; compare actual state with the specified revisit rule.

Record

Log expected, actual, pass/fail, defect owner and corrected checkpoint filename.

Activity 10 · Configure Results, Retry and Completion

Track only the scored quiz, set 80% pass and prove retry/review behaviour.

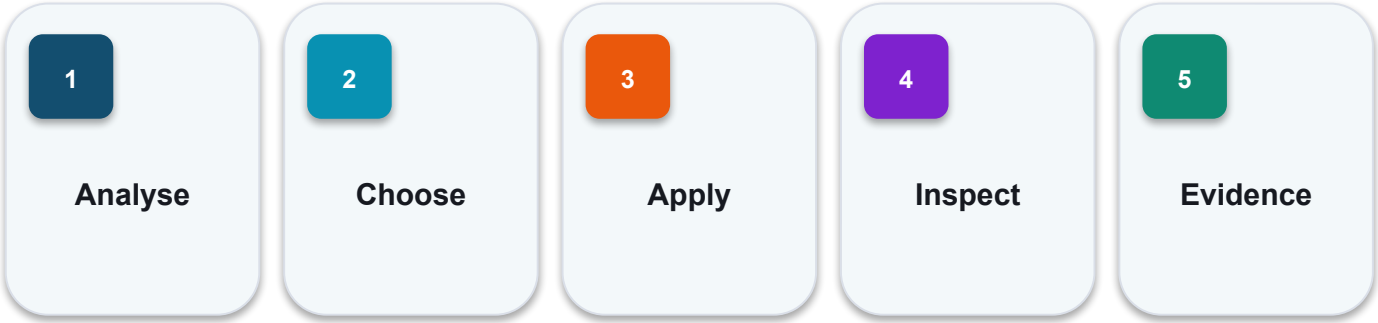


EVIDENCE

Retain the named .story checkpoint, the completed self-check table and one screenshot for each task showing the final state or setting that proves the acceptance criteria.

Full click-by-click procedure · Learner Guide / Activity 10

Activity 10 · Interface Reference

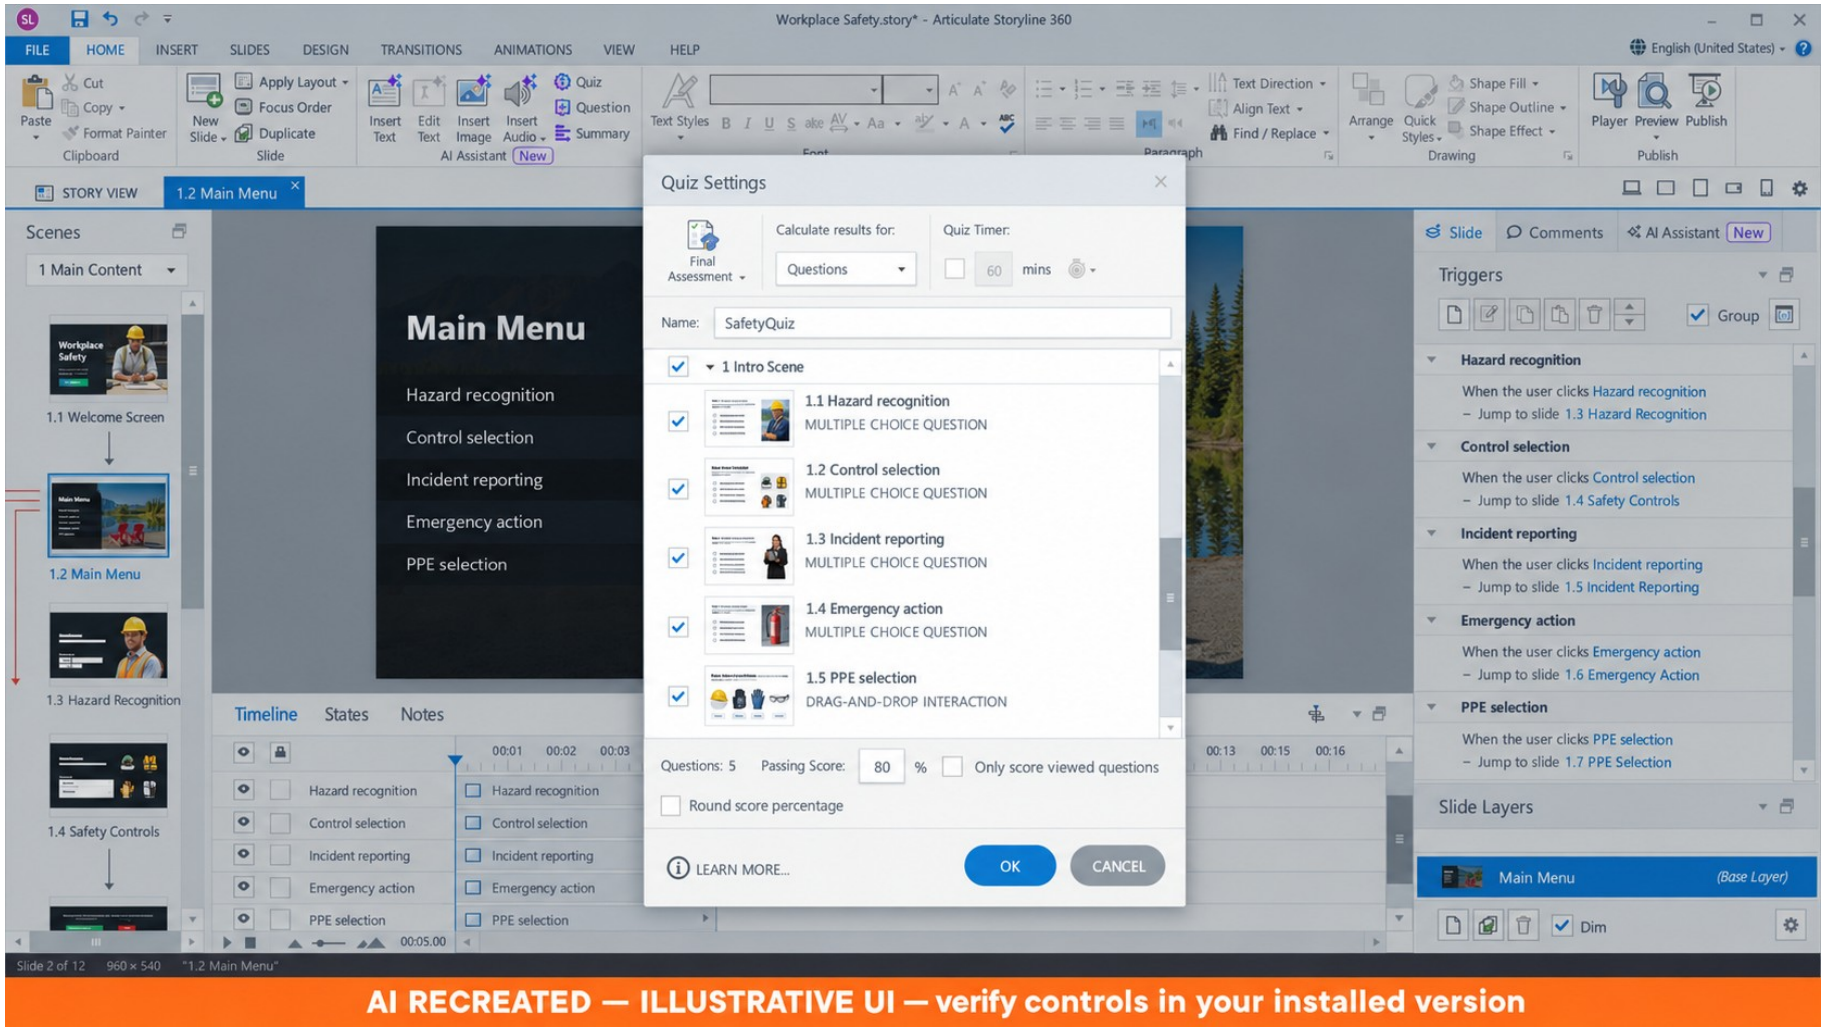

Locate	**Use this authentic interface capture to find the named…**
Set	**Open Result Tools — Design > Quiz Settings and select only…**
Verify	**80% threshold is exact.**
Evidence	**Capture one final-state screenshot for the task; this…**

EDITABLE TECHNICAL MODEL

Activity 10 · Artifact Model

Artifact

HarbourLink-WSH-Checkpoint-10-YourName.story

Purpose

Track only the scored quiz, set 80% pass and prove retry/review behaviour.

Scenario input

HarbourLink annual WSH refresher; picture-first content, narration, captions, keyboard access and five-question 80% practice quiz.

Required output

80% threshold is exact.

Control point

Slides viewed cannot bypass the quiz.

Readback

Retain the named .story checkpoint, the completed self-check table and one screenshot for each task showing the final state or setting that proves the acceptance criteria.

EDITABLE TECHNICAL MODEL

Activity 10 · Runtime State Trace

Initial state

Open with declared defaults and no prior test residue.

Input

Use the named WSA asset, learner decision or publish setting.

Control

80% threshold is exact.

Stored state

Slides viewed cannot bypass the quiz.

Runtime output

Retry starts a clean quiz attempt.

Boundary

Review appears only after submission.

EDITABLE TECHNICAL MODEL

Activity 10 · Worked Failure Case

Expected

80% threshold is exact.

Incomplete

Fail when: Slides viewed cannot bypass the quiz. is not demonstrated.

Repeat

Repeat/revisit must preserve: Retry starts a clean quiz attempt.

Access

Review appears only after submission.

Recovery

Correct the named setting in the next checkpoint, then rerun the same case.

Log

Record expected, actual, pass/fail and corrected version.

EDITABLE TECHNICAL MODEL

Activity 10 · Evidence Record

Source

HarbourLink-WSH-Checkpoint-10-YourName.story

Evidence rule

One decisive learner screenshot per task.

Setting evidence

80% threshold is exact.

Runtime evidence

Slides viewed cannot bypass the quiz.

Regression evidence


Review appears only after submission.

Retention

Retain the named .story checkpoint, the completed self-check table and one screenshot for each task showing the final state or setting that proves the acceptance criteria.

Activity 10 · Verify the Panel

AI RECREATED — ILLUSTRATIVE UI

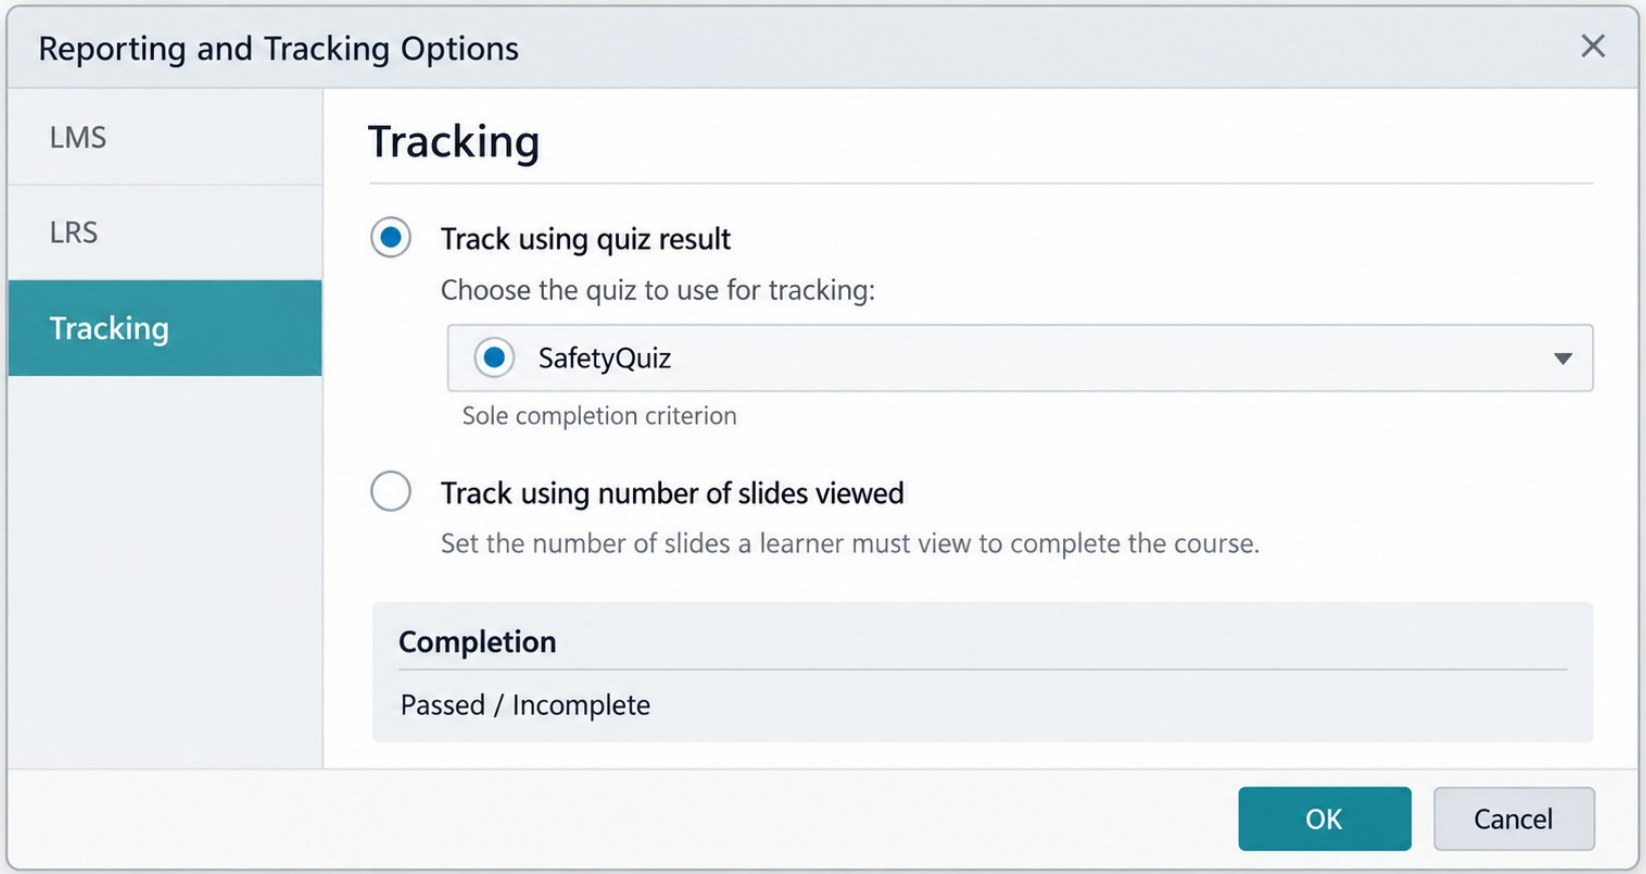

Named setting	In Result Tools — Design set Quiz Type to `Final…
Expected output	80% threshold is exact.
Boundary	Review appears only after submission.
Own evidence	Show the learner-created checkpoint and final setting, not…

EXPECTED VERSUS ACTUAL

Activity 10 · Test Matrix

Case 1

80% threshold is exact.

Case 2

Slides viewed cannot bypass the quiz.

Case 3

Retry starts a clean quiz attempt.

Case 4

Review appears only after submission.

Revisit

Navigate away and back; compare actual state with the specified revisit rule.

Record

Log expected, actual, pass/fail, defect owner and corrected checkpoint filename.

Topic 3 Checkpoint

Source

HarbourLink-WSH-Checkpoint-10-YourName.story

Quiz

Five criteria; 80% classroom pass

Results

3/5 fail · 4/5 pass · 5/5 pass

Retry

Reset result before jump

Tracking

Quiz Result only; no slides-viewed bypass

Evidence

Result properties and pass/fail readback

© 2026 Tertiary Infotech Academy Pte Ltd · Mastering Articulate Storyline 360 for e-Learning Content Creation · TGS-2024042308

04


Review, Publishing and Governance

Player · translation · Review 360 · SCORM 1.2/2004 · Tin Can xAPI · LMS/LRS tests · retention

LO4 · A4 · A7 · K4

EDITABLE CHANNEL COMPARISON

Distribution Capability

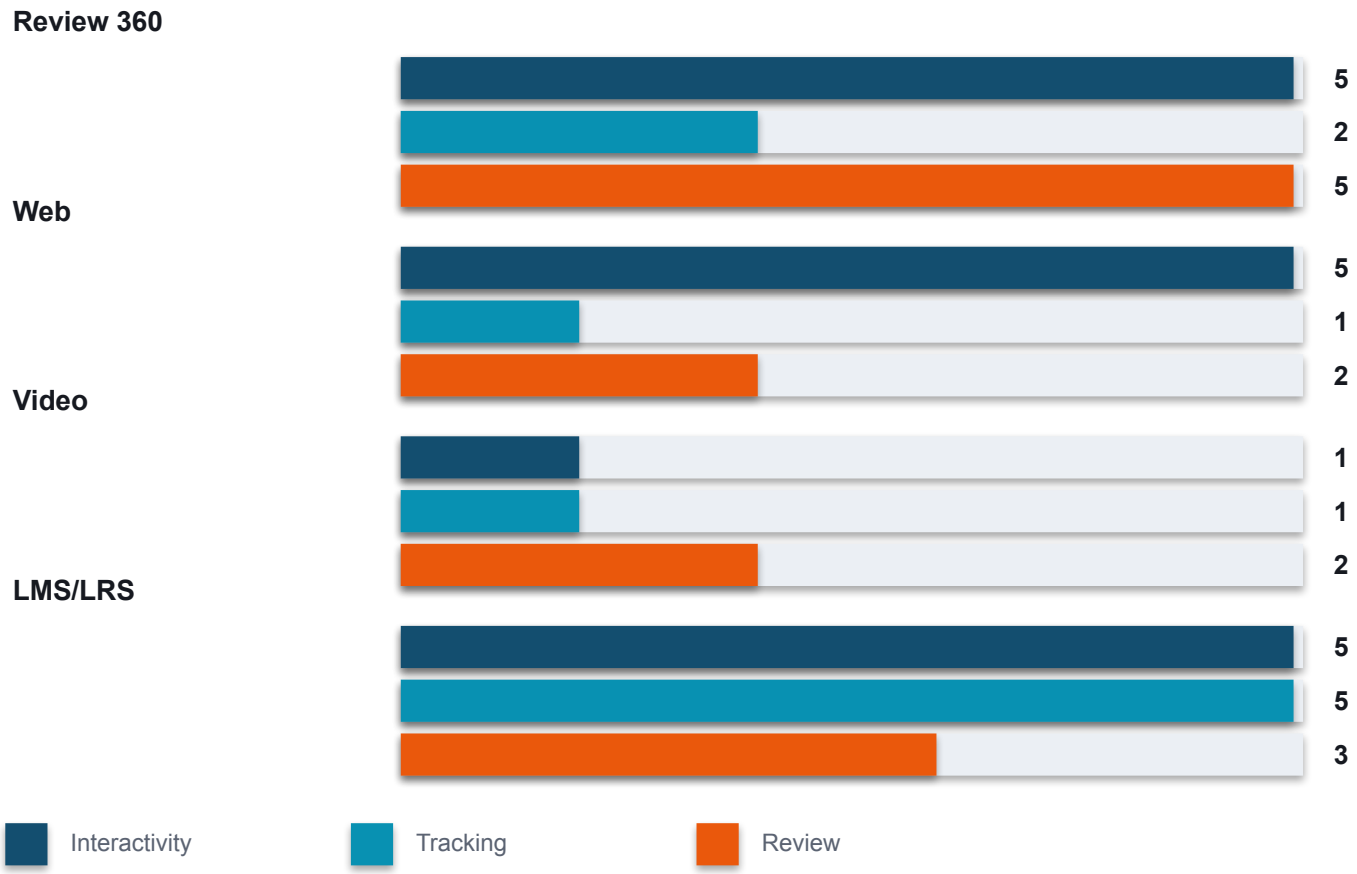


READ THE CHART

Illustrative 1–5 comparison: choose the channel from interaction, tracking, review and governance requirements—not from export convenience alone.

Editable PowerPoint shape chart


Player accessibility controls

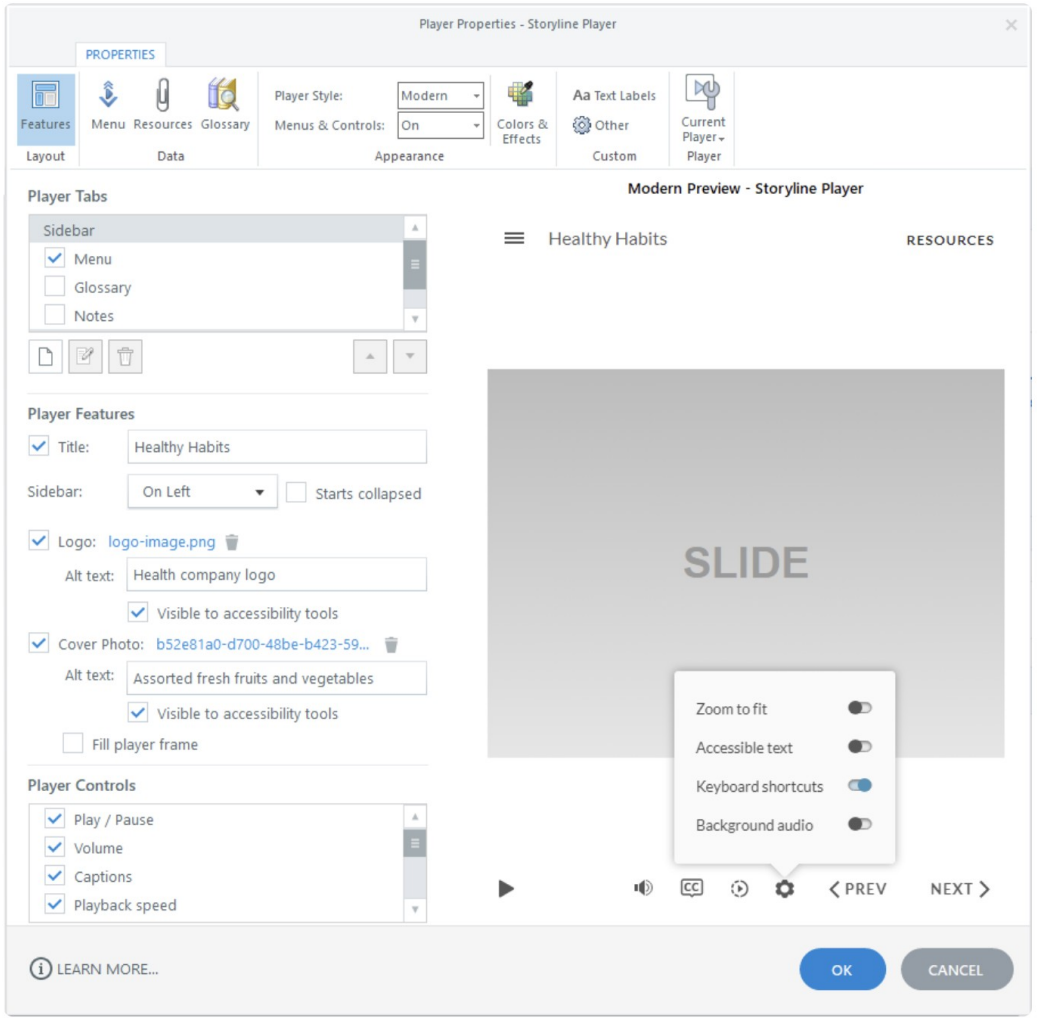

NAMED ARTIFACT	**WSA-073-Player-accessibility-controls**
MECHANISM	**Player Properties retains volume, captions, keyboard focus and clear labels**
EXPECTED	**keyboard and screen-reader test reaches each enabled control**

Authentic Articulate interface reference · verify the named control


Player accessibility controls

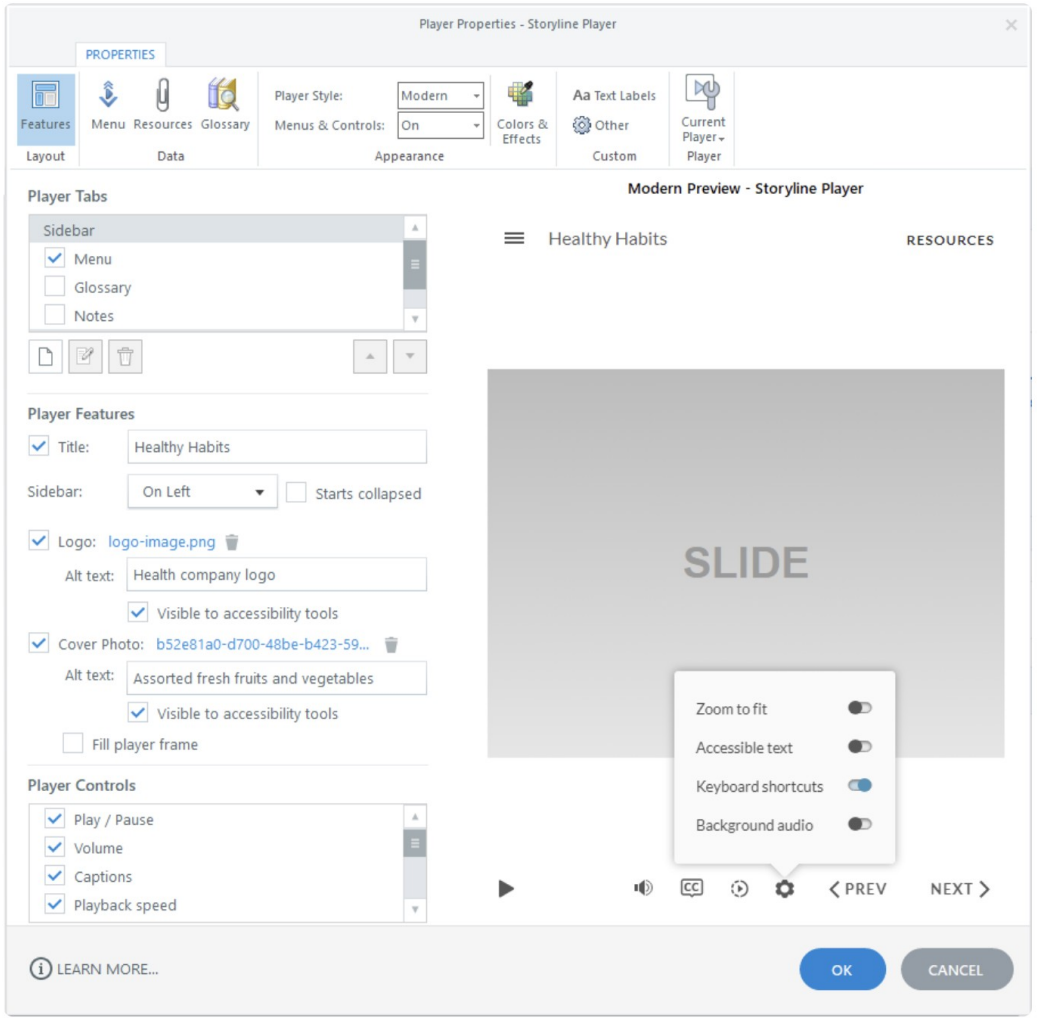

SET THESE CONTROLS	**C1=controls · C2=colour · C3=language · C4=menu · C5=seekbar**
REJECT WHEN	**hiding controls required for media access**
VERIFY READBACK	**keyboard and screen-reader test reaches each enabled control**

Authentic Articulate interface reference · verify the named control

Player accessibility controls

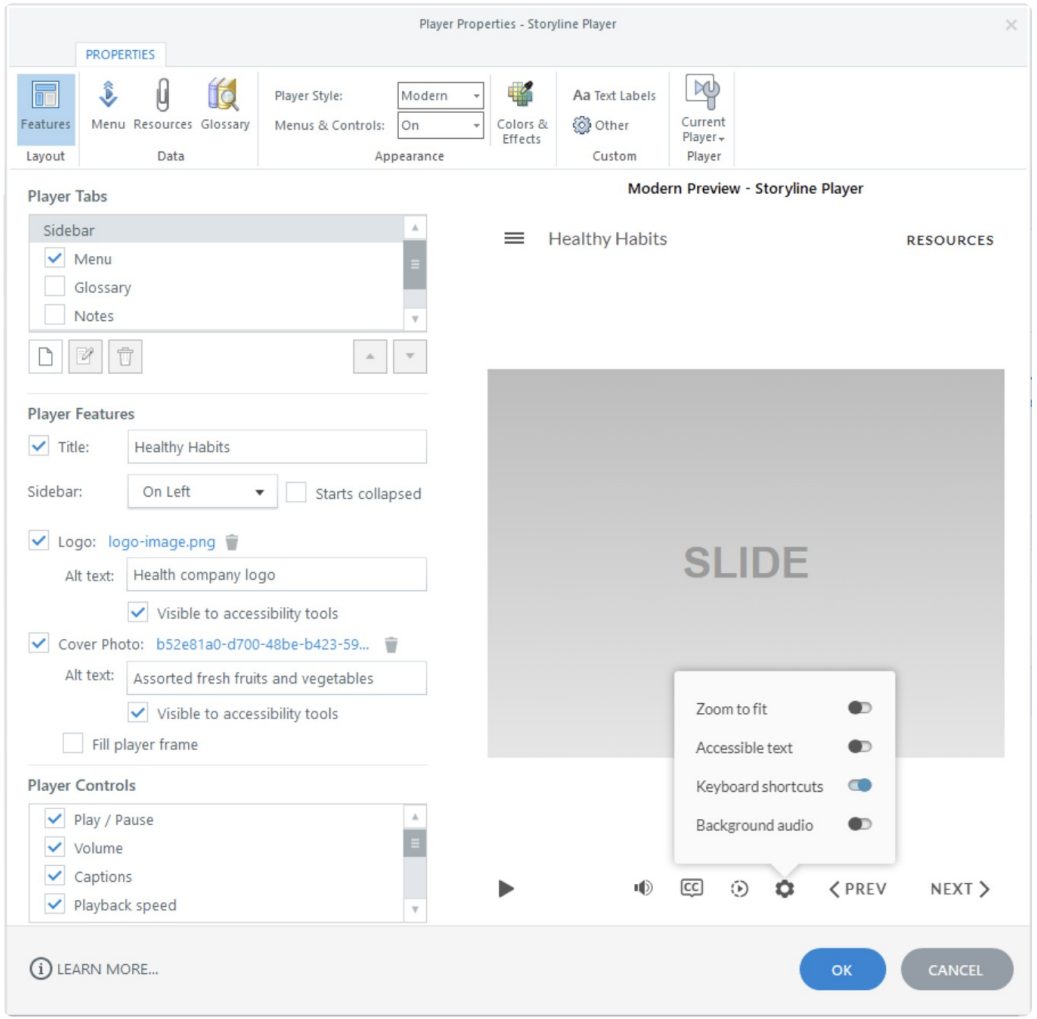


FAULTY OUTPUT (EXAMPLE) hiding controls required for media access

FIX IN NAMED PANEL controls; colour; language; menu; seekbar

EXPECTED AFTER FIX keyboard and screen-reader test reaches each enabled control · verify in…

Authentic Articulate interface reference · verify the named control


Translation workflow

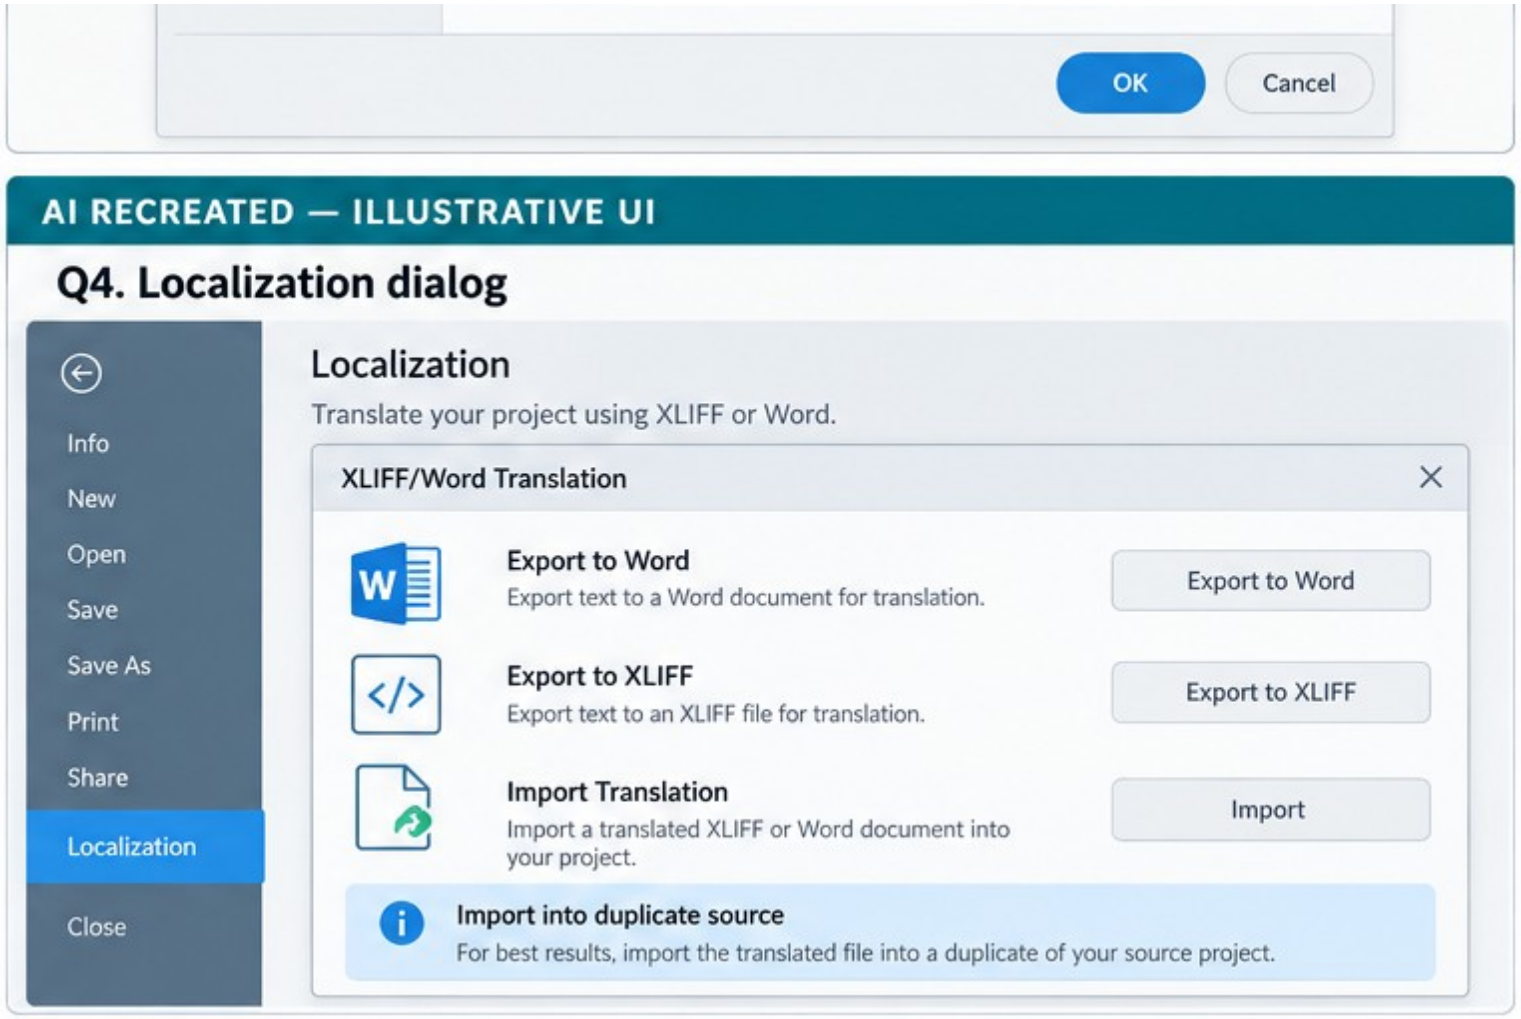

NAMED ARTIFACT	WSA-074-Translation-workflow
MECHANISM	File > Localization > XLIFF/Word Translation exports text, protects…
EXPECTED	import preserves triggers and representative layouts fit

AI RECREATED — ILLUSTRATIVE UI · verify the named control


Translation workflow

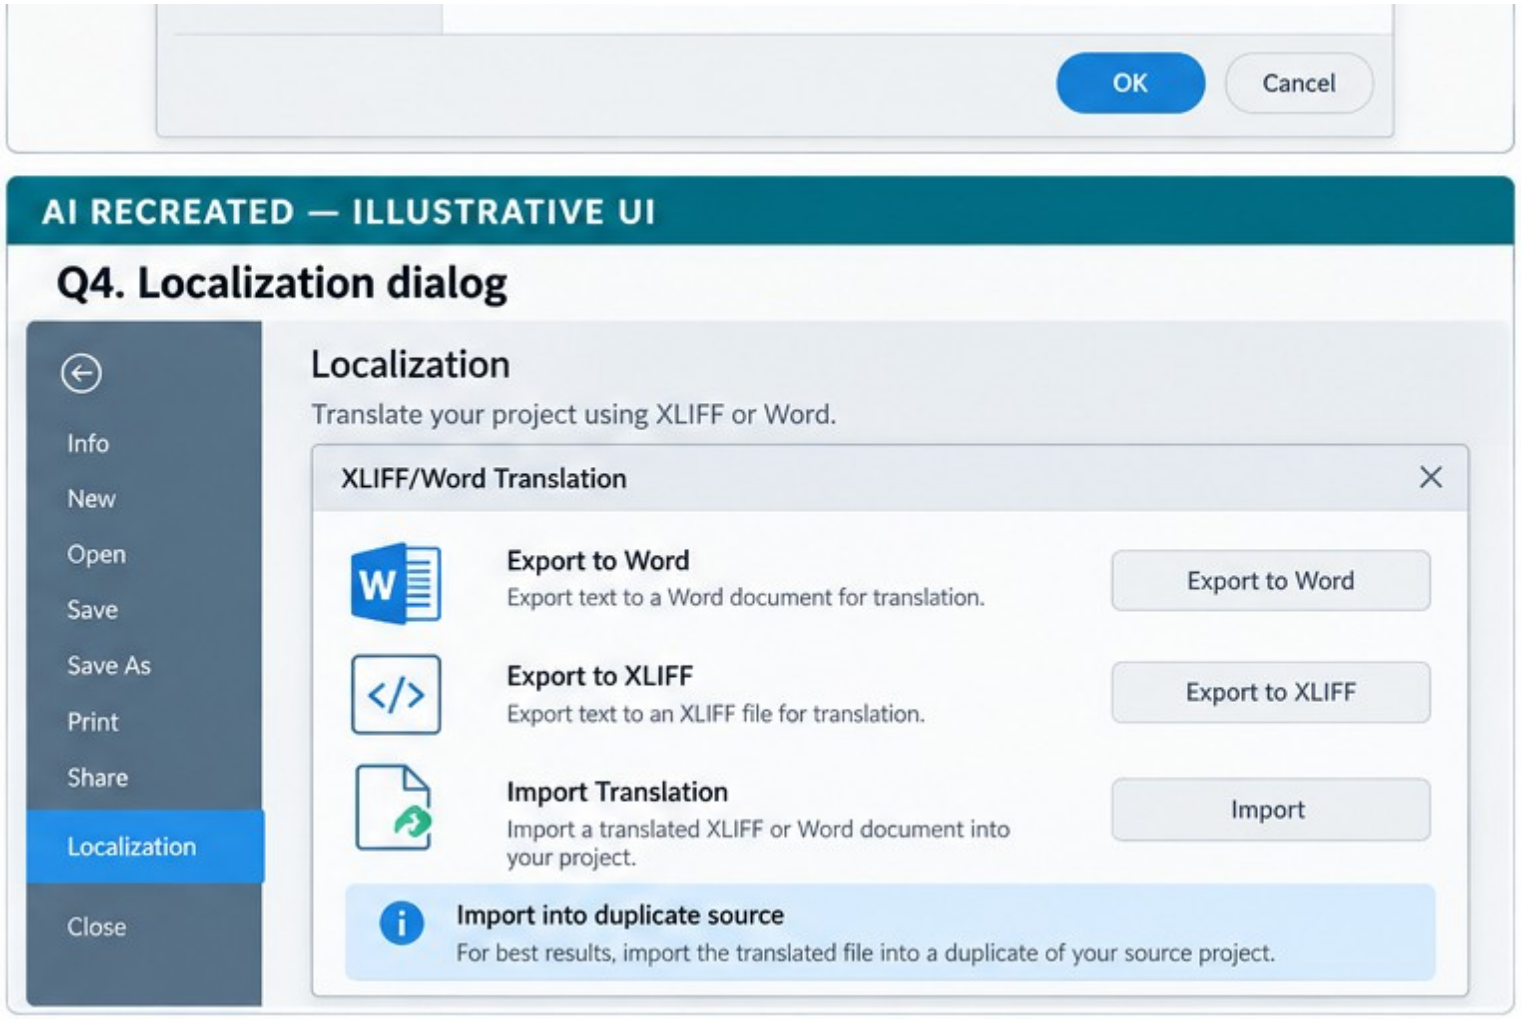

SET THESE CONTROLS	C1=XLIFF/Word workflow · C2=locale · C3=font · C4=expansion
REJECT WHEN	editing object IDs or truncating expanded text
VERIFY READBACK	import preserves triggers and representative layouts fit

AI RECREATED — ILLUSTRATIVE UI · verify the named control

Translation workflow

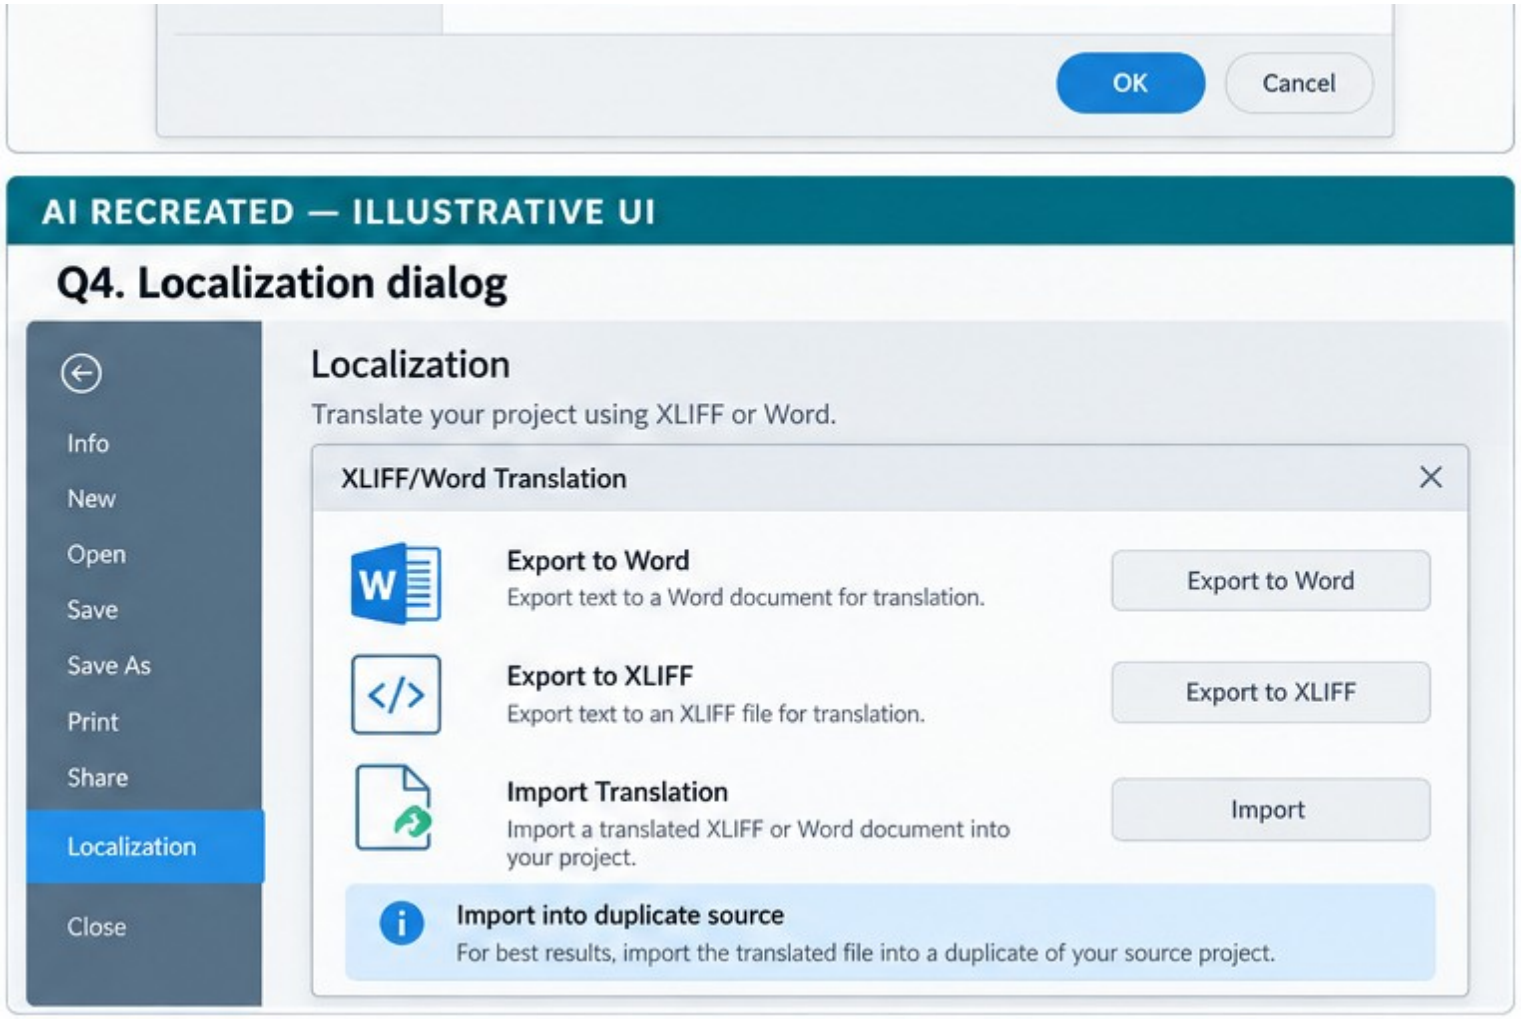

FAULTY OUTPUT (EXAMPLE) editing object IDs or truncating expanded text

FIX IN NAMED PANEL XLIFF/Word workflow; locale; font; expansion

EXPECTED AFTER FIX import preserves triggers and representative layouts fit · verify in your…

AI RECREATED — ILLUSTRATIVE UI · verify the named control

Review 360 publishing

Named HarbourLink WSH artifact

WSA-075-Review-360-publishing

Input / source state

WSA checkpoint plus item name; version; comments; resolve/reopen

Runtime mechanism

Home > Publish > Review 360 creates a versioned review item with named reviewers

Expected output

each comment has owner, disposition and source version

Rejected output

treating comments as the only requirement record

Evidence record

WSA-075-Review-360-publishing: capture the configured control and the runtime readback.

EDITABLE CONFIGURATION MODEL

Review 360 publishing

SET THESE CONTROLS

C1=item name · C2=version · C3=comments · C4=resolve/reopen

REJECT WHEN

treating comments as the only requirement record

VERIFY READBACK

each comment has owner, disposition and source version

Editable HarbourLink model · each comment has owner, disposition and source version

Review 360 publishing

FAULTY OUTPUT (EXAMPLE)

treating comments as the only requirement record

→

CORRECT THE RECORD

item name; version; comments; resolve/reopen

→

EXPECTED AFTER FIX

each comment has owner, disposition and source version · verify in your own Preview

Editable HarbourLink model · each comment has owner, disposition and source version

Review version control

Named HarbourLink WSH artifact

WSA-076-Review-version-control

Input / source state

WSA checkpoint plus review URL; version label; approval snapshot

Runtime mechanism

Update an existing Review 360 item only when continuity is intended; otherwise create a new item

Expected output

approved comment set maps to a retained .story checksum

Rejected output

overwriting an approved review with untracked changes

Evidence record

WSA-076-Review-version-control: capture the configured control and the runtime readback.

Review version control

SET THESE CONTROLS

C1=review URL · C2=version label · C3=approval snapshot

→

REJECT WHEN

overwriting an approved review with untracked changes

→

VERIFY READBACK

approved comment set maps to a retained .story checksum

Editable HarbourLink model · approved comment set maps to a retained .story checksum

Review version control

FAULTY OUTPUT (EXAMPLE)

overwriting an approved review with untracked changes

→

CORRECT THE RECORD

review URL; version label; approval snapshot


→

EXPECTED AFTER FIX

approved comment set maps to a retained .story checksum · verify in your own Preview

Editable HarbourLink model · approved comment set maps to a retained .story checksum


LMS/LRS publish target

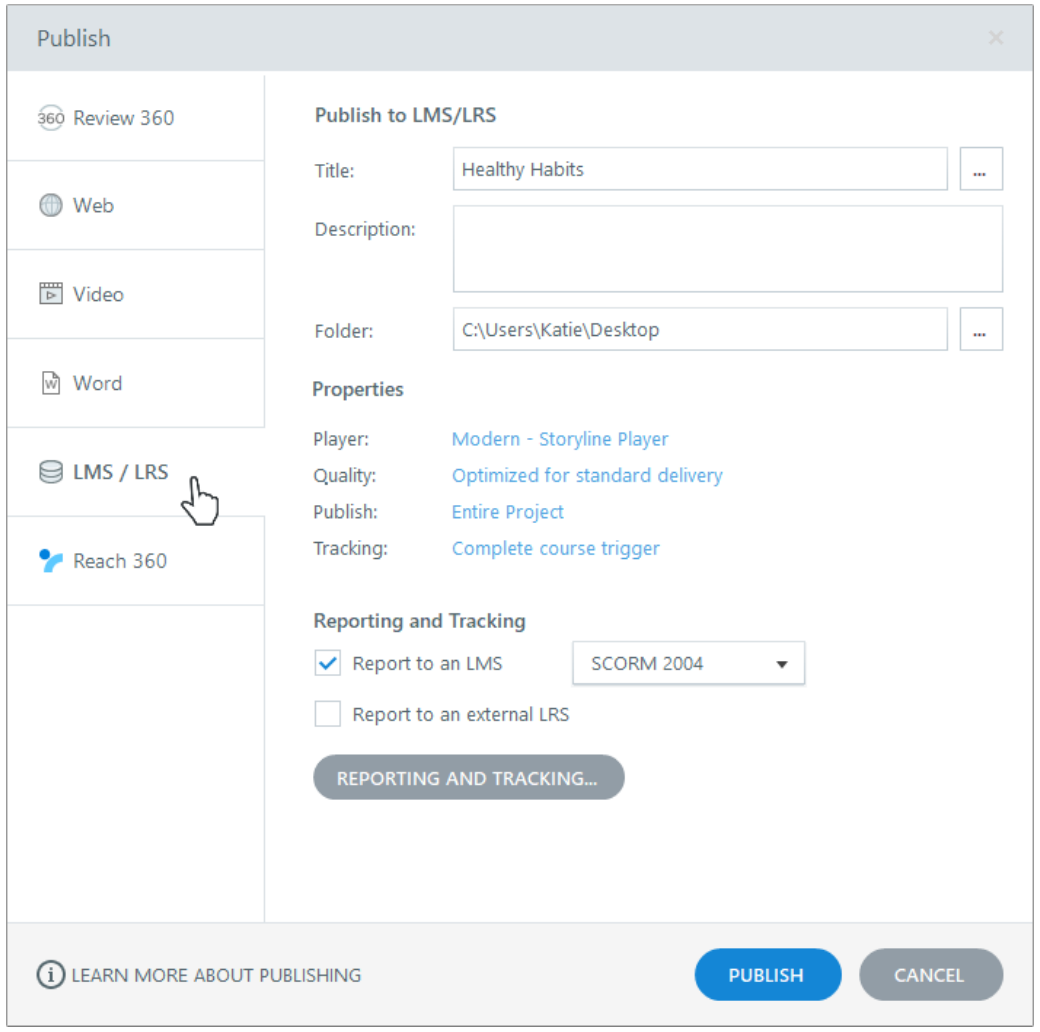

NAMED ARTIFACT	WSA-077-LMS-LRS-publish-target	MECHANISM	Home > Publish > LMS/LRS opens title, folder, quality, reporting and…	EXPECTED	local publish completes and the settings record identifies the package

Authentic Articulate interface reference · verify the named control

LMS/LRS publish target

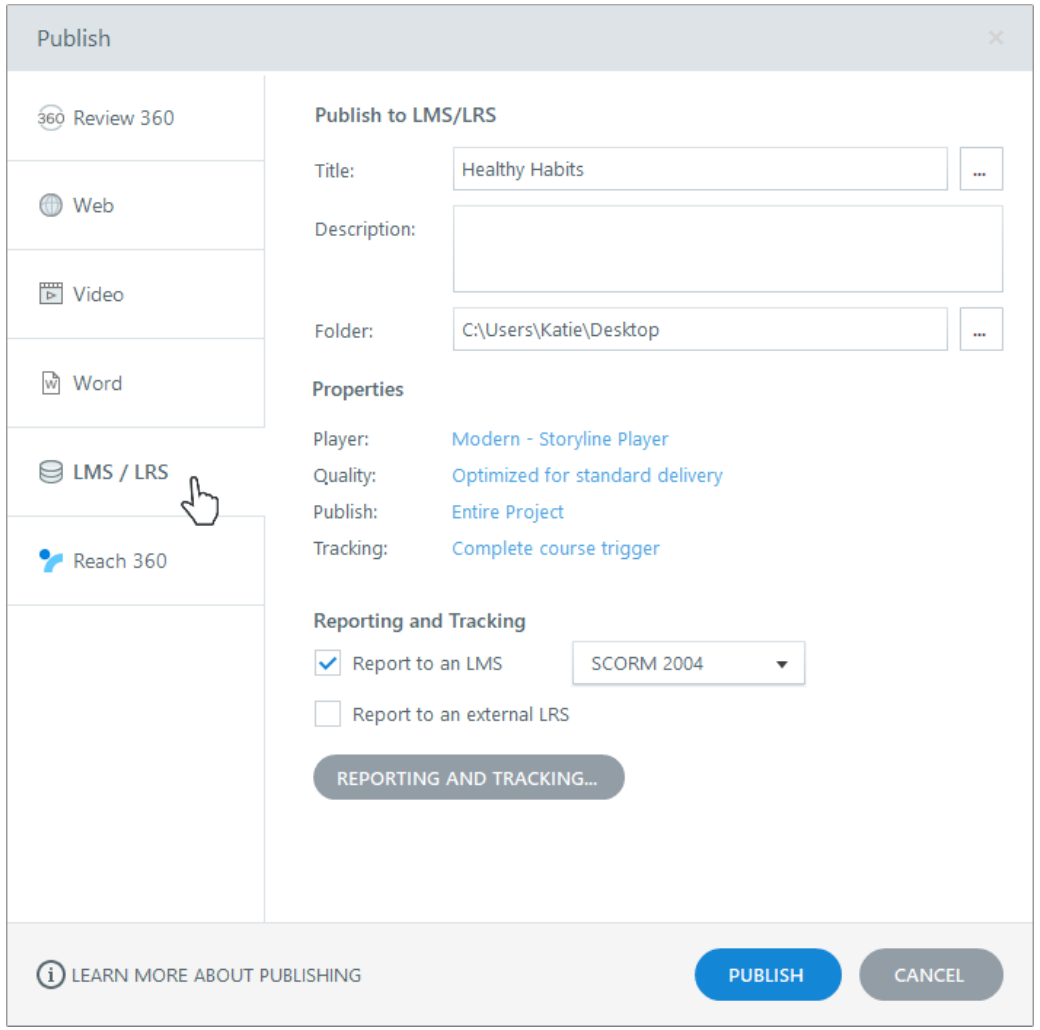


SET THESE CONTROLS C1=publish path · C2=title · C3=identifier · C4=standard · C5=tracking

REJECT WHEN publishing to a synced/network folder or reusing IDs carelessly

VERIFY READBACK local publish completes and the settings record identifies the package

Authentic Articulate interface reference · verify the named control

LMS/LRS publish target

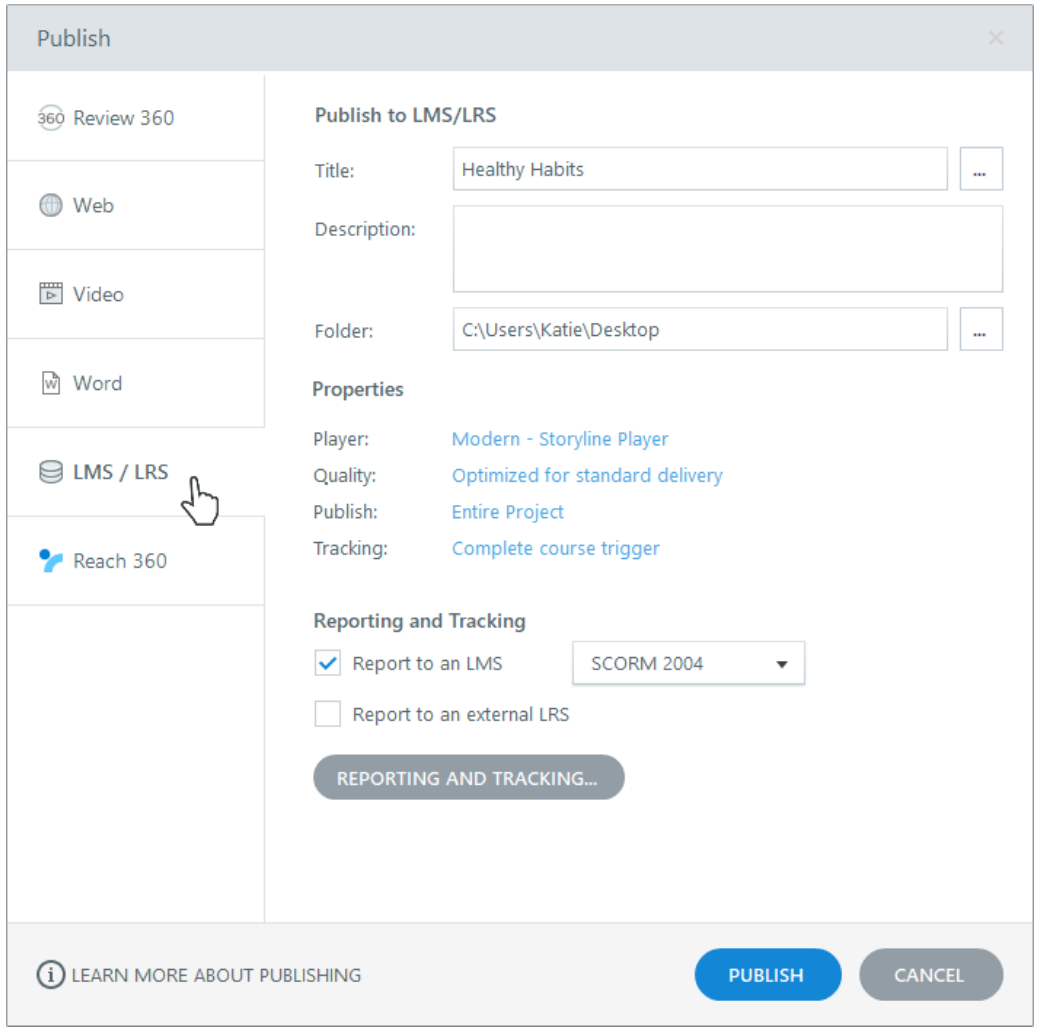

FAULTY OUTPUT (EXAMPLE) publishing to a synced/network folder or reusing IDs carelessly

FIX IN NAMED PANEL publish path; title; identifier; standard; tracking

EXPECTED AFTER FIX local publish completes and the settings record identifies the package ·…

Authentic Articulate interface reference · verify the named control

SCORM 1.2 reporting

Named HarbourLink WSH artifact

WSA-078-SCORM-1-2-reporting

Input / source state

WSA checkpoint plus Passed/Incomplete; Passed/Failed; identifier; title

Runtime mechanism

Reporting and Tracking selects SCORM 1.2 and the LMS status pair required by the target LMS

Expected output

sandbox records score, lesson status, location and suspend data

Rejected output

choosing a status model without LMS validation

Evidence record

WSA-078-SCORM-1-2-reporting: capture the configured control and the runtime readback.

SCORM 1.2 reporting

SET THESE CONTROLS

C1=Passed/Incomplete · C2=Passed/Failed · C3=identifier · C4=title

REJECT WHEN

choosing a status model without LMS validation

VERIFY READBACK

sandbox records score, lesson status, location and suspend data

Editable HarbourLink model · sandbox records score, lesson status, location and suspend data

SCORM 1.2 reporting

FAULTY OUTPUT (EXAMPLE)

choosing a status model without LMS validation

→

CORRECT THE RECORD

Passed/Incomplete; Passed/Failed; identifier; title


→

EXPECTED AFTER FIX

sandbox records score, lesson status, location and suspend data · verify in your own Preview

Editable HarbourLink model · sandbox records score, lesson status, location and suspend data


SCORM 2004 editions

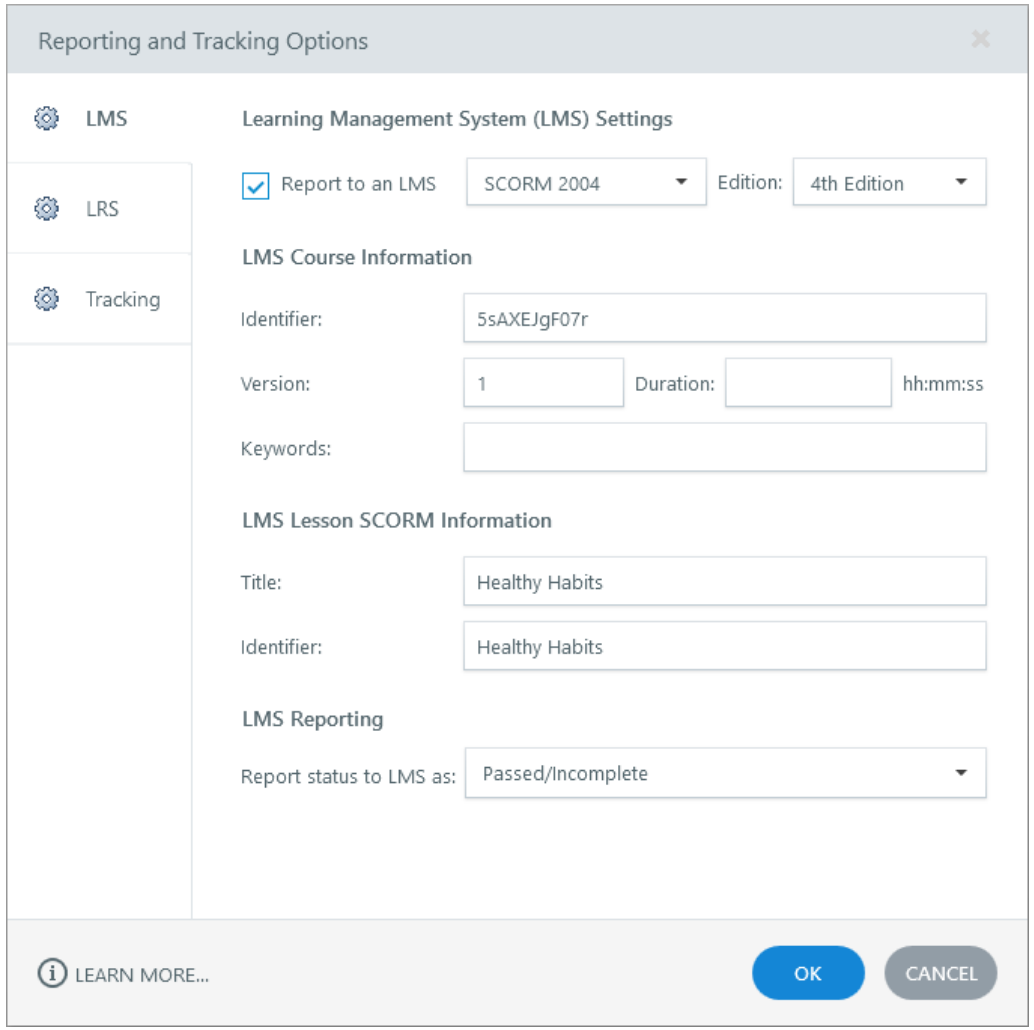

NAMED ARTIFACT	WSA-079-SCORM-2004-editions
MECHANISM	Reporting and Tracking selects the LMS-supported SCORM 2004 edition and…
EXPECTED	sandbox launch, suspend/resume and score readback pass

Authentic Articulate interface reference · verify the named control

SCORM 2004 editions

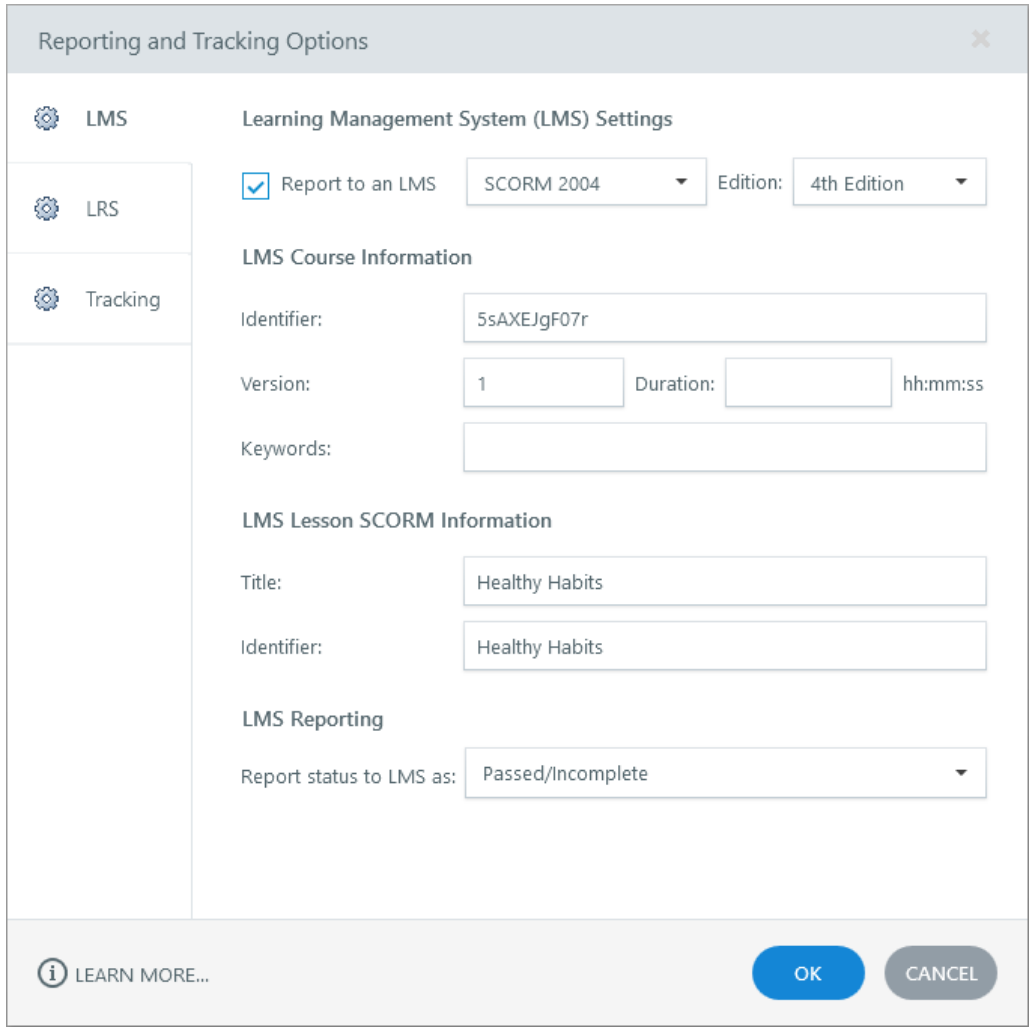


SET THESE CONTROLS C1=edition · C2=completion · C3=success · C4=score · C5=identifier

REJECT WHEN assuming every LMS supports the same edition

VERIFY READBACK sandbox launch, suspend/resume and score readback pass

Authentic Articulate interface reference · verify the named control

SCORM 2004 editions

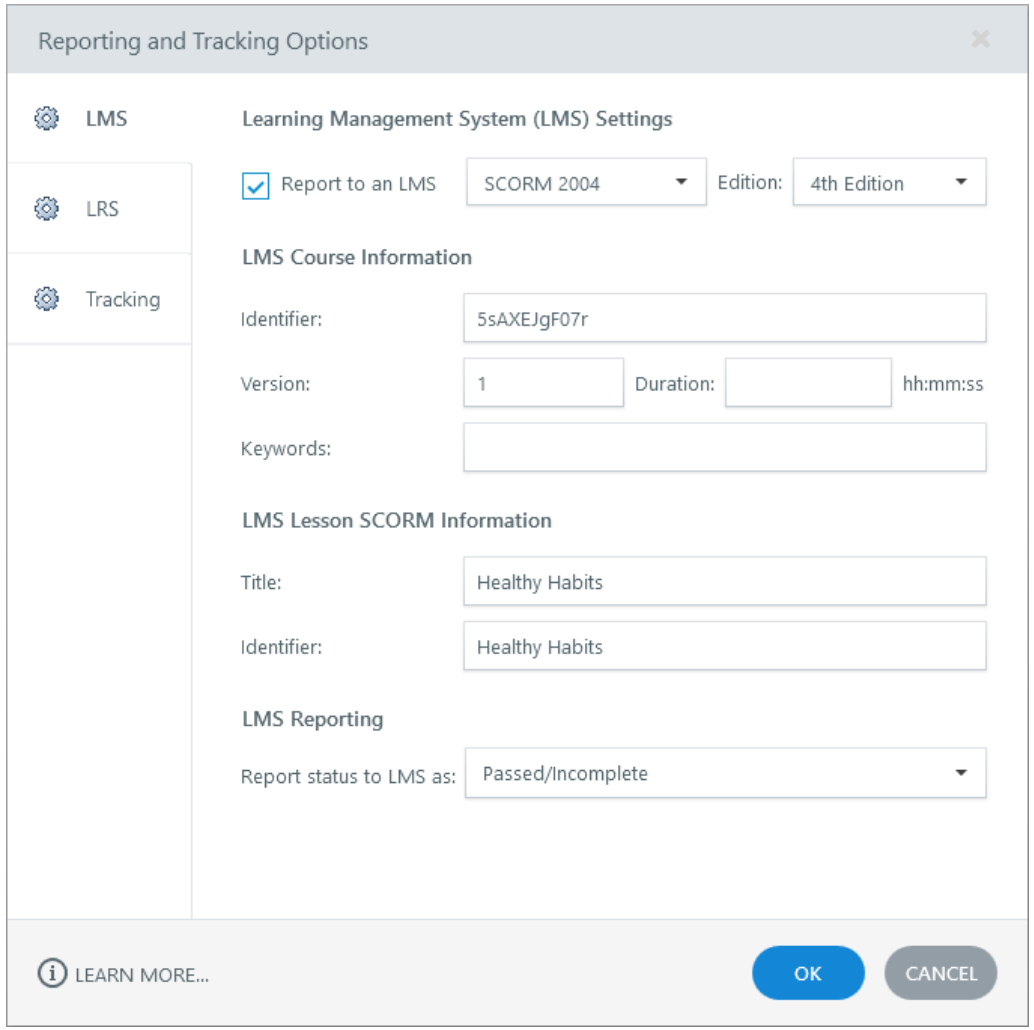

FAULTY OUTPUT (EXAMPLE) assuming every LMS supports the same edition

FIX IN NAMED PANEL edition; completion; success; score; identifier

EXPECTED AFTER FIX sandbox launch, suspend/resume and score readback pass · verify in your…

Authentic Articulate interface reference · verify the named control

Tin Can xAPI publishing

Named HarbourLink WSH artifact

WSA-080-Tin-Can-xAPI-publishing

Input / source state

WSA checkpoint plus activity ID; actor; endpoint; auth; statements

Runtime mechanism

Reporting and Tracking selects xAPI (Tin Can API) and uses launch-supplied actor/LRS configuration

Expected output

test launch sends expected statements without credentials stored in the package

Rejected output

embedding LRS secrets in learner assets

Evidence record

WSA-080-Tin-Can-xAPI-publishing: capture the configured control and the runtime readback.

EDITABLE CONFIGURATION MODEL

Tin Can xAPI publishing

SET THESE CONTROLS

C1=activity ID · C2=actor · C3=endpoint · C4=auth · C5=statements

REJECT WHEN

embedding LRS secrets in learner assets

VERIFY READBACK

test launch sends expected statements without credentials stored in the package

Editable HarbourLink model · test launch sends expected statements without credentials stored in the package

Tin Can xAPI publishing

FAULTY OUTPUT (EXAMPLE)

embedding LRS secrets in learner assets

→

CORRECT THE RECORD

activity ID; actor; endpoint; auth; statements

→

EXPECTED AFTER FIX

test launch sends expected statements without credentials stored in the package · verify in your own Preview

Editable HarbourLink model · test launch sends expected statements without credentials stored in the package

© 2026 Tertiary Infotech Academy Pte Ltd · Mastering Articulate Storyline 360 for e-Learning Content Creation · TGS-2024042308

cmi5 boundary

Named HarbourLink WSH artifact

WSA-081-cmi5-boundary

Input / source state

WSA checkpoint plus AU launch; session; moveOn; masteryScore

Runtime mechanism

cmi5 is chosen only when the LMS supports its launch/session rules and xAPI statement profile

Expected output

cmi5 conformance test shows launched, completed and passed lifecycle

Rejected output

treating generic xAPI and cmi5 as interchangeable

Evidence record

WSA-081-cmi5-boundary: capture the configured control and the runtime readback.

EDITABLE CONFIGURATION MODEL

cmi5 boundary

SET THESE CONTROLS

C1=AU launch · C2=session · C3=moveOn · C4=masteryScore

REJECT WHEN

treating generic xAPI and cmi5 as interchangeable

VERIFY READBACK

cmi5 conformance test shows launched, completed and passed lifecycle

Editable HarbourLink model · cmi5 conformance test shows launched, completed and passed lifecycle

cmi5 boundary

FAULTY OUTPUT (EXAMPLE)

treating generic xAPI and cmi5 as interchangeable

→

CORRECT THE RECORD

AU launch; session; moveOn; masteryScore

→

EXPECTED AFTER FIX


cmi5 conformance test shows launched, completed and passed lifecycle · verify in your own Preview

Editable HarbourLink model · cmi5 conformance test shows launched, completed and passed lifecycle

© 2026 Tertiary Infotech Academy Pte Ltd · Mastering Articulate Storyline 360 for e-Learning Content Creation · TGS-2024042308

Tracking criteria semantics

AI RECREATED — ILLUSTRATIVE UI

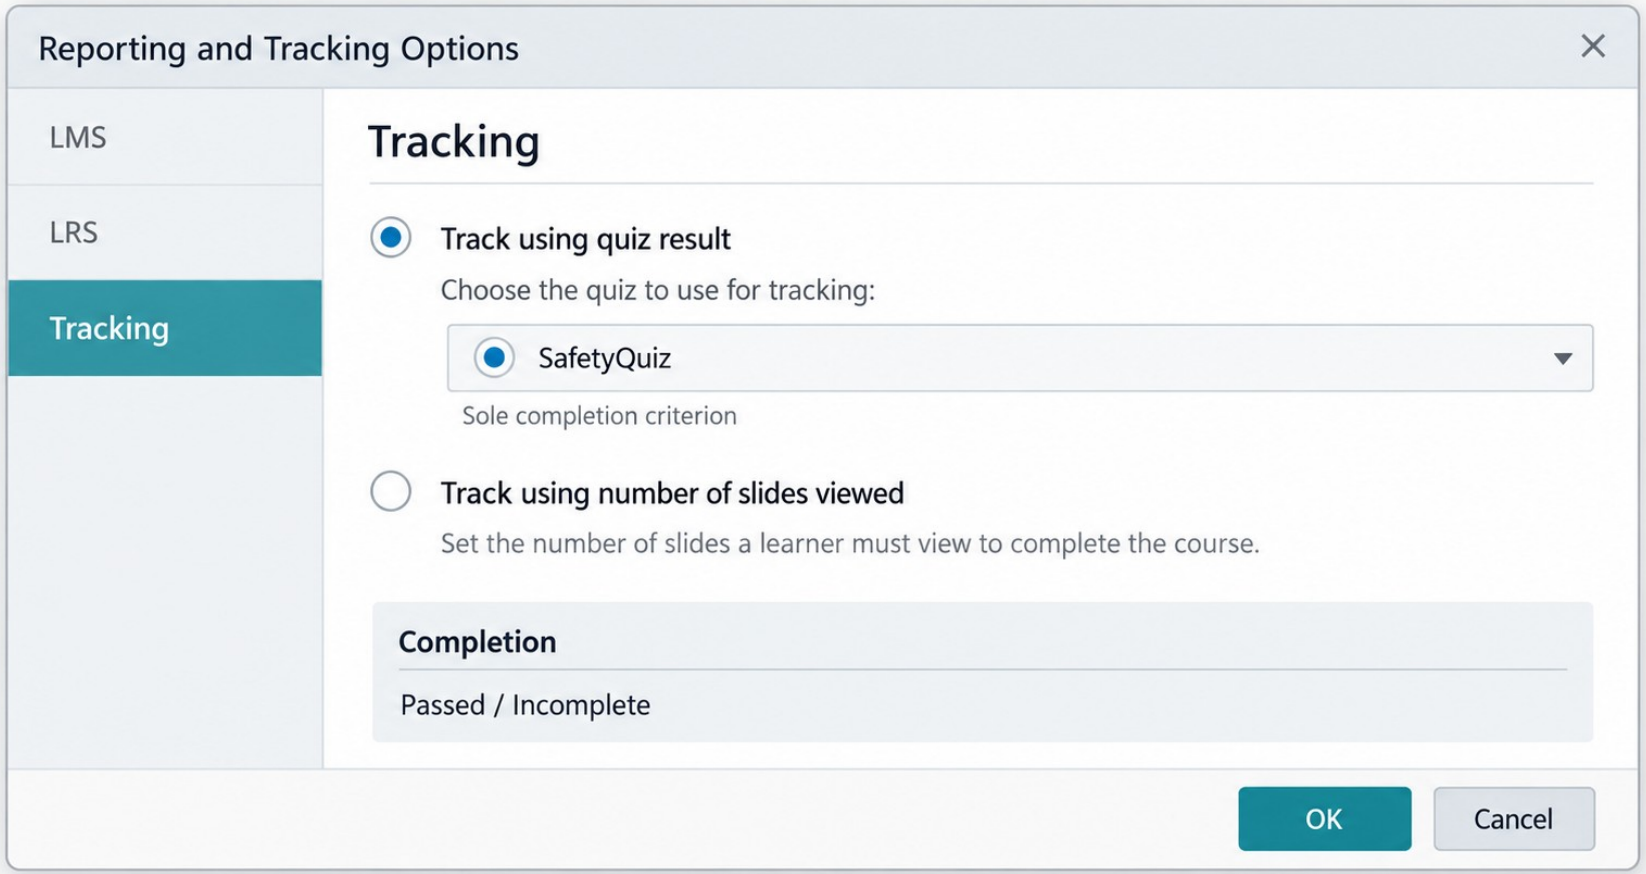


NAMED ARTIFACT	WSA-082-Tracking-criteria-semantics
MECHANISM	The scored safety module tracks the quiz result only because multiple…
EXPECTED	slides-viewed alone cannot complete the scored module

AI RECREATED — ILLUSTRATIVE UI · verify the named control

Tracking criteria semantics

AI RECREATED — ILLUSTRATIVE UI

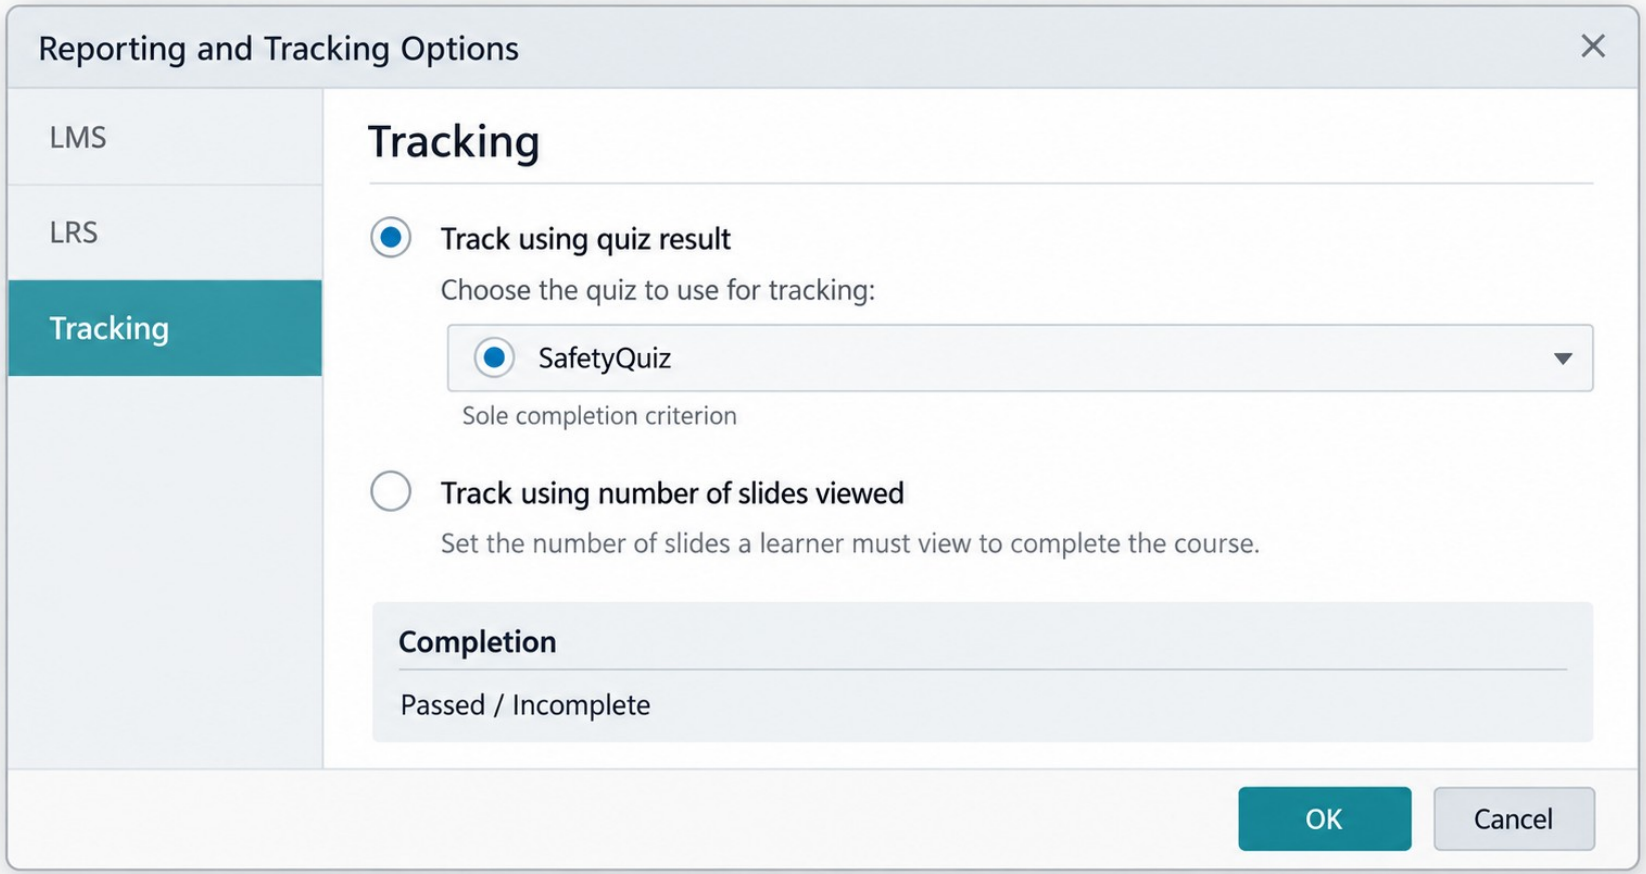


SET THESE CONTROLS	C1=result slide · C2=criteria list · C3=completion trigger
REJECT WHEN	adding slides viewed and allowing a bypass
VERIFY READBACK	slides-viewed alone cannot complete the scored module

AI RECREATED — ILLUSTRATIVE UI · verify the named control

Tracking criteria semantics

AI RECREATED — ILLUSTRATIVE UI

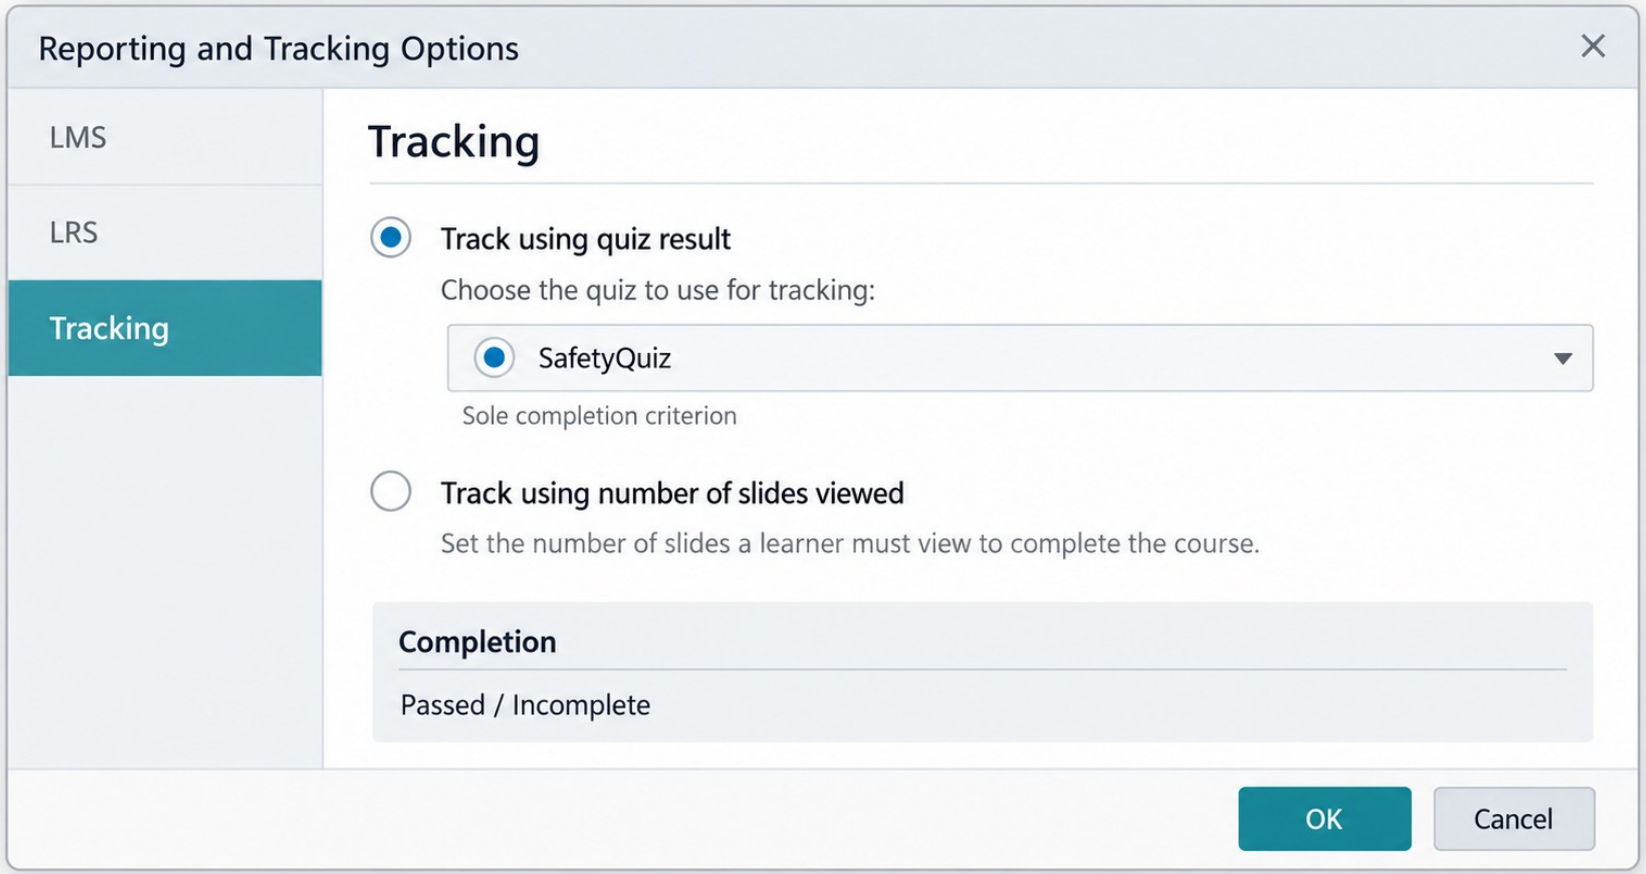


FAULTY OUTPUT (EXAMPLE) adding slides viewed and allowing a bypass

FIX IN NAMED PANEL result slide; criteria list; completion trigger

EXPECTED AFTER FIX slides-viewed alone cannot complete the scored module · verify in your own…

AI RECREATED — ILLUSTRATIVE UI · verify the named control


Publish Success ZIP

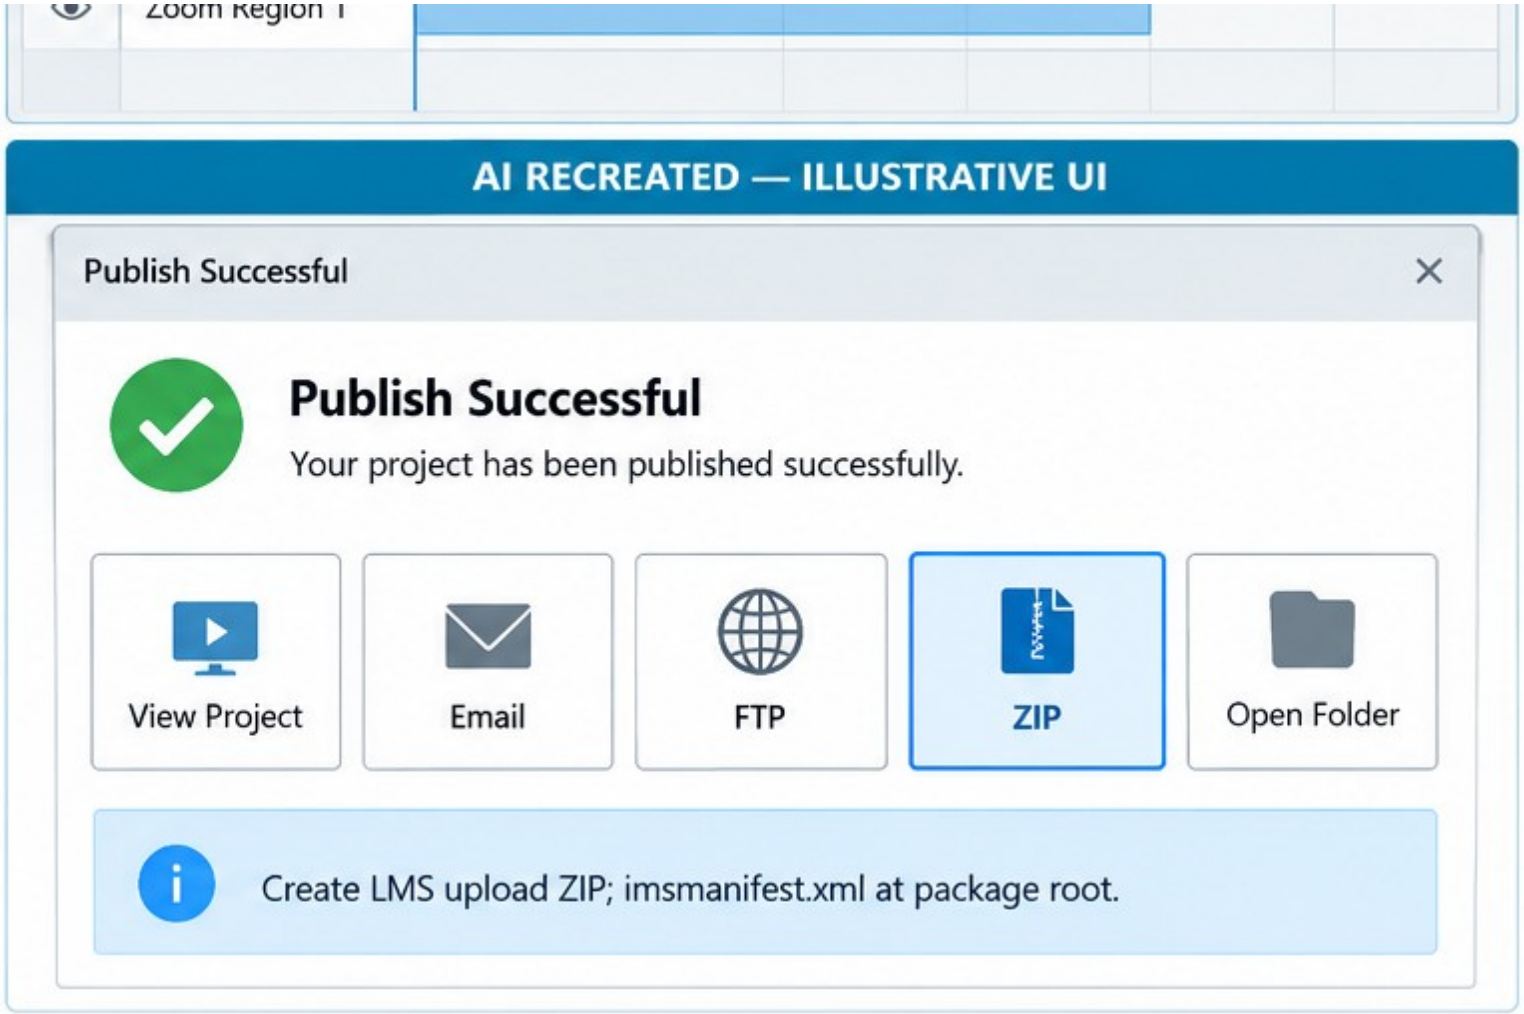

NAMED ARTIFACT	WSA-083-Publish-Success-ZIP
MECHANISM	Publish Successful > ZIP creates an upload package with imsmanifest.xml…
EXPECTED	archive inspection finds manifest and launch assets at root

AI RECREATED — ILLUSTRATIVE UI · verify the named control


Publish Success ZIP

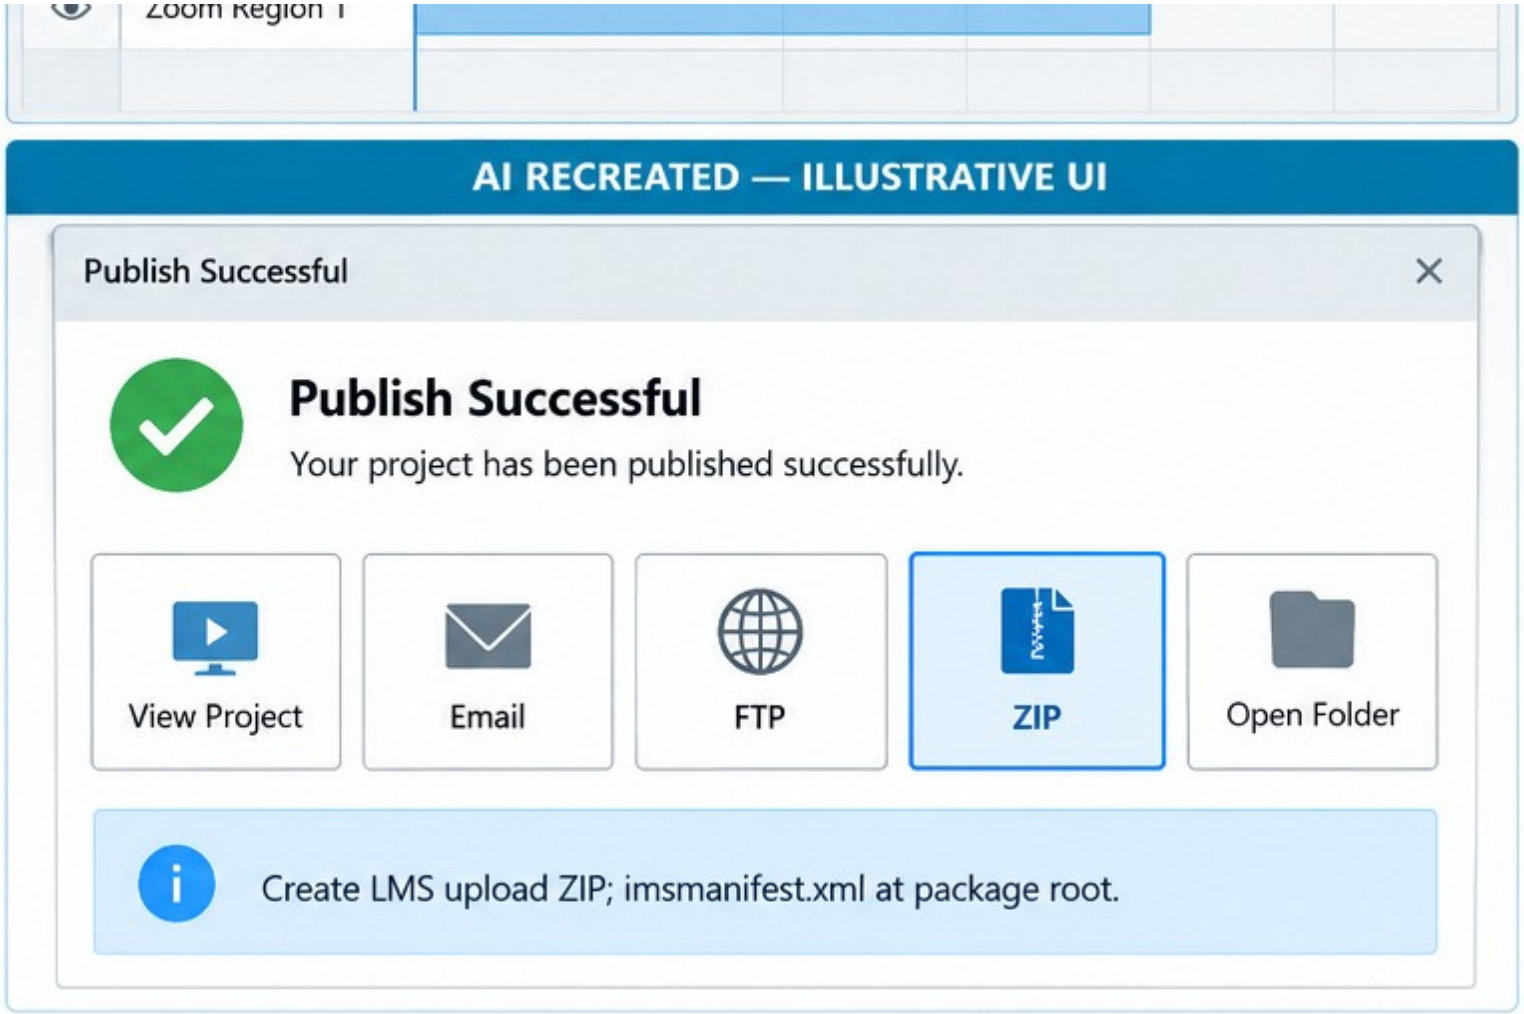

SET THESE CONTROLS	C1=ZIP command · C2=manifest root · C3=no extra wrapper folder
REJECT WHEN	zipping the containing folder manually
VERIFY READBACK	archive inspection finds manifest and launch assets at root

AI RECREATED — ILLUSTRATIVE UI · verify the named control


Publish Success ZIP

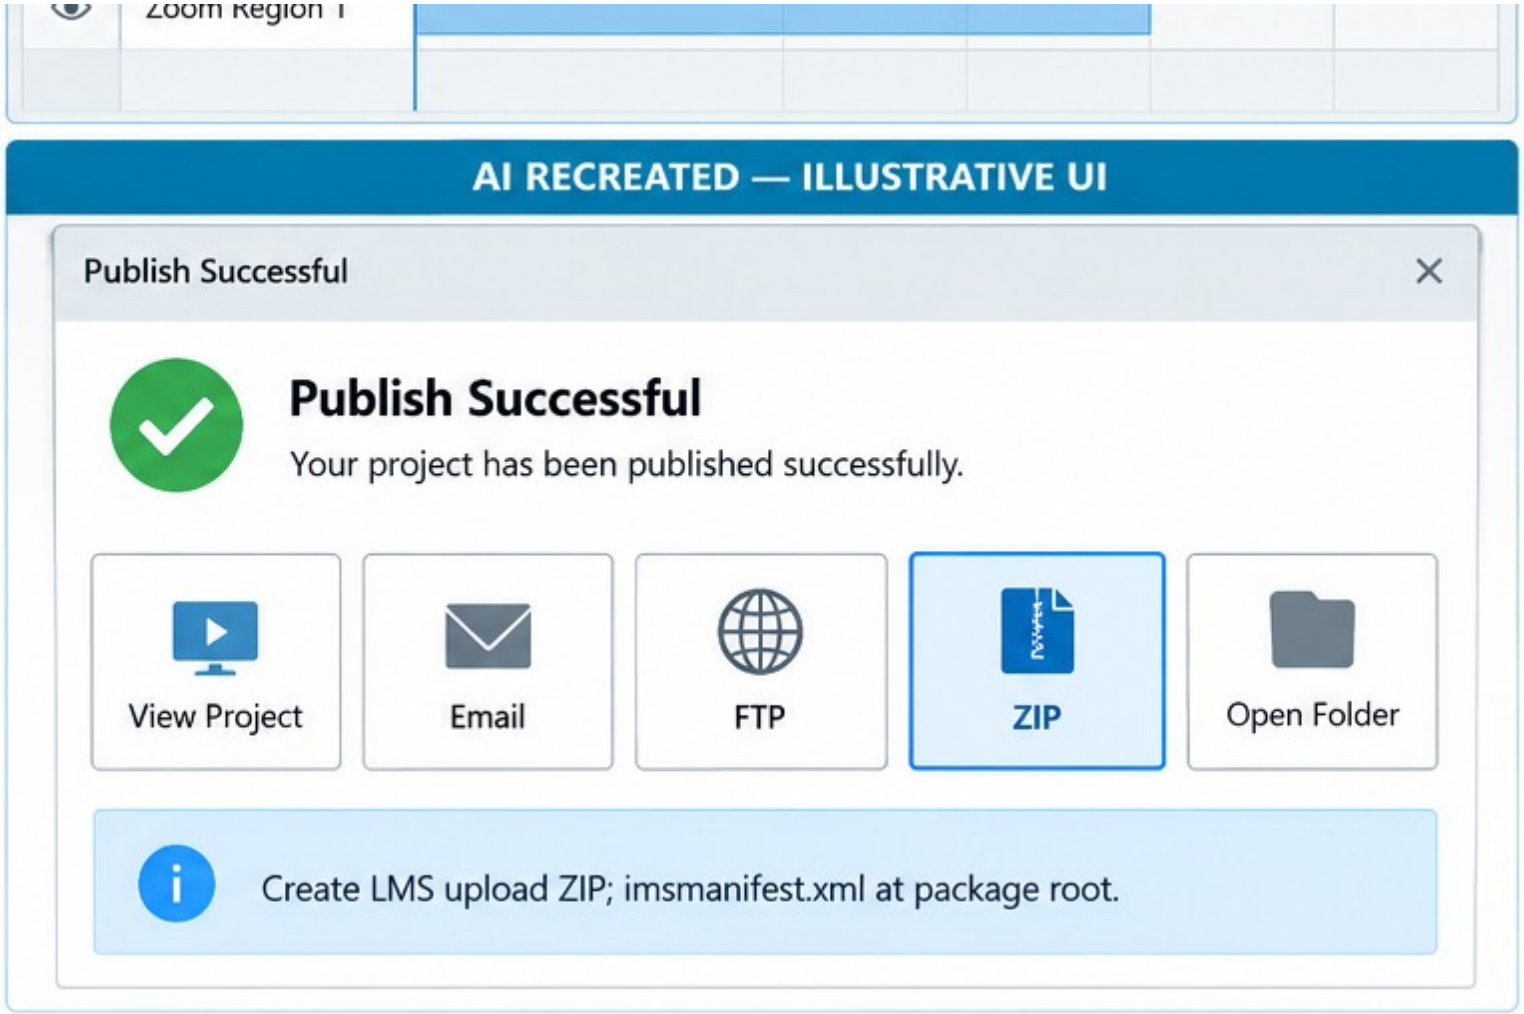

FAULTY OUTPUT (EXAMPLE)	zipping the containing folder manually
FIX IN NAMED PANEL	ZIP command; manifest root; no extra wrapper folder
EXPECTED AFTER FIX	archive inspection finds manifest and launch assets at root · verify in…

AI RECREATED — ILLUSTRATIVE UI · verify the named control


LMS sandbox upload

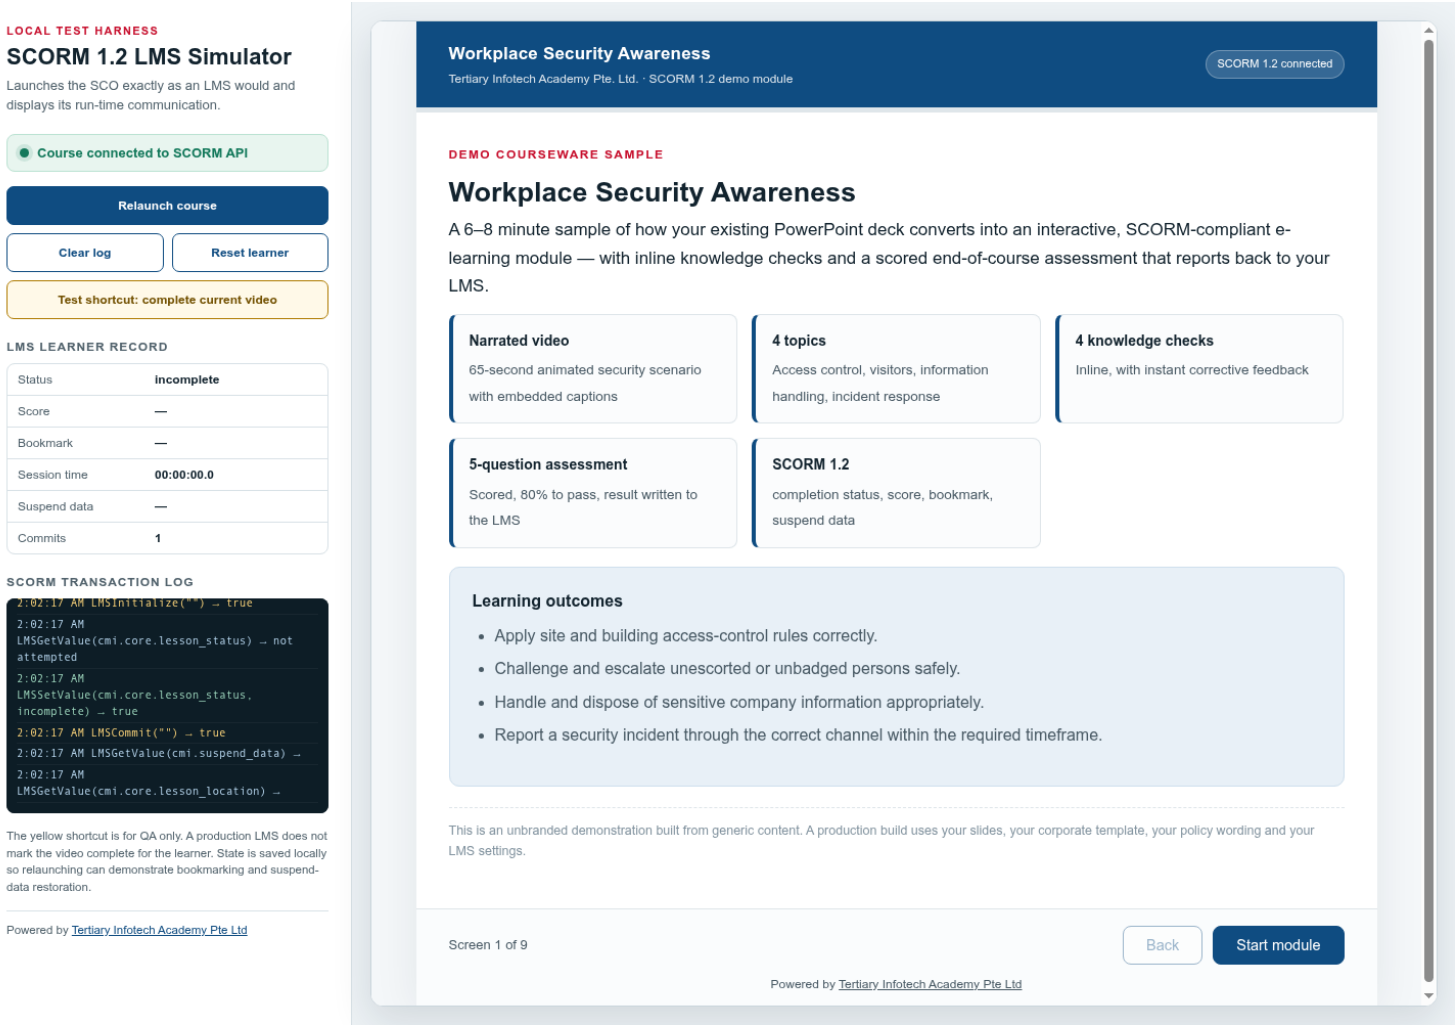

NAMED ARTIFACT	**WSA-084-LMS-sandbox-upload**
MECHANISM	**A non-production LMS course tests launch, completion, score, bookmark,…**
EXPECTED	**fresh, failed, passed and resumed attempts read back correctly**

Authentic Articulate interface reference · verify the named control

LMS sandbox upload

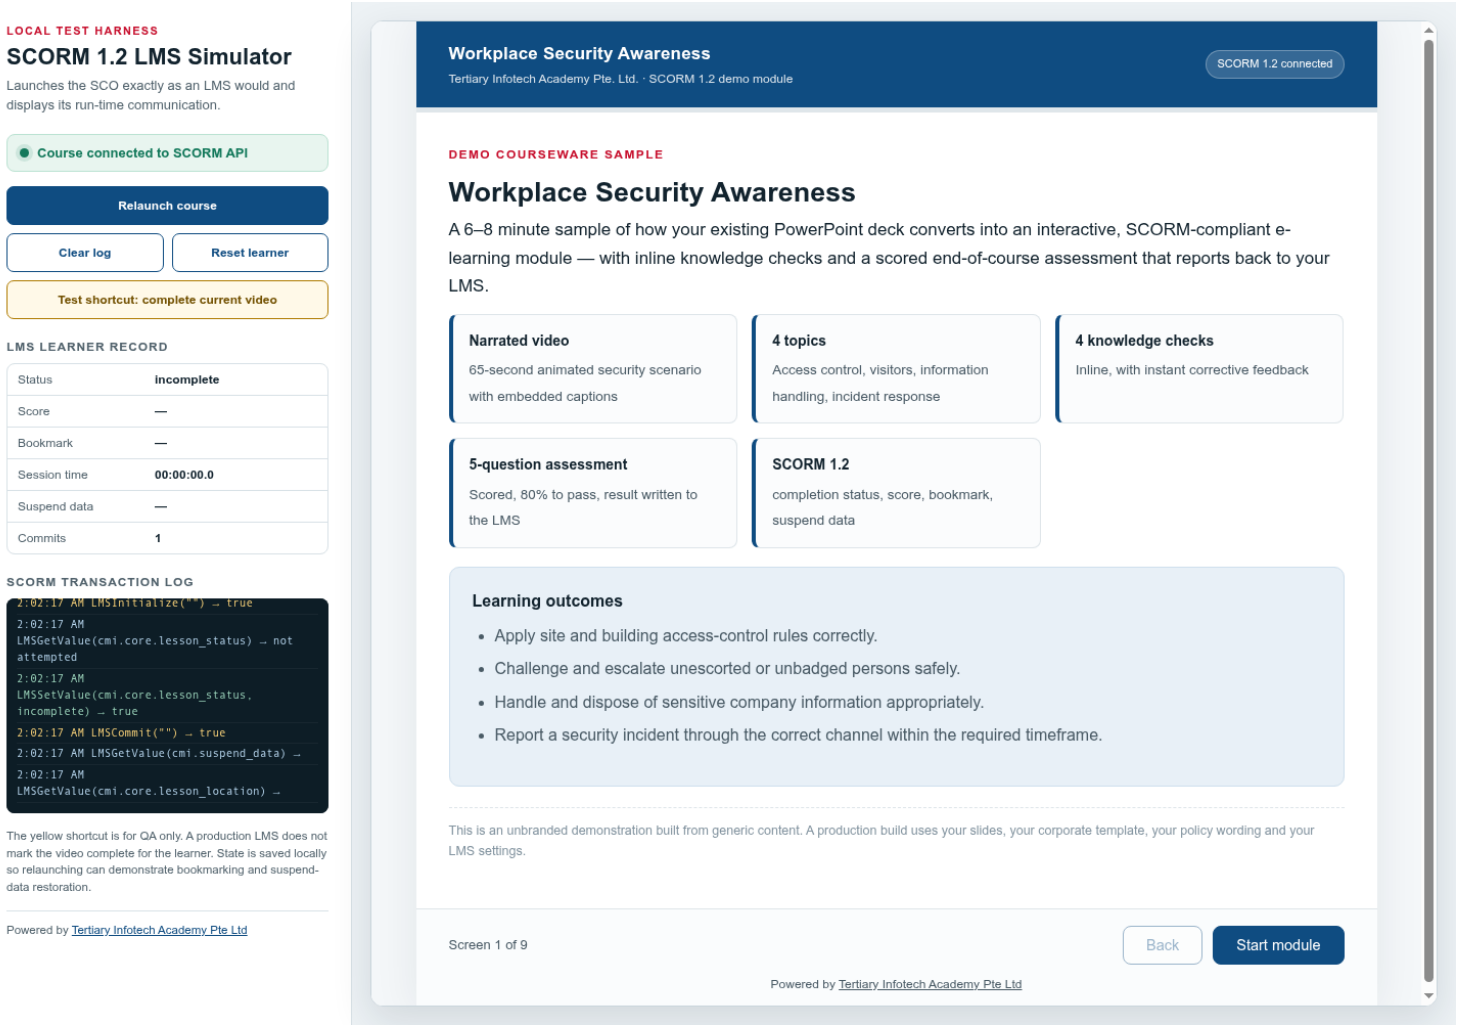


SET THESE CONTROLS C1=learner ID · C2=attempt · C3=status · C4=score · C5=resume · C6=debug log

REJECT WHEN using production learners for package debugging

VERIFY READBACK fresh, failed, passed and resumed attempts read back correctly

Authentic Articulate interface reference · verify the named control

LMS sandbox upload

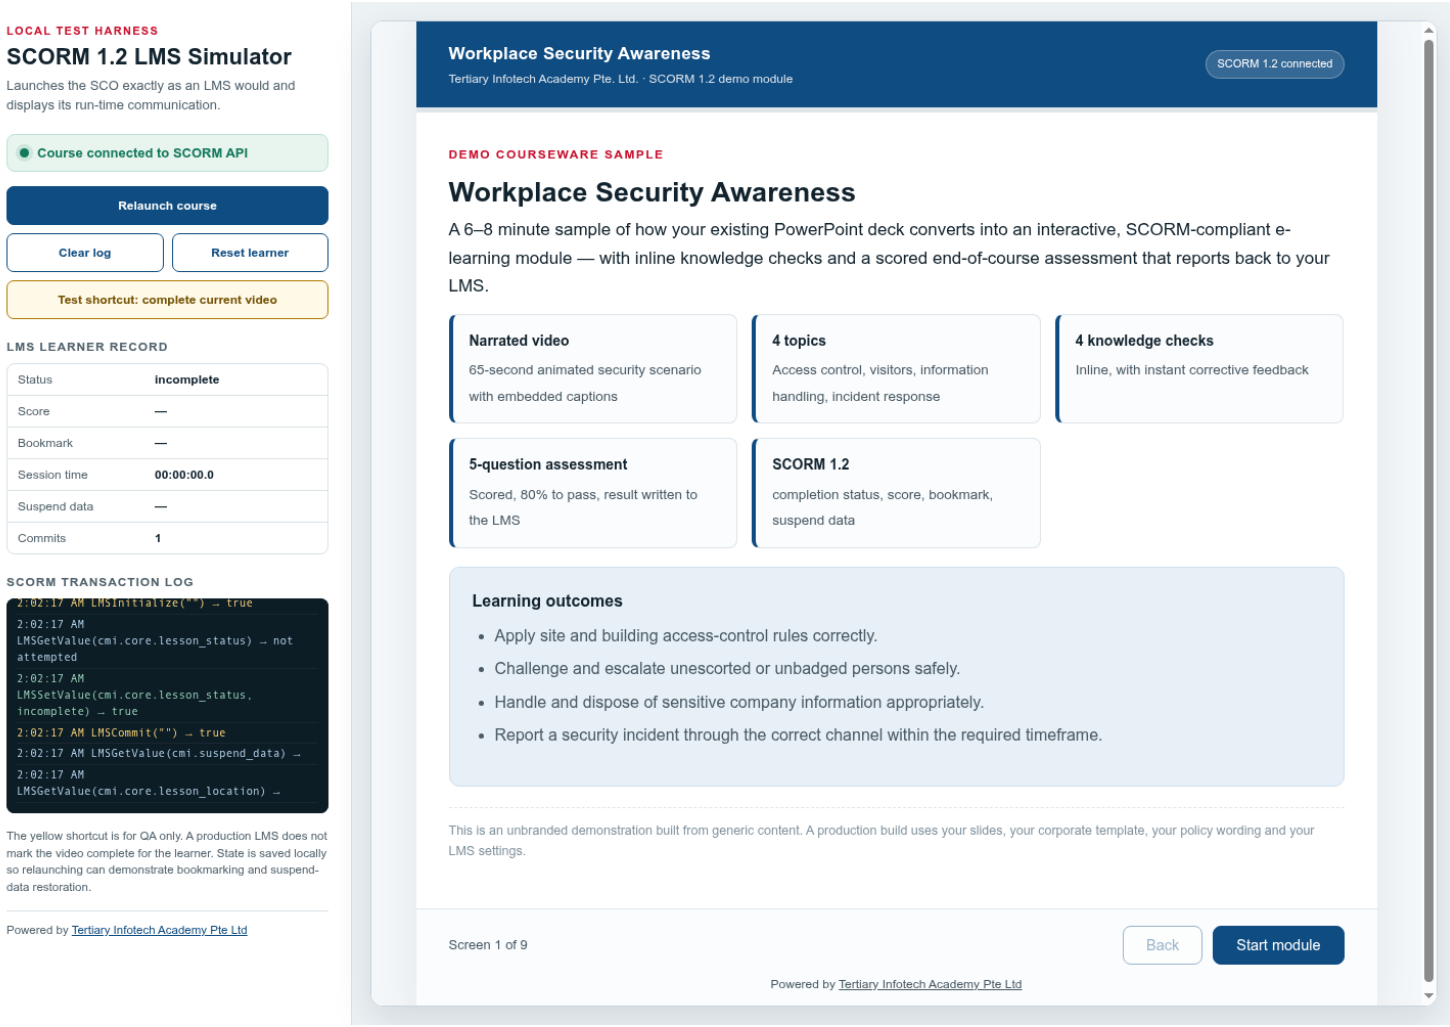


FAULTY OUTPUT (EXAMPLE) using production learners for package debugging

FIX IN NAMED PANEL learner ID; attempt; status; score; resume; debug log

EXPECTED AFTER FIX fresh, failed, passed and resumed attempts read back correctly · verify in…

Authentic Articulate interface reference · verify the named control


SCORM runtime reference

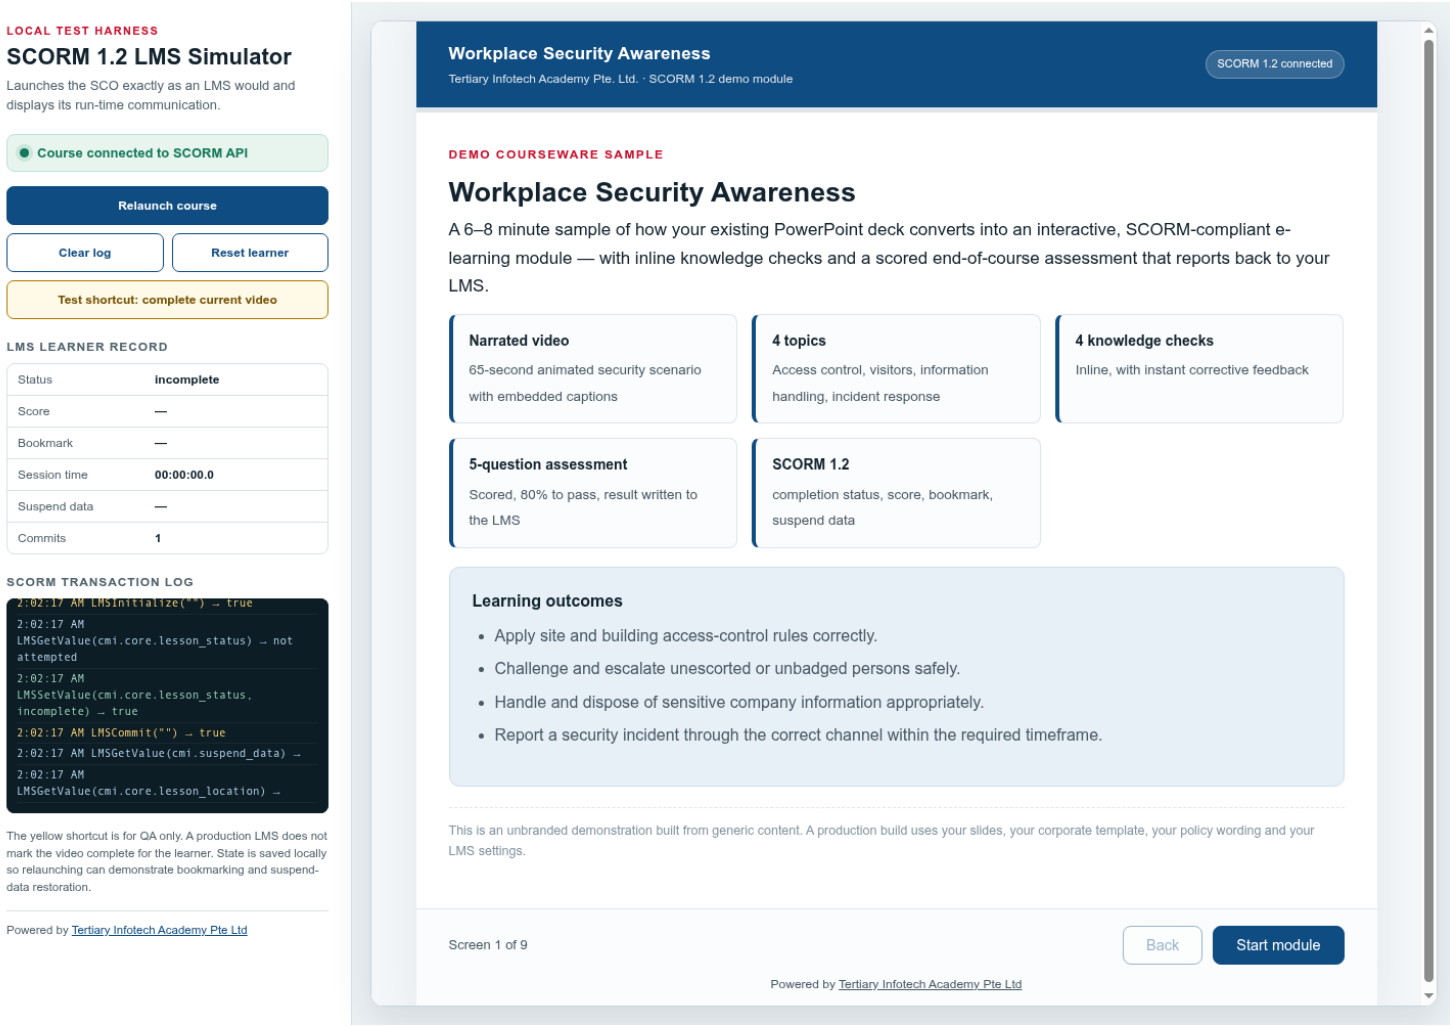

NAMED ARTIFACT	**WSA-085-SCORM-runtime-reference**
MECHANISM	**The supplied workplacesafety-scorm site informs runtime test structure,…**
EXPECTED	**comparison notes distinguish its SCORM demo role from the new Storyline build**

Authentic Articulate interface reference · verify the named control

SCORM runtime reference

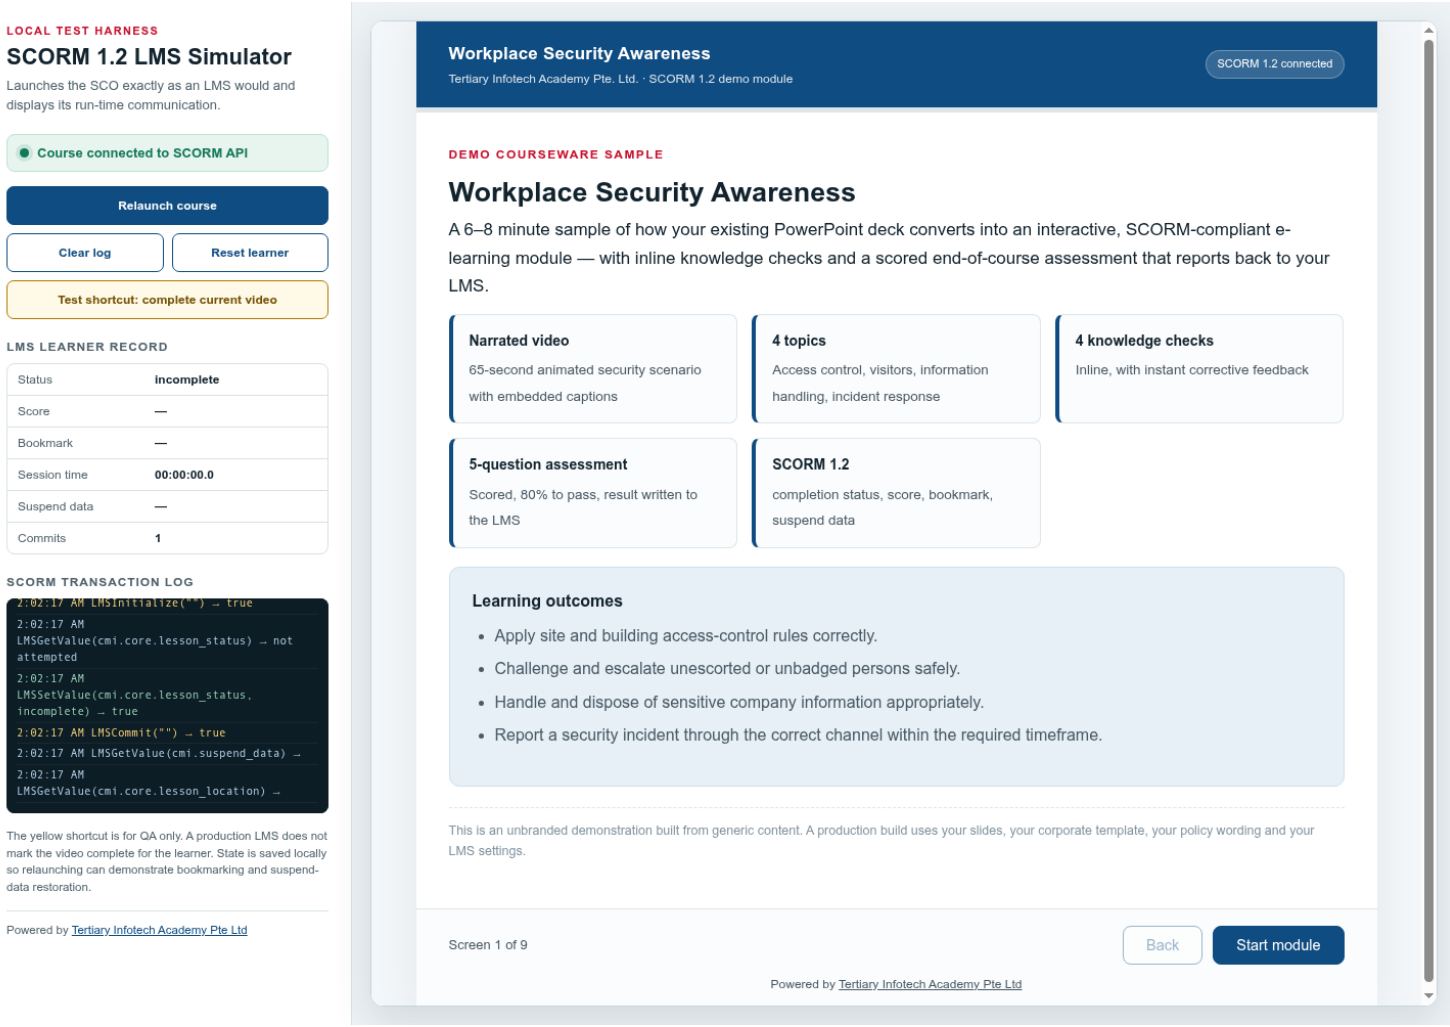


SET THESE CONTROLS C1=API discovery · C2=status · C3=score · C4=bookmark · C5=session time ·…

REJECT WHEN claiming the reference is Storyline output or an xAPI tester

VERIFY READBACK comparison notes distinguish its SCORM demo role from the new Storyline build

Authentic Articulate interface reference · verify the named control

SCORM runtime reference

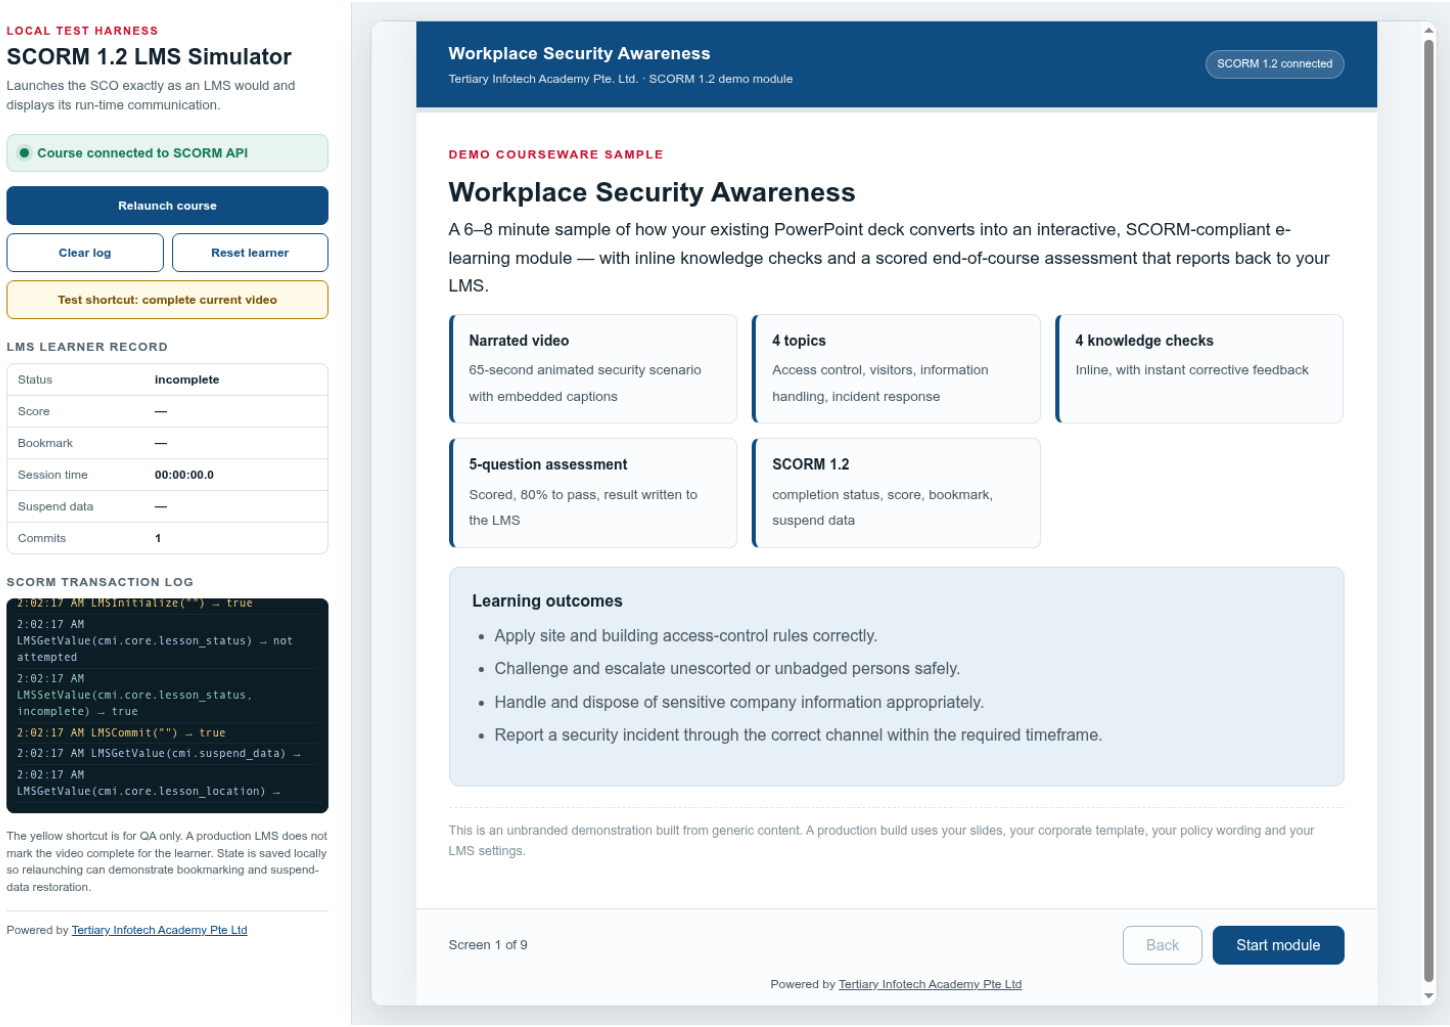

FAULTY OUTPUT (EXAMPLE) claiming the reference is Storyline output or an xAPI tester

FIX IN NAMED PANEL API discovery; status; score; bookmark; session time; suspend data

EXPECTED AFTER FIX comparison notes distinguish its SCORM demo role from the new Storyline…

Authentic Articulate interface reference · verify the named control

Standalone preview boundary

Named HarbourLink WSH artifact

WSA-086-Standalone-preview-boundary

Input / source state

WSA checkpoint plus preview notice; no tracking claim; fallback

Runtime mechanism

course.html style standalone preview is used for visual checks only because no LMS API is present

Expected output

test report labels standalone and LMS evidence separately

Rejected output

equating local browser preview with LMS completion

Evidence record

WSA-086-Standalone-preview-boundary: capture the configured control and the runtime readback.

EDITABLE CONFIGURATION MODEL

Standalone preview boundary

SET THESE CONTROLS

C1=preview notice · C2=no tracking claim · C3=fallback

→

REJECT WHEN

equating local browser preview with LMS completion

→

VERIFY READBACK

test report labels standalone and LMS evidence separately

Editable HarbourLink model · test report labels standalone and LMS evidence separately

Standalone preview boundary

FAULTY OUTPUT (EXAMPLE)

equating local browser preview with LMS completion

→

CORRECT THE RECORD

preview notice; no tracking claim; fallback

→

EXPECTED AFTER FIX

test report labels standalone and LMS evidence separately · verify in your own Preview

Editable HarbourLink model · test report labels standalone and LMS evidence separately

LMS debug diagnosis

Named HarbourLink WSH artifact

WSA-087-LMS-debug-diagnosis

Input / source state

WSA checkpoint plus API found; Initialize; SetValue; Commit; Terminate

Runtime mechanism

Browser console and LMS debug logs isolate API discovery, commit, status and suspend-data failures

Expected output

log timestamps identify the failing runtime call and value

Rejected output

guessing from a visible course screen

Evidence record

WSA-087-LMS-debug-diagnosis: capture the configured control and the runtime readback.

EDITABLE CONFIGURATION MODEL

LMS debug diagnosis

SET THESE CONTROLS

C1=API found · C2=Initialize · C3=SetValue · C4=Commit · C5=Terminate

REJECT WHEN

guessing from a visible course screen

VERIFY READBACK

log timestamps identify the failing runtime call and value

Editable HarbourLink model · log timestamps identify the failing runtime call and value

LMS debug diagnosis

FAULTY OUTPUT (EXAMPLE)

guessing from a visible course screen

→

CORRECT THE RECORD

API found; Initialize; SetValue; Commit; Terminate

→

EXPECTED AFTER FIX

log timestamps identify the failing runtime call and value · verify in your own Preview

Editable HarbourLink model · log timestamps identify the failing runtime call and value

© 2026 Tertiary Infotech Academy Pte Ltd · Mastering Articulate Storyline 360 for e-Learning Content Creation · TGS-2024042308

Package regression test

Named HarbourLink WSH artifact

WSA-088-Package-regression-test

Input / source state

WSA checkpoint plus source version; package checksum; clean state; results

Runtime mechanism

Republish after source changes and rerun the full high-risk matrix against a clean learner attempt

Expected output

new package checksum and clean readback match the release register

Rejected output

reusing a contaminated learner attempt

Evidence record

WSA-088-Package-regression-test: capture the configured control and the runtime readback.

Package regression test

SET THESE CONTROLS

C1=source version · C2=package checksum · C3=clean state · C4=results

→

REJECT WHEN

reusing a contaminated learner attempt

→

VERIFY READBACK

new package checksum and clean readback match the release register

Editable HarbourLink model · new package checksum and clean readback match the release register

Package regression test

FAULTY OUTPUT (EXAMPLE)

reusing a contaminated learner attempt

→

CORRECT THE RECORD

source version; package checksum; clean state; results

→

EXPECTED AFTER FIX

new package checksum and clean readback match the release register · verify in your own Preview

Editable HarbourLink model · new package checksum and clean readback match the release register

© 2026 Tertiary Infotech Academy Pte Ltd · Mastering Articulate Storyline 360 for e-Learning Content Creation · TGS-2024042308

Release retention

Named HarbourLink WSH artifact

WSA-089-Release-retention

Input / source state

WSA checkpoint plus owner; date; version; checksum; review trigger

Runtime mechanism

Retain .story, publish settings, ZIP, test log, review approval and asset provenance together

Expected output

auditor can reproduce which source and settings created the live package

Rejected output

keeping only the uploaded ZIP

Evidence record

WSA-089-Release-retention: capture the configured control and the runtime readback.

Release retention

SET THESE CONTROLS

C1=owner · C2=date · C3=version · C4=checksum · C5=review trigger

→

REJECT WHEN

keeping only the uploaded ZIP

→

VERIFY READBACK

auditor can reproduce which source and settings created the live package

Editable HarbourLink model · auditor can reproduce which source and settings created the live package

Release retention

FAULTY OUTPUT (EXAMPLE)

keeping only the uploaded ZIP

→

CORRECT THE RECORD

owner; date; version; checksum; review trigger

→

EXPECTED AFTER FIX

auditor can reproduce which source and settings created the live package · verify in your own Preview

Editable HarbourLink model · auditor can reproduce which source and settings created the live package

© 2026 Tertiary Infotech Academy Pte Ltd · Mastering Articulate Storyline 360 for e-Learning Content Creation · TGS-2024042308

Articulate Labs boundary

Named HarbourLink WSH artifact

WSA-090-Articulate-Labs-boundary

Input / source state

WSA checkpoint plus duplicate source; experiment flag; fallback; review

Runtime mechanism

Experimental Articulate Labs features are tried only in a duplicate sandbox project with manual fallback

Expected output

baseline remains buildable without the experiment

Rejected output

making an experimental feature mandatory in production

Evidence record

WSA-090-Articulate-Labs-boundary: capture the configured control and the runtime readback.

EDITABLE CONFIGURATION MODEL

Articulate Labs boundary

SET THESE CONTROLS

C1=duplicate source · C2=experiment flag · C3=fallback · C4=review

REJECT WHEN

making an experimental feature mandatory in production

VERIFY READBACK

baseline remains buildable without the experiment

Editable HarbourLink model · baseline remains buildable without the experiment

Articulate Labs boundary

FAULTY OUTPUT (EXAMPLE)

making an experimental feature mandatory in production

→

CORRECT THE RECORD

duplicate source; experiment flag; fallback; review

→

EXPECTED AFTER FIX

baseline remains buildable without the experiment · verify in your own Preview

Editable HarbourLink model · baseline remains buildable without the experiment

© 2026 Tertiary Infotech Academy Pte Ltd · Mastering Articulate Storyline 360 for e-Learning Content Creation · TGS-2024042308

AI-assisted authoring fallback

Named HarbourLink WSH artifact

WSA-091-AI-assisted-authoring-fallback

Input / source state

WSA checkpoint plus prompt record; provenance; human review; manual path

Runtime mechanism

Optional AI proposes copy or imagery, while the author verifies accuracy, rights and accessibility

Expected output

release evidence identifies reviewer and the non-AI fallback

Rejected output

publishing generated output without verification

Evidence record

WSA-091-AI-assisted-authoring-fallback: capture the configured control and the runtime readback.

EDITABLE CONFIGURATION MODEL

AI-assisted authoring fallback

SET THESE CONTROLS

C1=prompt record · C2=provenance · C3=human review · C4=manual path

→

REJECT WHEN

publishing generated output without verification

→

VERIFY READBACK

release evidence identifies reviewer and the non-AI fallback

Editable HarbourLink model · release evidence identifies reviewer and the non-AI fallback

AI-assisted authoring fallback

FAULTY OUTPUT (EXAMPLE)

publishing generated output without verification

→

CORRECT THE RECORD

prompt record; provenance; human review; manual path

→

EXPECTED AFTER FIX

release evidence identifies reviewer and the non-AI fallback · verify in your own Preview

Editable HarbourLink model · release evidence identifies reviewer and the non-AI fallback

© 2026 Tertiary Infotech Academy Pte Ltd · Mastering Articulate Storyline 360 for e-Learning Content Creation · TGS-2024042308

Distribution mode comparison

Named HarbourLink WSH artifact

WSA-092-Distribution-mode-comparison

Input / source state

WSA checkpoint plus channel; launch; tracking; interaction; security; maintenance

Runtime mechanism

A worked decision table compares Review 360, web, video, SCORM LMS and xAPI/cmi5 by interactivity, identity, score, resume, review and analytics

Expected output

SCORM LMS wins for scored induction and the rejected modes have recorded reasons

Rejected output

selecting the easiest export rather than the required evidence

Evidence record

WSA-092-Distribution-mode-comparison: capture the configured control and the runtime readback.

Distribution mode comparison

SET THESE CONTROLS

C1=channel · C2=launch · C3=tracking · C4=interaction · C5=security · C6=maintenance

→

REJECT WHEN

selecting the easiest export rather than the required evidence

→

VERIFY READBACK

SCORM LMS wins for scored induction and the rejected modes have recorded reasons

Editable HarbourLink model · SCORM LMS wins for scored induction and the rejected modes have recorded reasons

Distribution mode comparison

FAULTY OUTPUT (EXAMPLE)

selecting the easiest export rather than the required evidence

→

CORRECT THE RECORD

channel; launch; tracking; interaction; security; maintenance

→

EXPECTED AFTER FIX

SCORM LMS wins for scored induction and the rejected modes have recorded reasons · verify in your own Preview

Editable HarbourLink model · SCORM LMS wins for scored induction and the rejected modes have recorded reasons

© 2026 Tertiary Infotech Academy Pte Ltd · Mastering Articulate Storyline 360 for e-Learning Content Creation · TGS-2024042308

Delivery cadence calculation

Named HarbourLink WSH artifact

WSA-093-Delivery-cadence-calculation

Input / source state

WSA checkpoint plus trigger date; audience; channel; owner; stop condition; review interval

Runtime mechanism

A 30-day induction cadence schedules launch on Day 0, reminders on Days 3 and 7, supervisor escalation on Day 10 and content review every 180 days

Expected output

calendar table totals each touchpoint and stops when completion status is read back

Rejected output

sending reminders after completion or setting cadence without an owner

Evidence record

WSA-093-Delivery-cadence-calculation: capture the configured control and the runtime readback.

Delivery cadence calculation

SET THESE CONTROLS

C1=trigger date · C2=audience · C3=channel · C4=owner · C5=stop condition · C6=review interval

→

REJECT WHEN

sending reminders after completion or setting cadence without an owner

→

VERIFY READBACK

calendar table totals each touchpoint and stops when completion status is read back

Editable HarbourLink model · calendar table totals each touchpoint and stops when completion status is read back

© 2026 Tertiary Infotech Academy Pte Ltd · Mastering Articulate Storyline 360 for e-Learning Content Creation · TGS-2024042308

Delivery cadence calculation

FAULTY OUTPUT (EXAMPLE)

sending reminders after completion or setting cadence without an owner

→

CORRECT THE RECORD

trigger date; audience; channel; owner; stop condition; review interval

→

EXPECTED AFTER FIX

calendar table totals each touchpoint and stops when completion status is read back · verify in your own Preview

Editable HarbourLink model · calendar table totals each touchpoint and stops when completion status is read back

© 2026 Tertiary Infotech Academy Pte Ltd · Mastering Articulate Storyline 360 for e-Learning Content Creation · TGS-2024042308

Cadence exception rules

Named HarbourLink WSH artifact

WSA-094-Cadence-exception-rules

Input / source state

WSA checkpoint plus status; threshold; retry; suppression; escalation; privacy

Runtime mechanism

Status-driven rules suppress reminders for passed learners, route failed learners to retry guidance and escalate overdue incomplete learners

Expected output

test learner records produce the correct next contact and no unnecessary disclosure

Rejected output

broadcasting scores or sending identical messages to every status

Evidence record

WSA-094-Cadence-exception-rules: capture the configured control and the runtime readback.

© 2026 Tertiary Infotech Academy Pte Ltd · Mastering Articulate Storyline 360 for e-Learning Content Creation · TGS-2024042308

Cadence exception rules

SET THESE CONTROLS

C1=status · C2=threshold · C3=retry · C4=suppression · C5=escalation · C6=privacy

→

REJECT WHEN

broadcasting scores or sending identical messages to every status

→

VERIFY READBACK

test learner records produce the correct next contact and no unnecessary disclosure

Editable HarbourLink model · test learner records produce the correct next contact and no unnecessary disclosure

Cadence exception rules

FAULTY OUTPUT (EXAMPLE)

broadcasting scores or sending identical messages to every status

→

CORRECT THE RECORD

status; threshold; retry; suppression; escalation; privacy

→

EXPECTED AFTER FIX

test learner records produce the correct next contact and no unnecessary disclosure · verify in your own Preview

Editable HarbourLink model · test learner records produce the correct next contact and no unnecessary disclosure

© 2026 Tertiary Infotech Academy Pte Ltd · Mastering Articulate Storyline 360 for e-Learning Content Creation · TGS-2024042308

Content execution guideline register

Named HarbourLink WSH artifact

WSA-095-Content-execution-guideline-register

Input / source state

WSA checkpoint plus rule ID; rationale; owner; verification; exception; review date

Runtime mechanism

The WSA guideline records tone, terminology, template, object naming, accessibility, review, publish ID, cadence and archive controls

Expected output

a release reviewer can accept or reject each rule from retained evidence

Rejected output

guidelines with no verifier or exception path

Evidence record

WSA-095-Content-execution-guideline-register: capture the configured control and the runtime readback.

EDITABLE CONFIGURATION MODEL

Content execution guideline register

SET THESE CONTROLS

C1=rule ID · C2=rationale · C3=owner · C4=verification · C5=exception · C6=review date

→

REJECT WHEN

guidelines with no verifier or exception path

→

VERIFY READBACK

a release reviewer can accept or reject each rule from retained evidence

Editable HarbourLink model · a release reviewer can accept or reject each rule from retained evidence

Content execution guideline register

FAULTY OUTPUT (EXAMPLE)

guidelines with no verifier or exception path

→

CORRECT THE RECORD

rule ID; rationale; owner; verification; exception; review date

→

EXPECTED AFTER FIX

a release reviewer can accept or reject each rule from retained evidence · verify in your own Preview

Editable HarbourLink model · a release reviewer can accept or reject each rule from retained evidence

© 2026 Tertiary Infotech Academy Pte Ltd · Mastering Articulate Storyline 360 for e-Learning Content Creation · TGS-2024042308

Lifecycle metric decision

Named HarbourLink WSH artifact

WSA-096-Lifecycle-metric-decision

Input / source state

WSA checkpoint plus metric; source; threshold; action; owner; review date

Runtime mechanism

A worked register links completion, pass rate, retry rate, incident-report simulation errors and overdue rate to a defined action threshold

Expected output

each threshold triggers a named content, coaching or cadence response

Rejected output

collecting analytics without a decision purpose

Evidence record

WSA-096-Lifecycle-metric-decision: capture the configured control and the runtime readback.

EDITABLE CONFIGURATION MODEL

Lifecycle metric decision

SET THESE CONTROLS

C1=metric · C2=source · C3=threshold · C4=action · C5=owner · C6=review date

REJECT WHEN

collecting analytics without a decision purpose

VERIFY READBACK

each threshold triggers a named content, coaching or cadence response

Editable HarbourLink model · each threshold triggers a named content, coaching or cadence response

Lifecycle metric decision

FAULTY OUTPUT (EXAMPLE)

collecting analytics without a decision purpose

→

CORRECT THE RECORD

metric; source; threshold; action; owner; review date

→

EXPECTED AFTER FIX


each threshold triggers a named content, coaching or cadence response · verify in your own Preview

Editable HarbourLink model · each threshold triggers a named content, coaching or cadence response

© 2026 Tertiary Infotech Academy Pte Ltd · Mastering Articulate Storyline 360 for e-Learning Content Creation · TGS-2024042308

Activity 11 · Configure Player, Translation and Review 360

Prepare the module for accessible review and localisation.

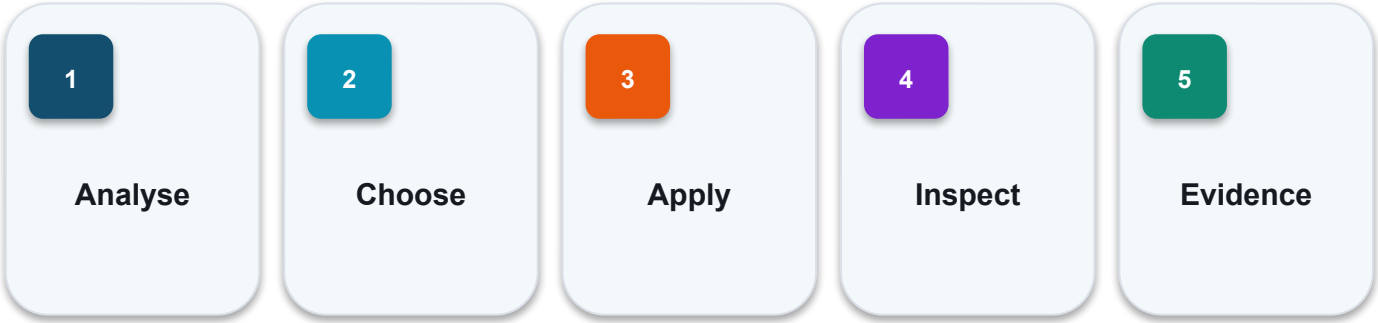


EVIDENCE

Retain the named .story checkpoint, the completed self-check table and one screenshot for each task showing the final state or setting that proves the acceptance criteria.

Full click-by-click procedure · Learner Guide / Activity 11

© 2026 Tertiary Infotech Academy Pte Ltd · Mastering Articulate Storyline 360 for e-Learning Content Creation · TGS-2024042308

Activity 11 · Interface Reference

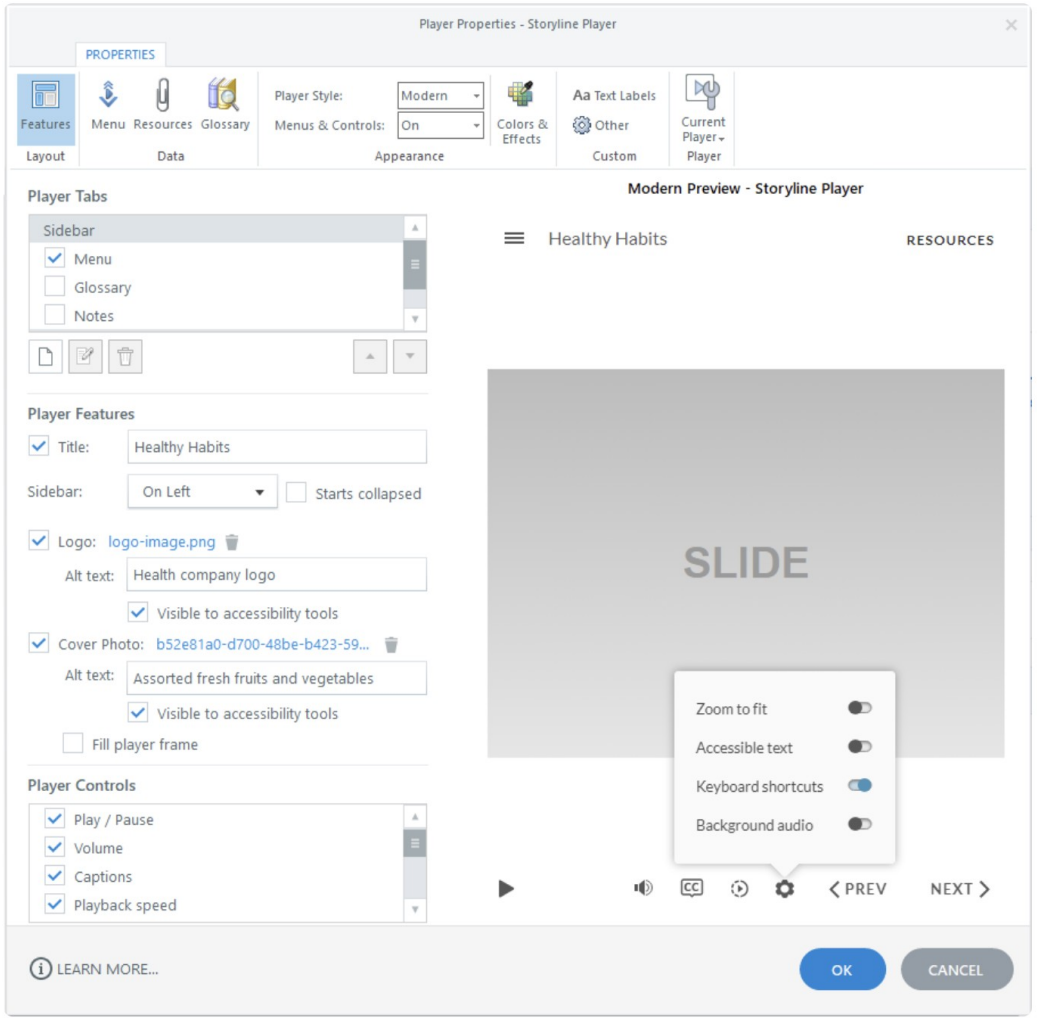

Locate	**Use this authentic interface capture to find the named…**
Set	**Open Player Properties and enable only required controls,…**
Verify	**Player controls are keyboard accessible.**
Evidence	**Capture one final-state screenshot for the task; this…**

EDITABLE TECHNICAL MODEL

Activity 11 · Artifact Model

Artifact

HarbourLink-WSH-Checkpoint-11-YourName.story

Purpose

Prepare the module for accessible review and localisation.

Scenario input

HarbourLink annual WSH refresher; picture-first content, narration, captions, keyboard access and five-question 80% practice quiz.

Required output

Player controls are keyboard accessible.

Control point

Translation workflow protects logic identifiers.

Readback

Retain the named .story checkpoint, the completed self-check table and one screenshot for each task showing the final state or setting that proves the acceptance criteria.

EDITABLE TECHNICAL MODEL

Activity 11 · Runtime State Trace

Initial state

Open with declared defaults and no prior test residue.

Input

Use the named WSA asset, learner decision or publish setting.

Control

Player controls are keyboard accessible.

Stored state

Translation workflow protects logic identifiers.

Runtime output

Review ownership is explicit.

Boundary

No upload is claimed without readback.

EDITABLE TECHNICAL MODEL

Activity 11 · Worked Failure Case

Expected

Player controls are keyboard accessible.

Incomplete

Fail when: Translation workflow protects logic identifiers. is not demonstrated.

Repeat

Repeat/revisit must preserve: Review ownership is explicit.

Access

No upload is claimed without readback.

Recovery

Correct the named setting in the next checkpoint, then rerun the same case.

Log

Record expected, actual, pass/fail and corrected version.

EDITABLE TECHNICAL MODEL

Activity 11 · Evidence Record

Source

HarbourLink-WSH-Checkpoint-11-YourName.story

Evidence rule

One decisive learner screenshot per task.

Setting evidence

Player controls are keyboard accessible.

Runtime evidence

Translation workflow protects logic identifiers.


Regression evidence

No upload is claimed without readback.

Retention

Retain the named .story checkpoint, the completed self-check table and one screenshot for each task showing the final state or setting that proves the acceptance criteria.

Activity 11 · Verify the Panel

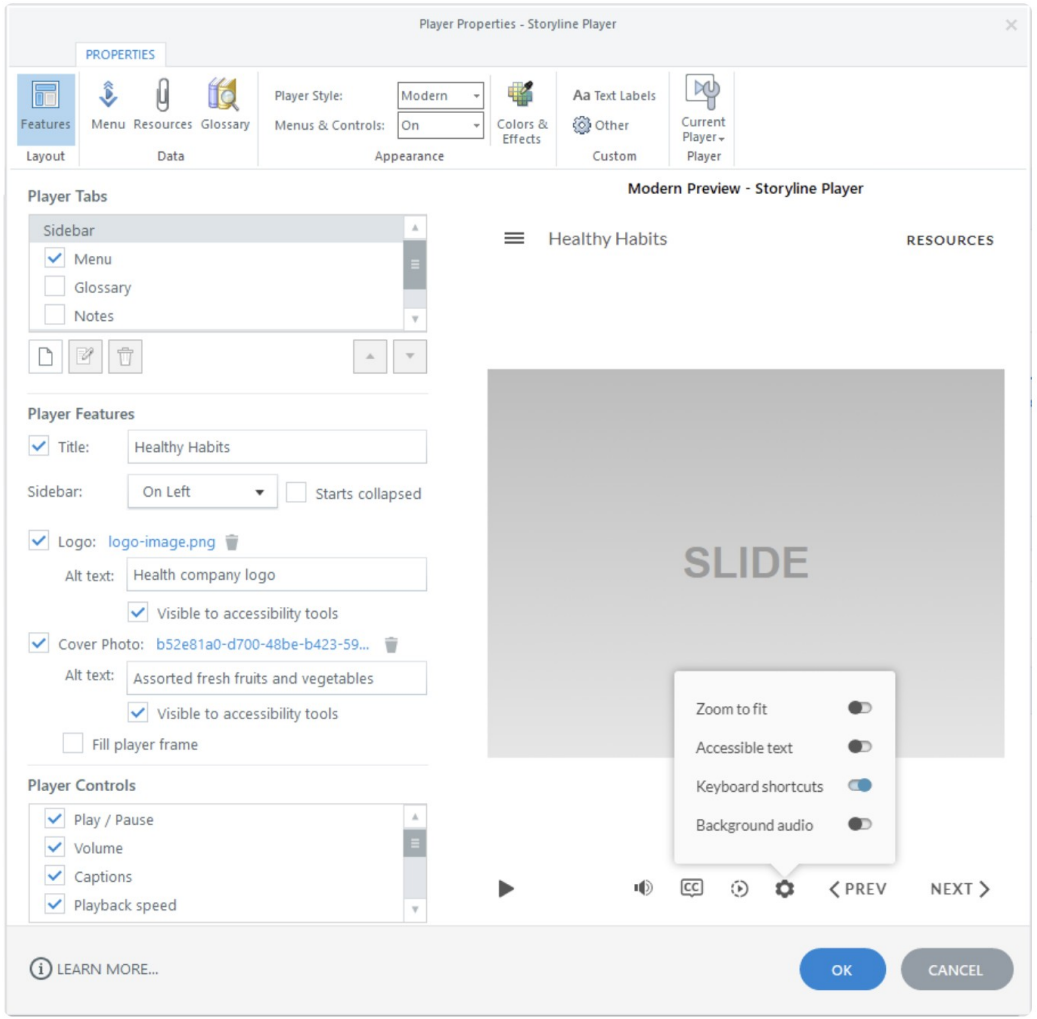

Named setting	Choose File > Localization > XLIFF/Word Translation >…	**Expected output**	Player controls are keyboard accessible.	**Boundary**	No upload is claimed without readback.	**Own evidence**	Show the learner-created checkpoint and final setting, not…

EXPECTED VERSUS ACTUAL

Activity 11 · Test Matrix

Case 1

Player controls are keyboard accessible.

Case 2

Translation workflow protects logic identifiers.

Case 3

Review ownership is explicit.

Case 4

No upload is claimed without readback.

Revisit


Navigate away and back; compare actual state with the specified revisit rule.

Record

Log expected, actual, pass/fail, defect owner and corrected checkpoint filename.

Activity 12 · Publish and Test SCORM 1.2 and 2004

Create root-correct SCORM packages and verify runtime behaviour in a sandbox.

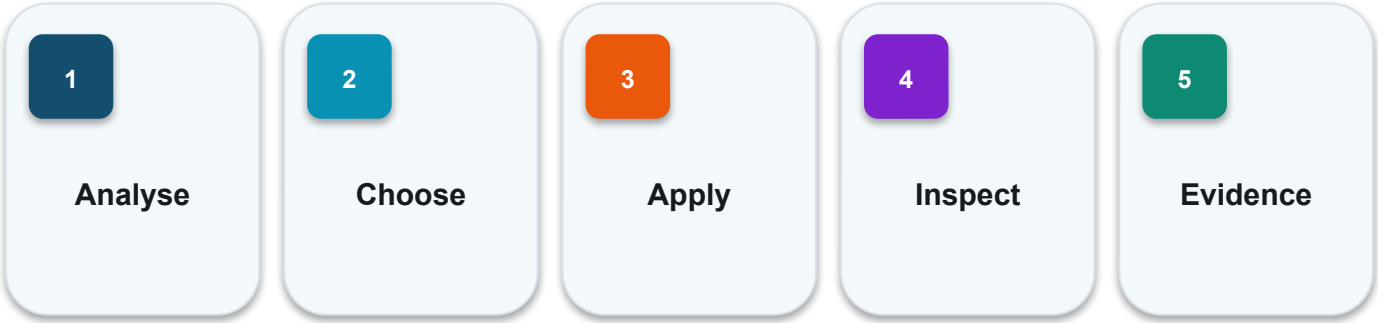


EVIDENCE

Retain the named .story checkpoint, the completed self-check table and one screenshot for each task showing the final state or setting that proves the acceptance criteria.

Full click-by-click procedure · Learner Guide / Activity 12

Activity 12 · Interface Reference

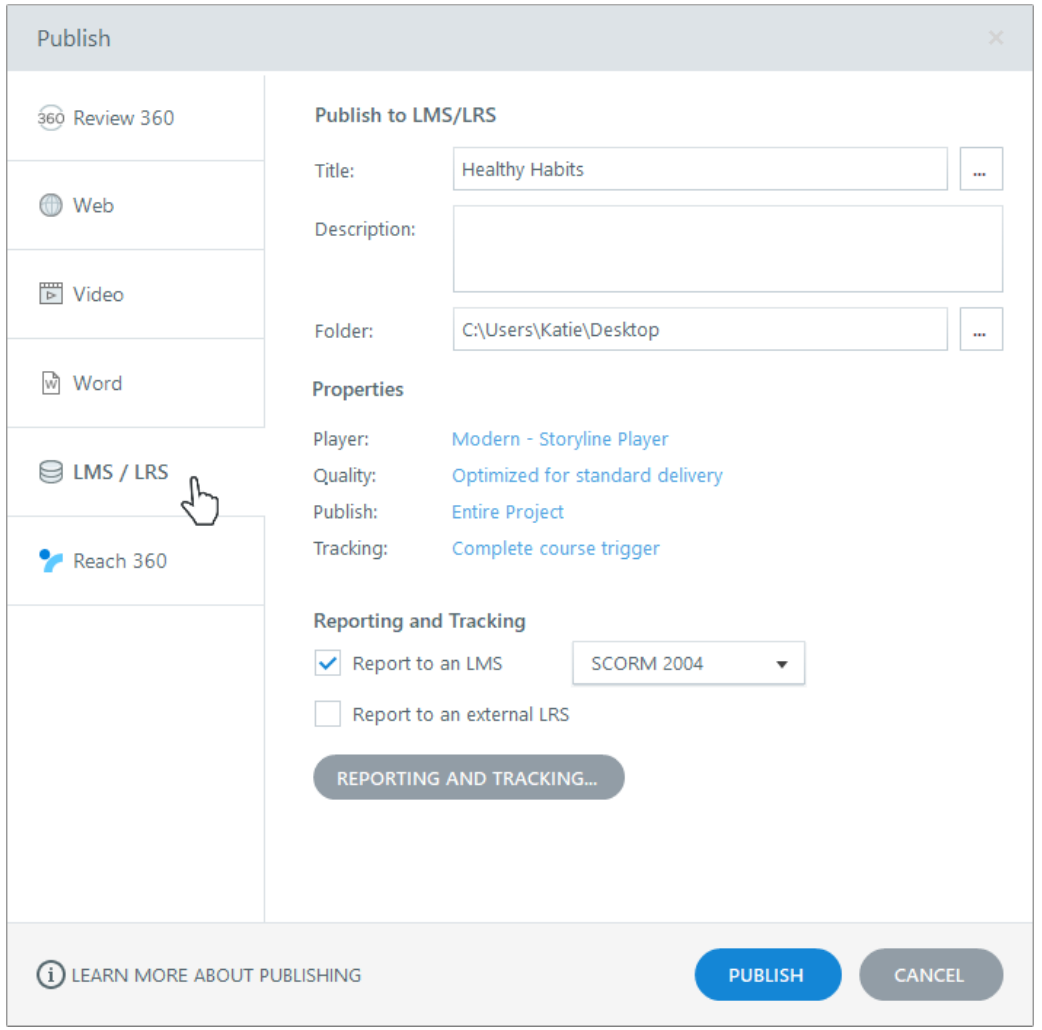

Locate	**Use this authentic interface capture to find the named…**
Set	**Open Reporting and Tracking; select `SCORM 1.2`.**
Verify	**Two distinct packages and setting records exist.**
Evidence	**Capture one final-state screenshot for the task; this…**

EDITABLE TECHNICAL MODEL

Activity 12 · Artifact Model

Artifact

HarbourLink-WSH-Checkpoint-12-YourName.story

Purpose

Create root-correct SCORM packages and verify runtime behaviour in a sandbox.

Scenario input

HarbourLink annual WSH refresher; picture-first content, narration, captions, keyboard access and five-question 80% practice quiz.

Required output

Two distinct packages and setting records exist.

Control point

Manifest is at archive root.

Readback

Retain the named .story checkpoint, the completed self-check table and one screenshot for each task showing the final state or setting that proves the acceptance criteria.

EDITABLE TECHNICAL MODEL

Activity 12 · Runtime State Trace

Initial state

Open with declared defaults and no prior test residue.

Input

Use the named WSA asset, learner decision or publish setting.

Control

Two distinct packages and setting records exist.

Stored state

Manifest is at archive root.

Runtime output

Score/status/resume read back in sandbox.

Boundary

Reference boundary is stated accurately.

EDITABLE TECHNICAL MODEL

Activity 12 · Worked Failure Case

Expected

Two distinct packages and setting records exist.

Incomplete

Fail when: Manifest is at archive root. is not demonstrated.

Repeat

Repeat/revisit must preserve: Score/status/resume read back in sandbox.

Access

Reference boundary is stated accurately.

Recovery

Correct the named setting in the next checkpoint, then rerun the same case.

Log

Record expected, actual, pass/fail and corrected version.

EDITABLE TECHNICAL MODEL

Activity 12 · Evidence Record

Source

HarbourLink-WSH-Checkpoint-12-YourName.story

Evidence rule

One decisive learner screenshot per task.

Setting evidence

Two distinct packages and setting records exist.

Runtime evidence

Manifest is at archive root.

Regression evidence


Reference boundary is stated accurately.

Retention

Retain the named .story checkpoint, the completed self-check table and one screenshot for each task showing the final state or setting that proves the acceptance criteria.

Activity 12 · Verify the Panel

AI RECREATED — ILLUSTRATIVE UI

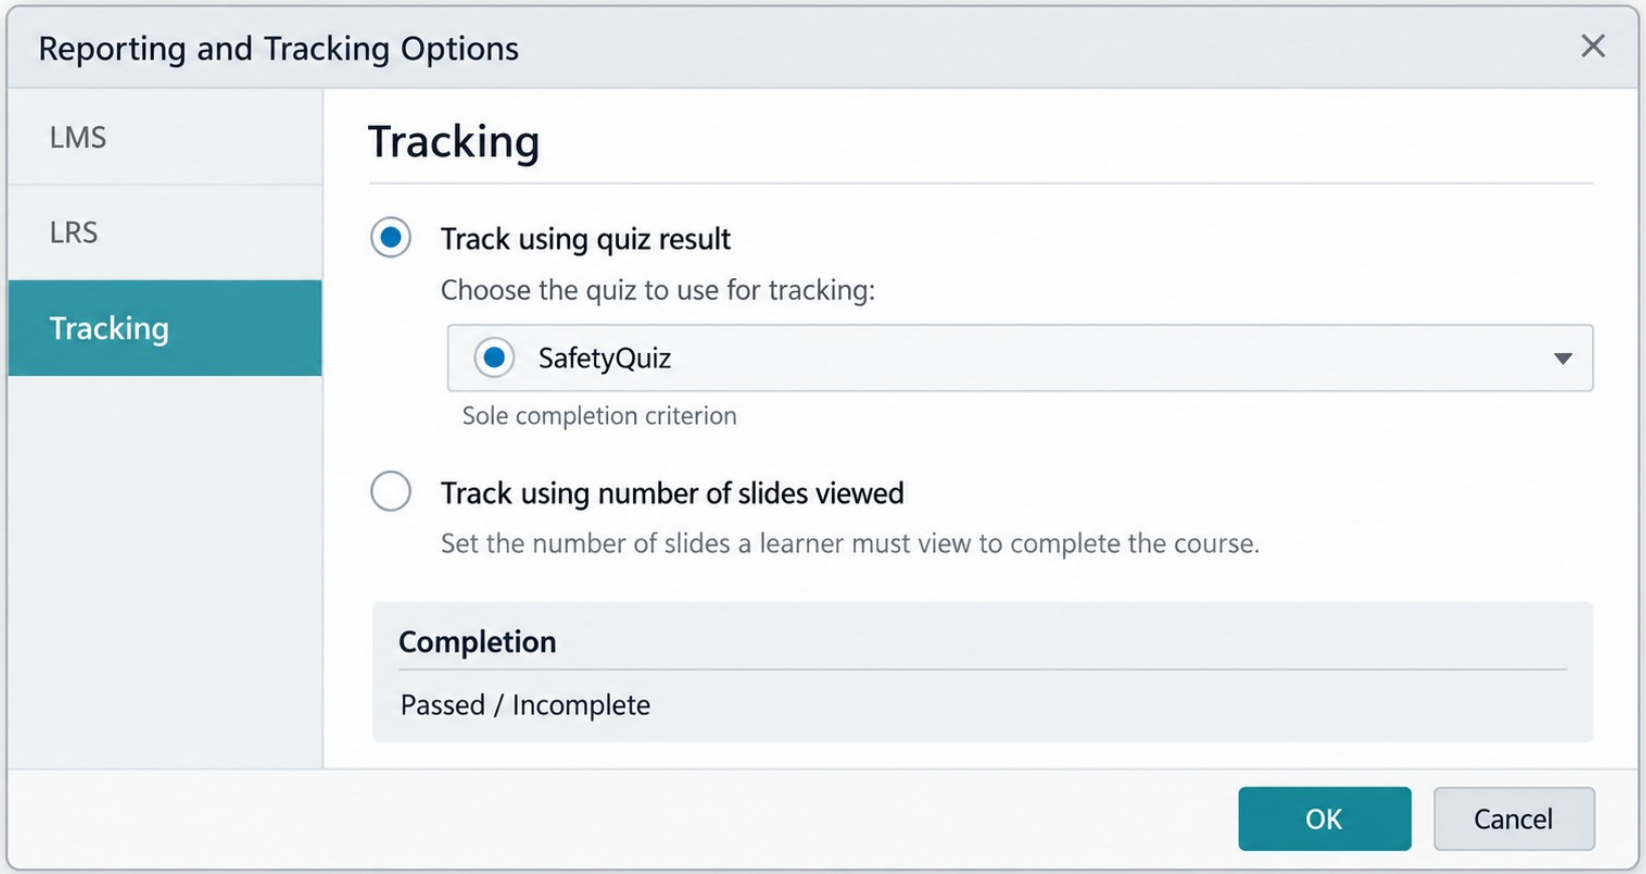

Named setting	Select the target LMS reporting status pair and record it;…
Expected output	Two distinct packages and setting records exist.
Boundary	Reference boundary is stated accurately.
Own evidence	Show the learner-created checkpoint and final setting, not…

EXPECTED VERSUS ACTUAL

Activity 12 · Test Matrix

Case 1

Two distinct packages and setting records exist.

Case 2

Manifest is at archive root.

Case 3

Score/status/resume read back in sandbox.

Case 4

Reference boundary is stated accurately.

Revisit


Navigate away and back; compare actual state with the specified revisit rule.

Record

Log expected, actual, pass/fail, defect owner and corrected checkpoint filename.

Activity 13 · Publish Tin Can xAPI and Validate Release

Prepare an xAPI package without embedded secrets and complete regression evidence.

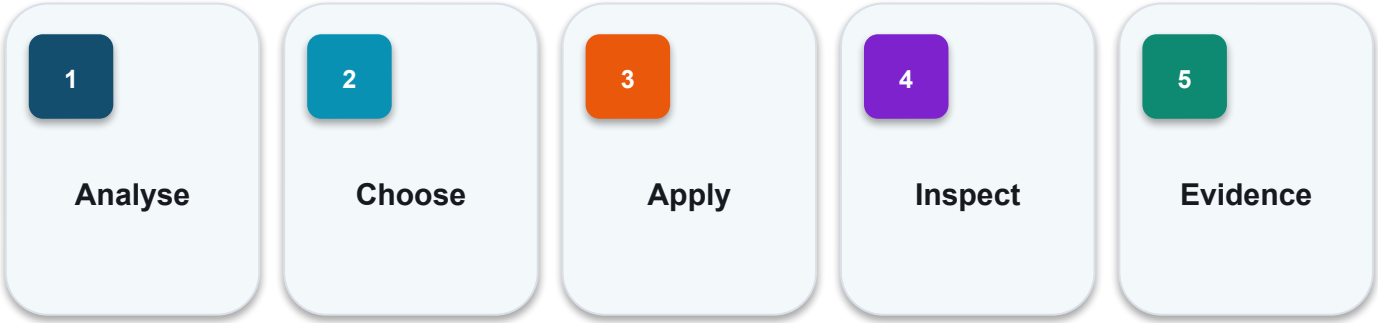


EVIDENCE

Retain the named .story checkpoint, the completed self-check table and one screenshot for each task showing the final state or setting that proves the acceptance criteria.

Full click-by-click procedure · Learner Guide / Activity 13

© 2026 Tertiary Infotech Academy Pte Ltd · Mastering Articulate Storyline 360 for e-Learning Content Creation · TGS-2024042308

Activity 13 · Interface Reference

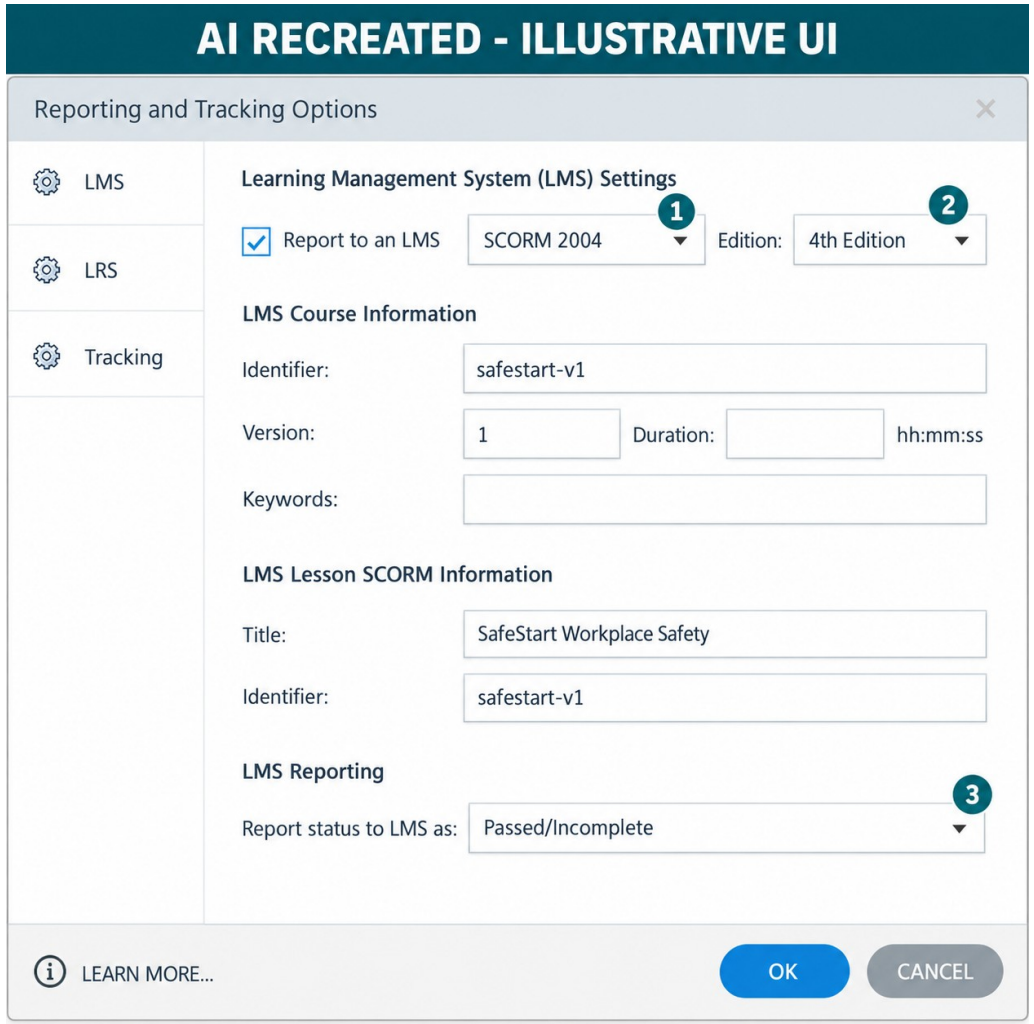

Locate	Use this authentic interface capture to find the named…
Set	Select `xAPI (Tin Can API)` and enter the approved stable…
Verify	No credential appears in the package.
Evidence	Capture one final-state screenshot for the task; this…

EDITABLE TECHNICAL MODEL

Activity 13 · Artifact Model

Artifact

HarbourLink-WSH-Checkpoint-13-YourName.story

Purpose

Prepare an xAPI package without embedded secrets and complete regression evidence.

Scenario input

HarbourLink annual WSH refresher; picture-first content, narration, captions, keyboard access and five-question 80% practice quiz.

Required output

No credential appears in the package.

Control point

Activity identifier is stable and recorded.

Readback

Retain the named .story checkpoint, the completed self-check table and one screenshot for each task showing the final state or setting that proves the acceptance criteria.

EDITABLE TECHNICAL MODEL

Activity 13 · Runtime State Trace

Initial state

Open with declared defaults and no prior test residue.

Input

Use the named WSA asset, learner decision or publish setting.

Control

No credential appears in the package.

Stored state

Activity identifier is stable and recorded.

Runtime output

Statement evidence or honest blocker is retained.

Boundary

Release package is reproducible.

EDITABLE TECHNICAL MODEL

Activity 13 · Worked Failure Case

Expected

No credential appears in the package.

Incomplete

Fail when: Activity identifier is stable and recorded. is not demonstrated.

Repeat

Repeat/revisit must preserve: Statement evidence or honest blocker is retained.

Access

Release package is reproducible.

Recovery

Correct the named setting in the next checkpoint, then rerun the same case.

Log

Record expected, actual, pass/fail and corrected version.

EDITABLE TECHNICAL MODEL

Activity 13 · Evidence Record

Source

HarbourLink-WSH-Checkpoint-13-YourName.story

Evidence rule

One decisive learner screenshot per task.

Setting evidence

No credential appears in the package.

Runtime evidence

Activity identifier is stable and recorded.


Regression evidence

Release package is reproducible.

Retention

Retain the named .story checkpoint, the completed self-check table and one screenshot for each task showing the final state or setting that proves the acceptance criteria.

Activity 13 · Verify the Panel

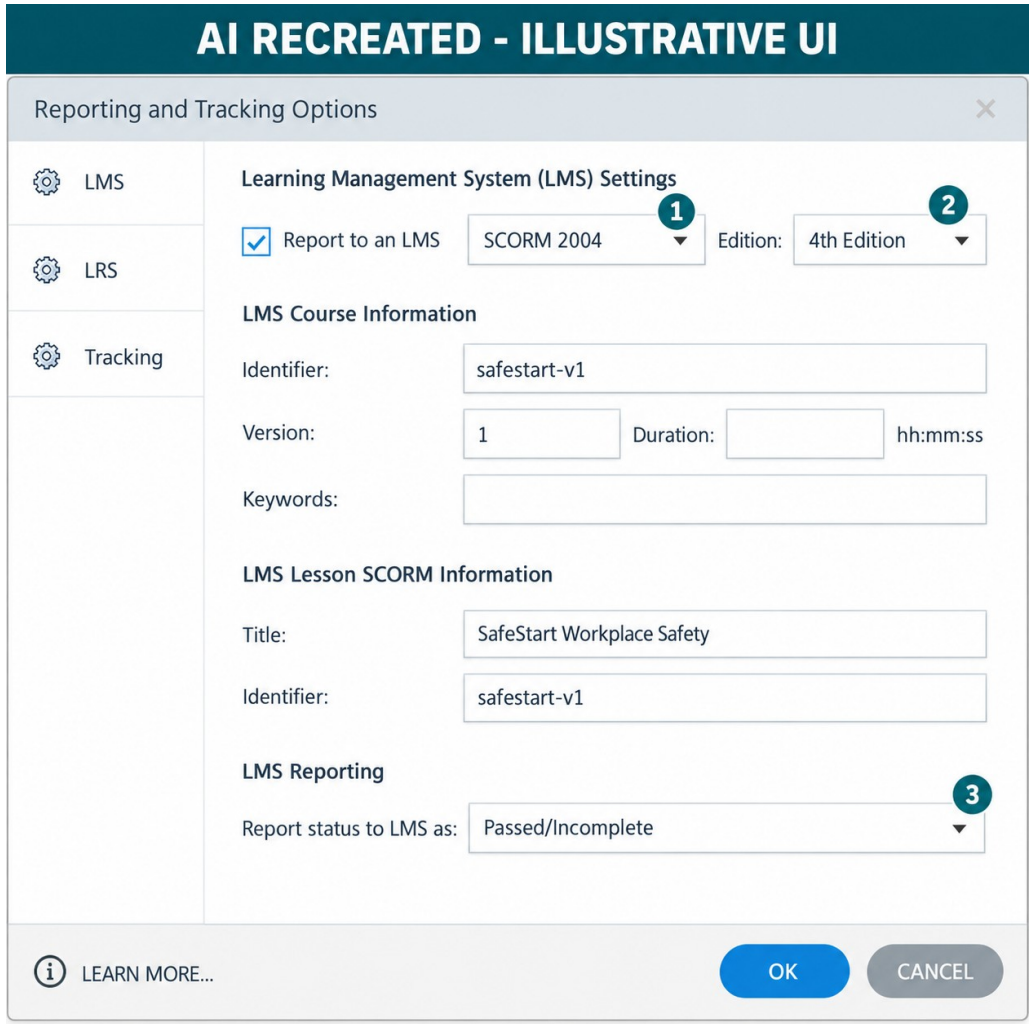

Named setting	Track the quiz Results slide and record the selected…
Expected output	No credential appears in the package.
Boundary	Release package is reproducible.
Own evidence	Show the learner-created checkpoint and final setting, not…

EXPECTED VERSUS ACTUAL

Activity 13 · Test Matrix

Case 1

No credential appears in the package.

Case 2

Activity identifier is stable and recorded.

Case 3

Statement evidence or honest blocker is retained.

Case 4

Release package is reproducible.

Revisit


Navigate away and back; compare actual state with the specified revisit rule.

Record

Log expected, actual, pass/fail, defect owner and corrected checkpoint filename.

Activity 14 · Independent Mini Capstone

Independently create a small original e-learning module from a new blank project and present verified evidence.

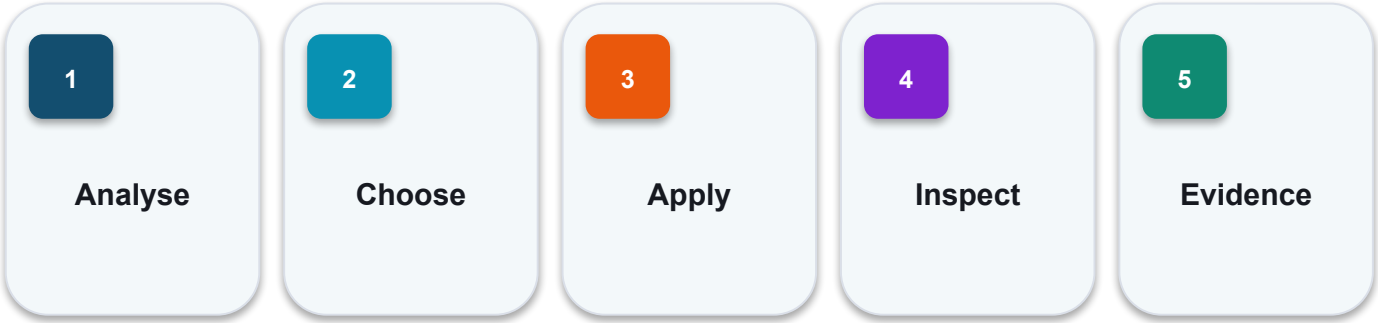

EVIDENCE

Retain the named .story checkpoint, the completed self-check table and one screenshot for each task showing the final state or setting that proves the acceptance criteria.

Full click-by-click procedure · Learner Guide / Activity 14

© 2026 Tertiary Infotech Academy Pte Ltd · Mastering Articulate Storyline 360 for e-Learning Content Creation · TGS-2024042308

EDITABLE TECHNICAL MODEL

Activity 14 · Artifact Model

Artifact

Capstone-YourName-v01.story

Purpose

Independently create a small original e-learning module from a new blank project and present verified evidence.

Scenario input

Own learning topic; blank project; original narration, interaction, quiz and standards package.

Required output

Original blank project and brief are evident.

Control point

Required Storyline mechanisms work together.

Readback

Retain the named .story checkpoint, the completed self-check table and one screenshot for each task showing the final state or setting that proves the acceptance criteria.

EDITABLE TECHNICAL MODEL

Activity 14 · Runtime State Trace

Initial state

Open with declared defaults and no prior test residue.

Input

Use the named WSA asset, learner decision or publish setting.

Control

Original blank project and brief are evident.

Stored state

Required Storyline mechanisms work together.

Runtime output

Accessibility and test evidence are complete.

Boundary

Capstone is labelled separately from formal PP.

EDITABLE TECHNICAL MODEL

Activity 14 · Worked Failure Case

Expected

Original blank project and brief are evident.

Incomplete

Fail when: Required Storyline mechanisms work together. is not demonstrated.

Repeat

Repeat/revisit must preserve: Accessibility and test evidence are complete.

Access

Capstone is labelled separately from formal PP.

Recovery

Correct the named setting in the next checkpoint, then rerun the same case.

Log

Record expected, actual, pass/fail and corrected version.

EDITABLE TECHNICAL MODEL

Activity 14 · Evidence Record

Source

Capstone-YourName-v01.story

Evidence rule

One decisive learner screenshot per task.

Setting evidence

Original blank project and brief are evident.

Runtime evidence

Required Storyline mechanisms work together.

Regression evidence

Capstone is labelled separately from formal PP.

Retention

Retain the named .story checkpoint, the completed self-check table and one screenshot for each task showing the final state or setting that proves the acceptance criteria.

EXPECTED VERSUS ACTUAL

Activity 14 · Test Matrix

Case 1

Original blank project and brief are evident.

Case 2

Required Storyline mechanisms work together.

Case 3

Accessibility and test evidence are complete.

Case 4

Publishing choice matches the target.

Case 5

Capstone is labelled separately from formal PP.

Revisit

Navigate away and back; compare actual state with the specified revisit rule.

Record

Log expected, actual, pass/fail, defect owner and corrected checkpoint filename.

Topic 4 Checkpoint

Source

HarbourLink-WSH-Checkpoint-13-YourName.story

SCORM

1.2 and supported 2004 edition; manifest at ZIP root

xAPI

Actor/endpoint/auth supplied at launch

Cadence

Day0, Day3/7, Day10; stop on completion

Release

Source + settings + checksum + sandbox log

Evidence

Score/status/resume or honest blocked-test record

COURSE SYNTHESIS

HarbourLink WSH Release Record

Source

HarbourLink-WSH-Checkpoint-13-YourName.story

Tracking

Quiz Result only; classroom quiz 5 questions, 80%

Package

SCORM/xAPI ZIP checksum recorded

Runtime

Fail, pass, bookmark, resume and session-time log

Cadence

Day0 launch; Days3/7 reminders; Day10 escalation

Review

180-day owner review event

CONTENT GOVERNANCE

HarbourLink WSH Media Attribution

Register

activities/source/media-attribution.json

Fields

file · kind · owner · source_page · accessed

Generated row

warehouse-seven-hazards.png · AI-generated fictional scene

Official row

official-caption-editor.png · Articulate support source

Use

Training orientation; official capture is not learner evidence

Check

File hash and source URL retained with release

PROVENANCE

HarbourLink WSH Generated Asset Review

Asset

warehouse-seven-hazards.png

Purpose

Fictional unsafe warehouse for seven-target inspection

Check

Seven named hazards visible; no accidental text/logo

Access

Instructional alt text + numbered keyboard controls

Boundary

No compliance or real-site claim

Record

Prompt/provenance entry retained in asset register

Review 360 Comment Record

Comment ID

R01

Finding

Caption covers Next at phone-width player

Owner

Storyline author

Due

Before package regression

Status

Open → corrected → resolved

Acceptance

Caption clear of control; keyboard path retested

AFTER THE COURSE

Support

Email

enquiry@tertiaryinfotech.com

Telephone

+65 6100 0613

Portal

https://lms-tms.tertiaryinfotech.com/

Provider

Tertiary Infotech Academy Pte Ltd

Website


www.tertiarycourses.com.sg

Privacy

Do not send assessment content publicly.

WA + PP

Final Assessment

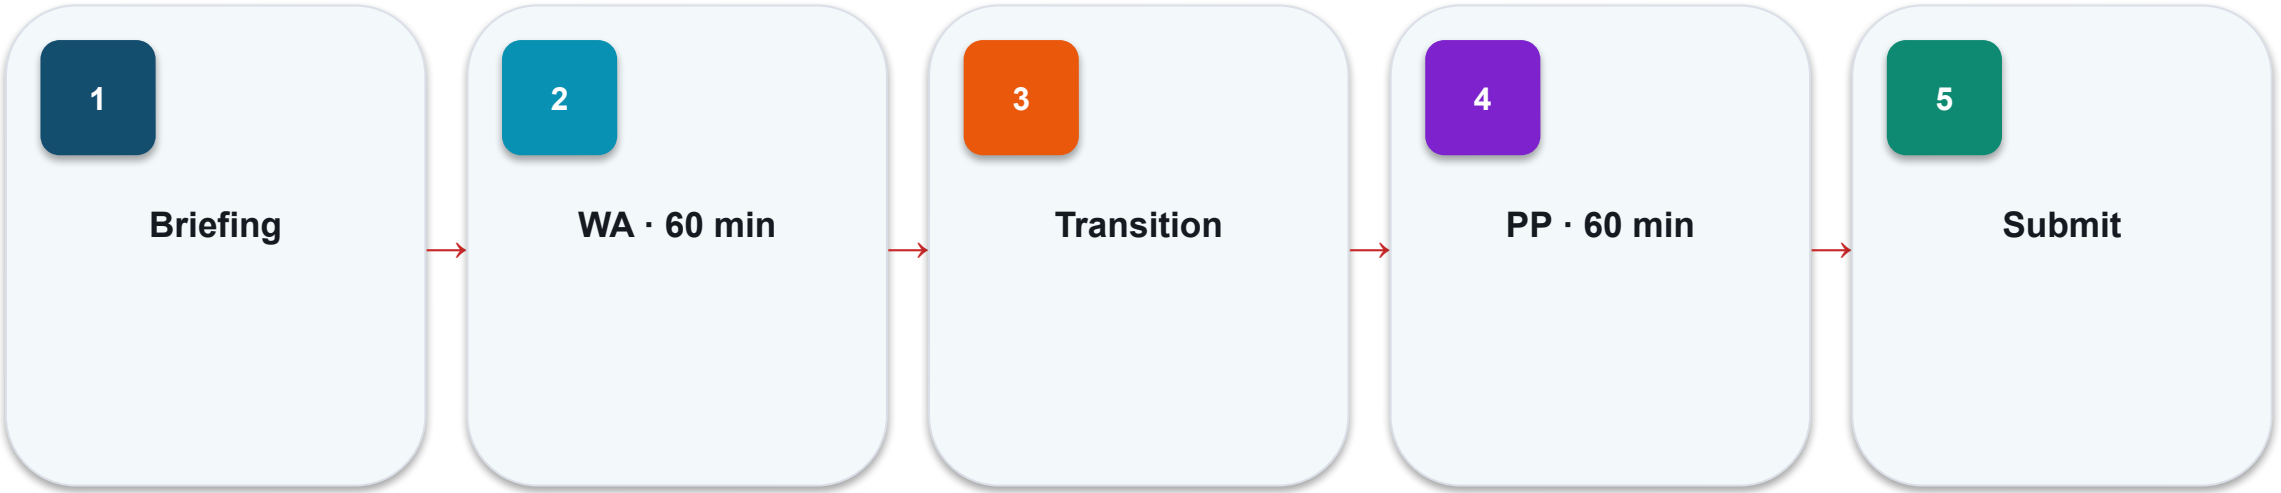

OUTCOME **Complete your own open-book evidence and upload the provided documents through LMS-TMS when instructed.**

COMPETENCY SIGN-OFF

Assessment Flow



OUTCOME

Complete TRAQOM, digital assessment attendance, WA then PP, LMS submission and the Assessment Summary Record in this exact order.

CLOSING ADMIN

Digital Attendance · Mandatory

Assessment event

Complete the official assessment attendance.

Verification

Remain until the trainer verifies the record.

Feedback

Use the official LMS-TMS/TRAQOM route after attendance.

Thank You

Design with intent · build accessibly · verify every path