COURSE SLIDES · WSQ

Microsoft Certified Endpoint Administrator Associate (MD-102)



Course Code: TGS-2024042603

Version v3.1 · 25 August 2026

Tertiary Infotech Academy Pte Ltd
UEN: 201200696W

Aligned to MD-102 skills measured 24 July 2026

COURSE ADMINISTRATION

Welcome and course controls

Briefing · evidence expectations · assessment · learner support

Digital attendance with TRAQOM

1 Open Singpass

Use the Singpass app when the trainer announces attendance.

2 Scan the session QR

Confirm the correct course, date and session before submission.

3 Verify recorded

Show the trainer the success state if attendance does not appear.

4 Escalate early

Resolve attendance exceptions during the session, not after course completion.

REMEMBER

Digital attendance appears again at the close so every session is reconciled.

© 2026 Tertiary Infotech Academy Pte Ltd

Trainer profile template

1 Name and role

Insert the assigned trainer's name, current role and delivery responsibility.

2 Endpoint expertise

Summarize Intune, Entra, Windows, Defender and automation experience.

3 Credentials

List only current, verifiable certifications and assessor credentials.

4 Contact protocol

State the approved course support and escalation channel.

REMEMBER

Replace the template only when the named trainer has been confirmed.

© 2026 Tertiary Infotech Academy Pte Ltd

TRAINER PROFILE · NAMED

Trainer profile: Dr Alfred Ang

1 Course leadership

Technical courseware architect and trainer for cloud, AI and enterprise administration.

2 Delivery focus

Mechanism-led instruction, reproducible labs and evidence-based troubleshooting.

3 Learner support

Clarify concepts during class; use the approved support channel after class.

4 Assessment boundary

Training support does not disclose model answers during assessment.

REMEMBER

Ask for the evidence behind a conclusion: state, log, report, timestamp and interpretation.

© 2026 Tertiary Infotech Academy Pte Ltd

WSQ ALIGNMENT

Learning outcomes and assessed performance

1 **LO1**

Administer complex security programs and analyze system-update impacts on Microsoft Endpoint administration.

2 **LO2**

Perform Microsoft Endpoint system administration and configure authentication to protect against security threats.

3 **LO3**

Troubleshoot Microsoft Endpoint security issues and assist users in defining access rights.

4 **LO4**

Coordinate advanced access-control rights and investigate unauthorized-access incidents on Microsoft Endpoint systems.

© 2026 Tertiary Infotech Academy Pte Ltd

TSC knowledge and ability map

1 LO1

K1 · K4 · A1 · A3
Infrastructure, complex administration and security mechanisms.

2 LO2

K2 · K4 · A2 · A4
Configuration, updates, authentication and protection.

3 LO3

K3 · A5 · A6
Troubleshooting, validation and user access clarification.

4 LO4

K5 · A7 · A8
Escalated access control and unauthorized-access investigation.

© 2026 Tertiary Infotech Academy Pte Ltd

5 DAYS · 40 HOURS

Course roadmap: five connected operating loops

1 Day 1

Infrastructure and identity
Prepare infrastructure; Entra identity; enrollment; scoped administration

2 Day 2

Device deployment and configuration
Compliance and access; Autopilot; Windows 365; configuration targeting

3 Day 3

Endpoint protection and updates
Defender; BitLocker; firewall; ASR; baselines; update operations

4 Day 4

Application lifecycle and data protection
Win32 and Microsoft 365 Apps; MAM; app configuration; troubleshooting


REMEMBER

Day 5 closes the loop with automation, monitoring, remediation and incident investigation.

© 2026 Tertiary Infotech Academy Pte Ltd

Current MD-102 exam blueprint

Midpoint weight

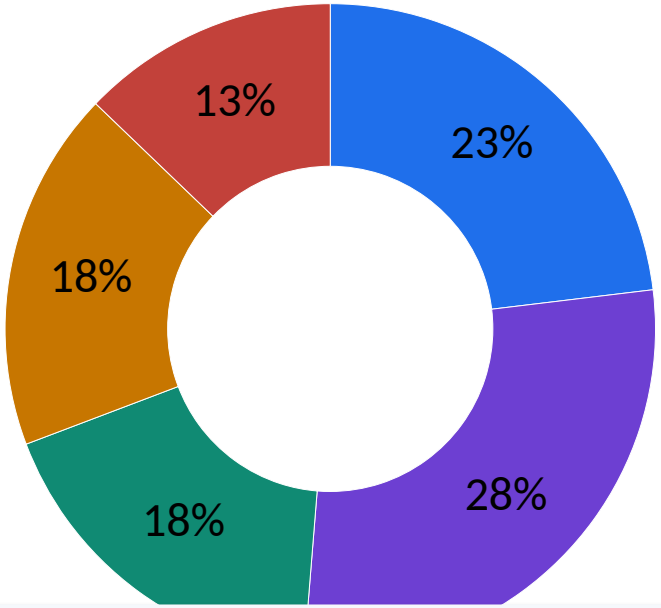

Prepare infrastructure for devices	20–25%
Manage and maintain devices	25–30%
Protect devices	15–20%
Manage and secure applications	15–20%
Optimize endpoint operations	10–15%


WHAT THE DATA SHOWS

The largest single domain is device management, but exam readiness depends on tracing identity, policy, security, apps and operations as one system.

© 2026 Tertiary Infotech Academy Pte Ltd

COURSE PORTAL

Login to LMS and Download Course Material

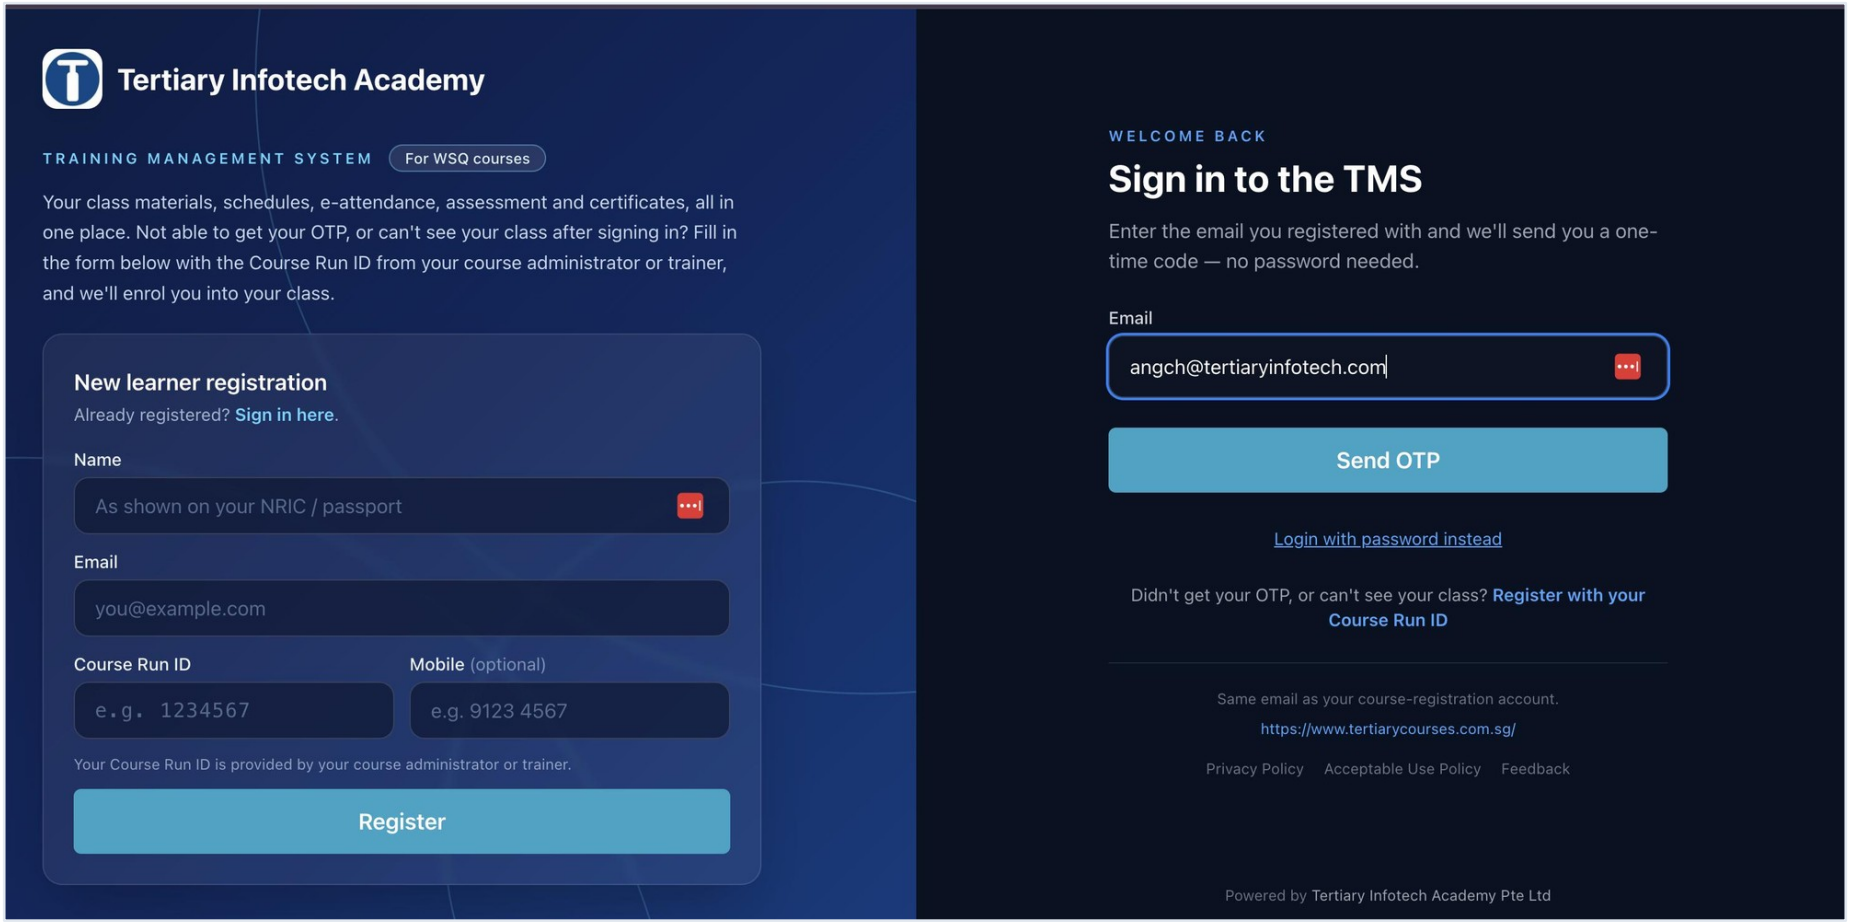


Log in at lms-tms.tertiaryinfotech.com with your registered email and the OTP sent to your inbox, then open this course to download the slides and Learner Guide.

© 2026 Tertiary Infotech Academy Pte Ltd

COURSE PORTAL · VISUAL FLOW

Download the course material

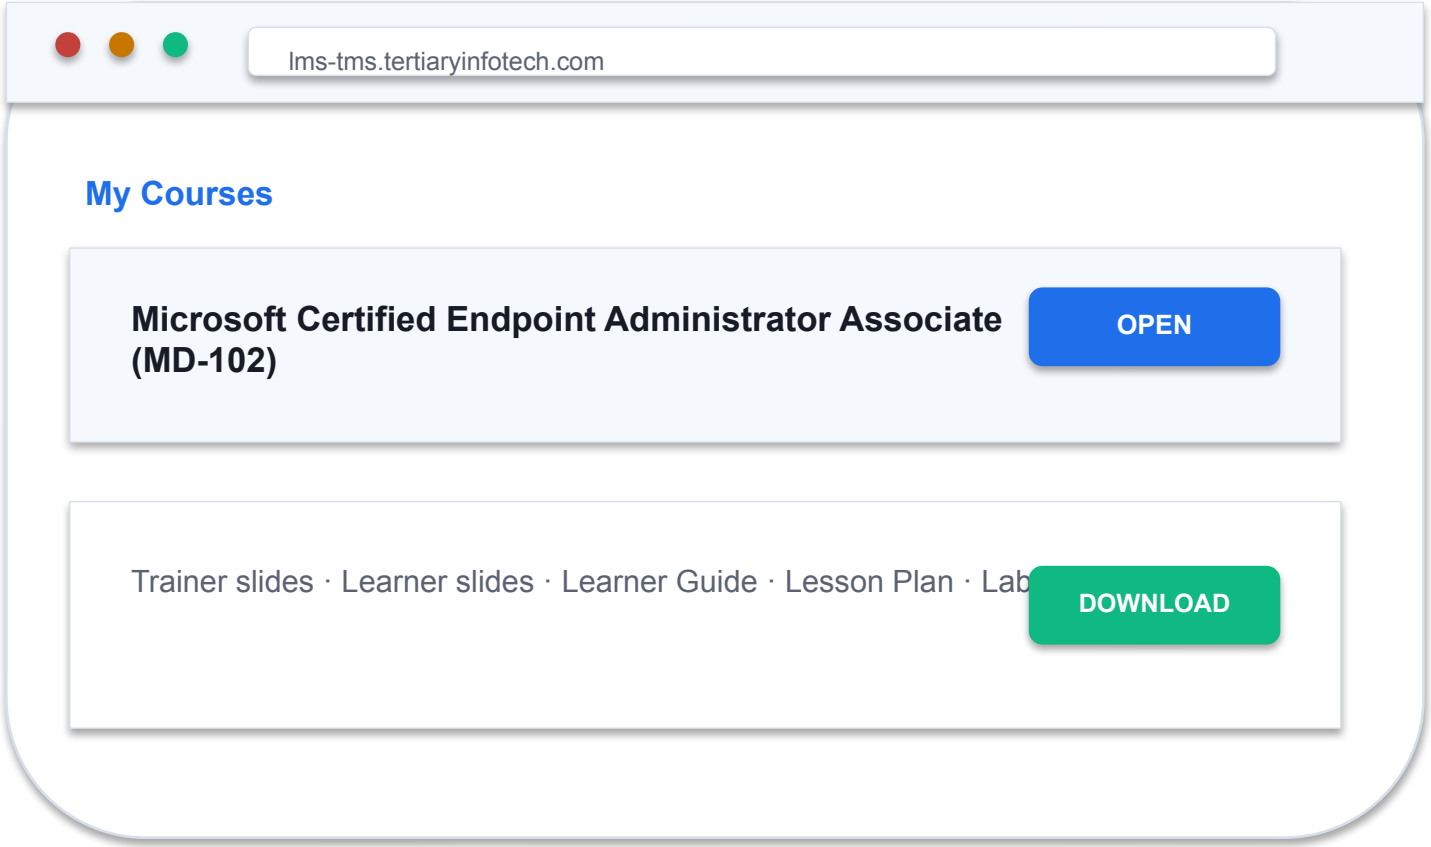

1

Sign in

Use the course account provided.

2

Open this course

Confirm code TGS-2024042603.

3

Download current files

Use PPTX for trainer slides; PDF for learner slides.

4

Keep versions together

Do not mix archived and current files.

© 2026 Tertiary Infotech Academy Pte Ltd

Assessment briefing

1 Written Assessment

5 open-ended questions · K1–K5 · 60 minutes · open book.

2 Practical Performance

6 connected tasks · A1–A8 · 60 minutes · evidence required.

3 Submission


Complete the supplied document and upload it to lms-tms.tertiaryinfotech.com.

4 Competency

Address every criterion and demonstrate the required evidence state.

© 2026 Tertiary Infotech Academy Pte Ltd

Assessment flow and sign-off

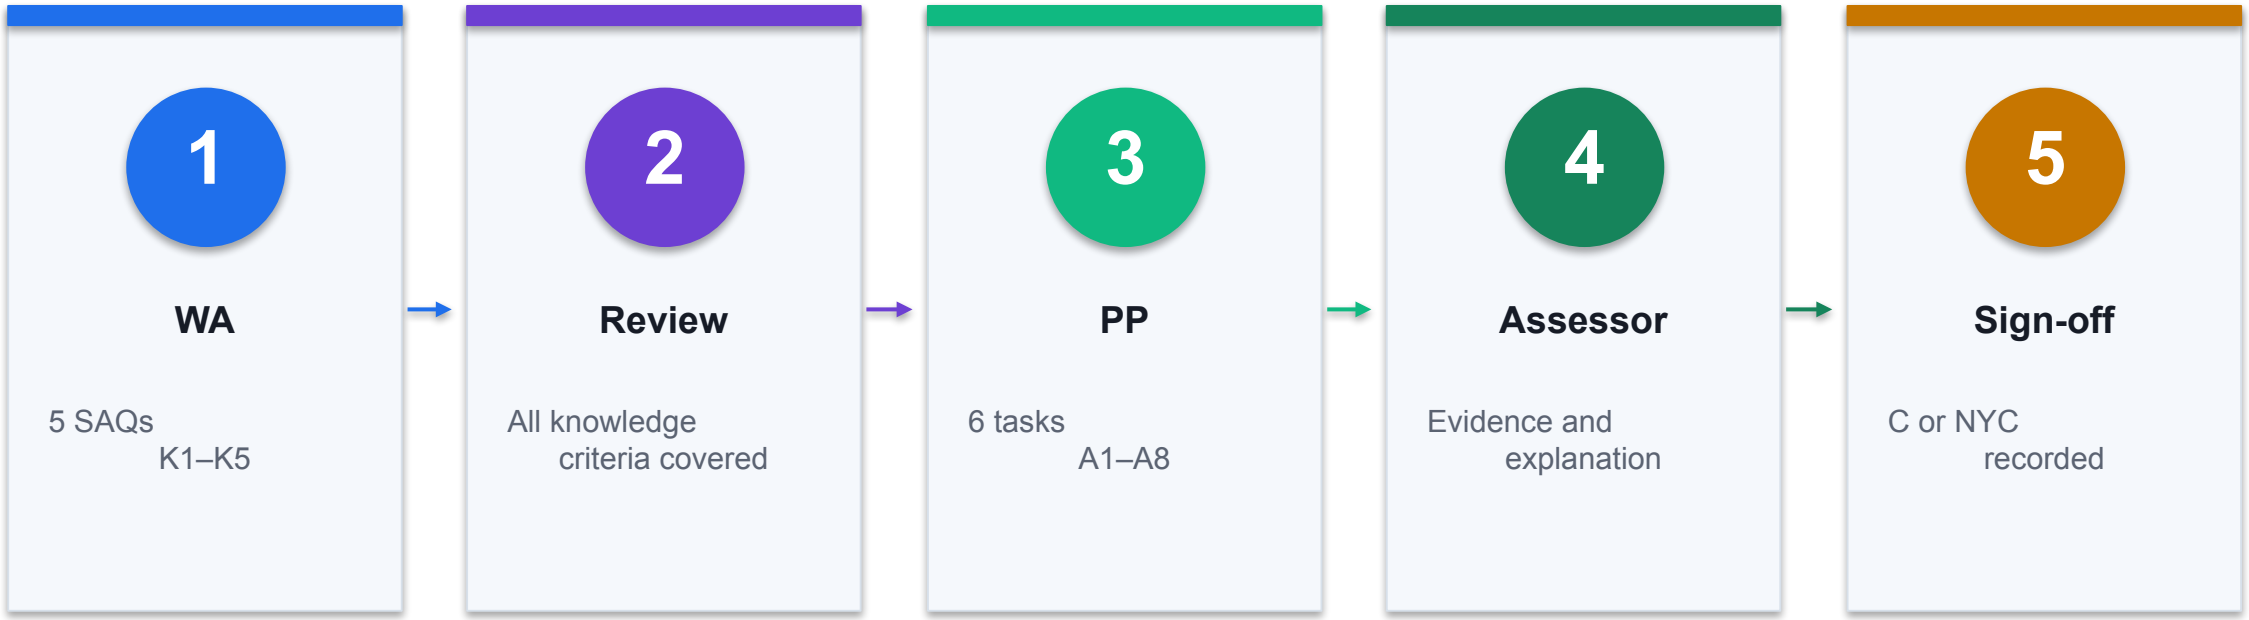

SUBMISSION RULE

Question papers go to the LMS. Answer keys remain trainer-only and are never linked from the learner record.

© 2026 Tertiary Infotech Academy Pte Ltd

Practice Exam: MD-102 readiness

MD-102 Practice Portal

Practice Mode — Feedback after each question

Exam Mode — Timed set with end-of-attempt review

https://exams.tertiaryinfotech.com

Baseline — Take one timed attempt before revision.

Gap map — Tag every miss to a current domain and objective.

Retest — Repeat after the linked lab and evidence review.

Exam judgment — Choose the control that satisfies the stated constraint with least privilege.

© 2026 Tertiary Infotech Academy Pte Ltd

Lab evidence standard

1 Configured state

Capture the policy, assignment, script or control values.

2 Observed result

Capture the device/service result and its timestamp.

3 Diagnosis

Tie the failure to an error, log, report or absent state.

4 Recovery

Retest and prove the expected state after correction.

REMEMBER

A screenshot without context is not evidence; pair it with the object, state, time and interpretation.

© 2026 Tertiary Infotech Academy Pte Ltd

Lab environment and tools

1 Microsoft 365 tenant

Intune and Entra permissions appropriate to each lab role.

2 Windows test device

Windows 11 VM or approved test endpoint; do not use production devices.

3 Command tools

PowerShell 7, Microsoft Graph PowerShell SDK, Windows Terminal and browser.

4 Evidence workspace

Individual lab folder with starter, solution and evidence subfolders.

© 2026 Tertiary Infotech Academy Pte Ltd

TECHNICAL AUTHORITY

Source currency and exam alignment

1 Study guide

Skills measured as of 24 July 2026; five weighted domains.

2 Microsoft Learn course

MD-102T00-A · 5 days · Intune-centred endpoint operations.

3 MicrosoftLearning labs

Adapted from repository commit 25eaad2a.

4 Registration page

40-hour accredited course; four WSQ outcomes and two assessment hours.

REMEMBER

When a secondary guide disagrees with the current Microsoft study guide, the official study guide wins.

© 2026 Tertiary Infotech Academy Pte Ltd


DAY 1 · 8 HOURS

Infrastructure and identity

Prepare infrastructure; Entra identity; enrollment; scoped administration · 20–25% · LO1 · K1 · K4 · A1 · A3

DOMAIN 1 · NATIVE CHART

Prepare infrastructure for devices — indicative operational signal

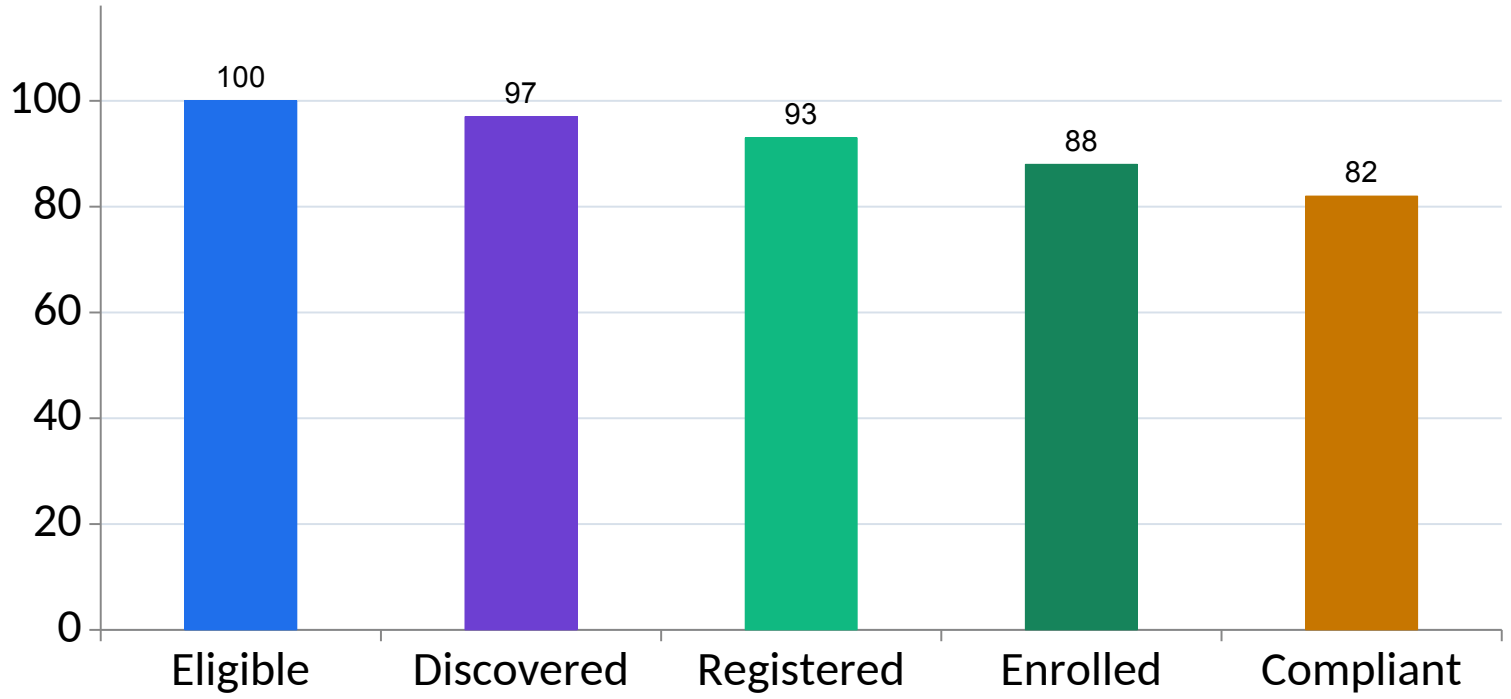

20–25%

CURRENT EXAM WEIGHT

LO1

K1 · K4 · A1 · A3

Indicative teaching data

WHAT THE DATA SHOWS

Enrollment funnels expose loss between identity, discovery and compliance.

© 2026 Tertiary Infotech Academy Pte Ltd

MECHANISM VISUAL · ANNOTATED

Zero Trust joins identity, device and access evidence



Identity

Who is requesting access?

Device

What join and management state exists?

Compliance

Does the endpoint meet policy?


Risk

What current threat signal changes the decision?

Concept illustration generated for this course; labels and decision rules remain editable PowerPoint objects.

© 2026 Tertiary Infotech Academy Pte Ltd

Choose the correct Microsoft Entra device identity — mechanism

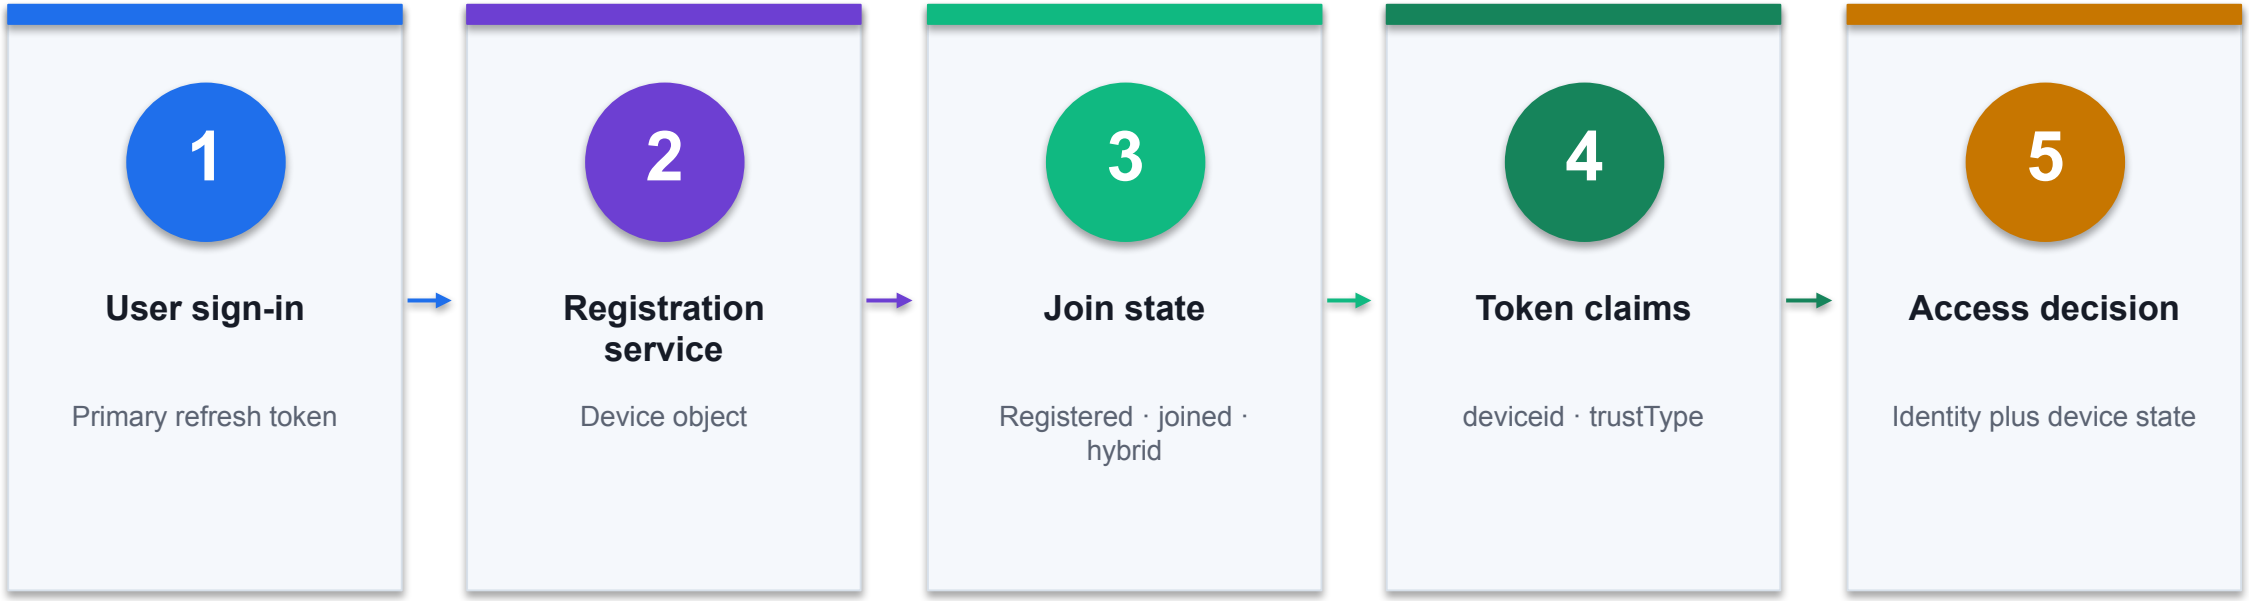

CONTROL POINT

Inspect the evidence at every transition; the first missing state is the most useful troubleshooting boundary. Lab 1 carries the full procedure.

© 2026 Tertiary Infotech Academy Pte Ltd

Choose the correct Microsoft Entra device identity — exact contract

1 Workplace join

AzureAdRegistered = YES

FIELD / STATE

2 Cloud join

AzureAdJoined = YES

FIELD / STATE

3 Hybrid join

DomainJoined + AzureAdJoined

FIELD / STATE

4 Verification

dsregcmd /status


FIELD / STATE

DECISION RULE

Configuration is a contract: names, values, scope and resulting state must all agree.

© 2026 Tertiary Infotech Academy Pte Ltd

Workplace join — control contract

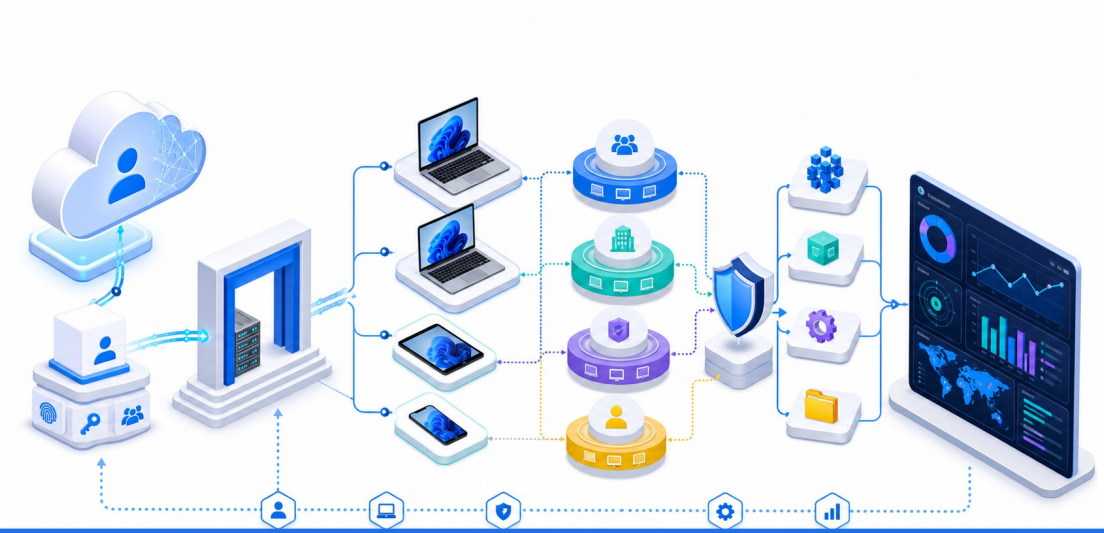

BOUNDARY · User sign-in

STATE **Workplace join**

AzureAdRegistered = YES

RISK **Pending device**

Check registration event log

PROOF **Device State block**


Join flags

CONTROL READING

The Workplace join state is valid only when User sign-in produces Device State block; Pending device requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Cloud join — control contract

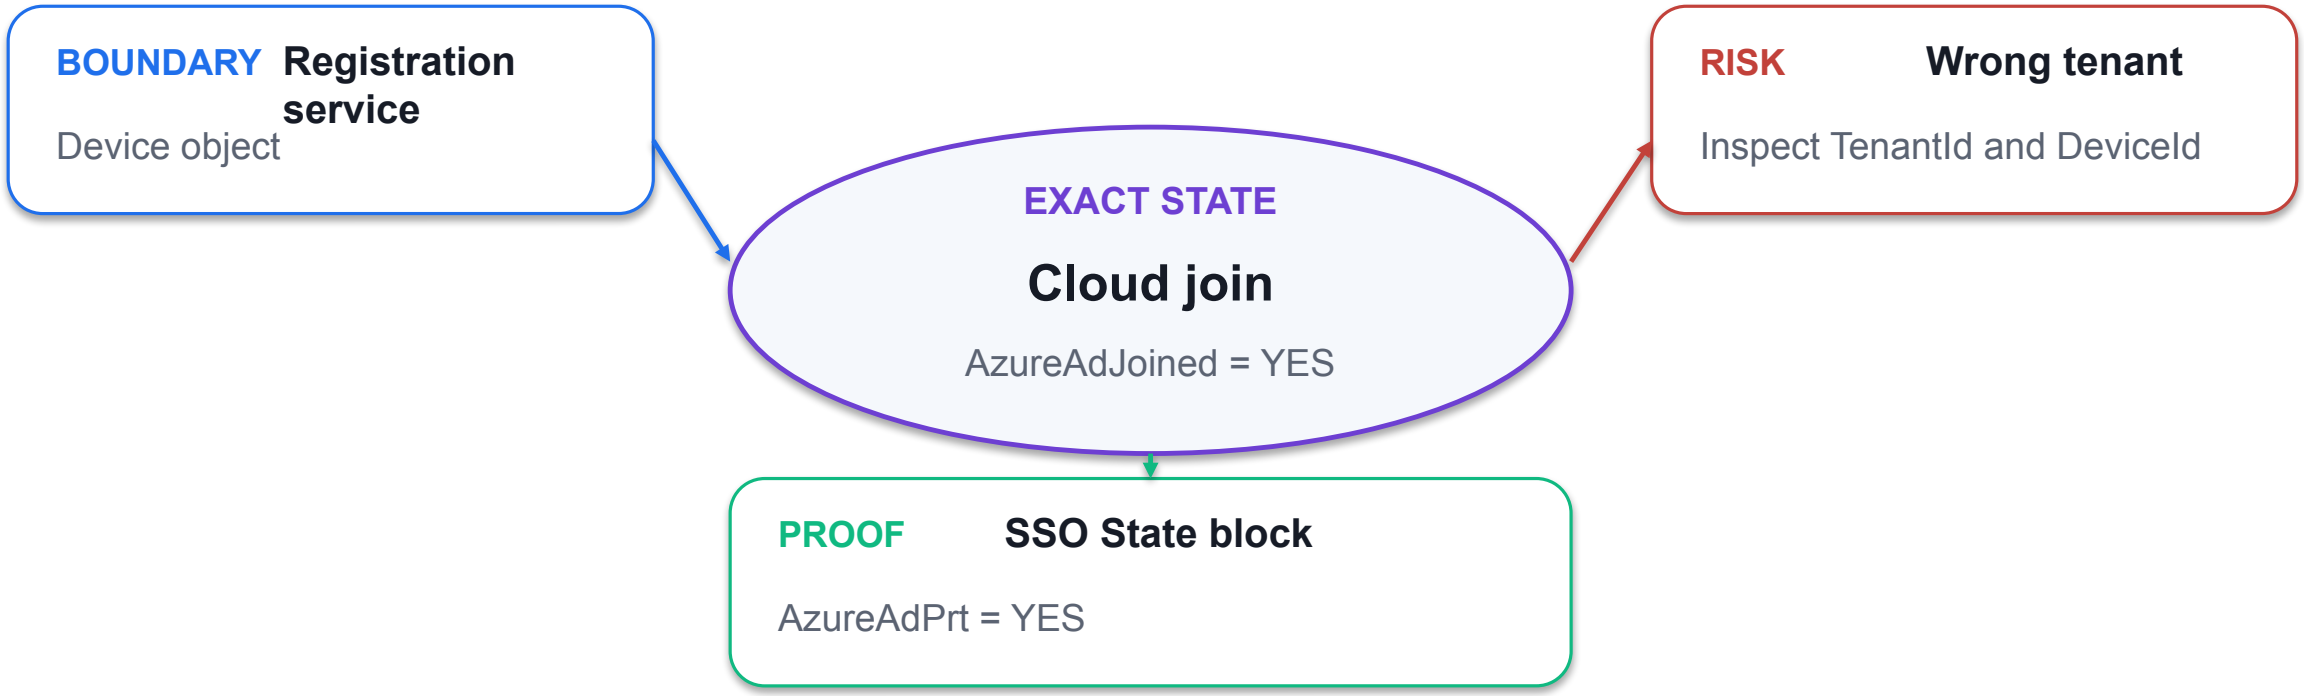

CONTROL READING

The Cloud join state is valid only when Registration service produces SSO State block; Wrong tenant requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Hybrid join — control contract

1

BOUNDARY **Join state**

Registered · joined · hybrid

2

EXACT STATE **Hybrid join**

DomainJoined + AzureAdJoined

3

CONTROL RISK **Missing PRT**

Validate WAM and sign-in

4

PROOF **Entra device record**

Owner and trust type

CONTROL READING

The Hybrid join state is valid only when Join state produces Entra device record; Missing PRT requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Verification — control contract

1	BOUNDARY	Token claims	deviceid · trustType
2	EXACT STATE	Verification	dsregcmd /status
3	CONTROL RISK	Duplicate object	Reconcile stale registrations
4	PROOF	Sign-in log	Device ID correlation

CONTROL READING

The Verification state is valid only when Token claims produces Sign-in log; Duplicate object requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Choose the correct Microsoft Entra device identity — failure and recovery

1 Pending device

Check registration event log

DIAGNOSE → RECOVER

2 Wrong tenant

Inspect TenantId and DeviceId

DIAGNOSE → RECOVER

3 Missing PRT

Validate WAM and sign-in

DIAGNOSE → RECOVER

4 Duplicate object

Reconcile stale registrations

DIAGNOSE → RECOVER

DECISION RULE

Treat the symptom as a pointer to a failed stage; collect evidence before changing policy.

© 2026 Tertiary Infotech Academy Pte Ltd

Pending device — diagnostic trace

1	SIGNAL	**Pending device**
2	BOUNDARY	Registration service
3	SUSPECT STATE	Workplace join
4	RECOVERY	Check registration event log
5	ACCEPTANCE	**Device State block**

EVIDENCE THRESHOLD

Accept the recovery only when Device State block shows Join flags; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Wrong tenant — diagnostic trace



RECOVERY ACTION Inspect TenantId and DeviceId


ACCEPTANCE PROOF AzureAdPrt = YES

EVIDENCE THRESHOLD

Accept the recovery only when SSO State block shows AzureAdPrt = YES; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Missing PRT — diagnostic trace

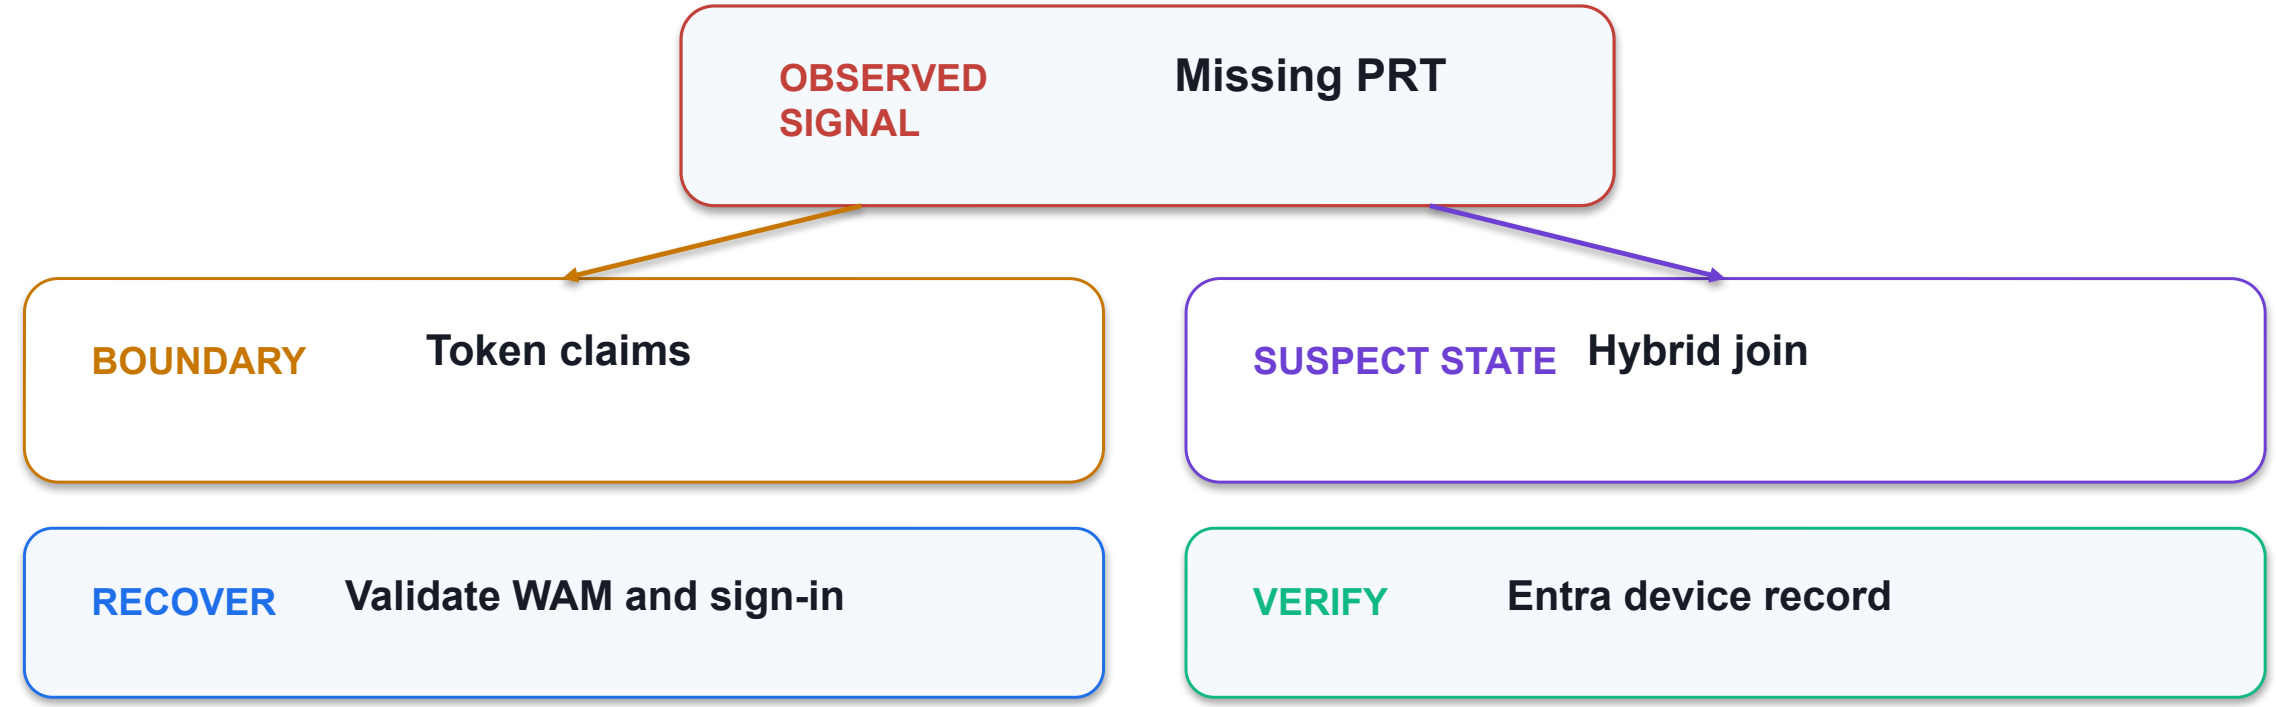

EVIDENCE THRESHOLD

Accept the recovery only when Entra device record shows Owner and trust type; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Duplicate object — diagnostic trace



BOUNDARY · Access decision | SUSPECT · Verification

SIGNAL Duplicate object

RECOVERY Reconcile stale registrations

PROOF Sign-in log

EVIDENCE THRESHOLD

Accept the recovery only when Sign-in log shows Device ID correlation; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Choose the correct Microsoft Entra device identity — verification evidence

Device State block	Join flags
SSO State block	AzureAdPrt = YES
Entra device record	Owner and trust type
Sign-in log	Device ID correlation

LAB 1

Evidence standard

Capture the configured state, the observed result, the timestamp or correlation ID, and the interpretation.


PASS = REPRODUCIBLE

PRACTICE BRIDGE

Full click paths, commands, expected outputs and troubleshooting are in the Learner Guide and the individual lab folder.

© 2026 Tertiary Infotech Academy Pte Ltd

Target policy with dynamic device groups — mechanism

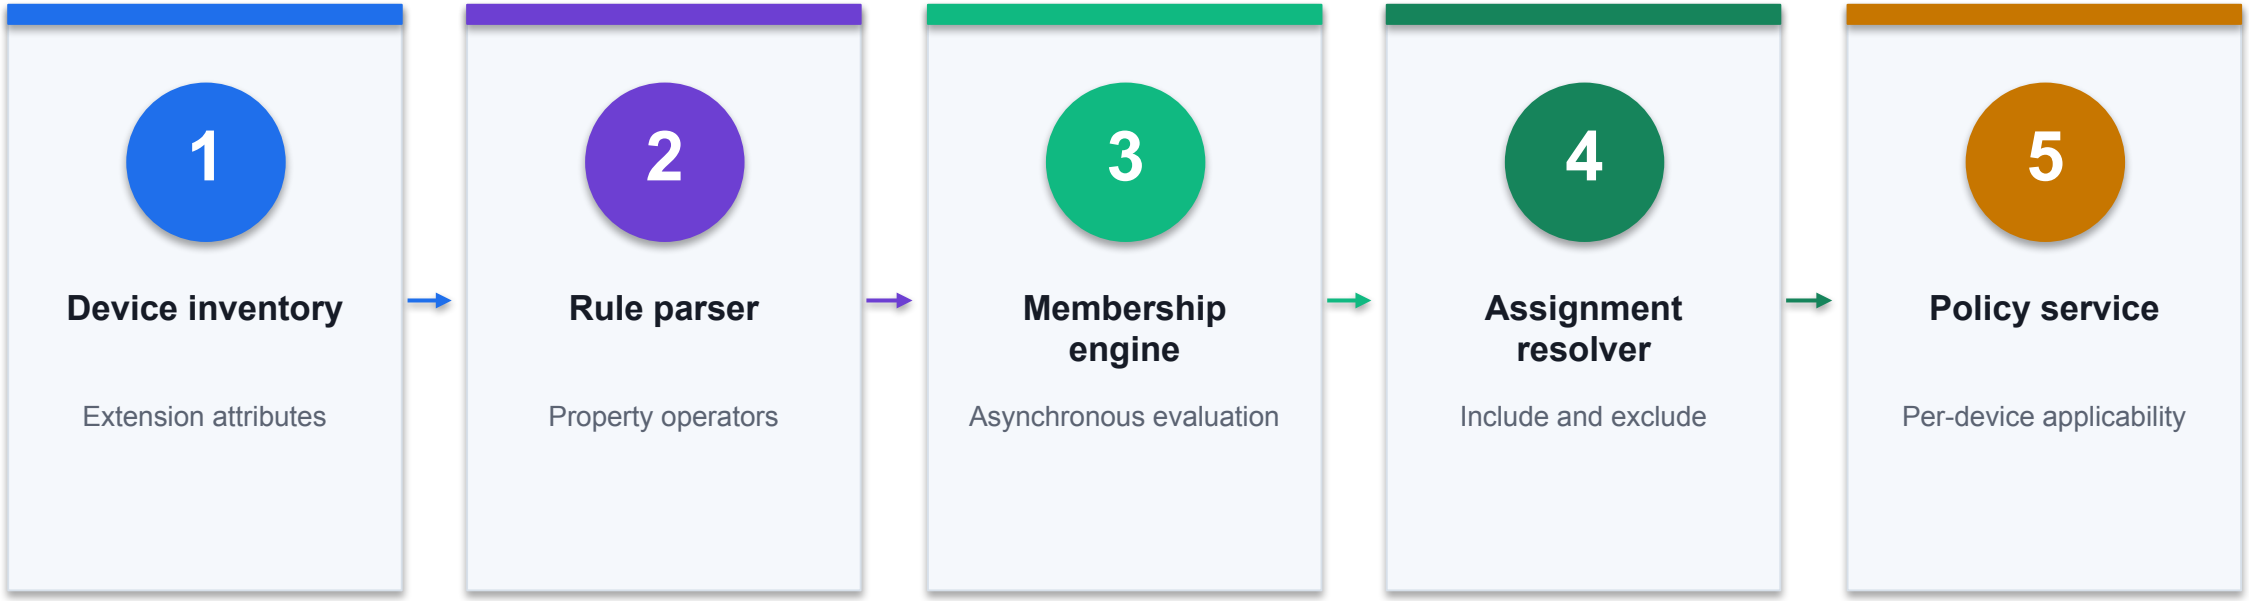

CONTROL POINT

Inspect the evidence at every transition; the first missing state is the most useful troubleshooting boundary. Lab 1 carries the full procedure.

© 2026 Tertiary Infotech Academy Pte Ltd

Target policy with dynamic device groups — exact contract

1 OS rule

device.deviceOSType -eq "Windows"

FIELD / STATE

2 Ownership rule

device.deviceOwnership -eq "Company"

FIELD / STATE

3 Autopilot rule

device.devicePhysicalIDs -any _ -contains "[ZTDId]"

FIELD / STATE

4 Preview

Validate rules before save


FIELD / STATE

DECISION RULE

Configuration is a contract: names, values, scope and resulting state must all agree.

© 2026 Tertiary Infotech Academy Pte Ltd

OS rule — control contract

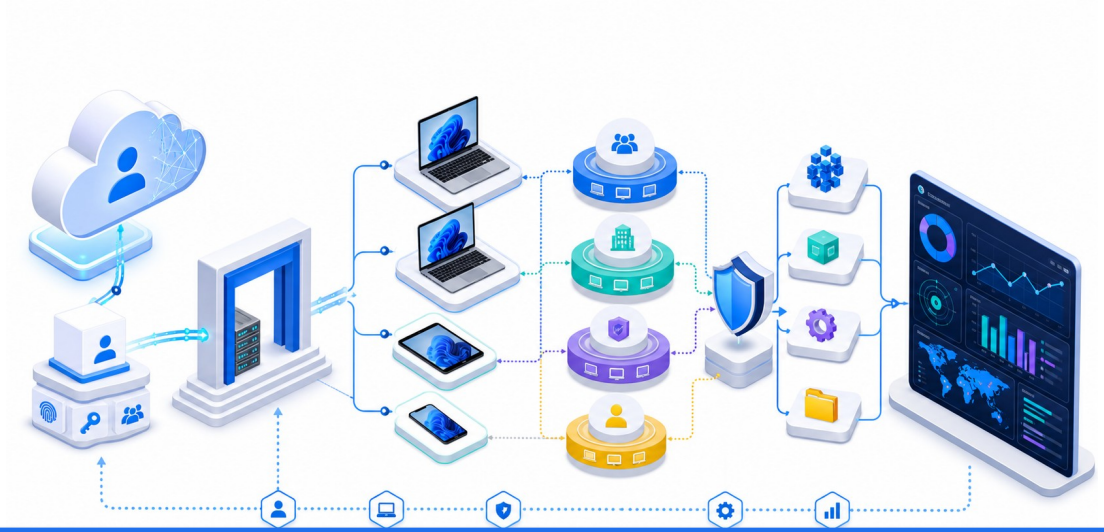

BOUNDARY · Device inventory

STATE **OS rule**

device.deviceOSType -eq "Windows"

RISK **Invalid property**

Use supported device schema

PROOF **Rule syntax**


Saved expression

CONTROL READING

The OS rule state is valid only when Device inventory produces Rule syntax; Invalid property requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Ownership rule — control contract

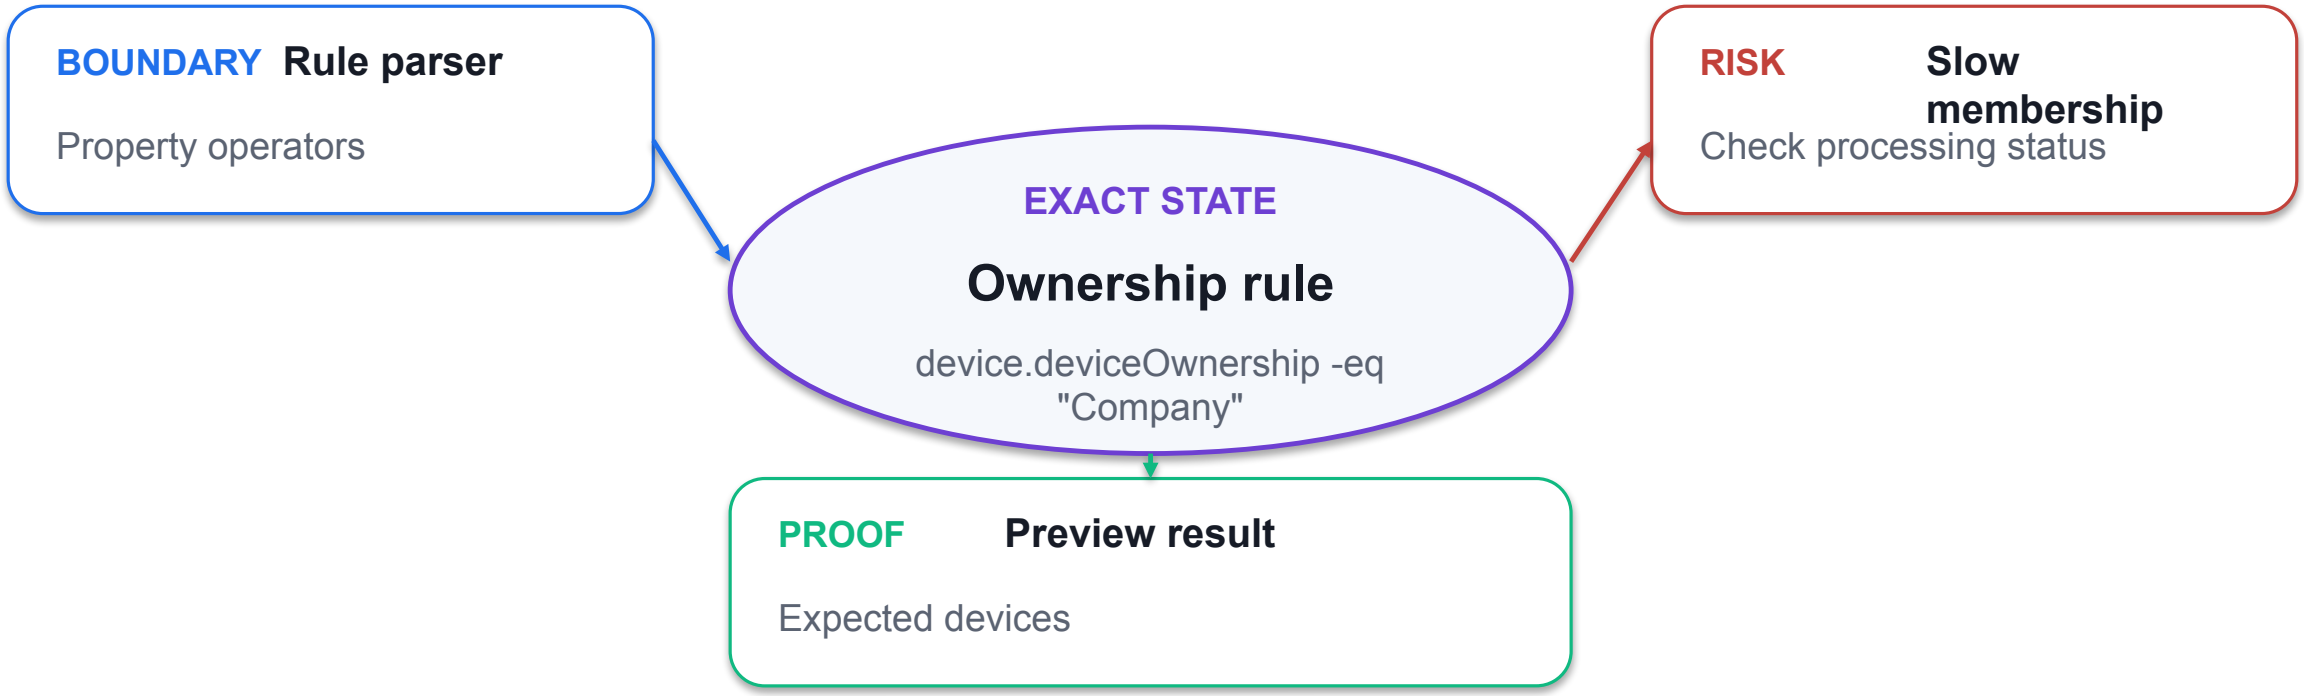

CONTROL READING

The Ownership rule state is valid only when Rule parser produces Preview result; Slow membership requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Autopilot rule — control contract

1

BOUNDARY **Membership engine**

Asynchronous evaluation

2

EXACT STATE **Autopilot rule**

device.devicePhysicalIDs -any _ -contains "[ZTDId]"

3

CONTROL RISK **Nested group assumption**

Dynamic groups do not use nested evaluation

4

PROOF **Membership audit**

Added/removed objects

CONTROL READING

The Autopilot rule state is valid only when Membership engine produces Membership audit; Nested group assumption requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Preview — control contract

1	BOUNDARY	**Assignment resolver**	Include and exclude
2	EXACT STATE	**Preview**	Validate rules before save
3	CONTROL RISK	**Broad targeting**	Test with a preview cohort
4	PROOF	**Assignment status**	Policy reached cohort

CONTROL READING

The Preview state is valid only when Assignment resolver produces Assignment status; Broad targeting requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Target policy with dynamic device groups — failure and recovery

1 Invalid property

Use supported device schema

DIAGNOSE → RECOVER

2 Slow membership

Check processing status

DIAGNOSE → RECOVER

3 Nested group assumption

Dynamic groups do not use nested evaluation

DIAGNOSE → RECOVER

4 Broad targeting

Test with a preview cohort

DIAGNOSE → RECOVER

DECISION RULE

Treat the symptom as a pointer to a failed stage; collect evidence before changing policy.

© 2026 Tertiary Infotech Academy Pte Ltd

Invalid property — diagnostic trace


1	SIGNAL	**Invalid property**
2	BOUNDARY	Rule parser
3	SUSPECT STATE	OS rule
4	RECOVERY	Use supported device schema
5	ACCEPTANCE	**Rule syntax**

EVIDENCE THRESHOLD

Accept the recovery only when Rule syntax shows Saved expression; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Slow membership — diagnostic trace

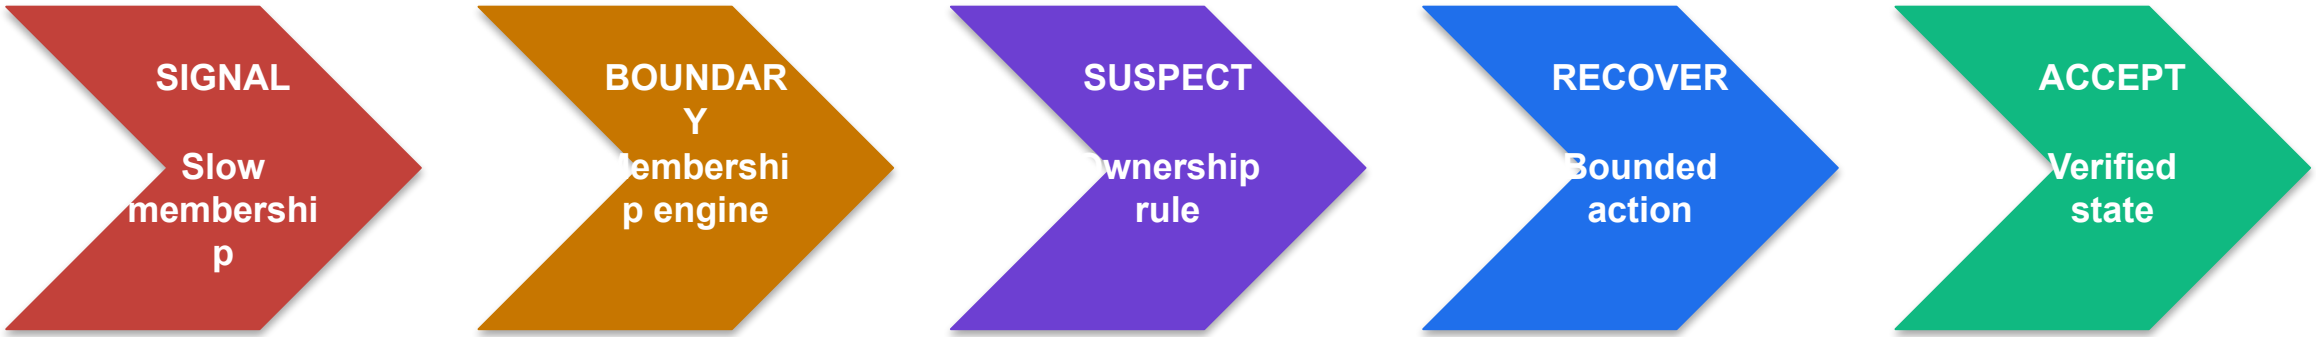

RECOVERY ACTION Check processing status


ACCEPTANCE PROOF Expected devices

EVIDENCE THRESHOLD

Accept the recovery only when Preview result shows Expected devices; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Nested group assumption — diagnostic trace

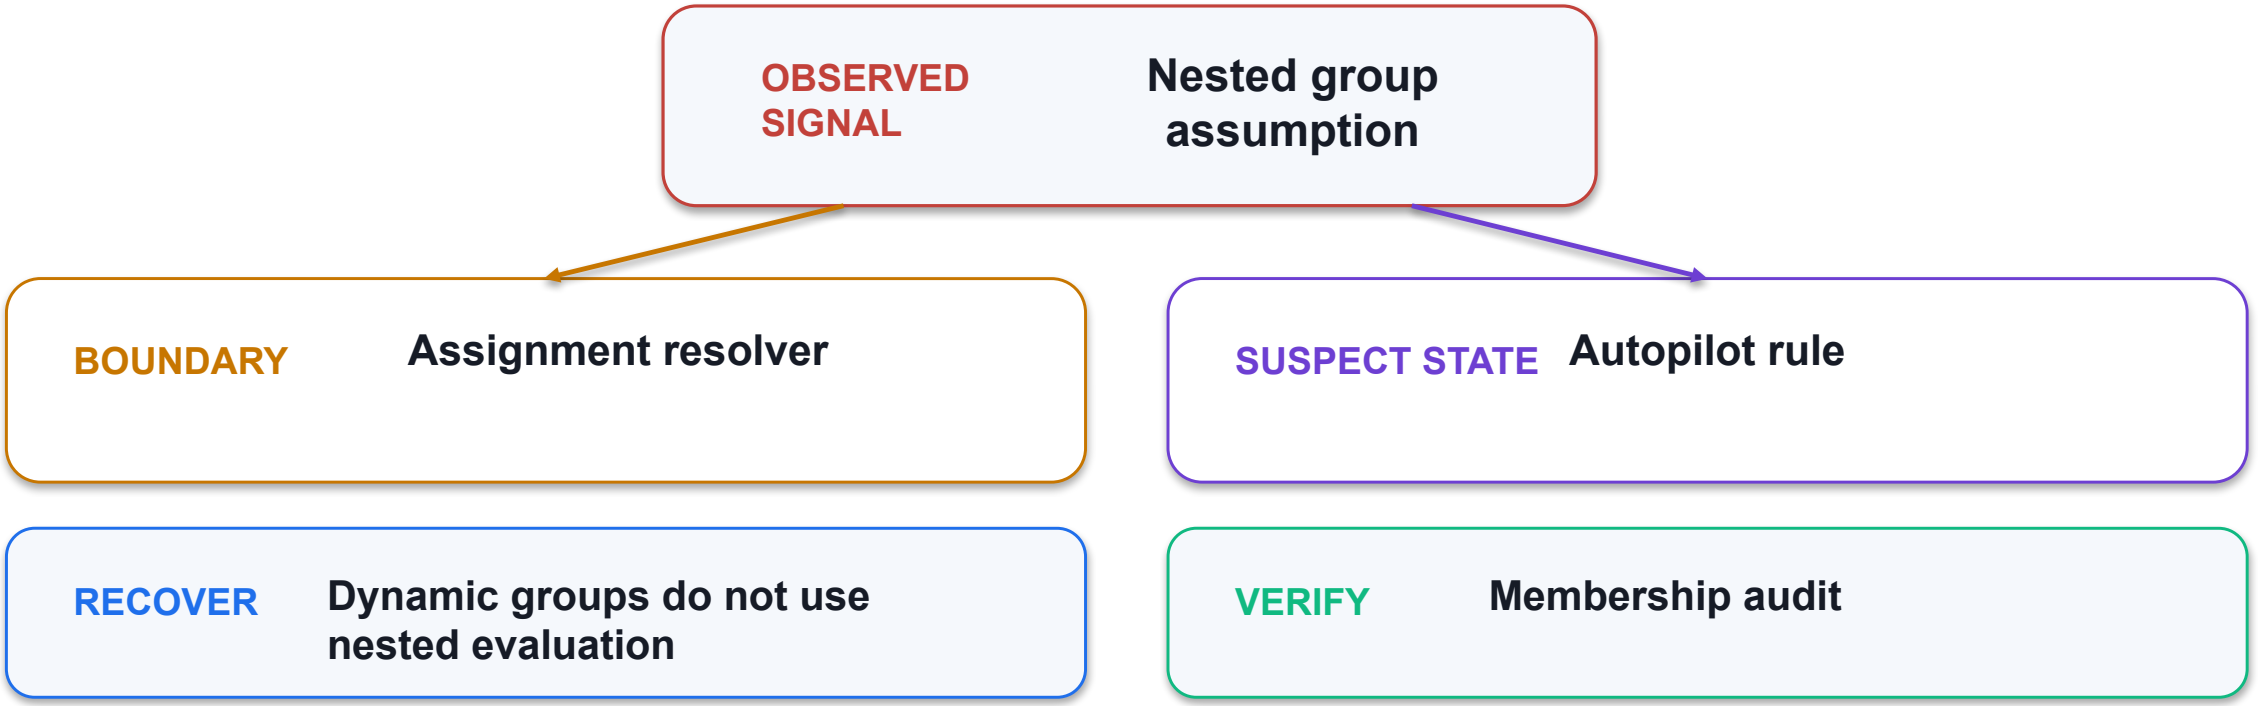


EVIDENCE THRESHOLD

Accept the recovery only when Membership audit shows Added/removed objects; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Broad targeting — diagnostic trace

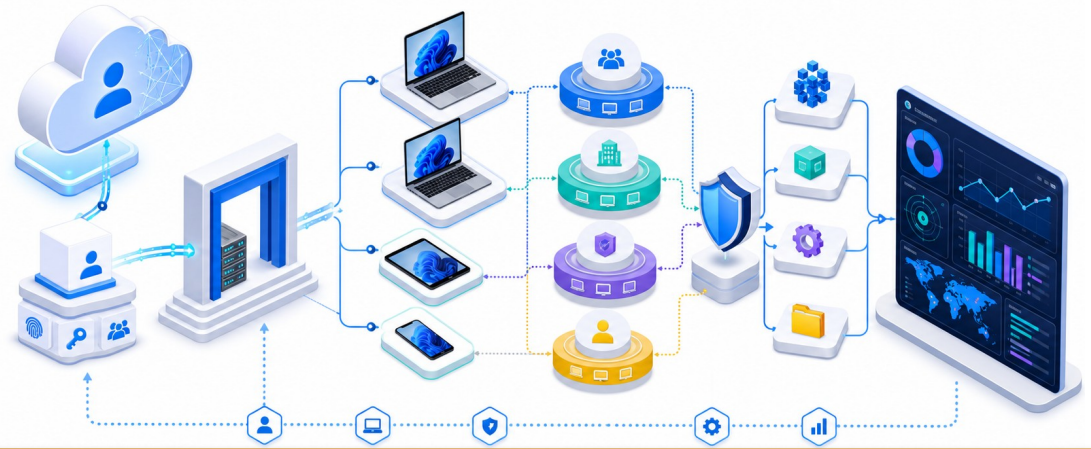

BOUNDARY · Policy service | SUSPECT · Preview

SIGNAL Broad targeting

RECOVERY Test with a preview cohort

PROOF Assignment status

EVIDENCE THRESHOLD

Accept the recovery only when Assignment status shows Policy reached cohort; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

DOMAIN 1 · ACCEPTANCE

Target policy with dynamic device groups — verification evidence

✓ **Rule syntax**	Saved expression
✓ **Preview result**	Expected devices
✓ **Membership audit**	Added/removed objects
✓ **Assignment status**	Policy reached cohort

LAB 1

Evidence standard

Capture the configured state, the observed result, the timestamp or correlation ID, and the interpretation.


PASS = REPRODUCIBLE

PRACTICE BRIDGE

Full click paths, commands, expected outputs and troubleshooting are in the Learner Guide and the individual lab folder.

© 2026 Tertiary Infotech Academy Pte Ltd

Configure Windows automatic enrollment — mechanism

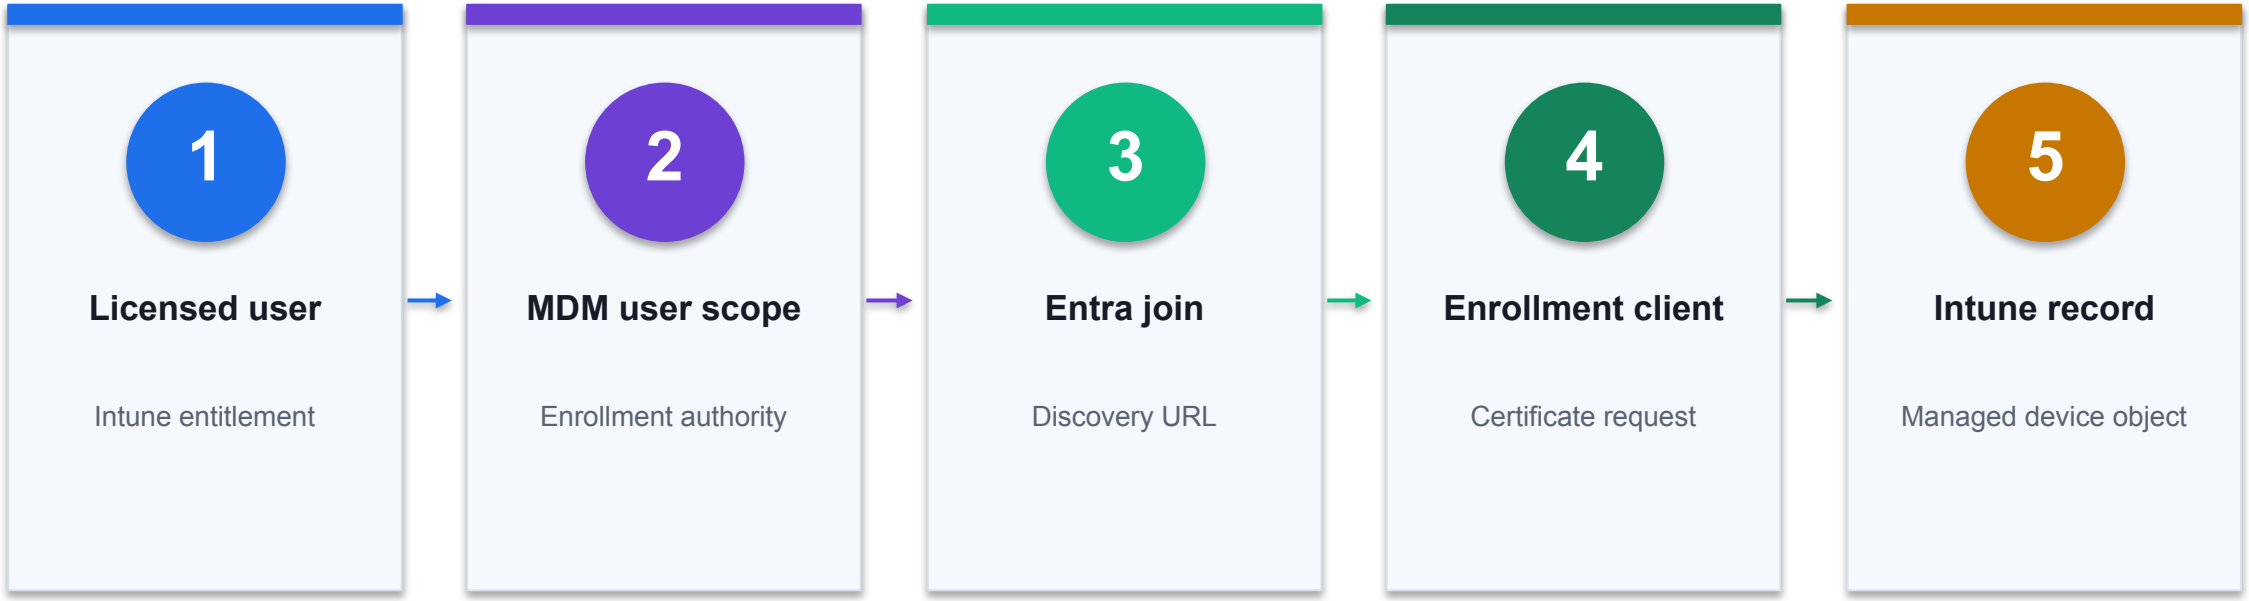

CONTROL POINT

Inspect the evidence at every transition; the first missing state is the most useful troubleshooting boundary. Lab 2 carries the full procedure.

© 2026 Tertiary Infotech Academy Pte Ltd

Configure Windows automatic enrollment — exact contract

1 MDM scope

Some or All

FIELD / STATE

2 Discovery URL

EnterpriseEnrollment.manage.microsoft.com

FIELD / STATE

3 Enrollment status

dsregcmd /status

FIELD / STATE

4 Diagnostics

MDMDiagReport.html


FIELD / STATE

DECISION RULE

Configuration is a contract: names, values, scope and resulting state must all agree.

© 2026 Tertiary Infotech Academy Pte Ltd

MDM scope — control contract

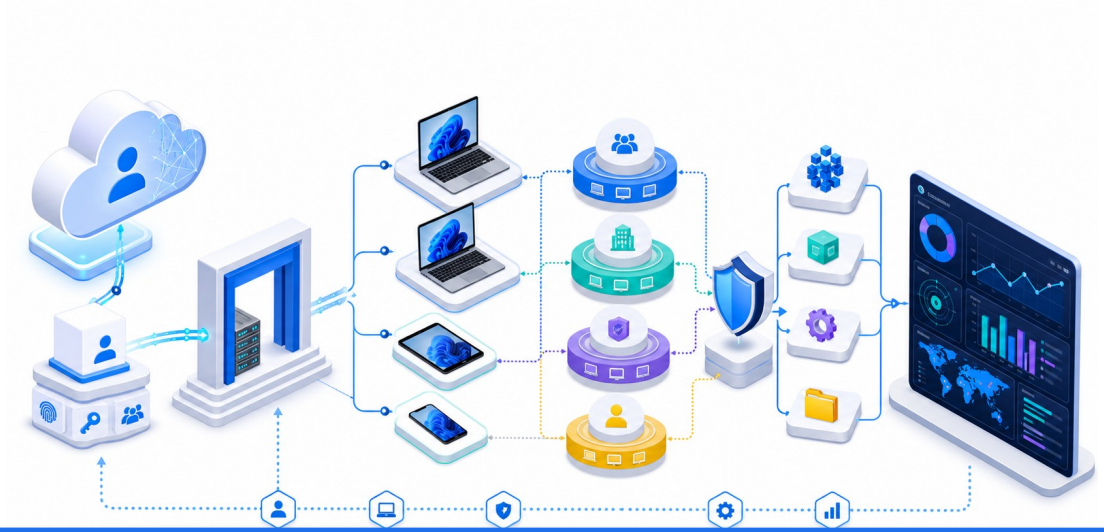

BOUNDARY · Licensed user

STATE **MDM scope**

Some or All

RISK **Scope excludes user**

Review MDM user scope

PROOF **ManagedBy value**


Intune

CONTROL READING

The MDM scope state is valid only when Licensed user produces ManagedBy value; Scope excludes user requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Discovery URL — control contract

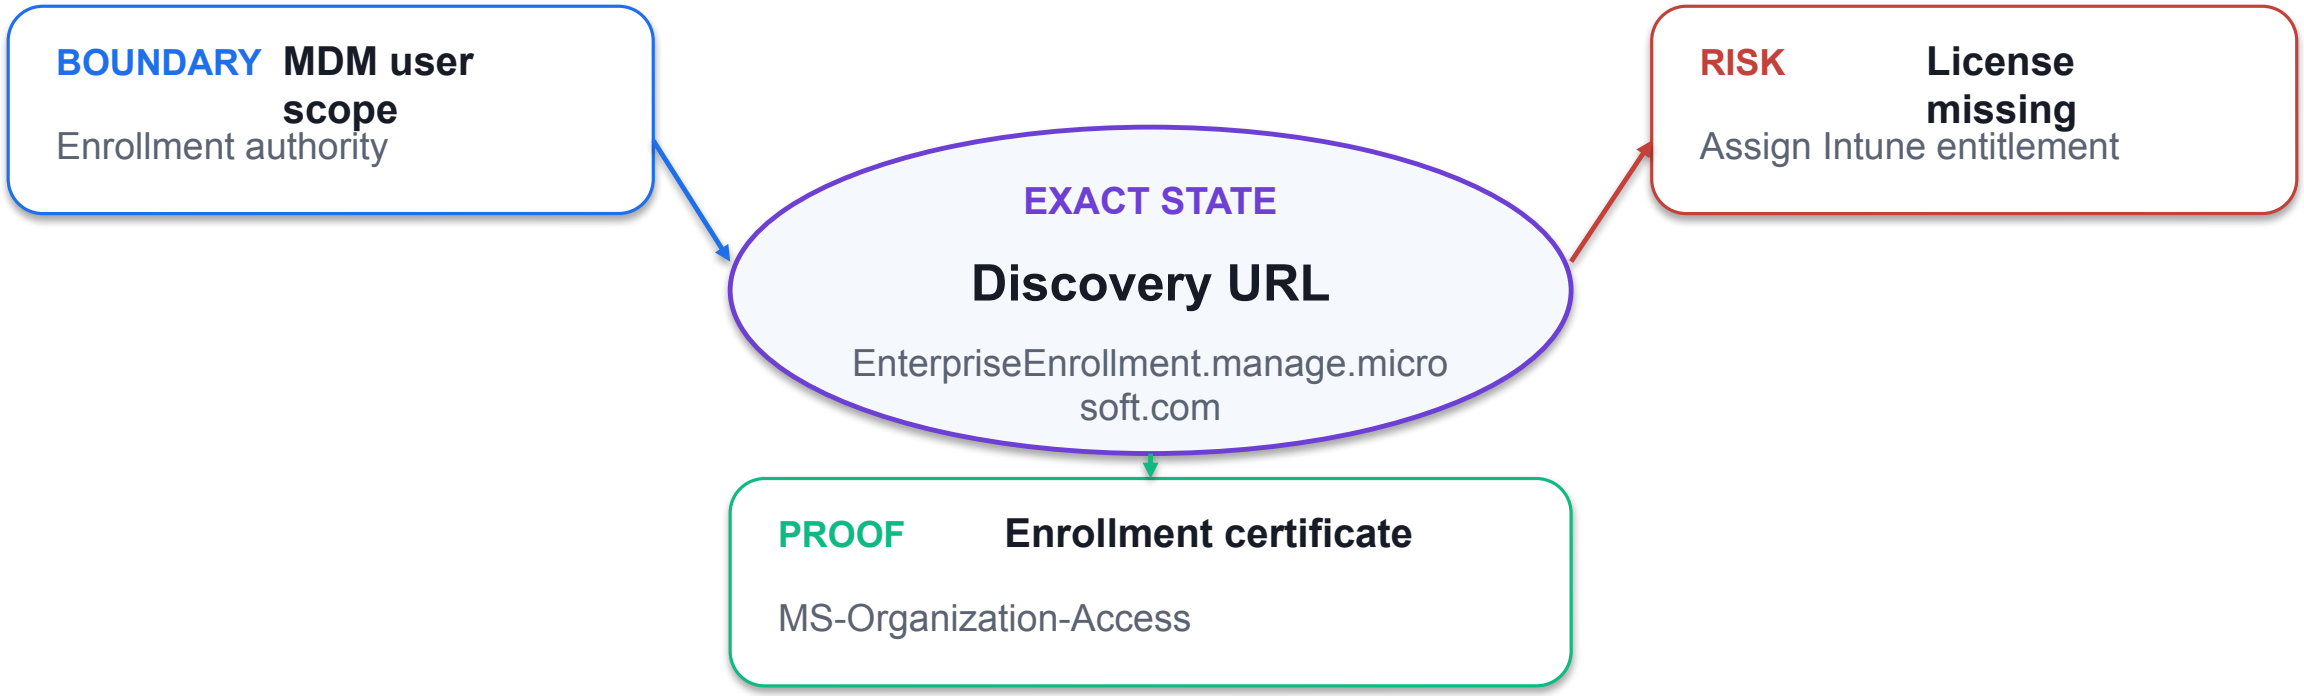

CONTROL READING

The Discovery URL state is valid only when MDM user scope produces Enrollment certificate; License missing requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Enrollment status — control contract

1

BOUNDARY **Entra join**

Discovery URL

2

EXACT STATE **Enrollment status**

dsregcmd /status

3

CONTROL RISK **Stale enrollment**

Inspect scheduled tasks

4

PROOF **Event log**

DeviceManagement-Enterprise-Diagnostics-Provider

CONTROL READING

The Enrollment status state is valid only when Entra join produces Event log; Stale enrollment requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Diagnostics — control contract

1	BOUNDARY	Enrollment client	Certificate request
2	EXACT STATE	Diagnostics	MDMDiagReport.html
3	CONTROL RISK	Network block	Test enrollment endpoints
4	PROOF	Intune record	Last check-in

CONTROL READING

The Diagnostics state is valid only when Enrollment client produces Intune record; Network block requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Configure Windows automatic enrollment — failure and recovery

1 Scope excludes user

Review MDM user scope

DIAGNOSE → RECOVER

2 License missing

Assign Intune entitlement

DIAGNOSE → RECOVER

3 Stale enrollment

Inspect scheduled tasks

DIAGNOSE → RECOVER

4 Network block

Test enrollment endpoints

DIAGNOSE → RECOVER

DECISION RULE

Treat the symptom as a pointer to a failed stage; collect evidence before changing policy.

© 2026 Tertiary Infotech Academy Pte Ltd

Scope excludes user — diagnostic trace

1	SIGNAL	**Scope excludes user**
2	BOUNDARY	MDM user scope
3	SUSPECT STATE	MDM scope
4	RECOVERY	Review MDM user scope
5	ACCEPTANCE	**ManagedBy value**

EVIDENCE THRESHOLD

Accept the recovery only when ManagedBy value shows Intune; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

License missing — diagnostic trace



RECOVERY ACTION Assign Intune entitlement


ACCEPTANCE PROOF MS-Organization-Access

EVIDENCE THRESHOLD

Accept the recovery only when Enrollment certificate shows MS-Organization-Access; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Stale enrollment — diagnostic trace

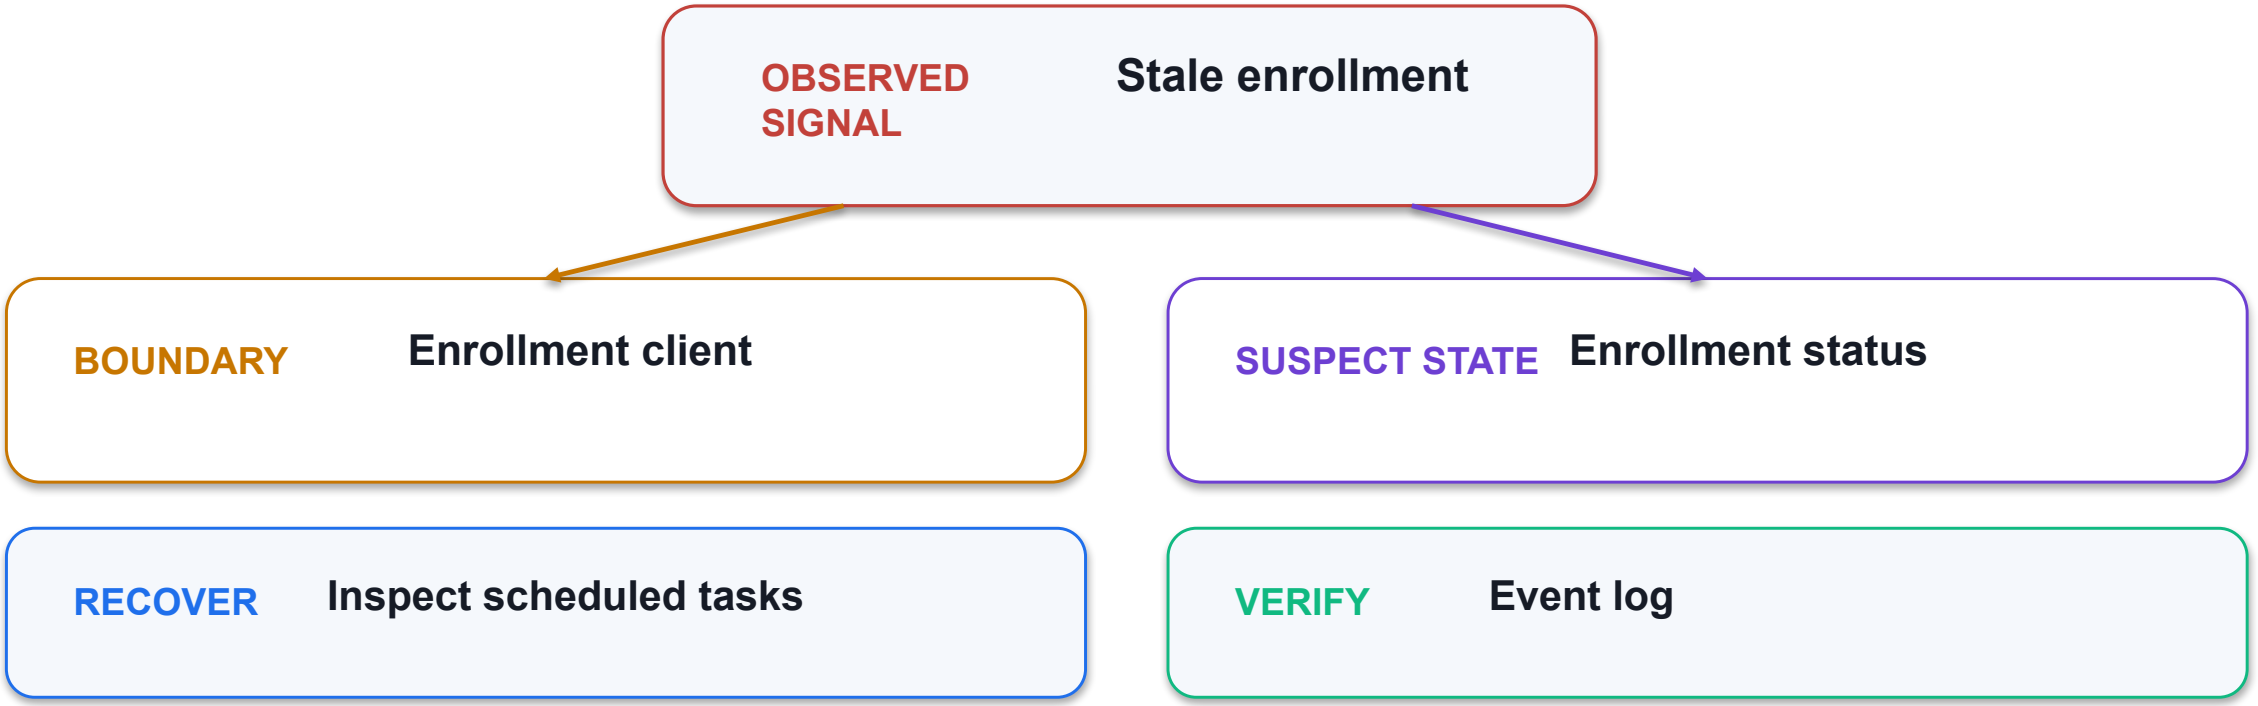


EVIDENCE THRESHOLD

Accept the recovery only when Event log shows DeviceManagement-Enterprise-Diagnostics-Provider; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Network block — diagnostic trace

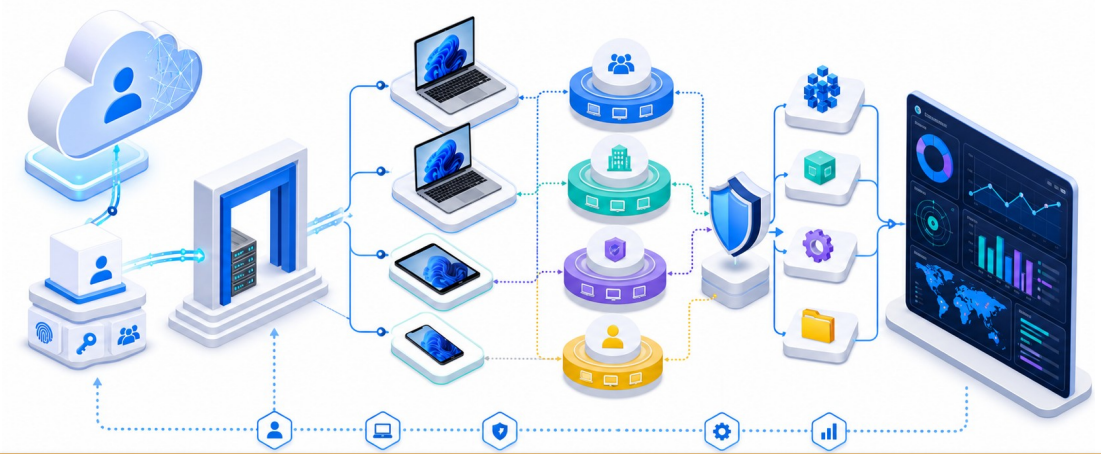

BOUNDARY · Intune record | SUSPECT · Diagnostics

SIGNAL Network block

RECOVERY Test enrollment endpoints

PROOF Intune record

EVIDENCE THRESHOLD

Accept the recovery only when Intune record shows Last check-in; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Configure Windows automatic enrollment — verification evidence

ManagedBy value	Intune
Enrollment certificate	MS-Organization-Access
Event log	DeviceManagement-Enterprise-Diagnostics-Provider
Intune record	Last check-in

LAB 2

Evidence standard

Capture the configured state, the observed result, the timestamp or correlation ID, and the interpretation.


PASS = REPRODUCIBLE

PRACTICE BRIDGE

Full click paths, commands, expected outputs and troubleshooting are in the Learner Guide and the individual lab folder.

© 2026 Tertiary Infotech Academy Pte Ltd

Control multi-platform enrollment — mechanism

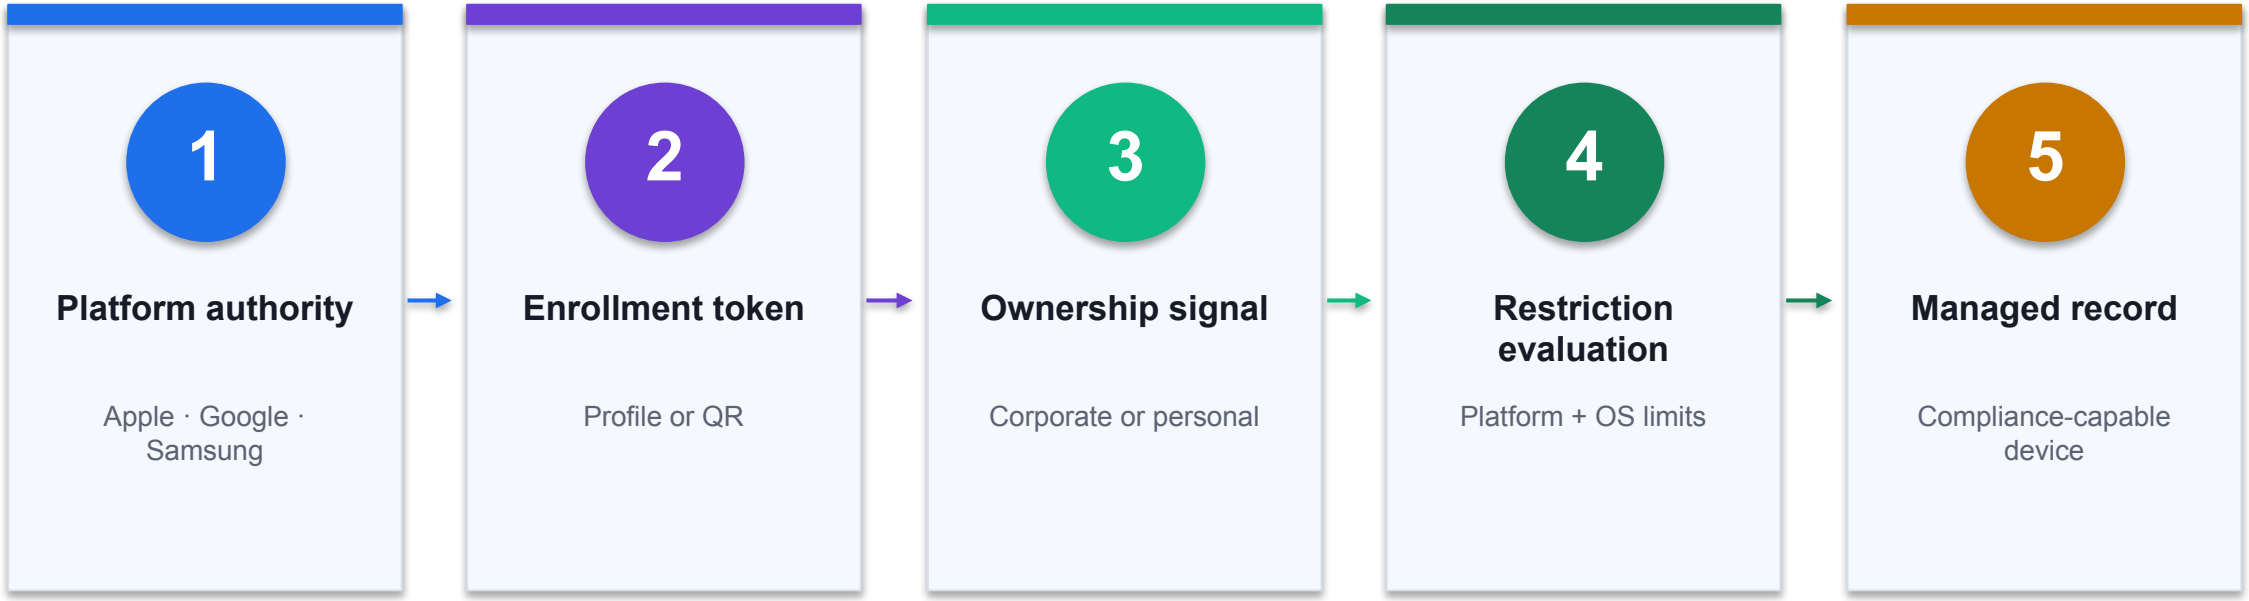

CONTROL POINT

Inspect the evidence at every transition; the first missing state is the most useful troubleshooting boundary. Lab 2 carries the full procedure.

© 2026 Tertiary Infotech Academy Pte Ltd

Control multi-platform enrollment — exact contract

1 Apple corporate

ABM automated enrollment

FIELD / STATE

2 Android corporate

Fully managed or corporate work profile

FIELD / STATE

3 Android shared

Dedicated device

FIELD / STATE

4 Restriction

Block personal where required


FIELD / STATE

DECISION RULE

Configuration is a contract: names, values, scope and resulting state must all agree.

© 2026 Tertiary Infotech Academy Pte Ltd

Apple corporate — control contract

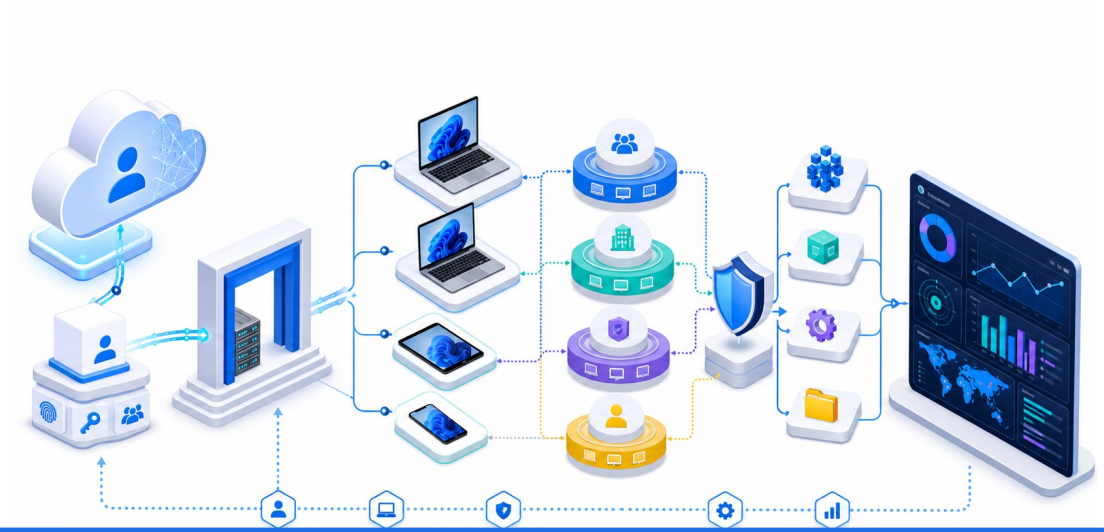

BOUNDARY · Platform authority

STATE **Apple corporate**

ABM automated enrollment

RISK **Expired token**

Renew before service impact

PROOF **Token status**


Active and unexpired

CONTROL READING

The Apple corporate state is valid only when Platform authority produces Token status; Expired token requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Android corporate — control contract

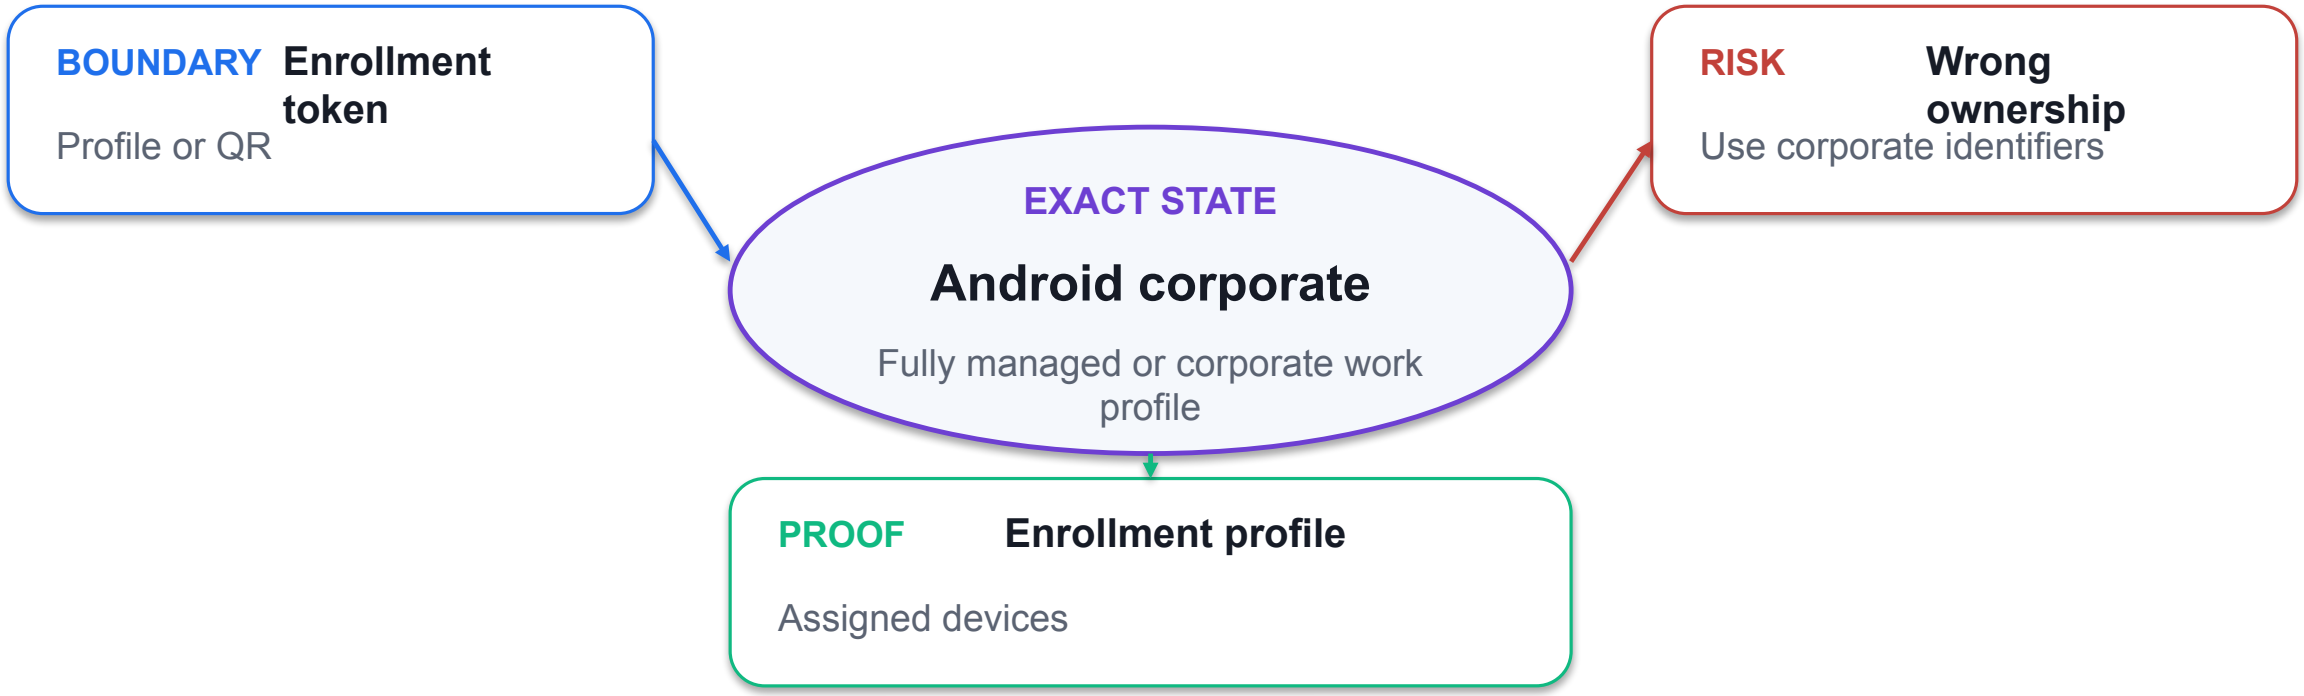

CONTROL READING

The Android corporate state is valid only when Enrollment token produces Enrollment profile; Wrong ownership requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Android shared — control contract

1

BOUNDARY **Ownership signal**

Corporate or personal

2

EXACT STATE **Android shared**

Dedicated device

3

CONTROL RISK **Unsupported OS**

Check minimum version

4

PROOF **Ownership field**

Corporate

CONTROL READING

The Android shared state is valid only when Ownership signal produces Ownership field; Unsupported OS requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Restriction — control contract

1	BOUNDARY	Restriction evaluation	Platform + OS limits
2	EXACT STATE	Restriction	Block personal where required
3	CONTROL RISK	Profile conflict	Verify one intended enrollment path
4	PROOF	Platform report	Enrollment success

CONTROL READING

The Restriction state is valid only when Restriction evaluation produces Platform report; Profile conflict requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Control multi-platform enrollment — failure and recovery

1 Expired token

Renew before service impact

DIAGNOSE → RECOVER

2 Wrong ownership

Use corporate identifiers

DIAGNOSE → RECOVER

3 Unsupported OS

Check minimum version

DIAGNOSE → RECOVER

4 Profile conflict

Verify one intended enrollment path

DIAGNOSE → RECOVER

DECISION RULE

Treat the symptom as a pointer to a failed stage; collect evidence before changing policy.

© 2026 Tertiary Infotech Academy Pte Ltd

Expired token — diagnostic trace

1	SIGNAL	**Expired token**
2	BOUNDARY	Enrollment token
3	SUSPECT STATE	Apple corporate
4	RECOVERY	Renew before service impact
5	ACCEPTANCE	**Token status**

EVIDENCE THRESHOLD

Accept the recovery only when Token status shows Active and unexpired; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Wrong ownership — diagnostic trace



RECOVERY ACTION Use corporate identifiers


ACCEPTANCE PROOF Assigned devices

EVIDENCE THRESHOLD

Accept the recovery only when Enrollment profile shows Assigned devices; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Unsupported OS — diagnostic trace

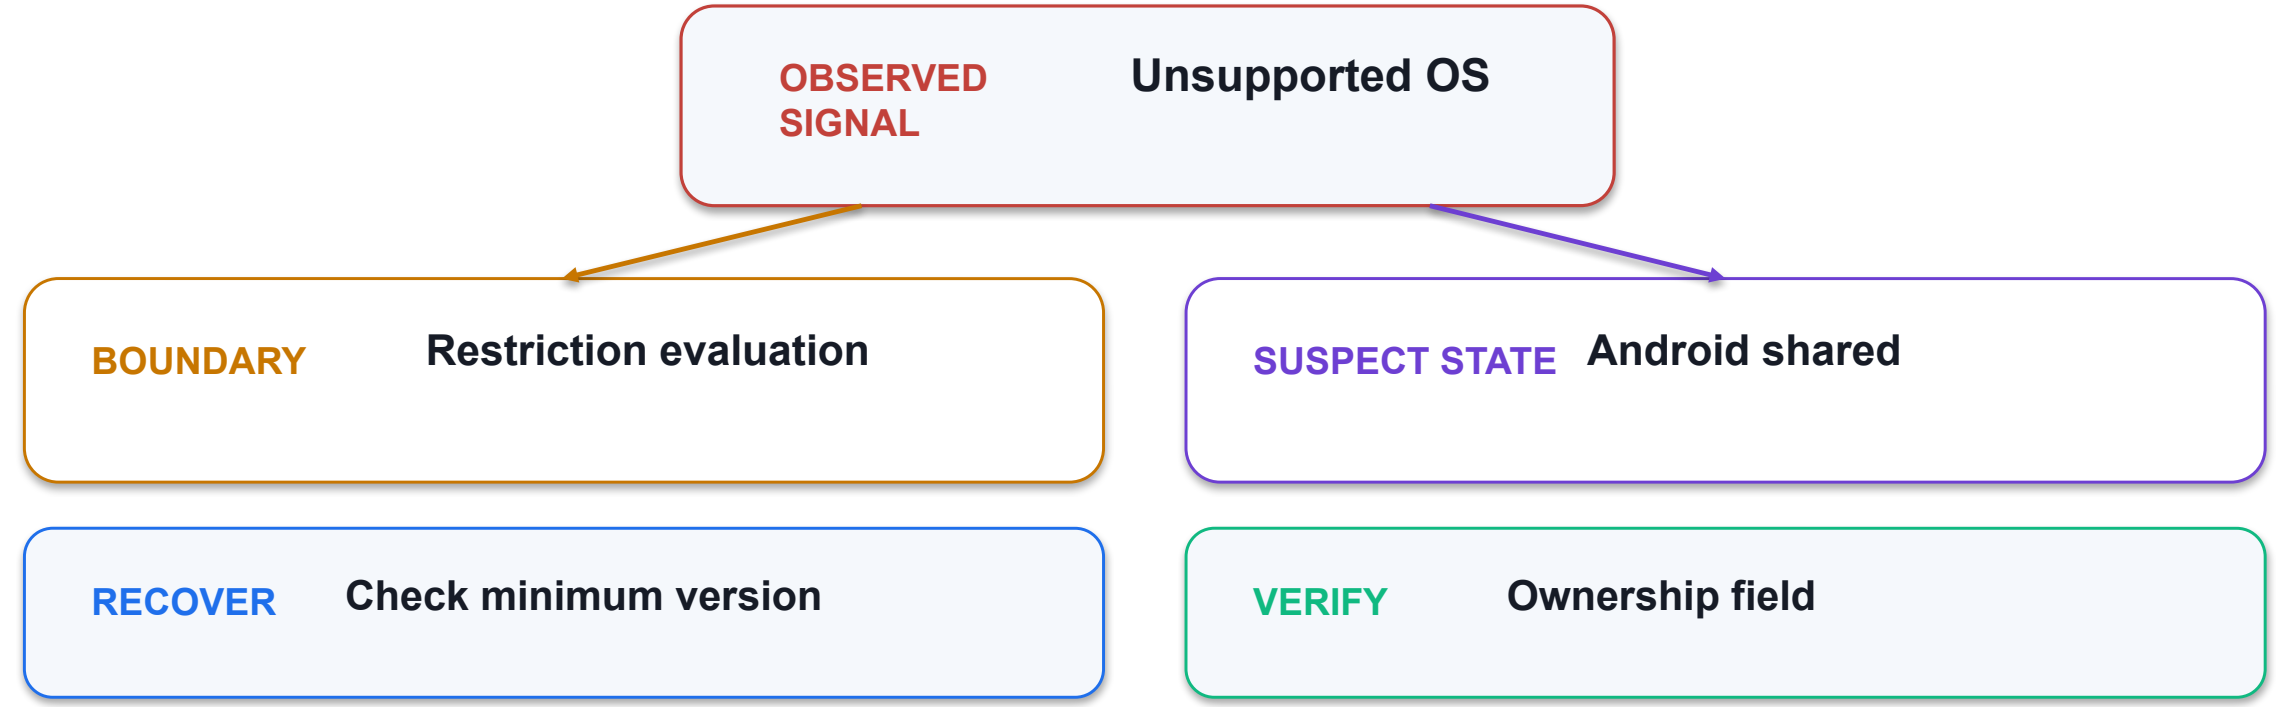


EVIDENCE THRESHOLD

Accept the recovery only when Ownership field shows Corporate; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Profile conflict — diagnostic trace

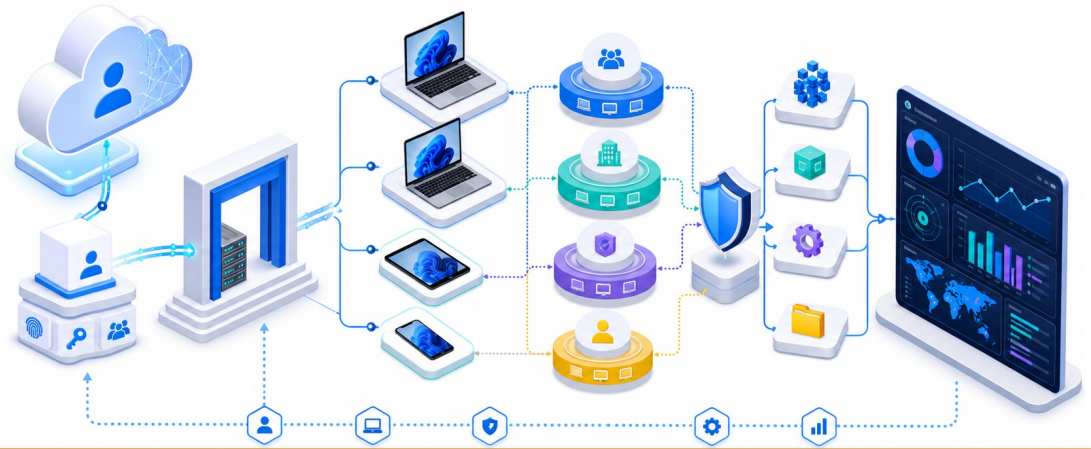

BOUNDARY · Managed record | SUSPECT · Restriction

SIGNAL Profile conflict

RECOVERY Verify one intended enrollment path

PROOF Platform report

EVIDENCE THRESHOLD

Accept the recovery only when Platform report shows Enrollment success; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Control multi-platform enrollment — verification evidence

✓ **Token status**	Active and unexpired
✓ **Enrollment profile**	Assigned devices
✓ **Ownership field**	Corporate
✓ **Platform report**	Enrollment success

LAB 2

Evidence standard

Capture the configured state, the observed result, the timestamp or correlation ID, and the interpretation.

PASS = REPRODUCIBLE

PRACTICE BRIDGE

Full click paths, commands, expected outputs and troubleshooting are in the Learner Guide and the individual lab folder.


© 2026 Tertiary Infotech Academy Pte Ltd

DAY 1

Tea break

Return at the time announced by the trainer.

Delegate Intune administration safely — mechanism

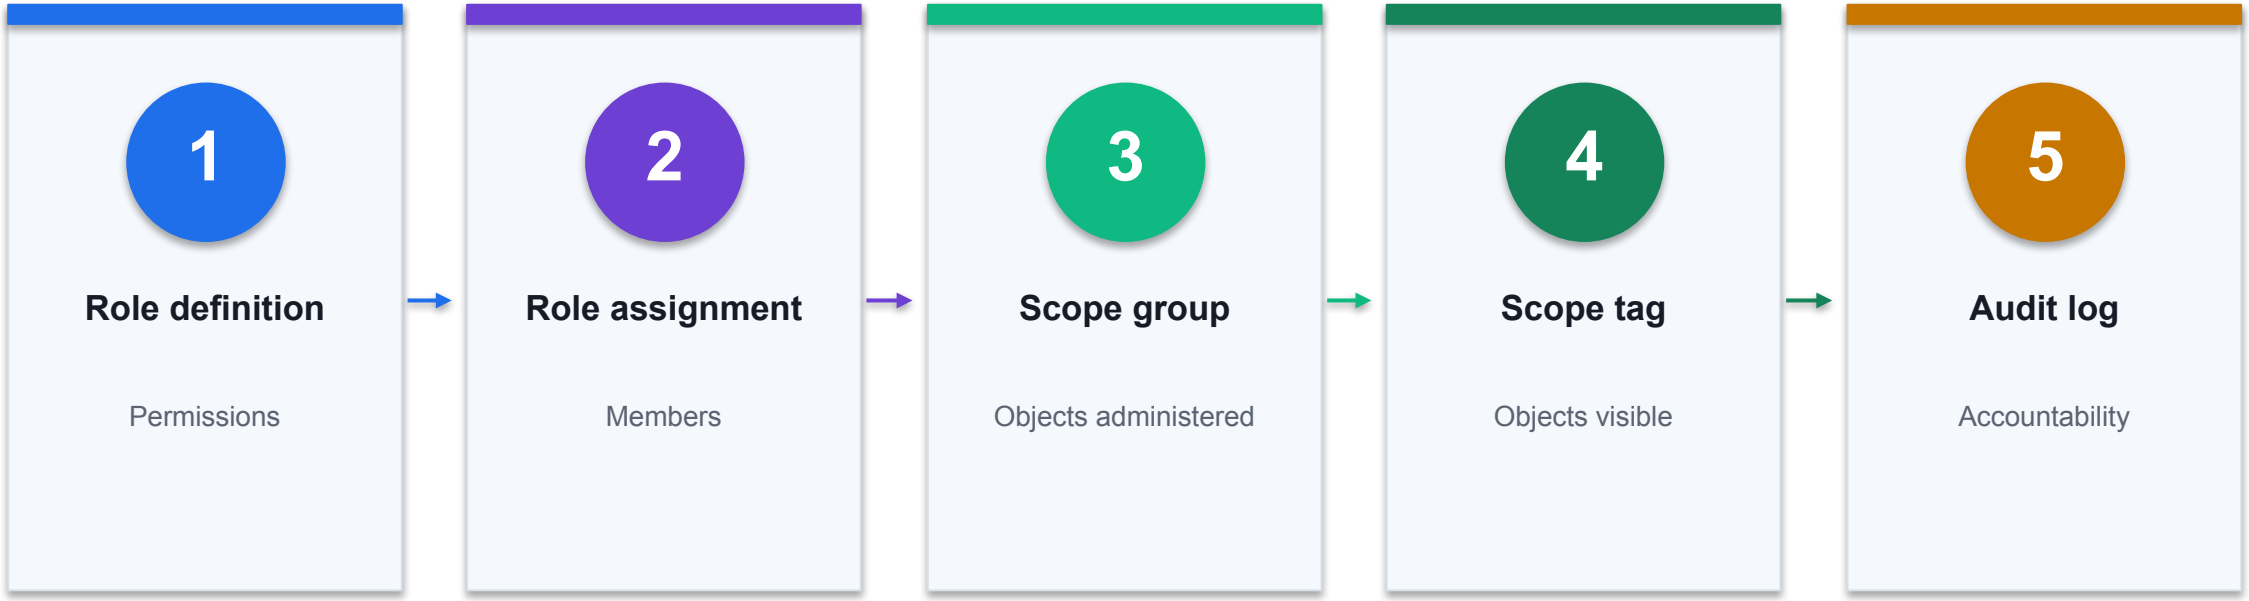

CONTROL POINT

Inspect the evidence at every transition; the first missing state is the most useful troubleshooting boundary. Lab 1 carries the full procedure.

© 2026 Tertiary Infotech Academy Pte Ltd

Delegate Intune administration safely — exact contract

1 Built-in role

Least-privilege baseline

FIELD / STATE

2 Custom role

Only required actions

FIELD / STATE

3 Scope tag

Regional visibility boundary

FIELD / STATE

4 Multi-admin approval

Second-person control


FIELD / STATE

DECISION RULE

Configuration is a contract: names, values, scope and resulting state must all agree.

© 2026 Tertiary Infotech Academy Pte Ltd

Built-in role — control contract

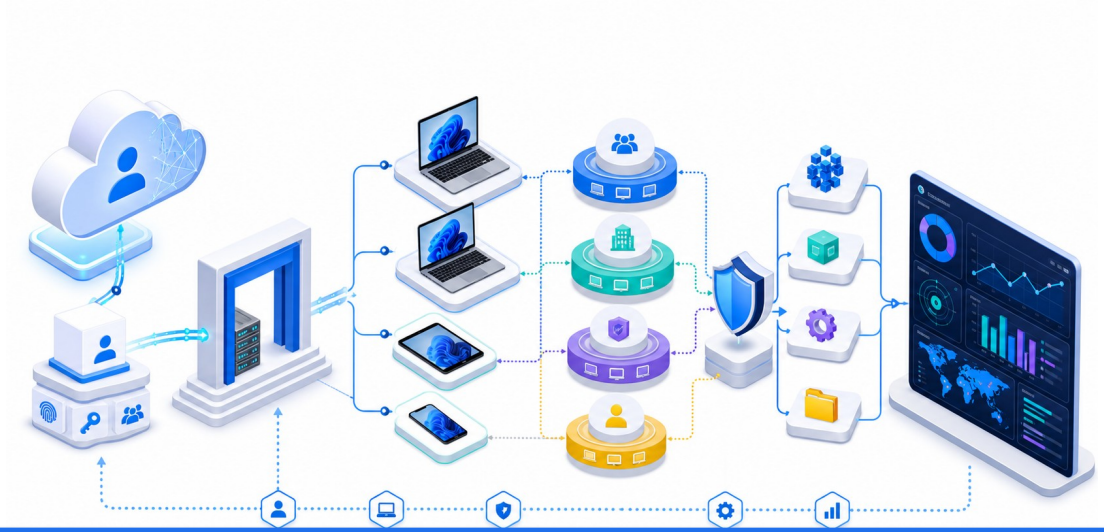

BOUNDARY · Role definition

STATE **Built-in role**

Least-privilege baseline

RISK **Role too broad**

Compare actions to task

PROOF **Effective permissions**


Expected actions only

CONTROL READING

The Built-in role state is valid only when Role definition produces Effective permissions; Role too broad requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Custom role — control contract

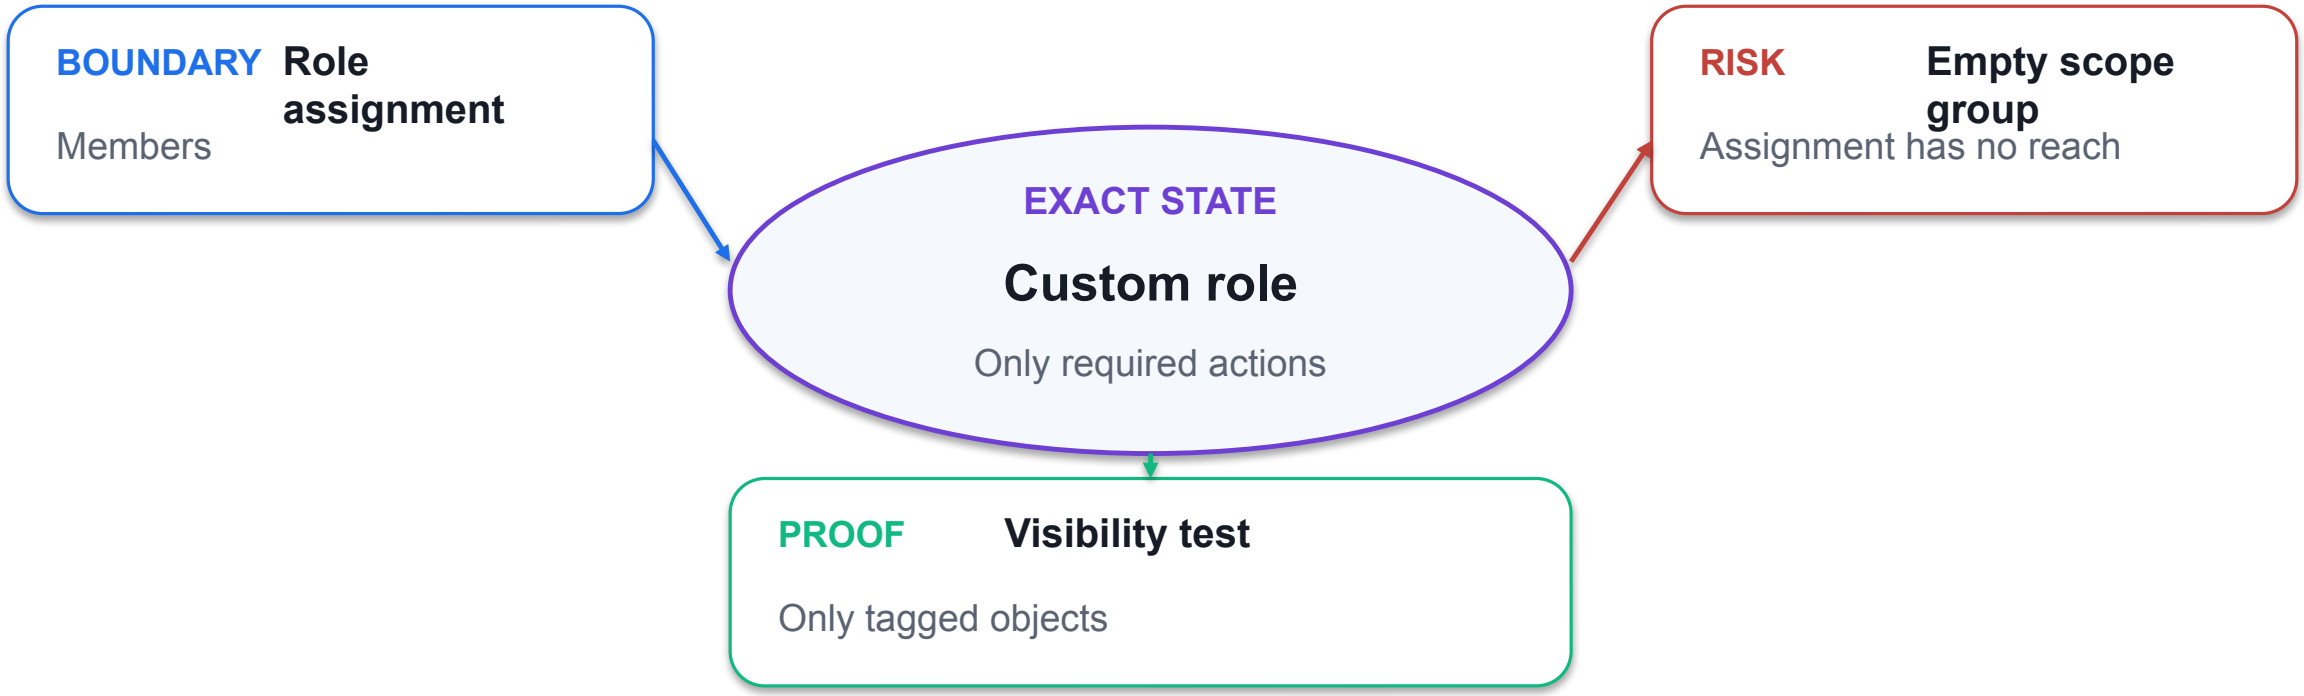

CONTROL READING

The Custom role state is valid only when Role assignment produces Visibility test; Empty scope group requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Scope tag — control contract

1

BOUNDARY **Scope group**

Objects administered

2

EXACT STATE **Scope tag**

Regional visibility boundary

3

CONTROL RISK **Tag mismatch**

Object not visible

4

PROOF **Approval record**

Requester and approver

CONTROL READING

The Scope tag state is valid only when Scope group produces Approval record; Tag mismatch requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Multi-admin approval — control contract

1	BOUNDARY	Scope tag	Objects visible
2	EXACT STATE	Multi-admin approval	Second-person control
3	CONTROL RISK	Approval deadlock	Maintain approver coverage
4	PROOF	Audit event	Role change trace

CONTROL READING

The Multi-admin approval state is valid only when Scope tag produces Audit event; Approval deadlock requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Delegate Intune administration safely — failure and recovery

1 Role too broad

Compare actions to task

DIAGNOSE → RECOVER

2 Empty scope group

Assignment has no reach

DIAGNOSE → RECOVER

3 Tag mismatch

Object not visible

DIAGNOSE → RECOVER

4 Approval deadlock

Maintain approver coverage

DIAGNOSE → RECOVER

DECISION RULE

Treat the symptom as a pointer to a failed stage; collect evidence before changing policy.

© 2026 Tertiary Infotech Academy Pte Ltd

Role too broad — diagnostic trace


1	SIGNAL	**Role too broad**
2	BOUNDARY	Role assignment
3	SUSPECT STATE	Built-in role
4	RECOVERY	Compare actions to task
5	ACCEPTANCE	**Effective permissions**

EVIDENCE THRESHOLD

Accept the recovery only when Effective permissions shows Expected actions only; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Empty scope group — diagnostic trace

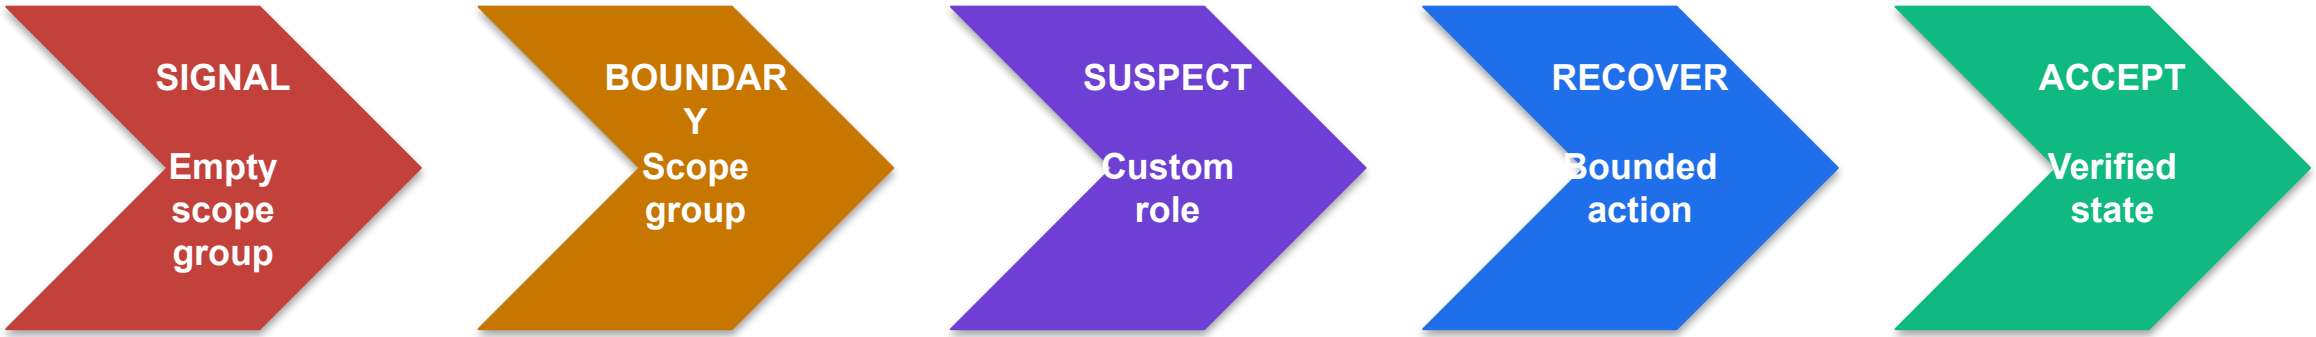

RECOVERY ACTION Assignment has no reach


ACCEPTANCE PROOF Only tagged objects

EVIDENCE THRESHOLD

Accept the recovery only when Visibility test shows Only tagged objects; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Tag mismatch — diagnostic trace

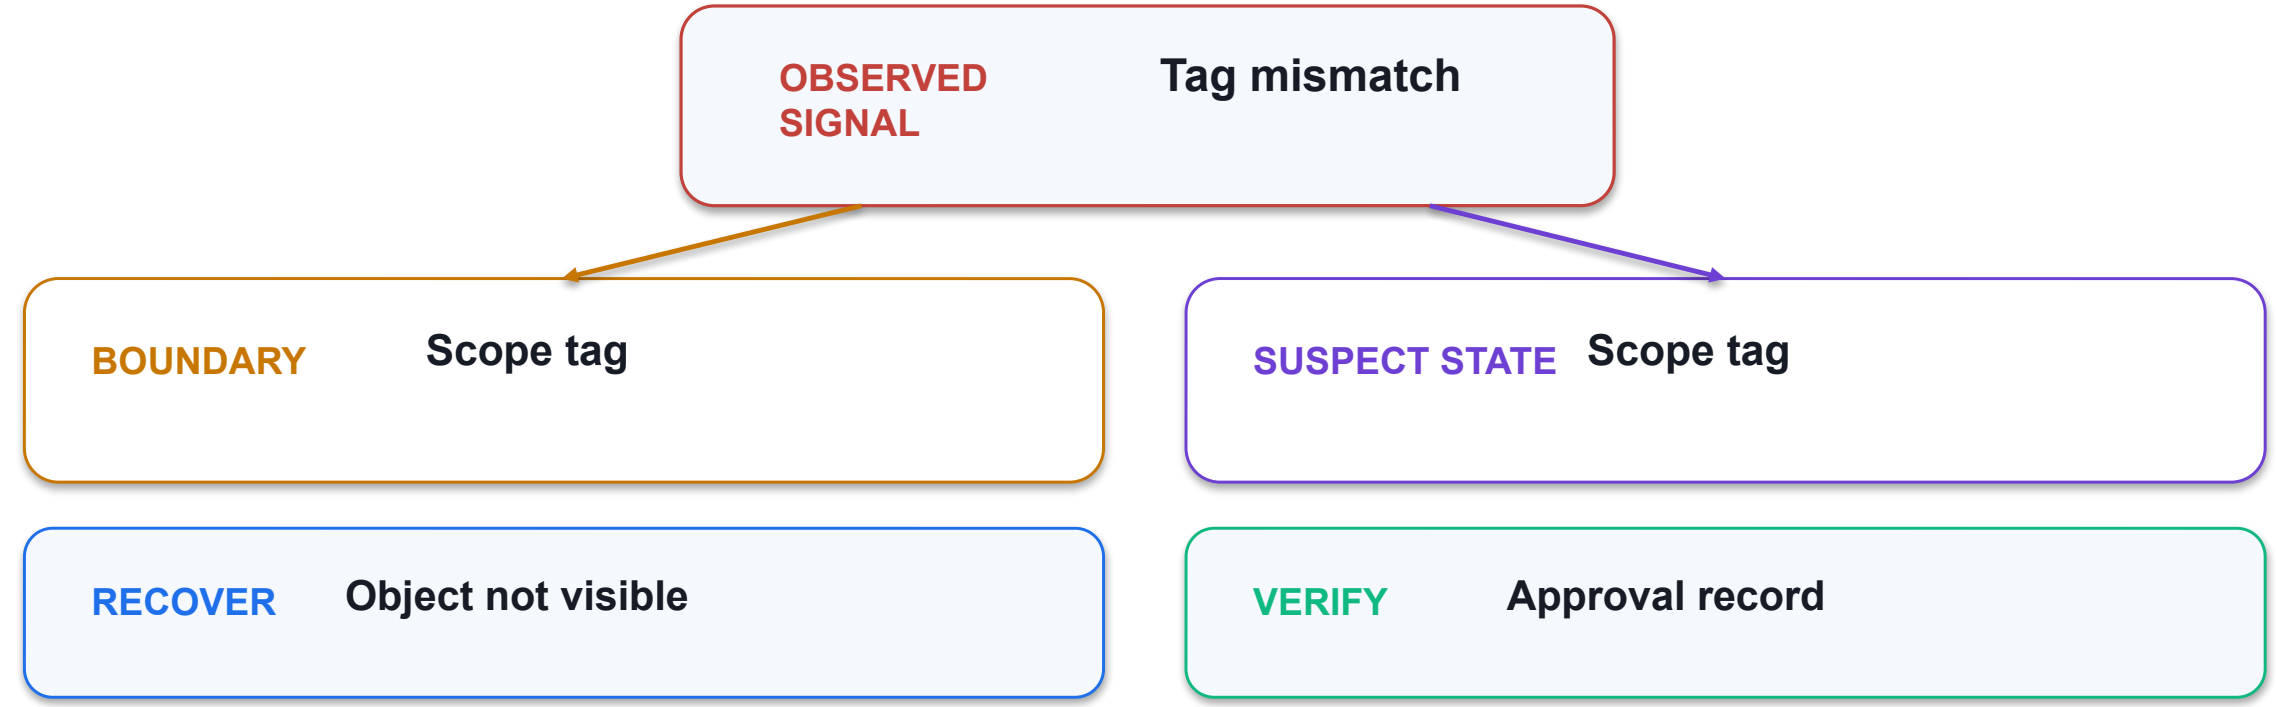


EVIDENCE THRESHOLD

Accept the recovery only when Approval record shows Requester and approver; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Approval deadlock — diagnostic trace

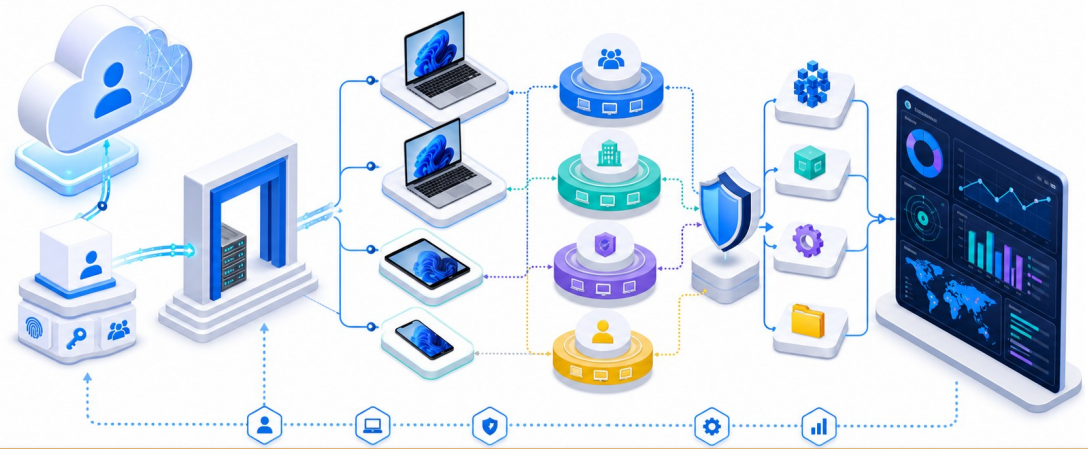

BOUNDARY · Audit log | SUSPECT · Multi-admin approval

SIGNAL Approval deadlock

RECOVERY Maintain approver coverage

PROOF Audit event

EVIDENCE THRESHOLD

Accept the recovery only when Audit event shows Role change trace; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Delegate Intune administration safely — verification evidence

✓ **Effective permissions**	Expected actions only
✓ **Visibility test**	Only tagged objects
✓ **Approval record**	Requester and approver
✓ **Audit event**	Role change trace

LAB 1

Evidence standard

Capture the configured state, the observed result, the timestamp or correlation ID, and the interpretation.


PASS = REPRODUCIBLE

PRACTICE BRIDGE

Full click paths, commands, expected outputs and troubleshooting are in the Learner Guide and the individual lab folder.

© 2026 Tertiary Infotech Academy Pte Ltd

Evaluate compliance before access — mechanism

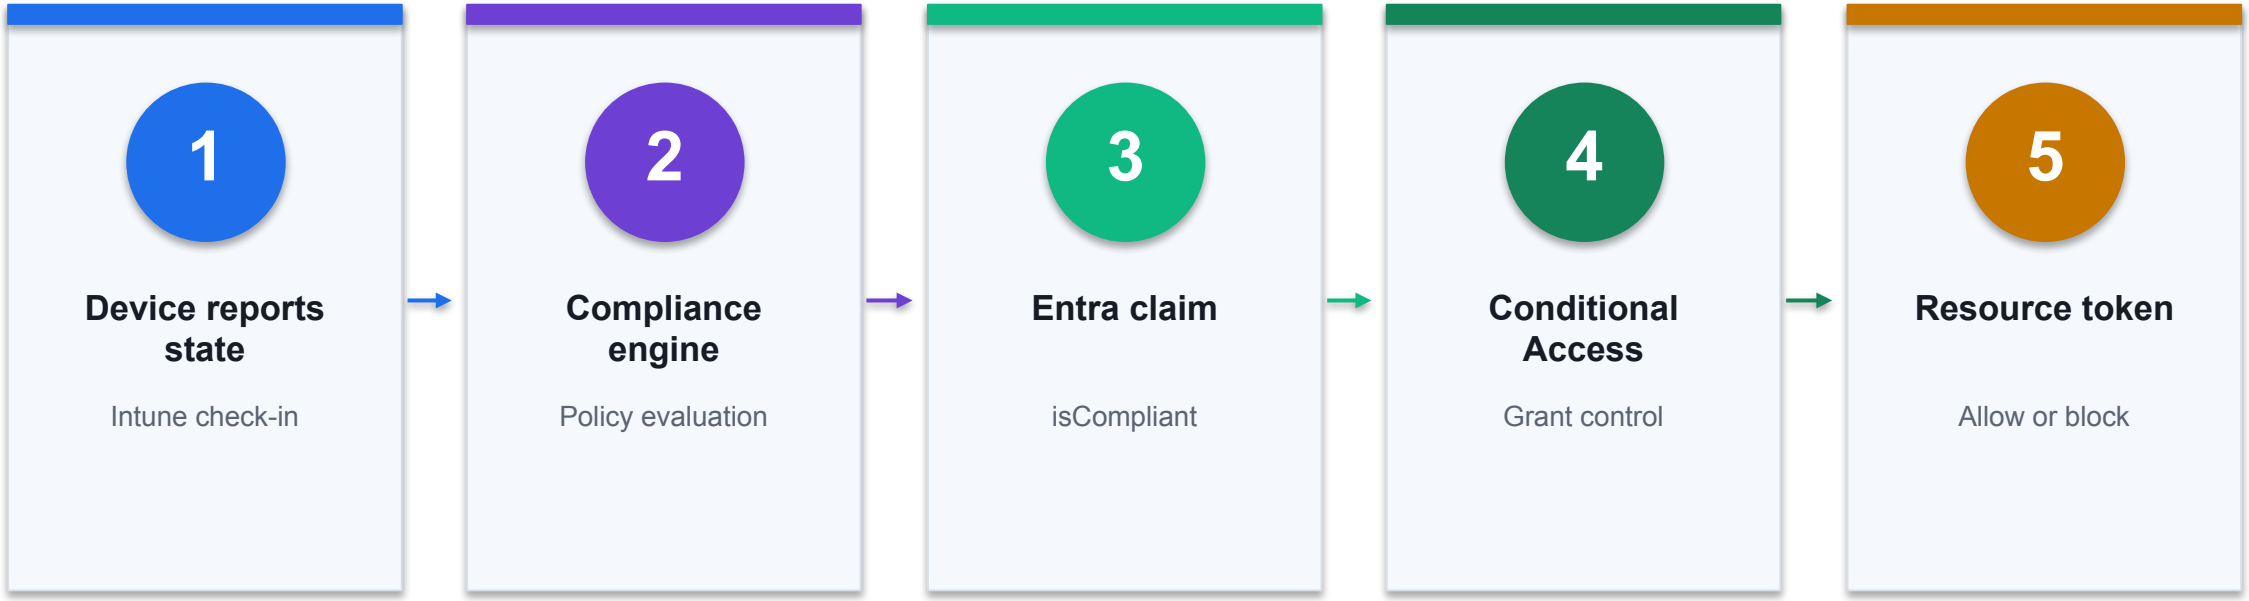

CONTROL POINT

Inspect the evidence at every transition; the first missing state is the most useful troubleshooting boundary. Lab 3 carries the full procedure.

© 2026 Tertiary Infotech Academy Pte Ltd

Evaluate compliance before access — exact contract

1 Grace period

Controlled remediation window

FIELD / STATE

2 Mark noncompliant

Immediate or delayed

FIELD / STATE

3 CA grant

Require compliant device

FIELD / STATE

4 Break-glass

Exclude emergency account


FIELD / STATE

DECISION RULE

Configuration is a contract: names, values, scope and resulting state must all agree.

© 2026 Tertiary Infotech Academy Pte Ltd

Grace period — control contract

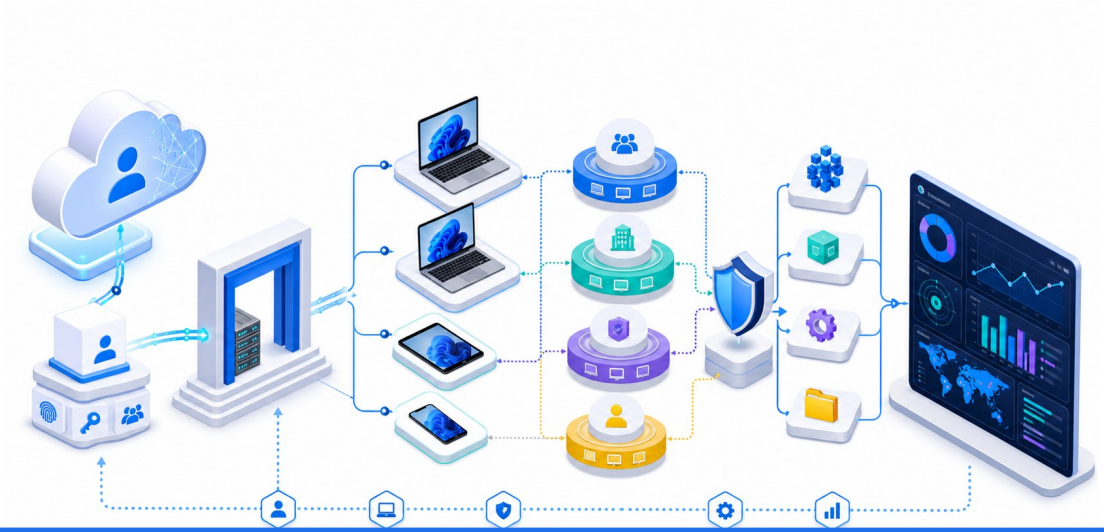

BOUNDARY · Device reports state

STATE **Grace period**

Controlled remediation window

RISK **Not evaluated**

Check assignment and check-in

PROOF **Per-setting status**


Failed condition

CONTROL READING

The Grace period state is valid only when Device reports state produces Per-setting status; Not evaluated requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Mark noncompliant — control contract

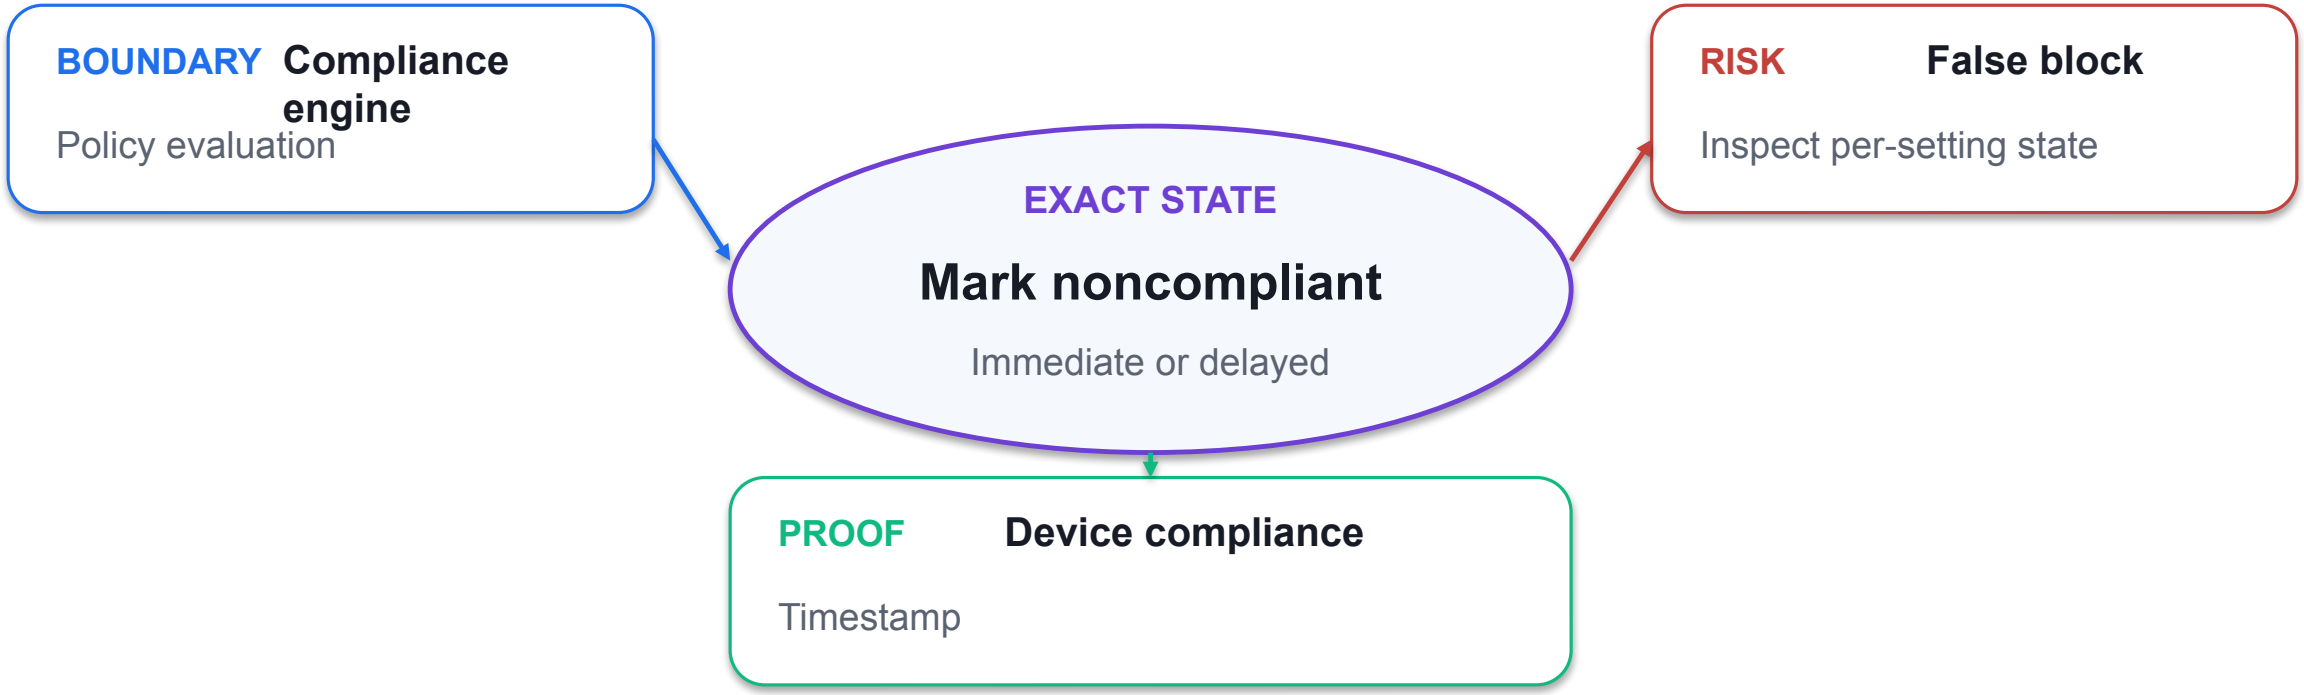

CONTROL READING

The Mark noncompliant state is valid only when Compliance engine produces Device compliance; False block requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

CA grant — control contract

1

BOUNDARY **Entra claim**

isCompliant

2

EXACT STATE **CA grant**

Require compliant device

3

CONTROL RISK **CA lockout**

Use report-only first

4

PROOF **CA result**

Grant control detail

CONTROL READING

The CA grant state is valid only when Entra claim produces CA result; CA lockout requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Break-glass — control contract

1	BOUNDARY	Conditional Access	Grant control
2	EXACT STATE	Break-glass	Exclude emergency account
3	CONTROL RISK	Stale signal	Force sync and reassess
4	PROOF	Sign-in correlation	User + device + policy

CONTROL READING

The Break-glass state is valid only when Conditional Access produces Sign-in correlation; Stale signal requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Evaluate compliance before access — failure and recovery

1 Not evaluated

Check assignment and check-in

DIAGNOSE → RECOVER

2 False block

Inspect per-setting state

DIAGNOSE → RECOVER

3 CA lockout

Use report-only first

DIAGNOSE → RECOVER

4 Stale signal

Force sync and reassess

DIAGNOSE → RECOVER

DECISION RULE

Treat the symptom as a pointer to a failed stage; collect evidence before changing policy.

© 2026 Tertiary Infotech Academy Pte Ltd

Not evaluated — diagnostic trace


1 SIGNAL	**Not evaluated**
2 BOUNDARY	Compliance engine
3 SUSPECT STATE	Grace period
4 RECOVERY	Check assignment and check-in
5 ACCEPTANCE	**Per-setting status**

EVIDENCE THRESHOLD

Accept the recovery only when Per-setting status shows Failed condition; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

False block — diagnostic trace

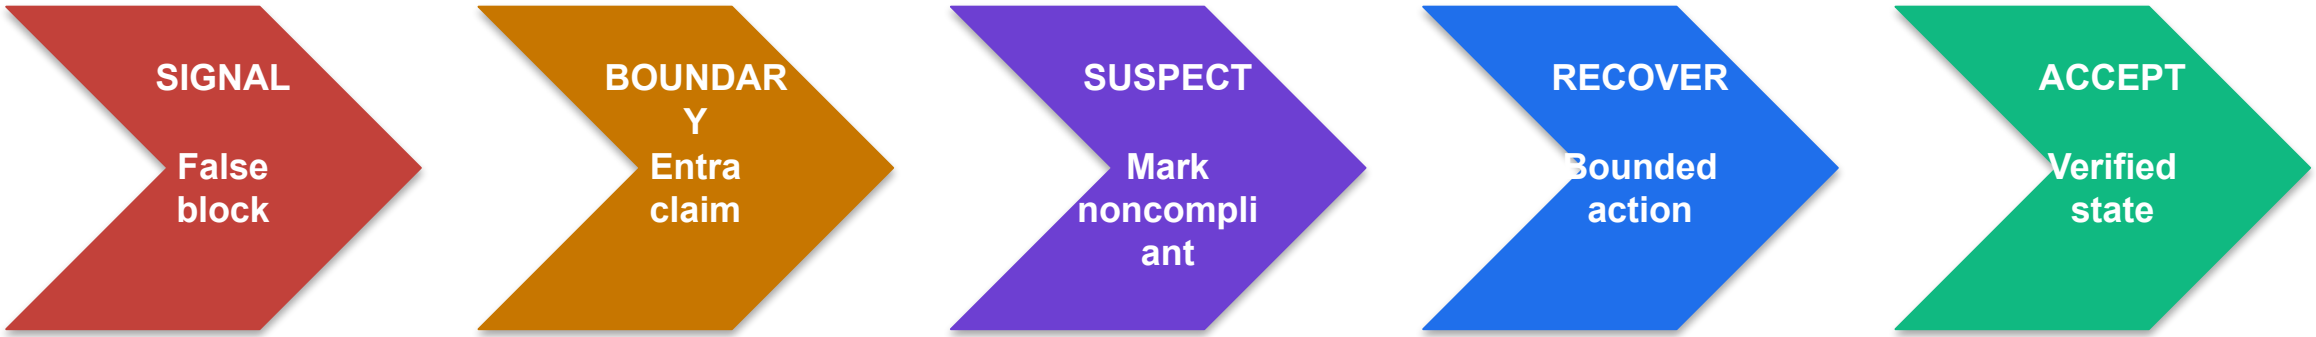


RECOVERY ACTION	Inspect per-setting state
ACCEPTANCE PROOF	Timestamp

EVIDENCE THRESHOLD

Accept the recovery only when Device compliance shows Timestamp; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

CA lockout — diagnostic trace

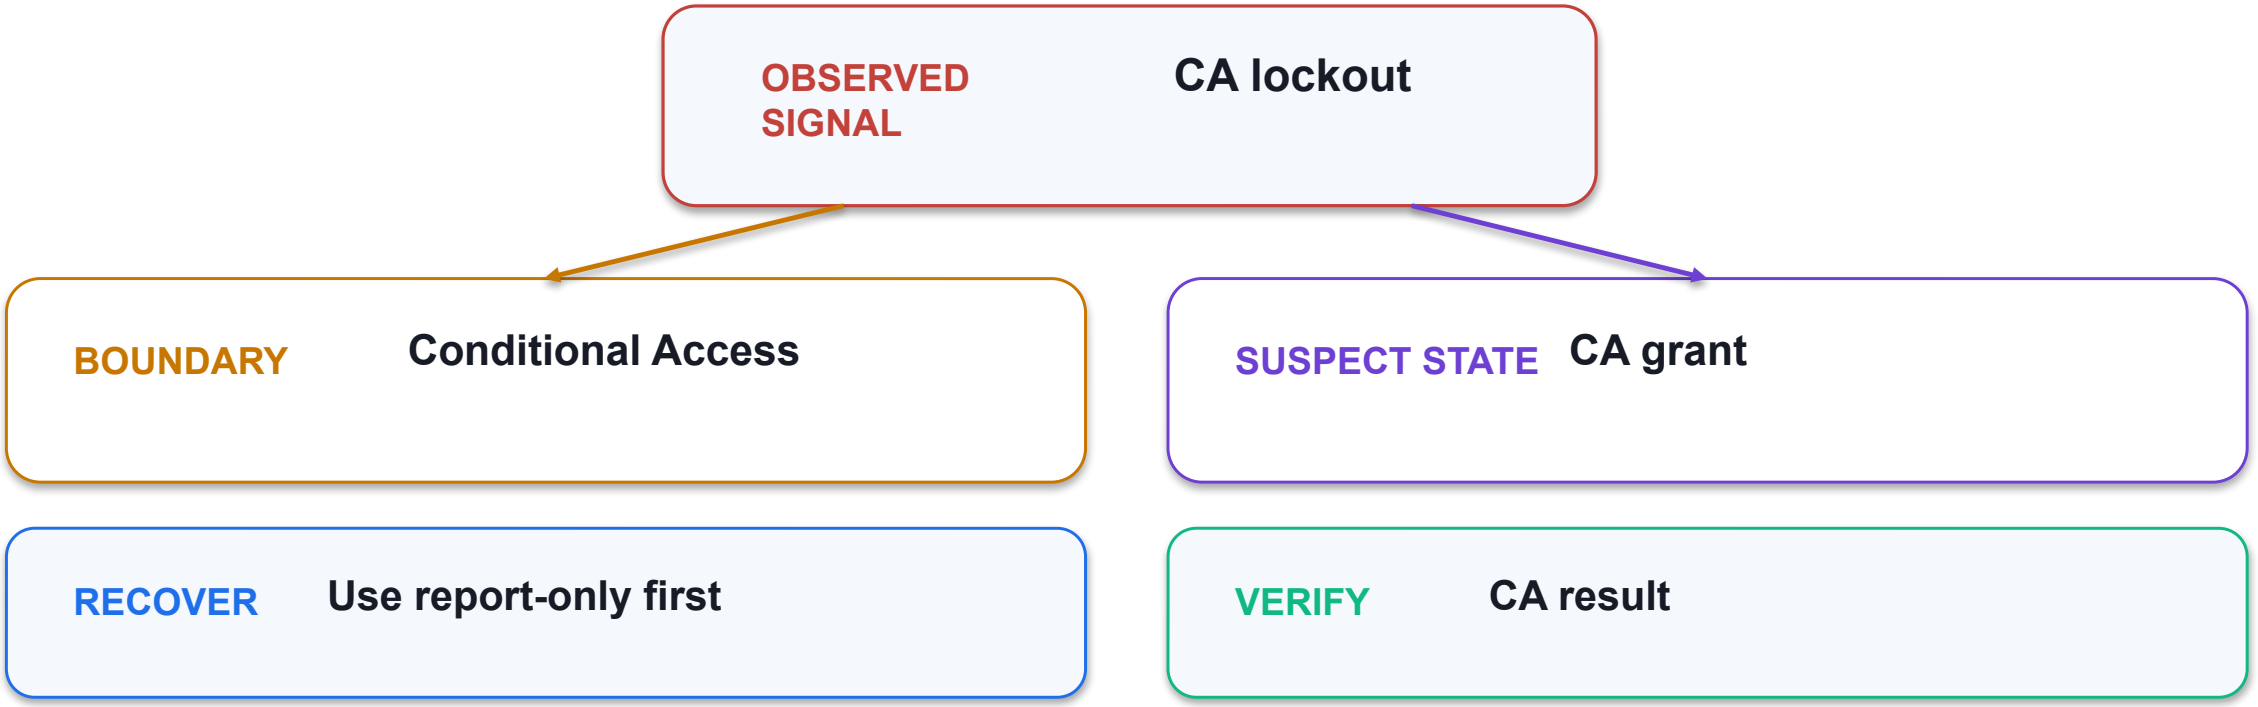


EVIDENCE THRESHOLD

Accept the recovery only when CA result shows Grant control detail; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Stale signal — diagnostic trace

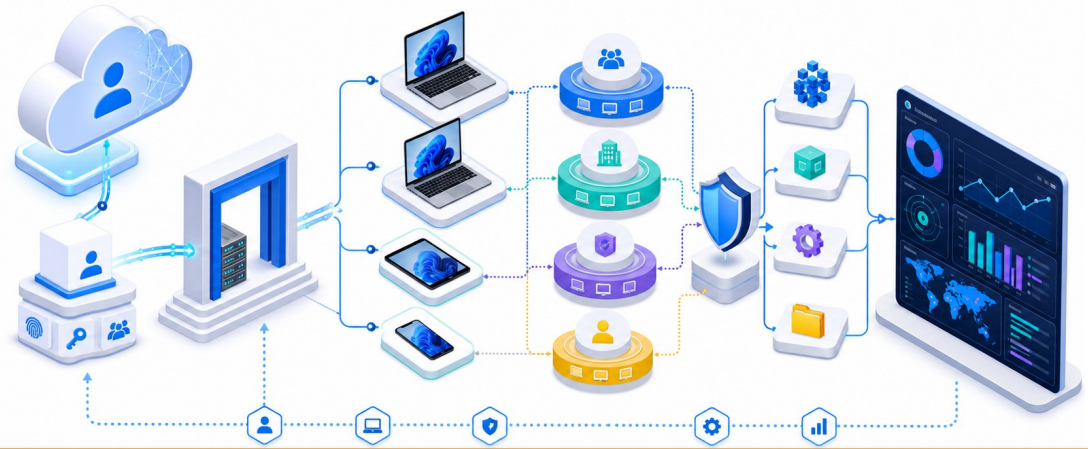

BOUNDARY · Resource token | SUSPECT · Break-glass

SIGNAL Stale signal

RECOVERY Force sync and reassess

PROOF Sign-in correlation

EVIDENCE THRESHOLD

Accept the recovery only when Sign-in correlation shows User + device + policy; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Evaluate compliance before access — verification evidence

✓ **Per-setting status**	Failed condition
✓ **Device compliance**	Timestamp
✓ **CA result**	Grant control detail
✓ **Sign-in correlation**	User + device + policy

LAB 3

Evidence standard

Capture the configured state, the observed result, the timestamp or correlation ID, and the interpretation.

PASS = REPRODUCIBLE

PRACTICE BRIDGE

Full click paths, commands, expected outputs and troubleshooting are in the Learner Guide and the individual lab folder.


© 2026 Tertiary Infotech Academy Pte Ltd

DAY 1

Lunch break

Return at the time announced by the trainer.

Deploy Windows Hello for Business and Windows LAPS — mechanism

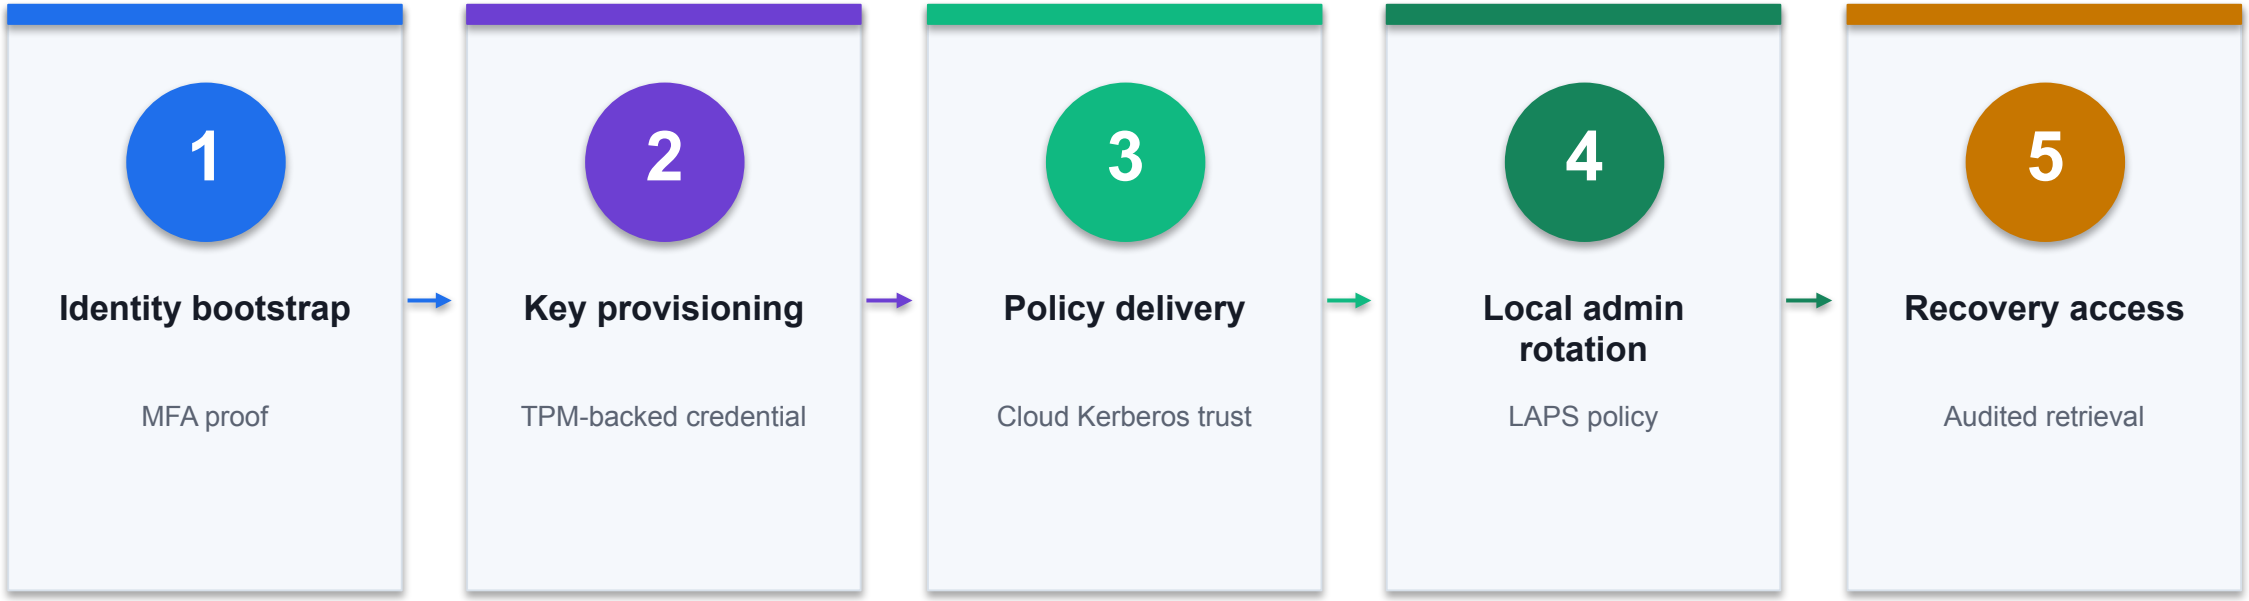

CONTROL POINT

Inspect the evidence at every transition; the first missing state is the most useful troubleshooting boundary. Lab 3 carries the full procedure.

© 2026 Tertiary Infotech Academy Pte Ltd

Deploy Windows Hello for Business and Windows LAPS — exact contract

1 WHfB trust

Cloud Kerberos trust

FIELD / STATE

2 PIN policy

Length and anti-spoofing

FIELD / STATE

3 LAPS backup

Microsoft Entra ID

FIELD / STATE

4 Rotation

After-use password reset


FIELD / STATE

DECISION RULE

Configuration is a contract: names, values, scope and resulting state must all agree.

© 2026 Tertiary Infotech Academy Pte Ltd

WHfB trust — control contract

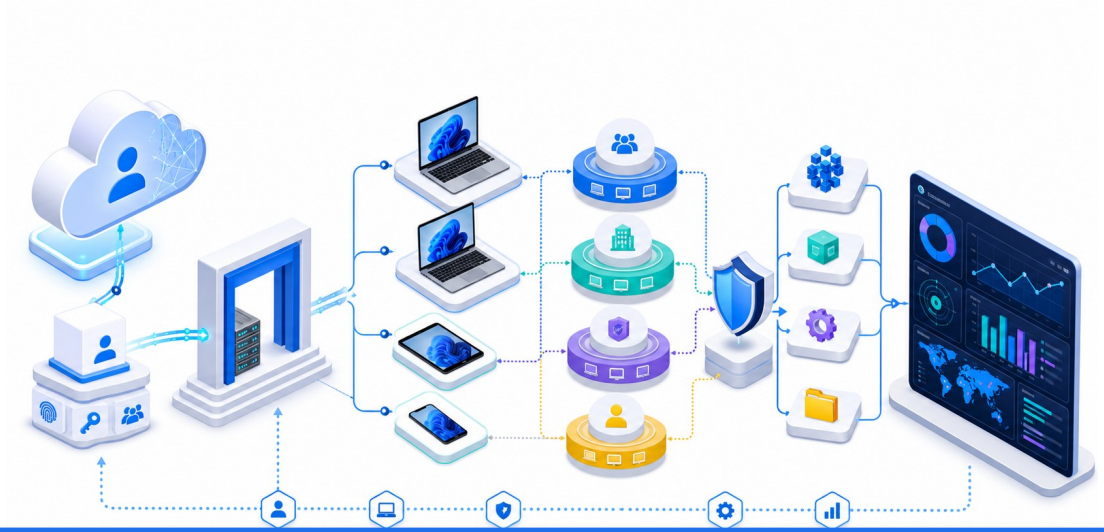

BOUNDARY · Identity bootstrap

STATE **WHfB trust**

Cloud Kerberos trust

RISK **Provisioning blocked**

Check tenant and device prerequisites

PROOF **WHfB container**


certutil -DeleteHelloContainer for reset

CONTROL READING

The WHfB trust state is valid only when Identity bootstrap produces WHfB container; Provisioning blocked requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

PIN policy — control contract

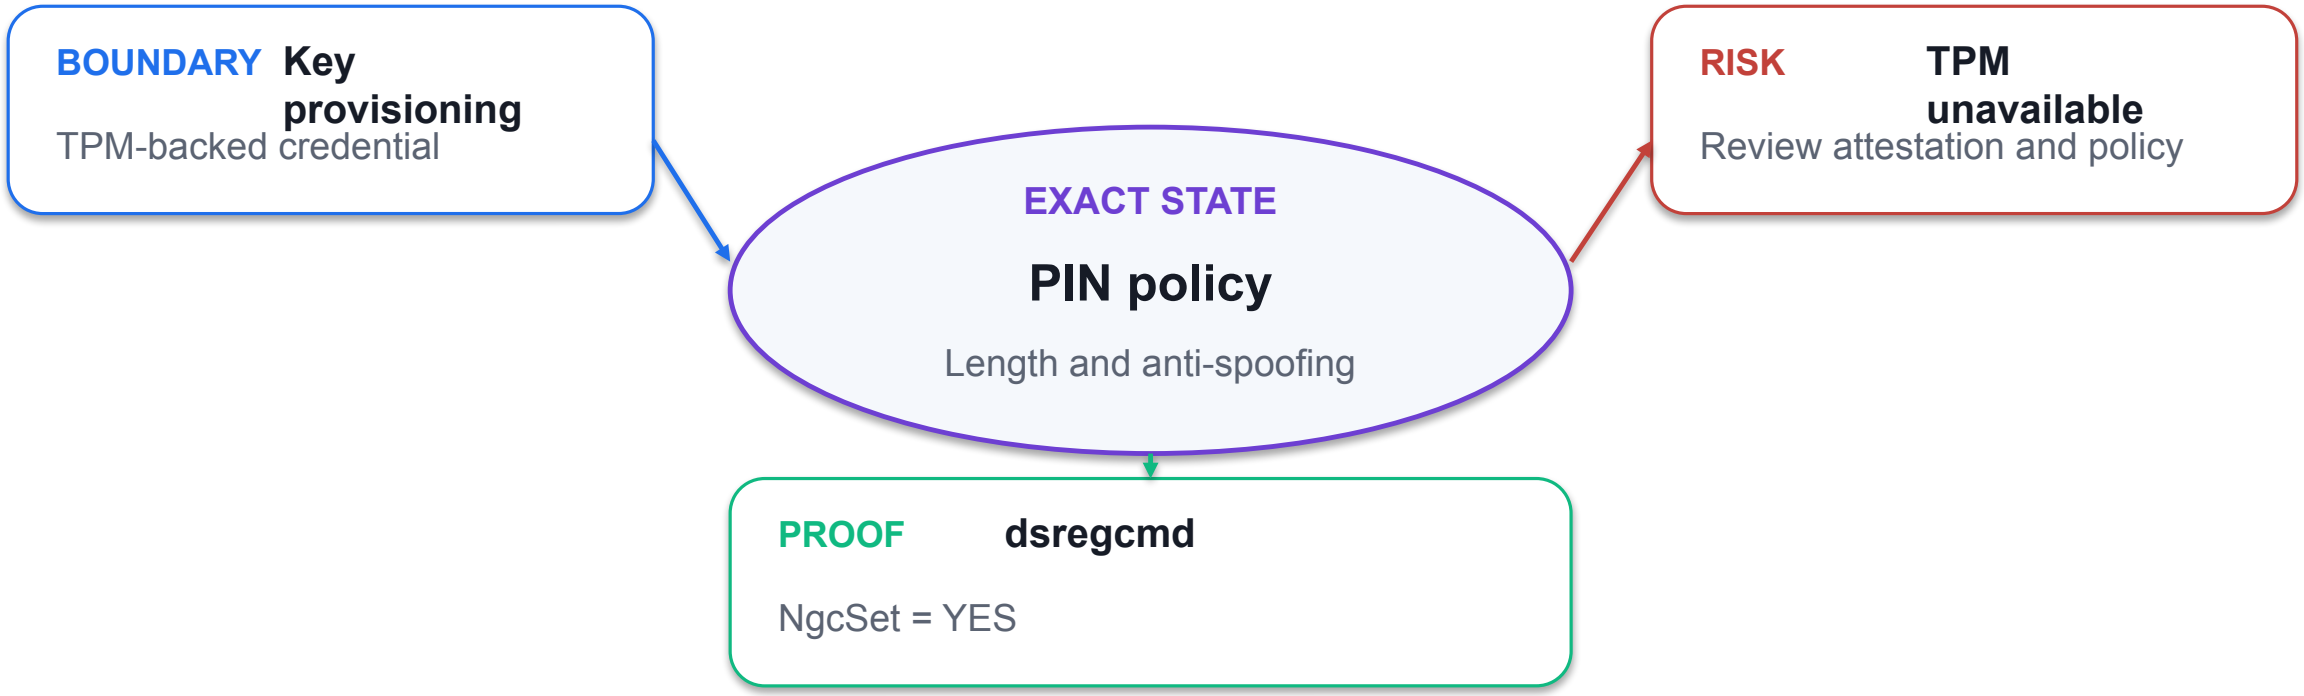

CONTROL READING

The PIN policy state is valid only when Key provisioning produces dsregcmd; TPM unavailable requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

LAPS backup — control contract

1

BOUNDARY **Policy delivery**

Cloud Kerberos trust

2

EXACT STATE **LAPS backup**

Microsoft Entra ID

3

CONTROL RISK **Password not backed up**

Inspect LAPS event log

4

PROOF **LAPS status**

Password backup timestamp

CONTROL READING

The LAPS backup state is valid only when Policy delivery produces LAPS status; Password not backed up requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Rotation — control contract

1	BOUNDARY	Local admin rotation	LAPS policy
2	EXACT STATE	Rotation	After-use password reset
3	CONTROL RISK	Overprivileged retrieval	Restrict role and audit
4	PROOF	Audit log	Password retrieval actor

CONTROL READING

The Rotation state is valid only when Local admin rotation produces Audit log; Overprivileged retrieval requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Deploy Windows Hello for Business and Windows LAPS — failure and recovery

1 Provisioning blocked

Check tenant and device prerequisites

DIAGNOSE → RECOVER

2 TPM unavailable

Review attestation and policy

DIAGNOSE → RECOVER

3 Password not backed up

Inspect LAPS event log

DIAGNOSE → RECOVER

4 Overprivileged retrieval

Restrict role and audit

DIAGNOSE → RECOVER

DECISION RULE

Treat the symptom as a pointer to a failed stage; collect evidence before changing policy.

© 2026 Tertiary Infotech Academy Pte Ltd

Provisioning blocked — diagnostic trace

1	SIGNAL	**Provisioning blocked**
2	BOUNDARY	Key provisioning
3	SUSPECT STATE	WHfB trust
4	RECOVERY	Check tenant and device prerequisites
5	ACCEPTANCE	**WHfB container**

EVIDENCE THRESHOLD

Accept the recovery only when WHfB container shows certutil -DeleteHelloContainer for reset; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

TPM unavailable — diagnostic trace



RECOVERY ACTION Review attestation and policy


ACCEPTANCE PROOF NgcSet = YES

EVIDENCE THRESHOLD

Accept the recovery only when dsregcmd shows NgcSet = YES; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Password not backed up — diagnostic trace

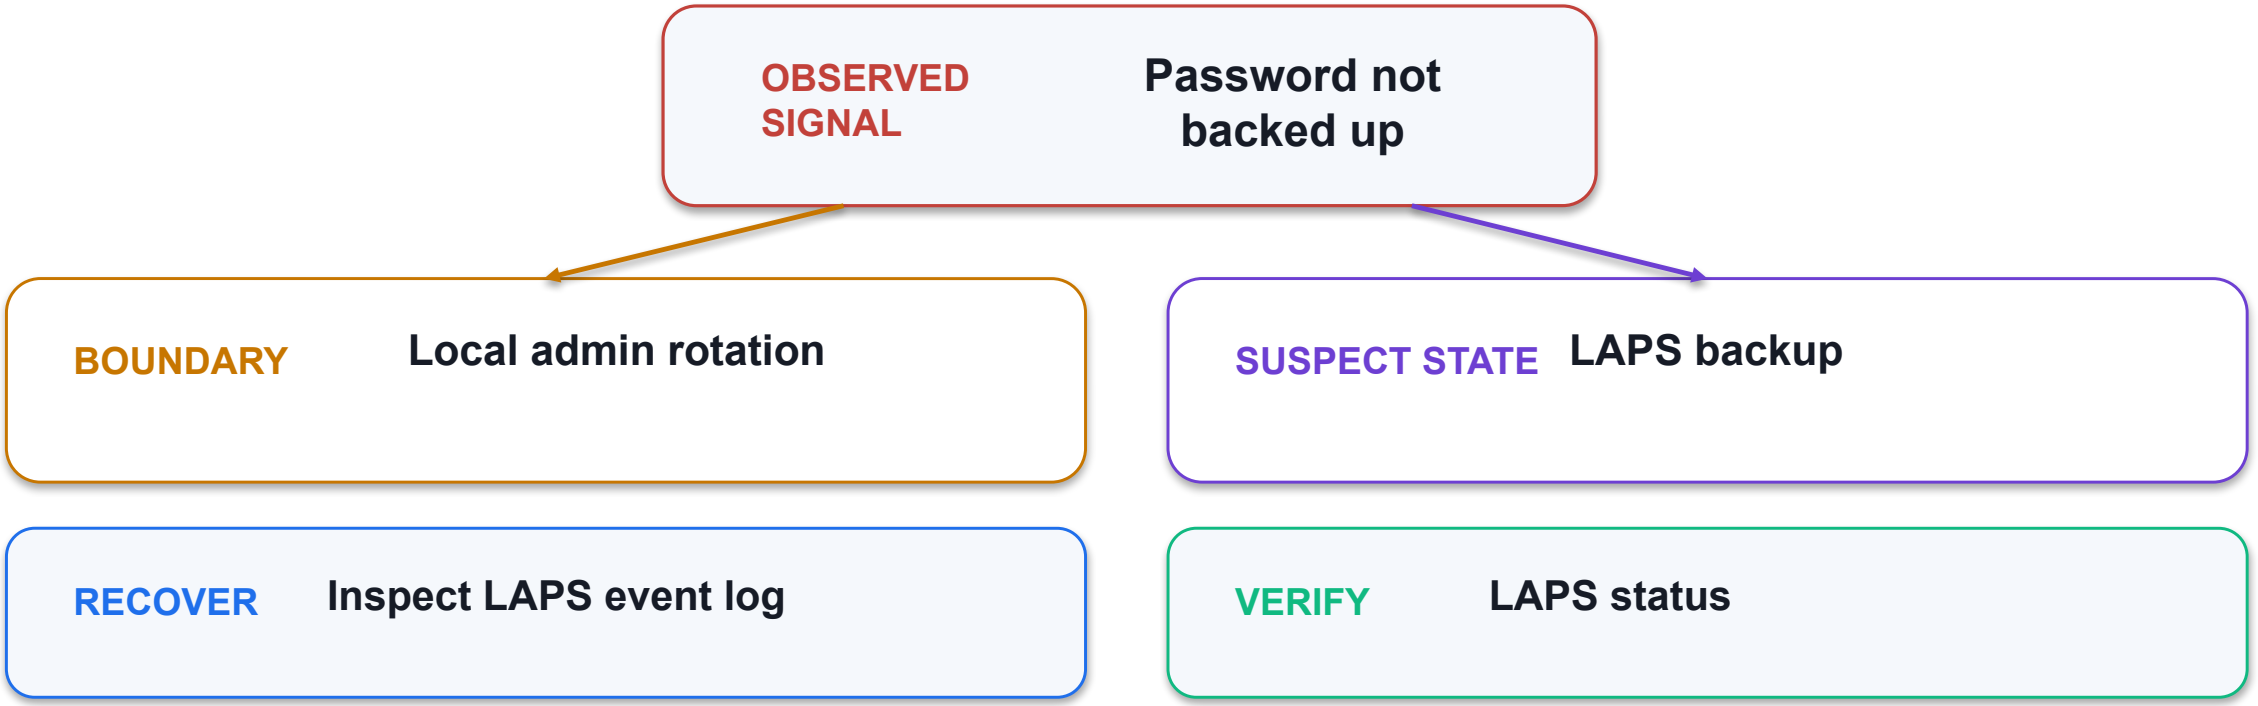

EVIDENCE THRESHOLD

Accept the recovery only when LAPS status shows Password backup timestamp; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Overprivileged retrieval — diagnostic trace



BOUNDARY · Recovery access | SUSPECT · Rotation

SIGNAL Overprivileged retrieval

RECOVERY Restrict role and audit

PROOF Audit log

EVIDENCE THRESHOLD

Accept the recovery only when Audit log shows Password retrieval actor; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Deploy Windows Hello for Business and Windows LAPS — verification evidence

WHfB container	certutil -DeleteHelloContainer for reset
dsregcmd	NgcSet = YES
LAPS status	Password backup timestamp
Audit log	Password retrieval actor

LAB 3

Evidence standard

Capture the configured state, the observed result, the timestamp or correlation ID, and the interpretation.


PASS = REPRODUCIBLE

PRACTICE BRIDGE

Full click paths, commands, expected outputs and troubleshooting are in the Learner Guide and the individual lab folder.

© 2026 Tertiary Infotech Academy Pte Ltd

Troubleshoot enrollment as an evidence chain — mechanism

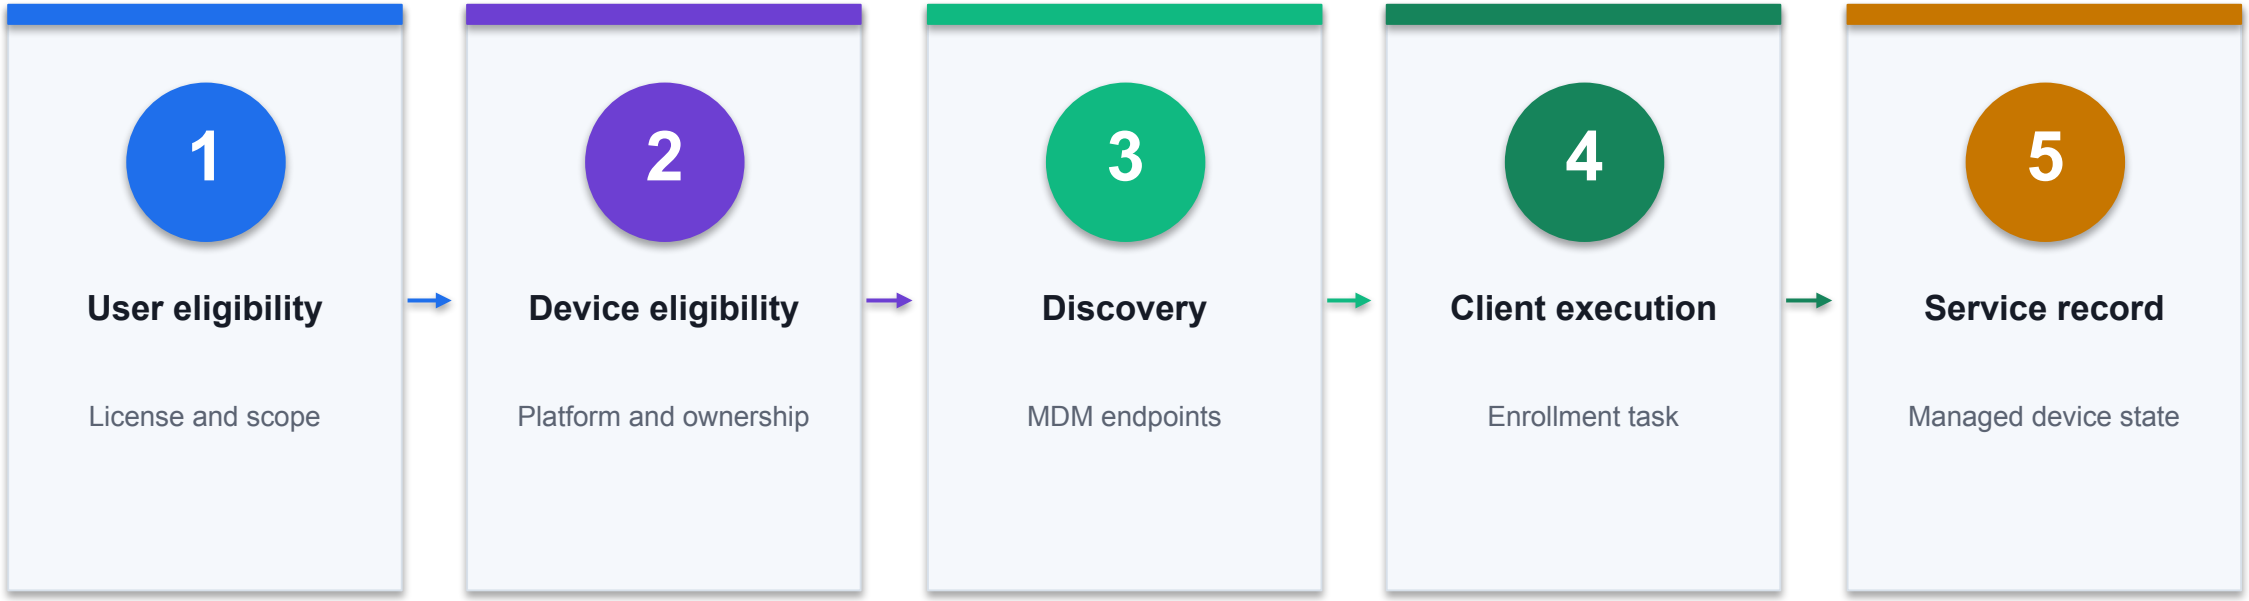

CONTROL POINT

Inspect the evidence at every transition; the first missing state is the most useful troubleshooting boundary. Lab 2 carries the full procedure.

© 2026 Tertiary Infotech Academy Pte Ltd

Troubleshoot enrollment as an evidence chain — exact contract

1 Local report

MDMDiagReport.html

FIELD / STATE

2 Event channel

Admin + Operational logs

FIELD / STATE

3 Service view

Troubleshooting + support

FIELD / STATE

4 Network test

Required endpoint reachability


FIELD / STATE

DECISION RULE

Configuration is a contract: names, values, scope and resulting state must all agree.

© 2026 Tertiary Infotech Academy Pte Ltd

Local report — control contract

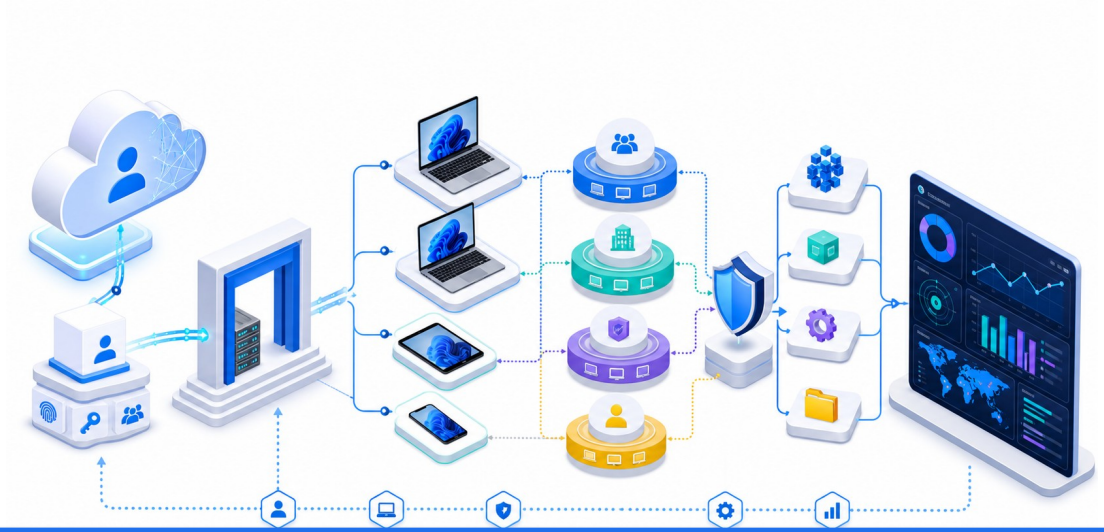

BOUNDARY · User eligibility

STATE **Local report**

MDMDiagReport.html

RISK **0x80180014**

Personal Windows blocked

PROOF **Error code**


Exact HRESULT

CONTROL READING

The Local report state is valid only when User eligibility produces Error code; 0x80180014 requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Event channel — control contract

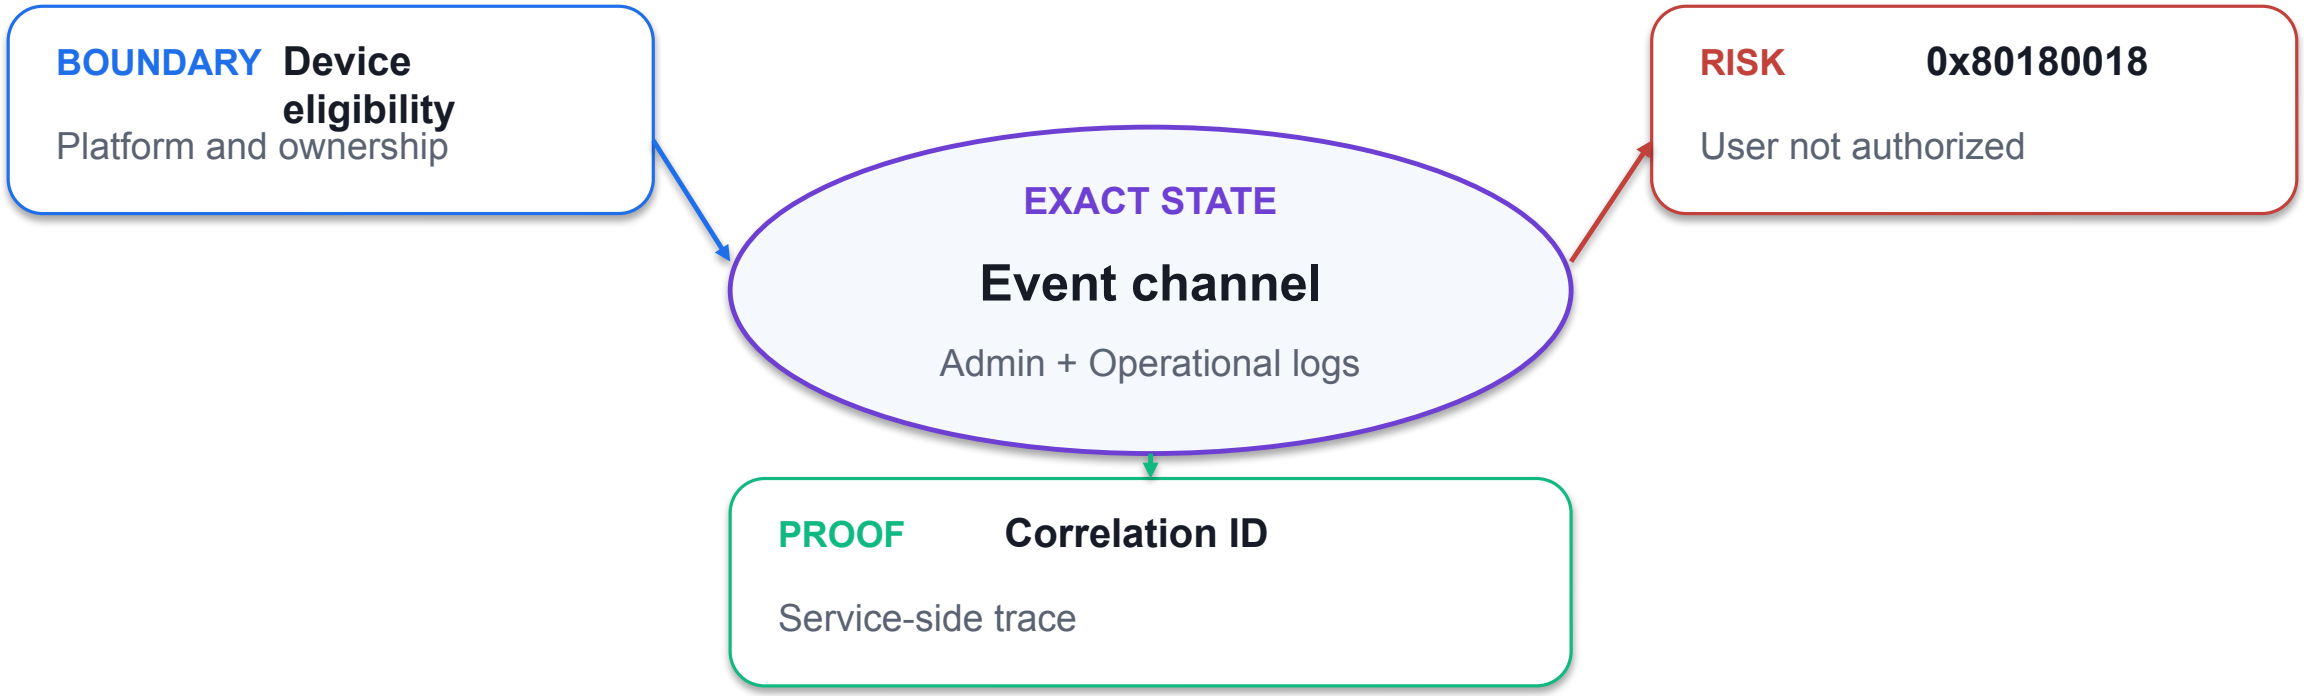

CONTROL READING

The Event channel state is valid only when Device eligibility produces Correlation ID; 0x80180018 requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Service view — control contract

1

BOUNDARY **Discovery**

MDM endpoints

2

EXACT STATE **Service view**

Troubleshooting + support

3

CONTROL RISK **0x801c03f3**

Device registration problem

4

PROOF **Enrollment log**

First failing stage

CONTROL READING

The Service view state is valid only when Discovery produces Enrollment log; 0x801c03f3 requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Network test — control contract

1	BOUNDARY	Client execution	Enrollment task
2	EXACT STATE	Network test	Required endpoint reachability
3	CONTROL RISK	Duplicate serial	Retire stale record
4	PROOF	Remediation retest	New successful record

CONTROL READING

The Network test state is valid only when Client execution produces Remediation retest; Duplicate serial requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Troubleshoot enrollment as an evidence chain — failure and recovery

1 **0x80180014**

Personal Windows blocked

DIAGNOSE → RECOVER

2 **0x80180018**

User not authorized

DIAGNOSE → RECOVER

3 **0x801c03f3**

Device registration problem

DIAGNOSE → RECOVER

4 **Duplicate serial**

Retire stale record

DIAGNOSE → RECOVER

DECISION RULE

Treat the symptom as a pointer to a failed stage; collect evidence before changing policy.

© 2026 Tertiary Infotech Academy Pte Ltd

0x80180014 — diagnostic trace

1	SIGNAL	**0x80180014**
2	BOUNDARY	Device eligibility
3	SUSPECT STATE	Local report
4	RECOVERY	Personal Windows blocked
5	ACCEPTANCE	**Error code**

EVIDENCE THRESHOLD

Accept the recovery only when Error code shows Exact HRESULT; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

0x80180018 — diagnostic trace



RECOVERY ACTION — User not authorized


ACCEPTANCE PROOF — Service-side trace

EVIDENCE THRESHOLD

Accept the recovery only when Correlation ID shows Service-side trace; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

0x801c03f3 — diagnostic trace

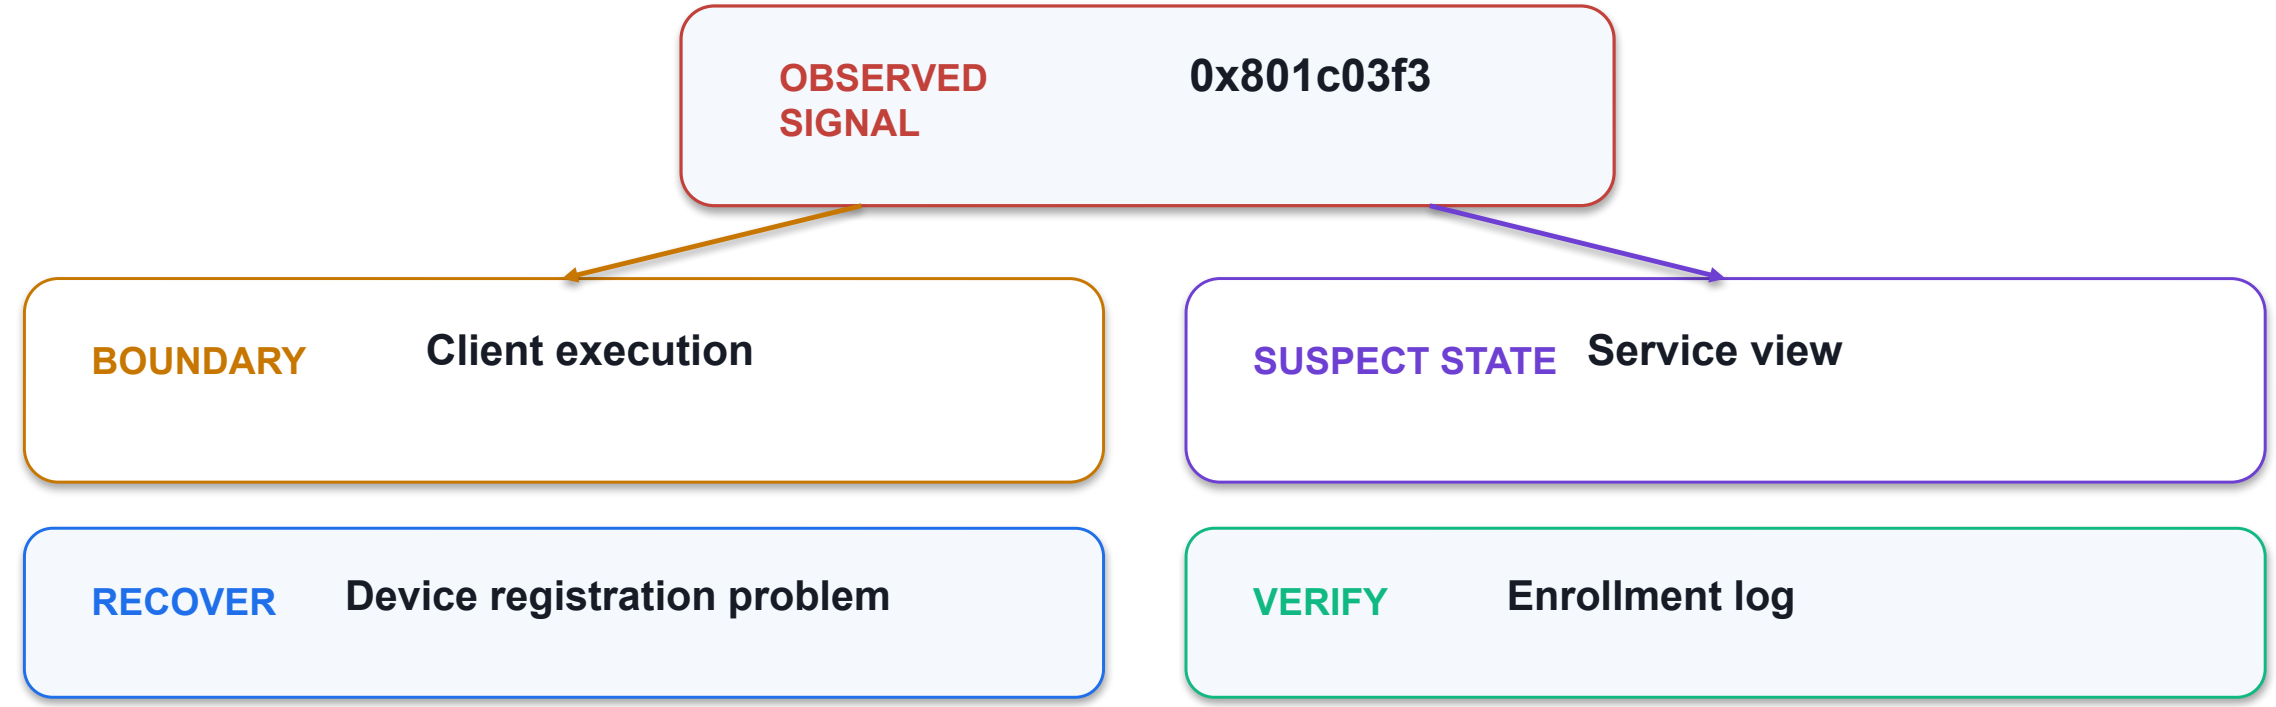


EVIDENCE THRESHOLD

Accept the recovery only when Enrollment log shows First failing stage; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Duplicate serial — diagnostic trace

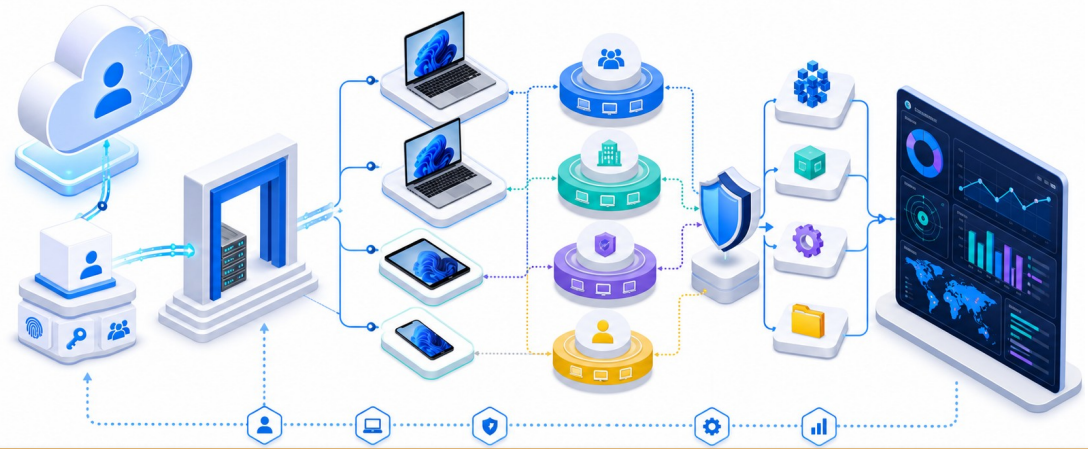

BOUNDARY · Service record | SUSPECT · Network test

SIGNAL Duplicate serial

RECOVERY Retire stale record

PROOF Remediation retest

EVIDENCE THRESHOLD

Accept the recovery only when Remediation retest shows New successful record; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Troubleshoot enrollment as an evidence chain — verification evidence

✓ **Error code**	Exact HRESULT
✓ **Correlation ID**	Service-side trace
✓ **Enrollment log**	First failing stage
✓ **Remediation retest**	New successful record

LAB 2

Evidence standard

Capture the configured state, the observed result, the timestamp or correlation ID, and the interpretation.

PASS = REPRODUCIBLE

PRACTICE BRIDGE

Full click paths, commands, expected outputs and troubleshooting are in the Learner Guide and the individual lab folder.

© 2026 Tertiary Infotech Academy Pte Ltd

HANDS-ON · 110 MIN

Lab 1: Entra device identity, dynamic groups and delegated administration

SCENARIO Contoso must implement the control, prove the observed state, diagnose one seeded failure, and retain an auditable evidence pack.



YOU'LL PRODUCE

Validated join-state evidence pack, dynamic-group rule, scoped role assignment and audit trace

© 2026 Tertiary Infotech Academy Pte Ltd

LO1 · K1 · K4 · A1 · A3

Lab 1 — acceptance and evidence

Configured state

Policy/profile/assignment values are visible and scoped to the intended cohort.

EVIDENCE REQUIRED

Observed result

The device, app or identity shows the expected service and client-side outcome.

EVIDENCE REQUIRED

Failure diagnosis

The seeded issue is tied to an error, log, report or missing state—not a guess.

EVIDENCE REQUIRED

Recovery proof

A post-change retest demonstrates the corrected state with timestamp/correlation evidence.

EVIDENCE REQUIRED

SUBMISSION

Save the evidence under labs/lab-01-entra-identity-groups-rbac/evidence/. Detailed steps are in the Learner Guide.

© 2026 Tertiary Infotech Academy Pte Ltd

HANDS-ON · 115 MIN

Lab 2: Multi-platform Intune enrollment and troubleshooting

SCENARIO

Contoso must implement the control, prove the observed state, diagnose one seeded failure, and retain an auditable evidence pack.



YOU'LL PRODUCE

Enrollment configuration matrix, MDMDiag evidence, error-code diagnosis and successful retest

© 2026 Tertiary Infotech Academy Pte Ltd

LO1 · K1 · K3 · A1 · A3

Lab 2 — acceptance and evidence

Configured state

Policy/profile/assignment values are visible and scoped to the intended cohort.

EVIDENCE REQUIRED

Observed result

The device, app or identity shows the expected service and client-side outcome.

EVIDENCE REQUIRED

Failure diagnosis

The seeded issue is tied to an error, log, report or missing state—not a guess.

EVIDENCE REQUIRED

Recovery proof

A post-change retest demonstrates the corrected state with timestamp/correlation evidence.

EVIDENCE REQUIRED

SUBMISSION

Save the evidence under labs/lab-02-intune-enrollment-troubleshooting/evidence/. Detailed steps are in the Learner Guide.

© 2026 Tertiary Infotech Academy Pte Ltd

RETRIEVE · DIAGNOSE · EXPLAIN

Day 1 technical recap

1 Checkpoint 1

- Choose the correct Microsoft Entra device identity
- Target policy with dynamic device groups

2 Checkpoint 2

- Configure Windows automatic enrollment
- Control multi-platform enrollment

3 Checkpoint 3

- Delegate Intune administration safely
- Evaluate compliance before access

4 Checkpoint 4

- Deploy Windows Hello for Business and Windows LAPS
- Troubleshoot enrollment as an evidence chain

REMEMBER

For each checkpoint, name the architecture boundary, exact contract, failure evidence and acceptance state.


© 2026 Tertiary Infotech Academy Pte Ltd

DAY 2 · 8 HOURS

Device deployment and configuration

Compliance and access; Autopilot; Windows 365; configuration targeting · 25–30% · LO1 · LO2 · K1 · K2 · A2 · A4

Manage and maintain devices — indicative operational signal

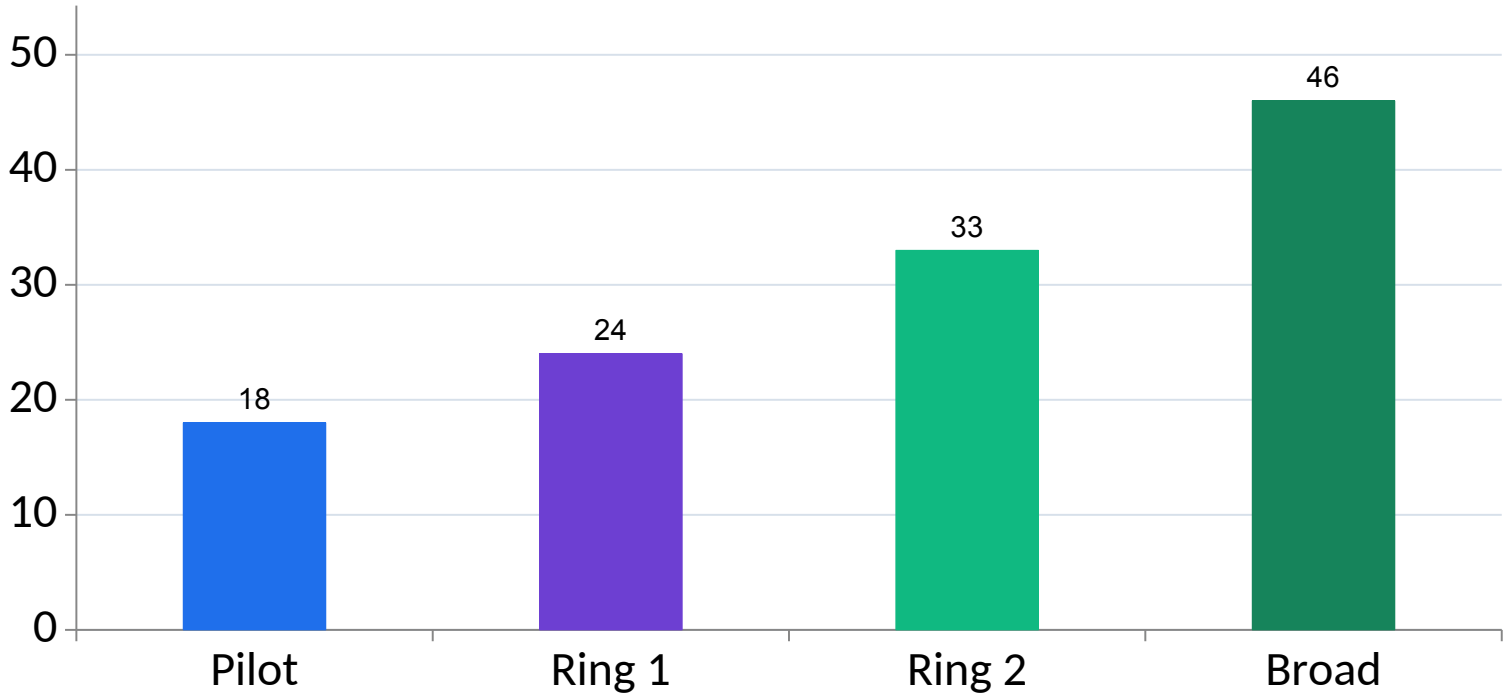

25–30%

CURRENT EXAM WEIGHT

LO1 · LO2

K1 · K2 · A2 · A4


Indicative teaching data

WHAT THE DATA SHOWS

Provisioning duration rises with payload breadth; use phase timing to locate delay.

© 2026 Tertiary Infotech Academy Pte Ltd

Select Windows Autopilot or device preparation — mechanism

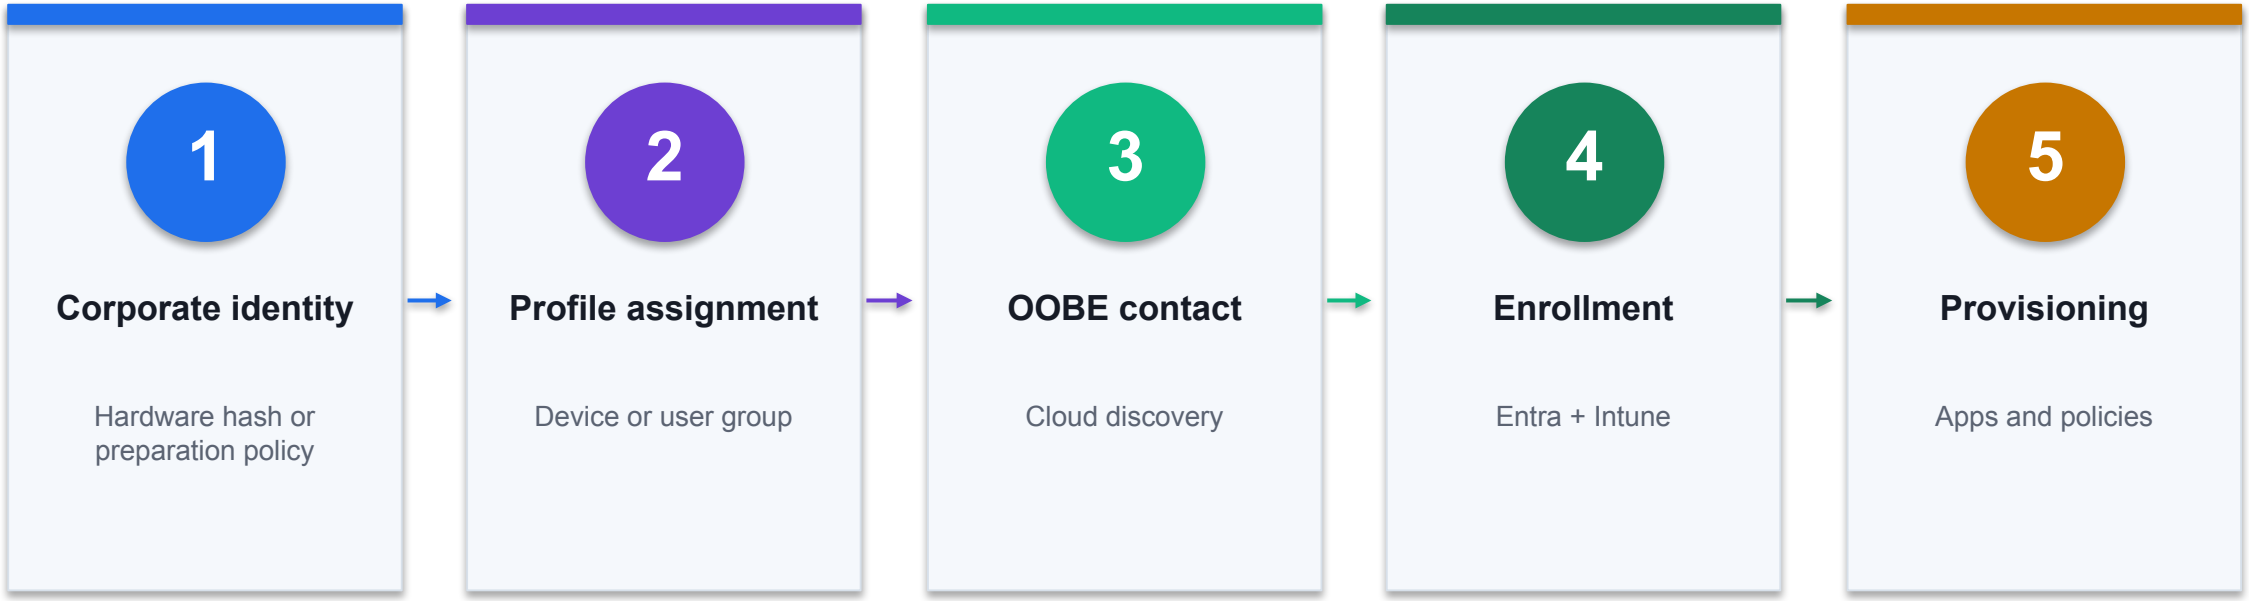

CONTROL POINT

Inspect the evidence at every transition; the first missing state is the most useful troubleshooting boundary. Lab 4 carries the full procedure.

© 2026 Tertiary Infotech Academy Pte Ltd

Select Windows Autopilot or device preparation — exact contract

1 Classic Autopilot

Registered corporate devices

FIELD / STATE

2 Device preparation

Streamlined cloud-native setup

FIELD / STATE

3 User-driven

Named-user productivity

FIELD / STATE

4 Self-deploying

Shared or kiosk scenario

FIELD / STATE

DECISION RULE

Configuration is a contract: names, values, scope and resulting state must all agree.

© 2026 Tertiary Infotech Academy Pte Ltd

Classic Autopilot — control contract



BOUNDARY · Corporate identity

STATE **Classic Autopilot**

Registered corporate devices

RISK **No profile**

Verify assignment state

PROOF **Deployment profile**


Assigned

CONTROL READING

The Classic Autopilot state is valid only when Corporate identity produces Deployment profile; No profile requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Device preparation — control contract

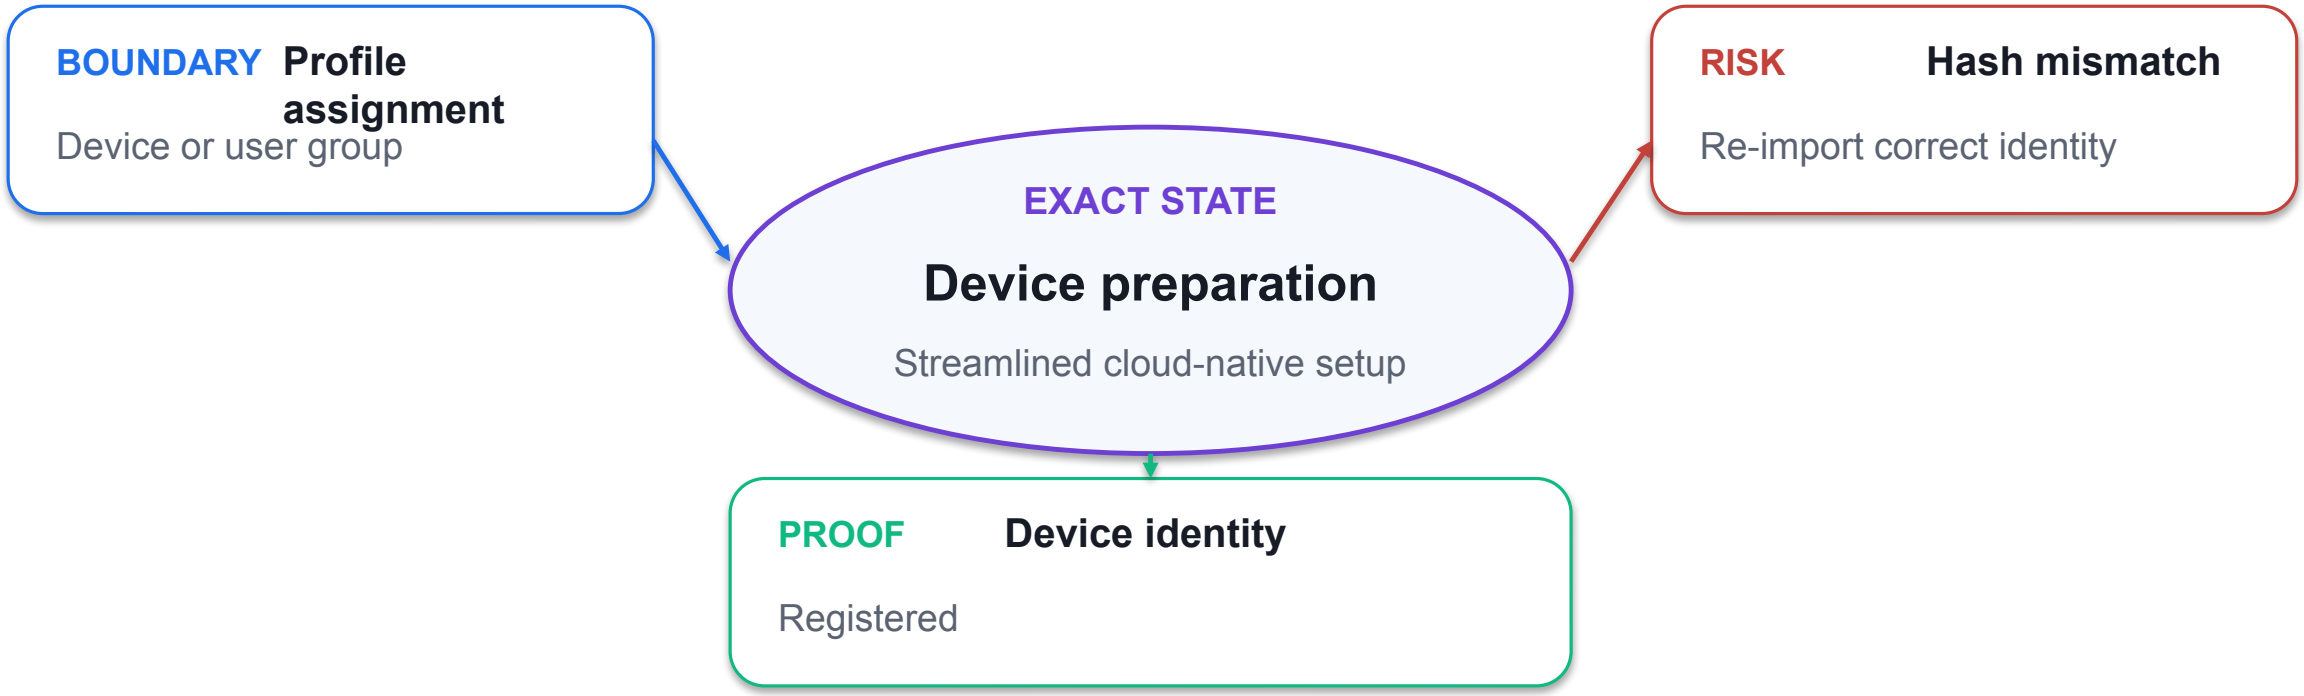

CONTROL READING

The Device preparation state is valid only when Profile assignment produces Device identity; Hash mismatch requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

User-driven — control contract

1

BOUNDARY **OOBE contact**

Cloud discovery

2

EXACT STATE **User-driven**

Named-user productivity

3

CONTROL RISK **Unsupported mode**

Check TPM and network

4

PROOF **Enrollment report**

Phase timings

CONTROL READING

The User-driven state is valid only when OOBE contact produces Enrollment report; Unsupported mode requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Self-deploying — control contract

1	BOUNDARY	Enrollment	Entra + Intune
2	EXACT STATE	Self-deploying	Shared or kiosk scenario
3	CONTROL RISK	Policy race	Use readiness reporting
4	PROOF	Final state	Entra joined and managed

CONTROL READING

The Self-deploying state is valid only when Enrollment produces Final state; Policy race requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Select Windows Autopilot or device preparation — failure and recovery

1 No profile

Verify assignment state

DIAGNOSE → RECOVER

2 Hash mismatch

Re-import correct identity

DIAGNOSE → RECOVER

3 Unsupported mode

Check TPM and network

DIAGNOSE → RECOVER

4 Policy race

Use readiness reporting

DIAGNOSE → RECOVER

DECISION RULE

Treat the symptom as a pointer to a failed stage; collect evidence before changing policy.

© 2026 Tertiary Infotech Academy Pte Ltd

No profile — diagnostic trace

1	SIGNAL	**No profile**
2	BOUNDARY	Profile assignment
3	SUSPECT STATE	Classic Autopilot
4	RECOVERY	Verify assignment state
5	ACCEPTANCE	**Deployment profile**

EVIDENCE THRESHOLD

Accept the recovery only when Deployment profile shows Assigned; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Hash mismatch — diagnostic trace



RECOVERY ACTION Re-import correct identity


ACCEPTANCE PROOF Registered

EVIDENCE THRESHOLD

Accept the recovery only when Device identity shows Registered; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Unsupported mode — diagnostic trace

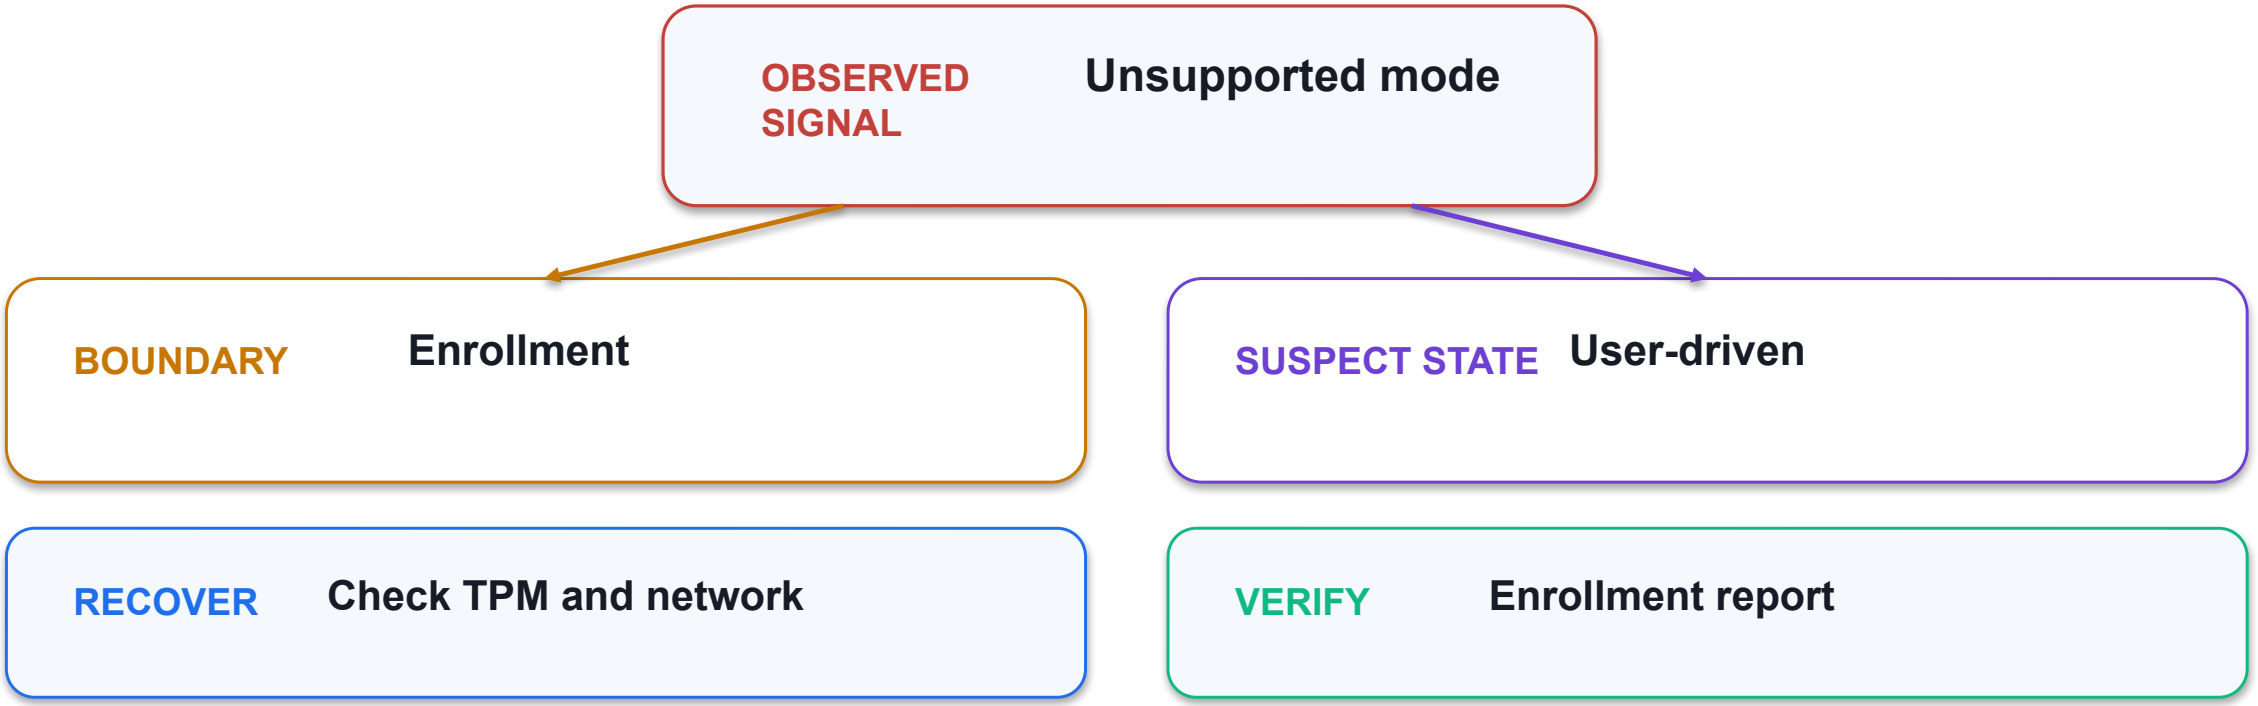

EVIDENCE THRESHOLD

Accept the recovery only when Enrollment report shows Phase timings; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Policy race — diagnostic trace



BOUNDARY · Provisioning | SUSPECT · Self-deploying

SIGNAL Policy race

RECOVERY Use readiness reporting

PROOF Final state

EVIDENCE THRESHOLD

Accept the recovery only when Final state shows Entra joined and managed; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Select Windows Autopilot or device preparation — verification evidence

✓ **Deployment profile**	Assigned
✓ **Device identity**	Registered
✓ **Enrollment report**	Phase timings
✓ **Final state**	Entra joined and managed

LAB 4

Evidence standard

Capture the configured state, the observed result, the timestamp or correlation ID, and the interpretation.


PASS = REPRODUCIBLE

PRACTICE BRIDGE

Full click paths, commands, expected outputs and troubleshooting are in the Learner Guide and the individual lab folder.

© 2026 Tertiary Infotech Academy Pte Ltd

Control Autopilot with ESP and naming — mechanism

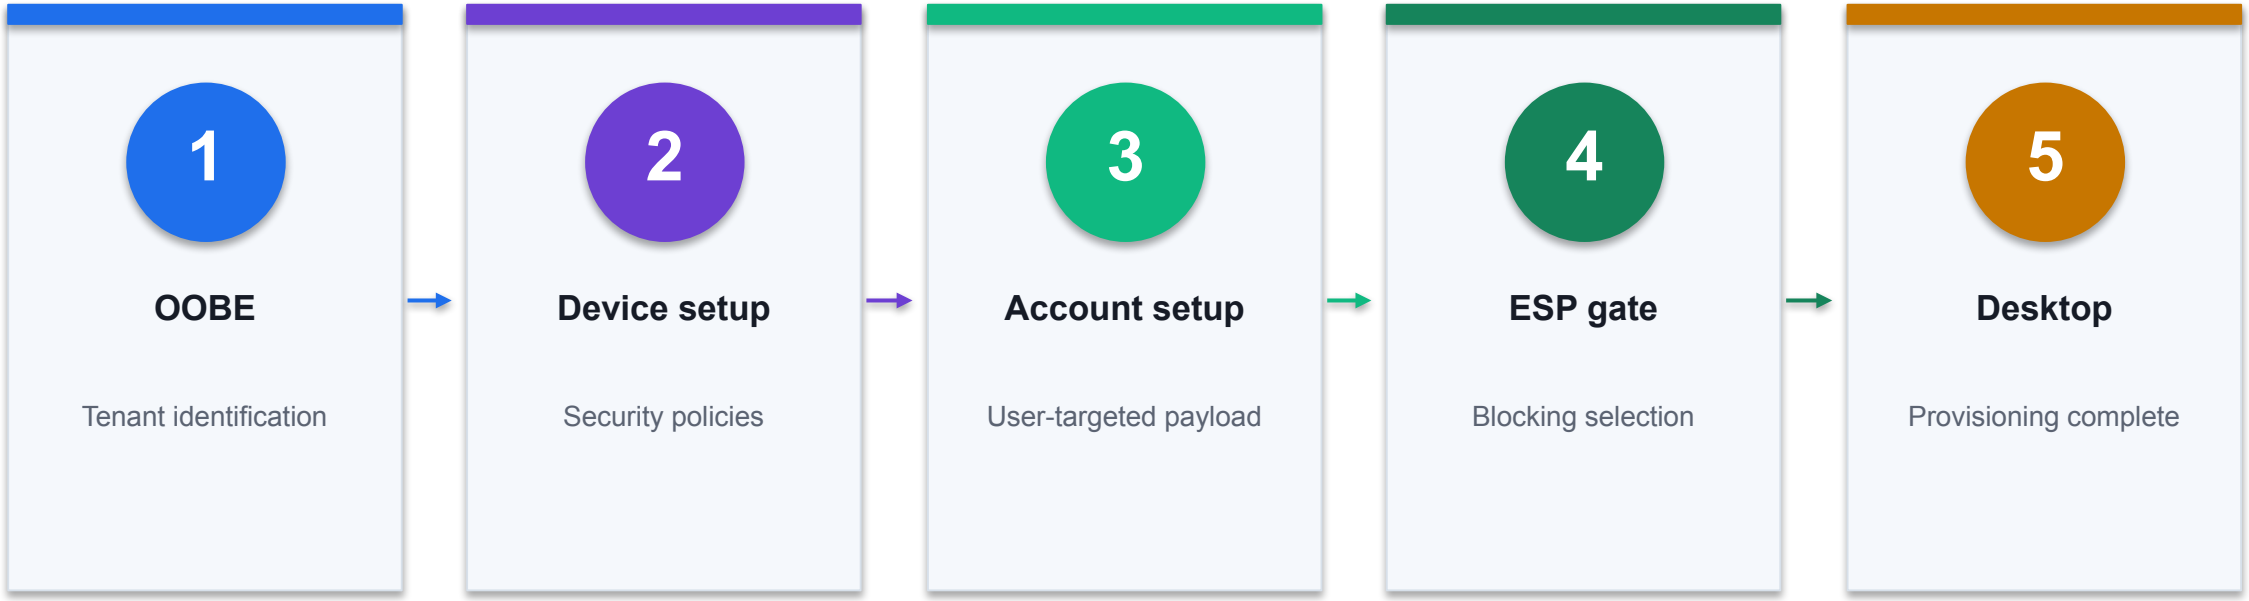

CONTROL POINT

Inspect the evidence at every transition; the first missing state is the most useful troubleshooting boundary. Lab 4 carries the full procedure.

© 2026 Tertiary Infotech Academy Pte Ltd

Control Autopilot with ESP and naming — exact contract

1 Name template

Prefix plus serial or random

FIELD / STATE

2 Block use

Until required apps install

FIELD / STATE

3 Timeout

Controlled failure route

FIELD / STATE

4 Tracking

Autopilot deployment report

FIELD / STATE

DECISION RULE

Configuration is a contract: names, values, scope and resulting state must all agree.

© 2026 Tertiary Infotech Academy Pte Ltd

Name template — control contract



BOUNDARY · OOBE

STATE **Name template**

Prefix plus serial or random

RISK **Infinite ESP**

Review blocking apps

PROOF **ESP phase**


Device or account

CONTROL READING

The Name template state is valid only when OOBE produces ESP phase; Infinite ESP requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Block use — control contract

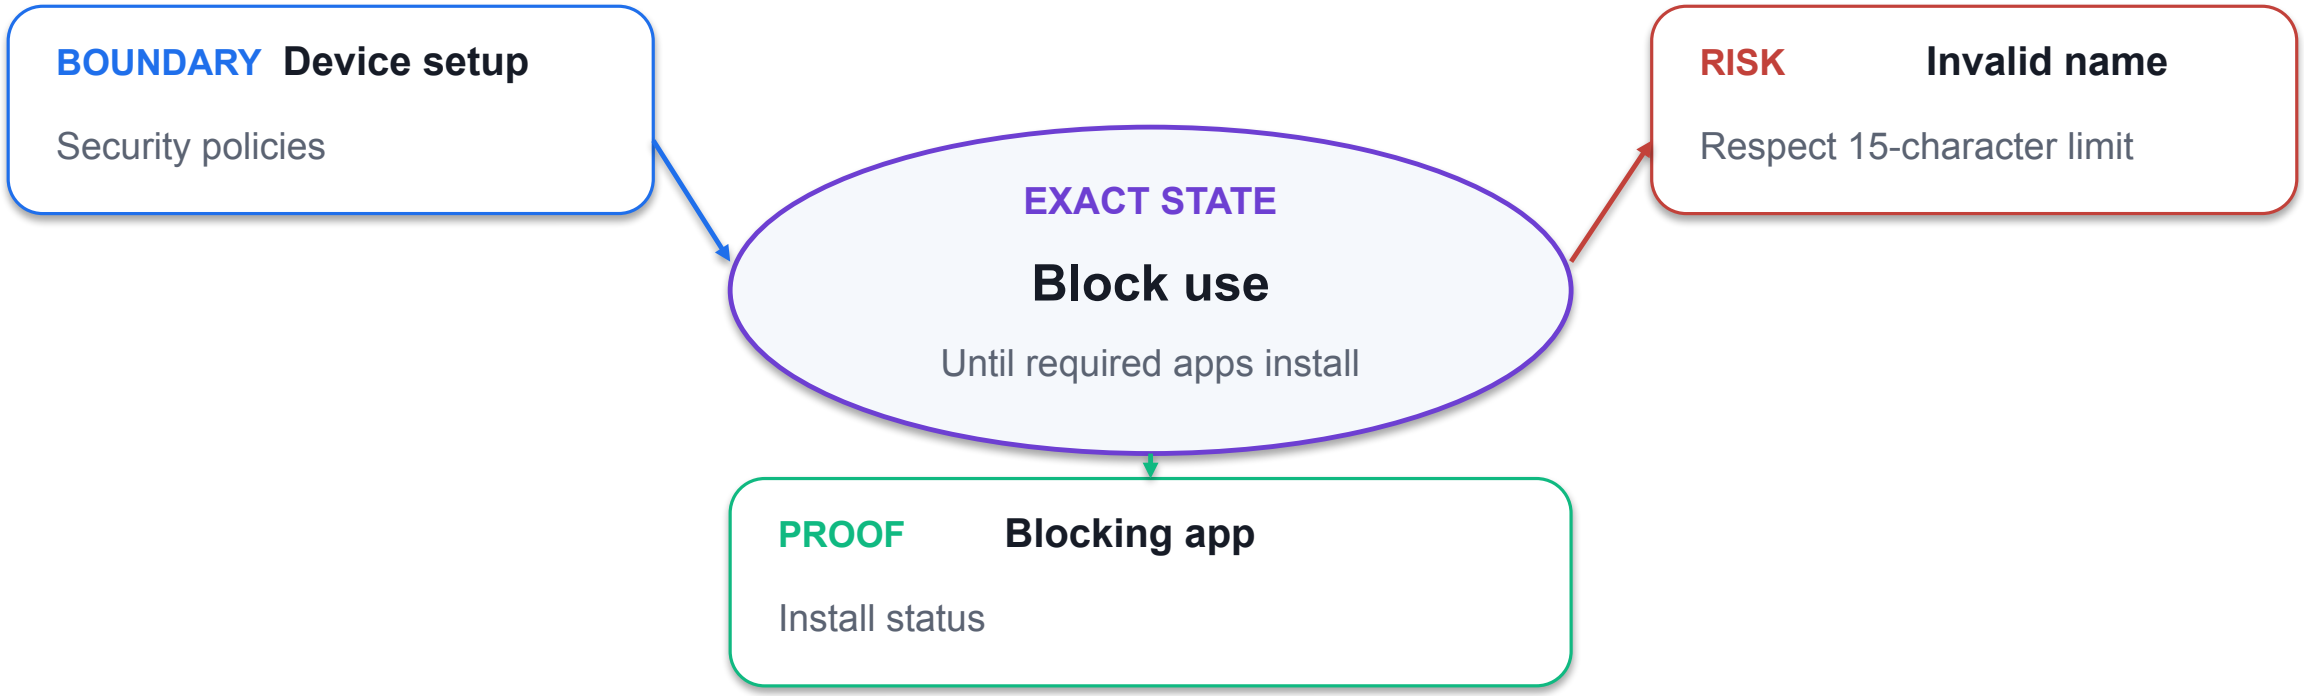

CONTROL READING

The Block use state is valid only when Device setup produces Blocking app; Invalid name requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Timeout — control contract

1

BOUNDARY Account setup

User-targeted payload

2

EXACT STATE Timeout

Controlled failure route

3

CONTROL RISK App dependency

Validate install order

4

PROOF Enrollment time

Phase duration

CONTROL READING

The Timeout state is valid only when Account setup produces Enrollment time; App dependency requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Tracking — control contract

1	BOUNDARY	ESP gate	Blocking selection
2	EXACT STATE	Tracking	Autopilot deployment report
3	CONTROL RISK	User reaches desktop early	Correct ESP targeting
4	PROOF	Device name	Template resolved

CONTROL READING

The Tracking state is valid only when ESP gate produces Device name; User reaches desktop early requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Control Autopilot with ESP and naming — failure and recovery

1 Infinite ESP

Review blocking apps

DIAGNOSE → RECOVER

2 Invalid name

Respect 15-character limit

DIAGNOSE → RECOVER

3 App dependency

Validate install order

DIAGNOSE → RECOVER

4 User reaches desktop early

Correct ESP targeting

DIAGNOSE → RECOVER

DECISION RULE

Treat the symptom as a pointer to a failed stage; collect evidence before changing policy.

© 2026 Tertiary Infotech Academy Pte Ltd

Infinite ESP — diagnostic trace


1	SIGNAL	**Infinite ESP**
2	BOUNDARY	Device setup
3	SUSPECT STATE	Name template
4	RECOVERY	Review blocking apps
5	ACCEPTANCE	**ESP phase**

EVIDENCE THRESHOLD

Accept the recovery only when ESP phase shows Device or account; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Invalid name — diagnostic trace

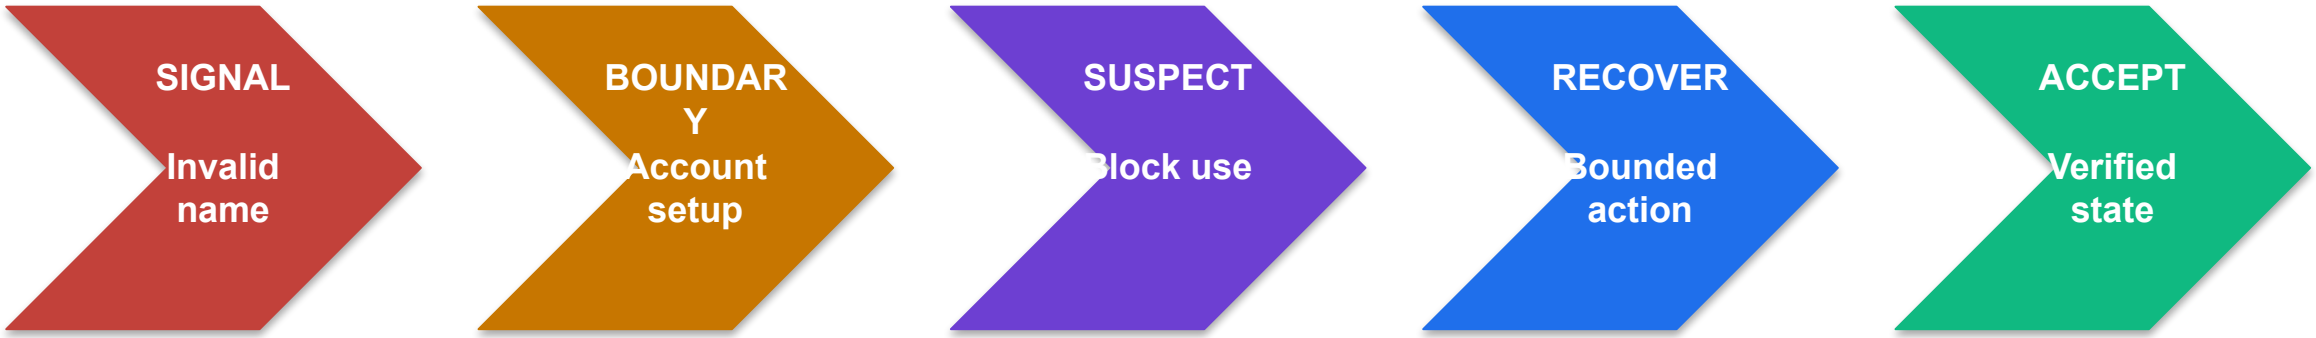


RECOVERY ACTION	Respect 15-character limit
ACCEPTANCE PROOF	Install status

EVIDENCE THRESHOLD

Accept the recovery only when Blocking app shows Install status; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

App dependency — diagnostic trace

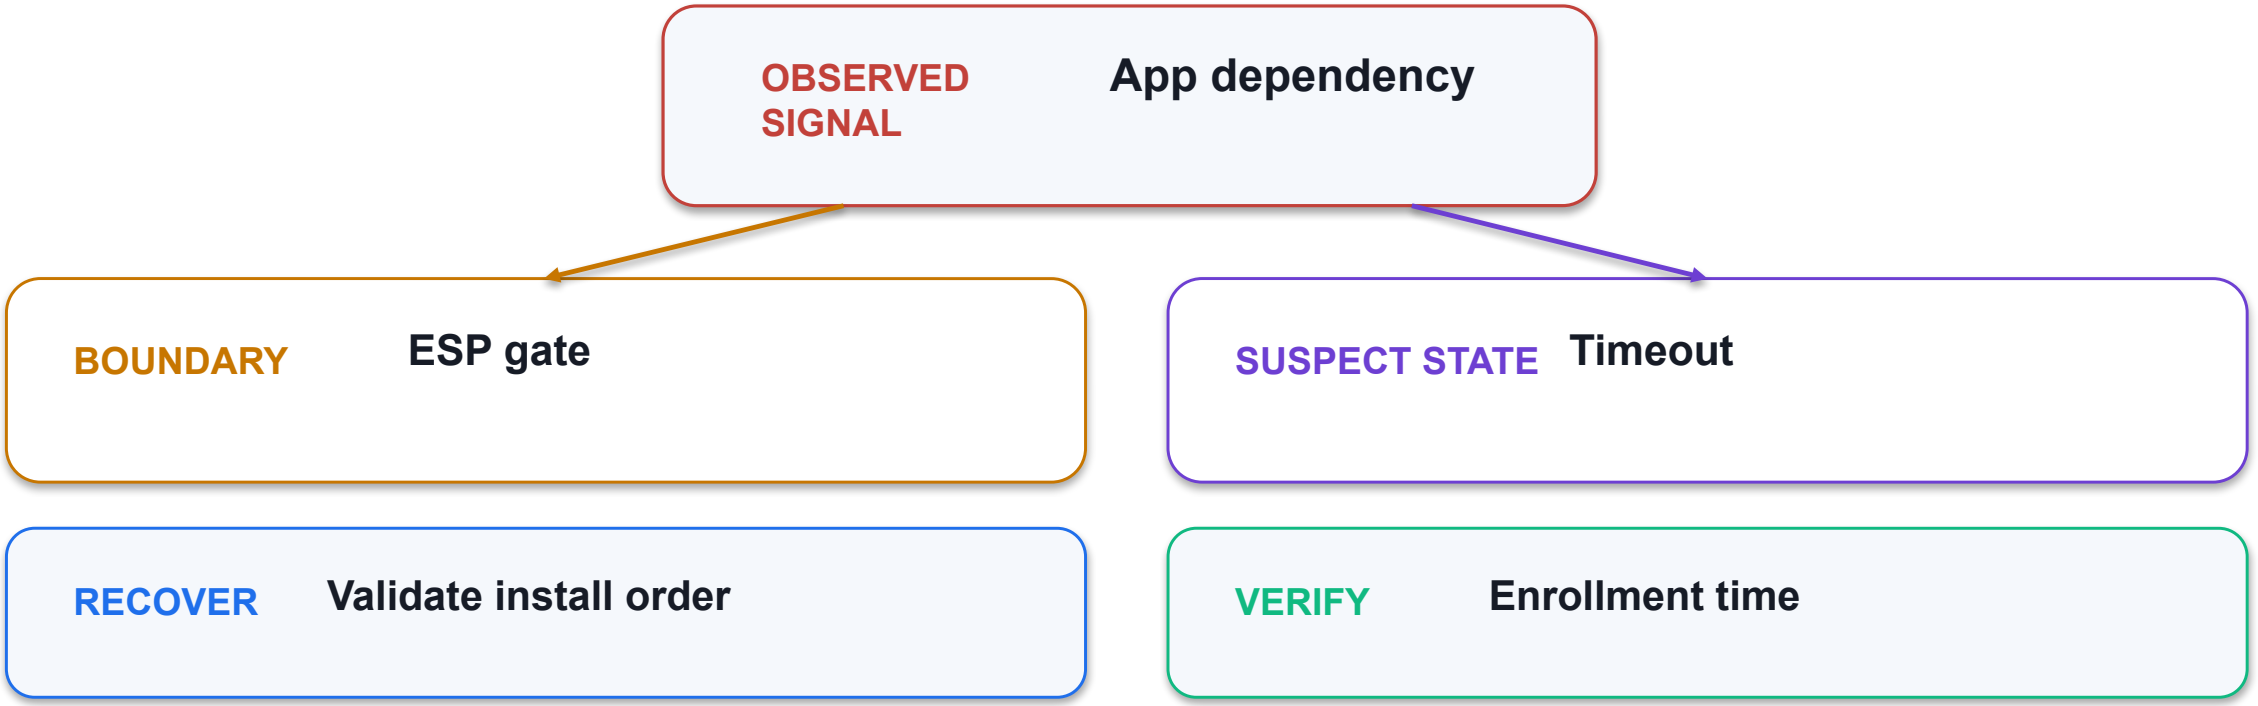

EVIDENCE THRESHOLD

Accept the recovery only when Enrollment time shows Phase duration; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

User reaches desktop early — diagnostic trace



BOUNDARY · Desktop | SUSPECT · Tracking

SIGNAL User reaches desktop early

RECOVERY Correct ESP targeting

PROOF Device name

EVIDENCE THRESHOLD

Accept the recovery only when Device name shows Template resolved; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Control Autopilot with ESP and naming — verification evidence

ESP phase	Device or account
Blocking app	Install status
Enrollment time	Phase duration
Device name	Template resolved

LAB 4

Evidence standard

Capture the configured state, the observed result, the timestamp or correlation ID, and the interpretation.


PASS = REPRODUCIBLE

PRACTICE BRIDGE

Full click paths, commands, expected outputs and troubleshooting are in the Learner Guide and the individual lab folder.

© 2026 Tertiary Infotech Academy Pte Ltd

Upgrade Windows 11 with deployment rings — mechanism

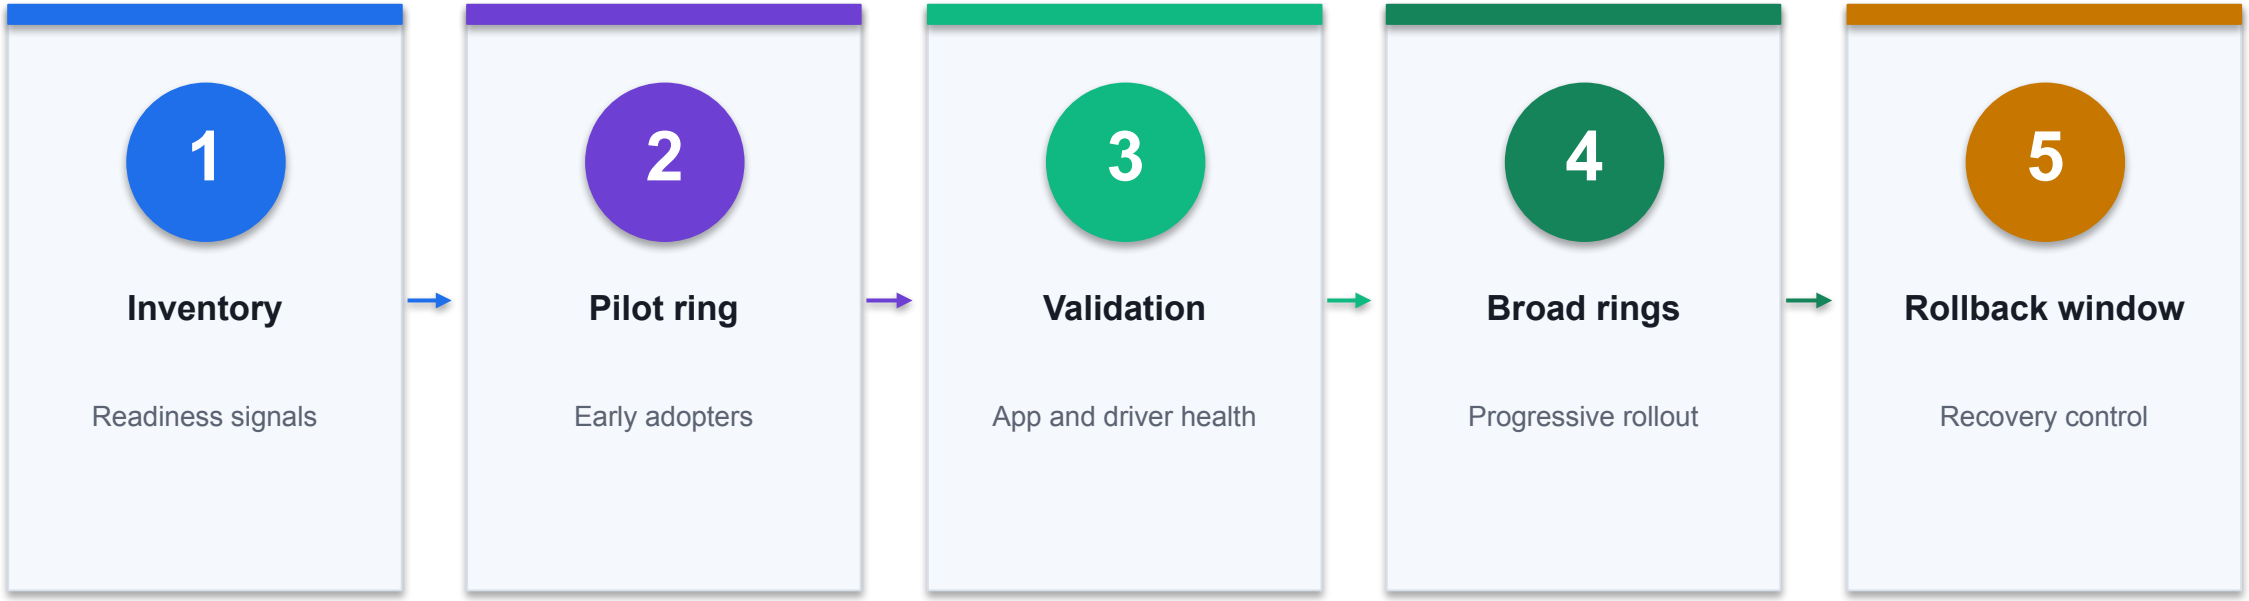

CONTROL POINT

Inspect the evidence at every transition; the first missing state is the most useful troubleshooting boundary. Lab 7 carries the full procedure.

© 2026 Tertiary Infotech Academy Pte Ltd

Upgrade Windows 11 with deployment rings — exact contract

1 Feature policy

Target Windows release

FIELD / STATE

2 Safeguard hold

Respect by default

FIELD / STATE

3 Deadline

User experience boundary

FIELD / STATE

4 Rollback

Uninstall period

FIELD / STATE

DECISION RULE

Configuration is a contract: names, values, scope and resulting state must all agree.

© 2026 Tertiary Infotech Academy Pte Ltd

Feature policy — control contract



BOUNDARY · Inventory

STATE **Feature policy**

Target Windows release

RISK **Compatibility hold**

Inspect safeguard ID

PROOF **Readiness report**


Capable or blocked

CONTROL READING

The Feature policy state is valid only when Inventory produces Readiness report; Compatibility hold requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Safeguard hold — control contract

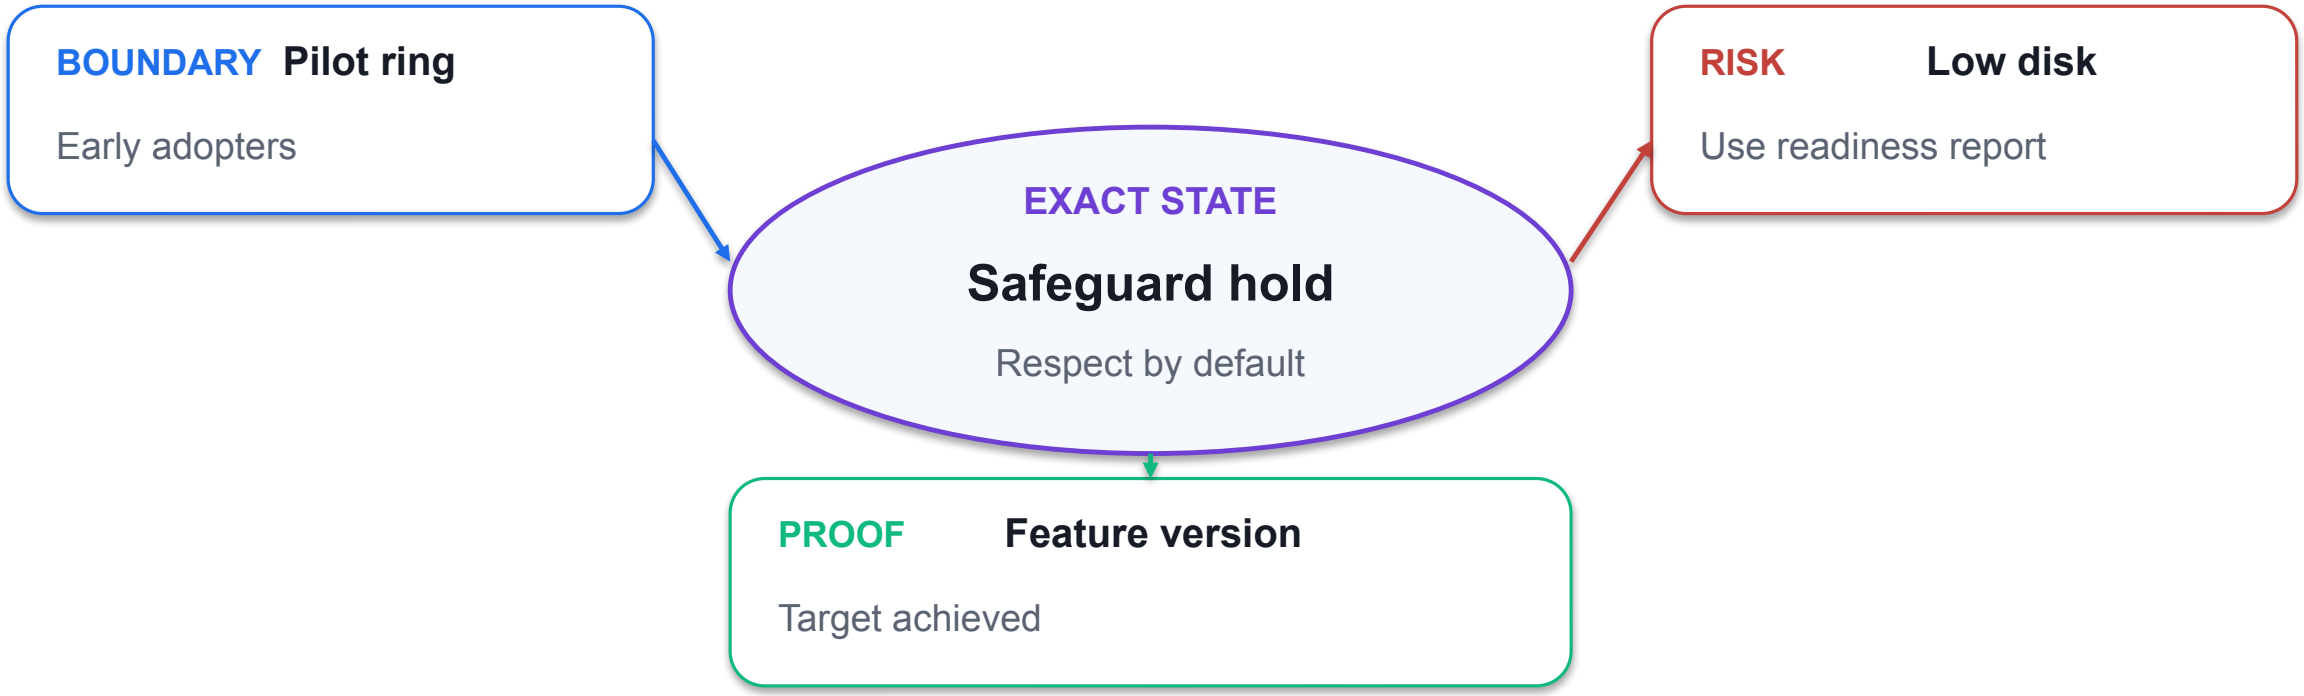

CONTROL READING

The Safeguard hold state is valid only when Pilot ring produces Feature version; Low disk requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Deadline — control contract

1

BOUNDARY Validation

App and driver health

2

EXACT STATE Deadline

User experience boundary

3

CONTROL RISK Driver failure

Pause affected cohort

4

PROOF Failure code

Deployment error

CONTROL READING

The Deadline state is valid only when Validation produces Failure code; Driver failure requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Rollback — control contract

1	BOUNDARY	Broad rings	Progressive rollout
2	EXACT STATE	Rollback	Uninstall period
3	CONTROL RISK	Productivity impact	Roll back within window
4	PROOF	Ring KPI	Success and rollback rate

CONTROL READING

The Rollback state is valid only when Broad rings produces Ring KPI; Productivity impact requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Upgrade Windows 11 with deployment rings — failure and recovery

1 Compatibility hold

Inspect safeguard ID

DIAGNOSE → RECOVER

2 Low disk

Use readiness report

DIAGNOSE → RECOVER

3 Driver failure

Pause affected cohort

DIAGNOSE → RECOVER

4 Productivity impact

Roll back within window

DIAGNOSE → RECOVER

DECISION RULE

Treat the symptom as a pointer to a failed stage; collect evidence before changing policy.

© 2026 Tertiary Infotech Academy Pte Ltd

Compatibility hold — diagnostic trace


1	SIGNAL	**Compatibility hold**
2	BOUNDARY	Pilot ring
3	SUSPECT STATE	Feature policy
4	RECOVERY	Inspect safeguard ID
5	ACCEPTANCE	**Readiness report**

EVIDENCE THRESHOLD

Accept the recovery only when Readiness report shows Capable or blocked; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Low disk — diagnostic trace

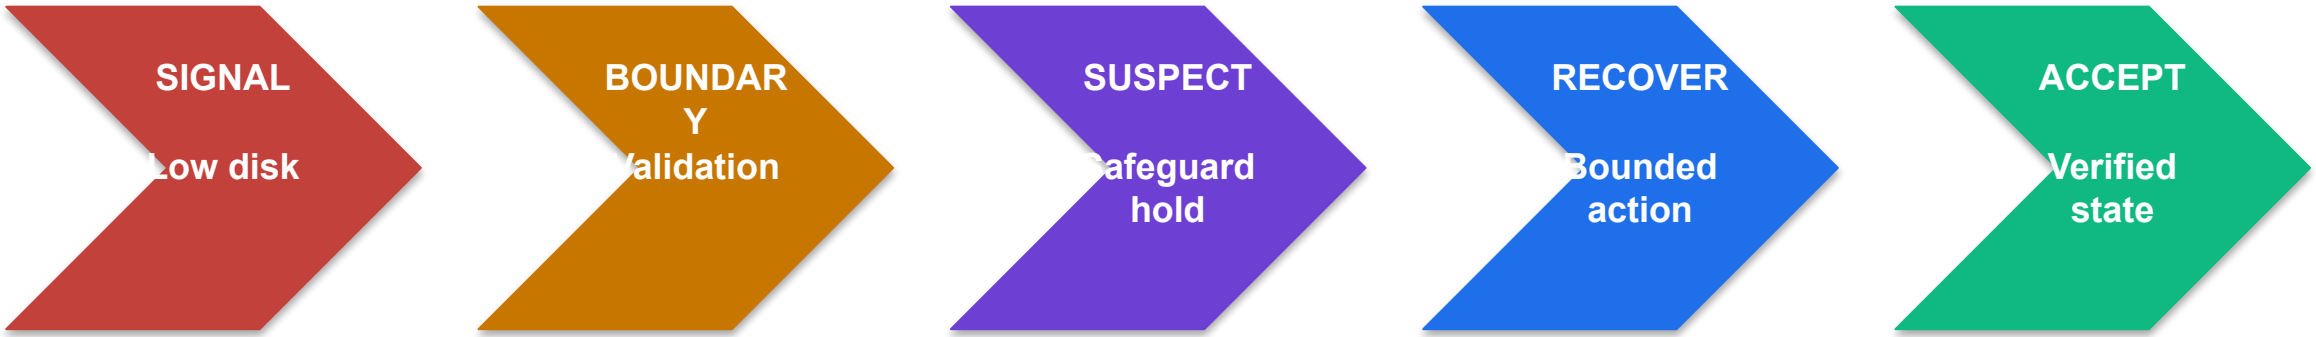

RECOVERY ACTION Use readiness report


ACCEPTANCE PROOF Target achieved

EVIDENCE THRESHOLD

Accept the recovery only when Feature version shows Target achieved; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Driver failure — diagnostic trace

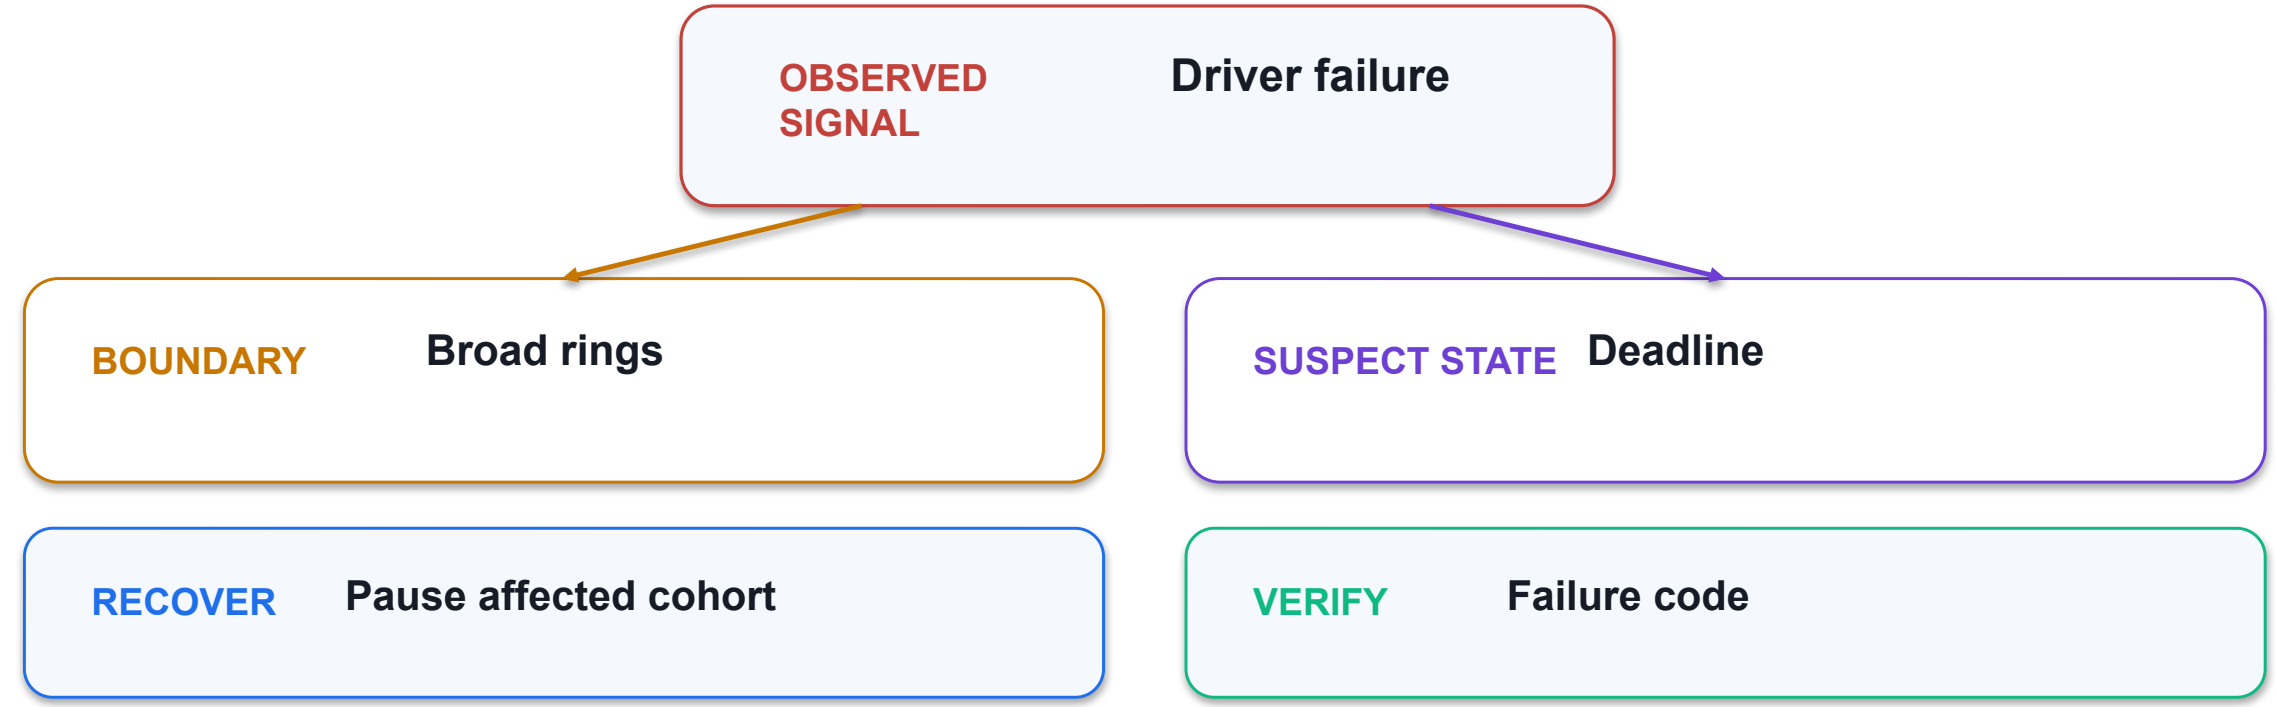

EVIDENCE THRESHOLD

Accept the recovery only when Failure code shows Deployment error; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Productivity impact — diagnostic trace



BOUNDARY · Rollback window | SUSPECT · Rollback

SIGNAL Productivity impact

RECOVERY Roll back within window

PROOF Ring KPI

EVIDENCE THRESHOLD

Accept the recovery only when Ring KPI shows Success and rollback rate; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Upgrade Windows 11 with deployment rings — verification evidence

✓ **Readiness report**	Capable or blocked
✓ **Feature version**	Target achieved
✓ **Failure code**	Deployment error
✓ **Ring KPI**	Success and rollback rate

LAB 7

Evidence standard

Capture the configured state, the observed result, the timestamp or correlation ID, and the interpretation.


PASS = REPRODUCIBLE

PRACTICE BRIDGE

Full click paths, commands, expected outputs and troubleshooting are in the Learner Guide and the individual lab folder.

© 2026 Tertiary Infotech Academy Pte Ltd

Provision Windows 365 Cloud PCs — mechanism

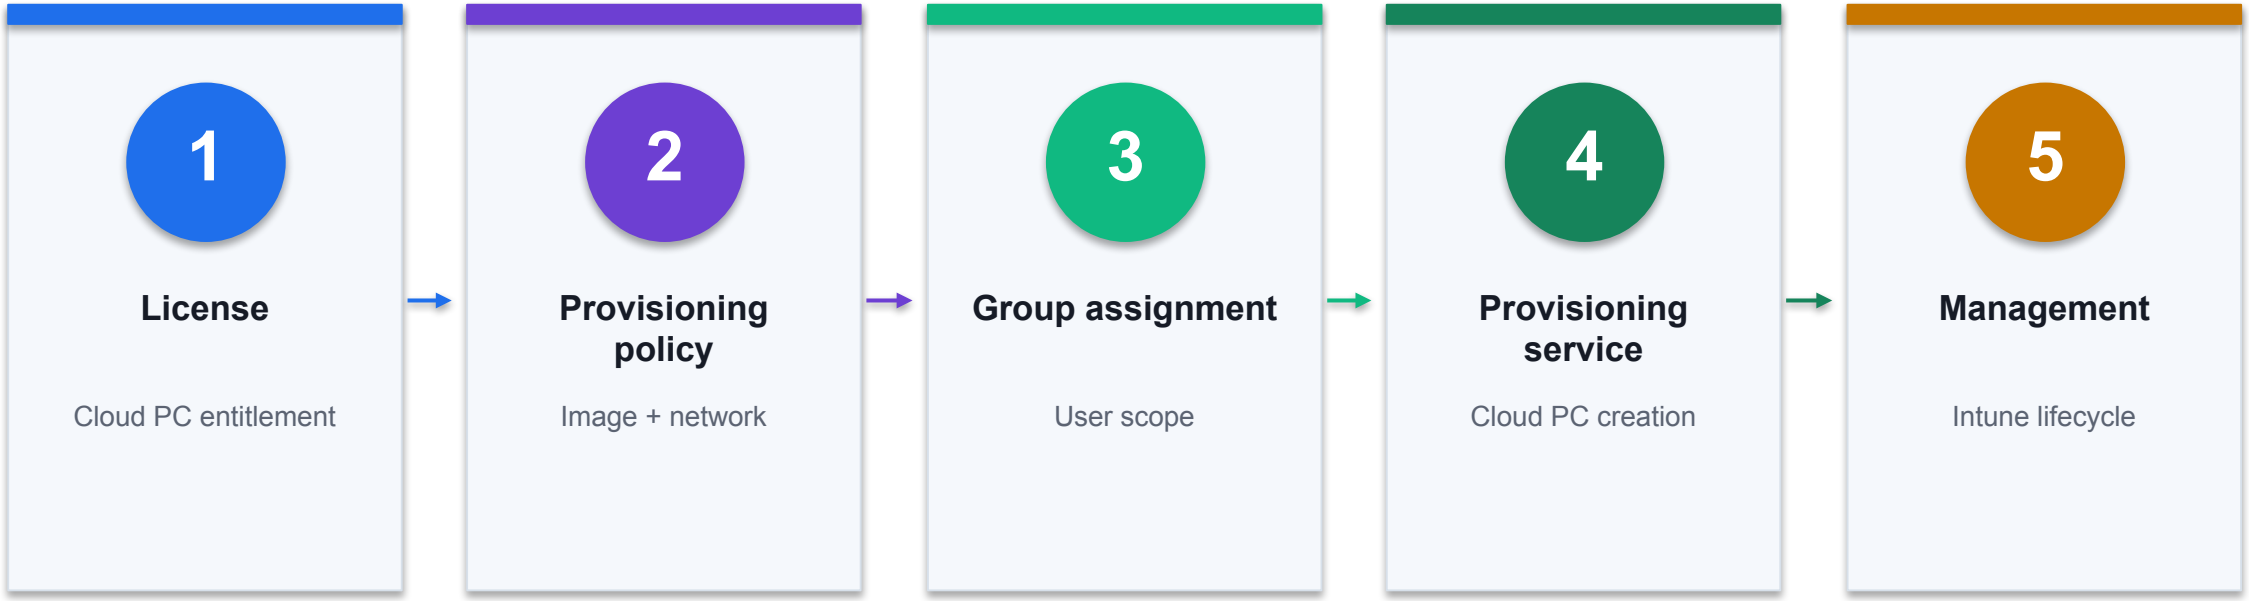

CONTROL POINT

Inspect the evidence at every transition; the first missing state is the most useful troubleshooting boundary. Lab 4 carries the full procedure.

© 2026 Tertiary Infotech Academy Pte Ltd

Provision Windows 365 Cloud PCs — exact contract

1 Join type

Microsoft Entra joined

FIELD / STATE

2 Network

Microsoft-hosted or ANC

FIELD / STATE

3 Image

Gallery or custom

FIELD / STATE

4 Resize/ reprovision

Controlled lifecycle action

FIELD / STATE

DECISION RULE

Configuration is a contract: names, values, scope and resulting state must all agree.

© 2026 Tertiary Infotech Academy Pte Ltd

Join type — control contract



BOUNDARY · License

STATE **Join type**

Microsoft Entra joined

RISK **Provisioning failed**

Review network and license

PROOF **Provisioning state**


Succeeded

CONTROL READING

The Join type state is valid only when License produces Provisioning state; Provisioning failed requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Network — control contract

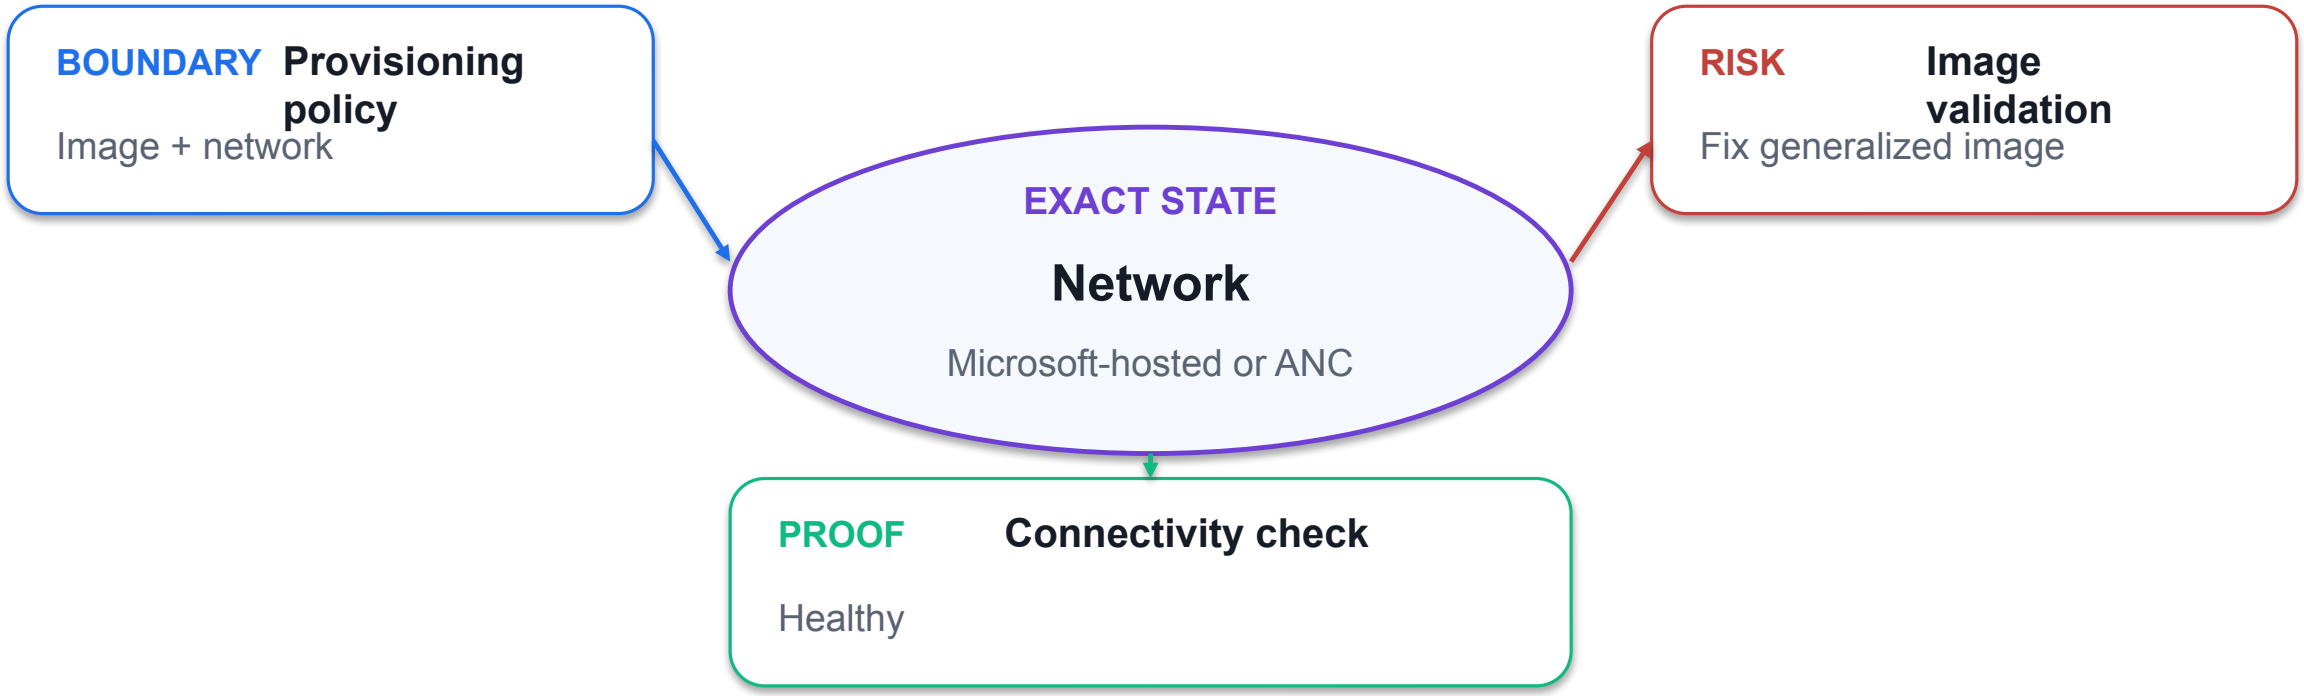

CONTROL READING

The Network state is valid only when Provisioning policy produces Connectivity check; Image validation requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Image — control contract

1

BOUNDARY Group assignment

User scope

2

EXACT STATE Image

Gallery or custom

3

CONTROL RISK Connectivity issue

Check ANC health

4

PROOF Intune record

Cloud PC managed

CONTROL READING

The Image state is valid only when Group assignment produces Intune record; Connectivity issue requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Resize/reprovision — control contract

1	BOUNDARY	Provisioning service	Cloud PC creation
2	EXACT STATE	Resize/reprovision	Controlled lifecycle action
3	CONTROL RISK	Data loss risk	Understand reprovision impact
4	PROOF	End-user test	Windows 365 connection

CONTROL READING

The Resize/reprovision state is valid only when Provisioning service produces End-user test; Data loss risk requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Provision Windows 365 Cloud PCs — failure and recovery

1 Provisioning failed

Review network and license

DIAGNOSE → RECOVER

2 Image validation

Fix generalized image

DIAGNOSE → RECOVER

3 Connectivity issue

Check ANC health

DIAGNOSE → RECOVER

4 Data loss risk

Understand reprovision impact

DIAGNOSE → RECOVER

DECISION RULE

Treat the symptom as a pointer to a failed stage; collect evidence before changing policy.

© 2026 Tertiary Infotech Academy Pte Ltd

Provisioning failed — diagnostic trace


1	SIGNAL	**Provisioning failed**
2	BOUNDARY	Provisioning policy
3	SUSPECT STATE	Join type
4	RECOVERY	Review network and license
5	ACCEPTANCE	**Provisioning state**

EVIDENCE THRESHOLD

Accept the recovery only when Provisioning state shows Succeeded; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Image validation — diagnostic trace

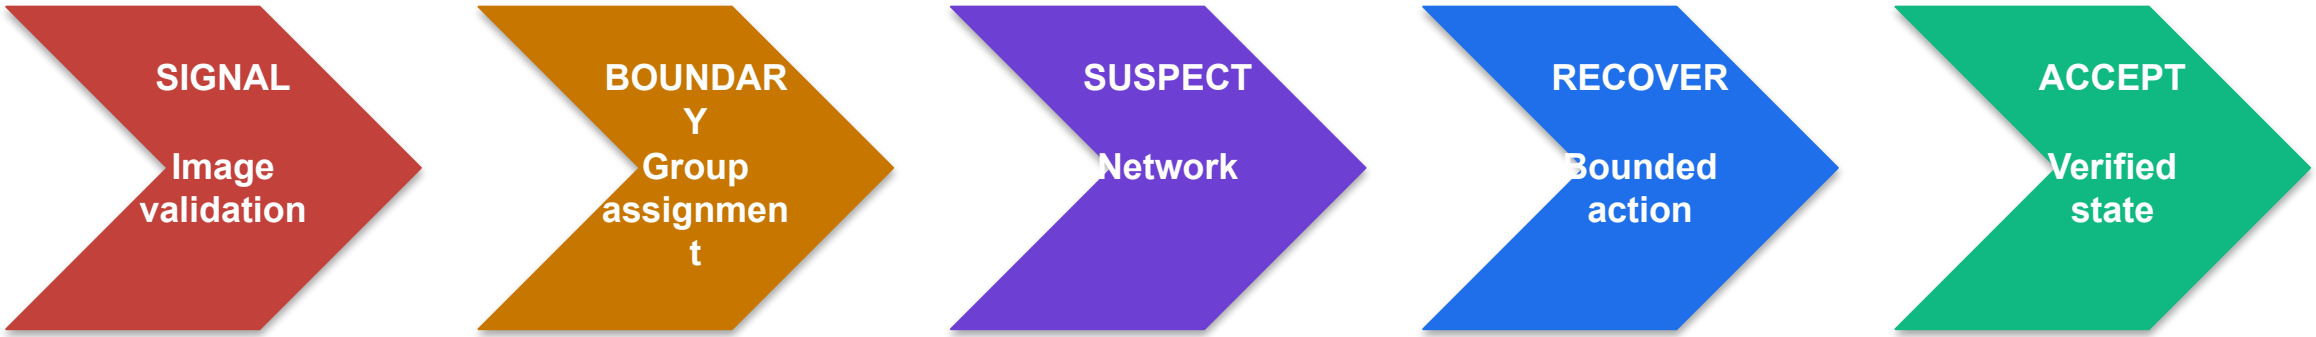

RECOVERY ACTION Fix generalized image


ACCEPTANCE PROOF Healthy

EVIDENCE THRESHOLD

Accept the recovery only when Connectivity check shows Healthy; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Connectivity issue — diagnostic trace

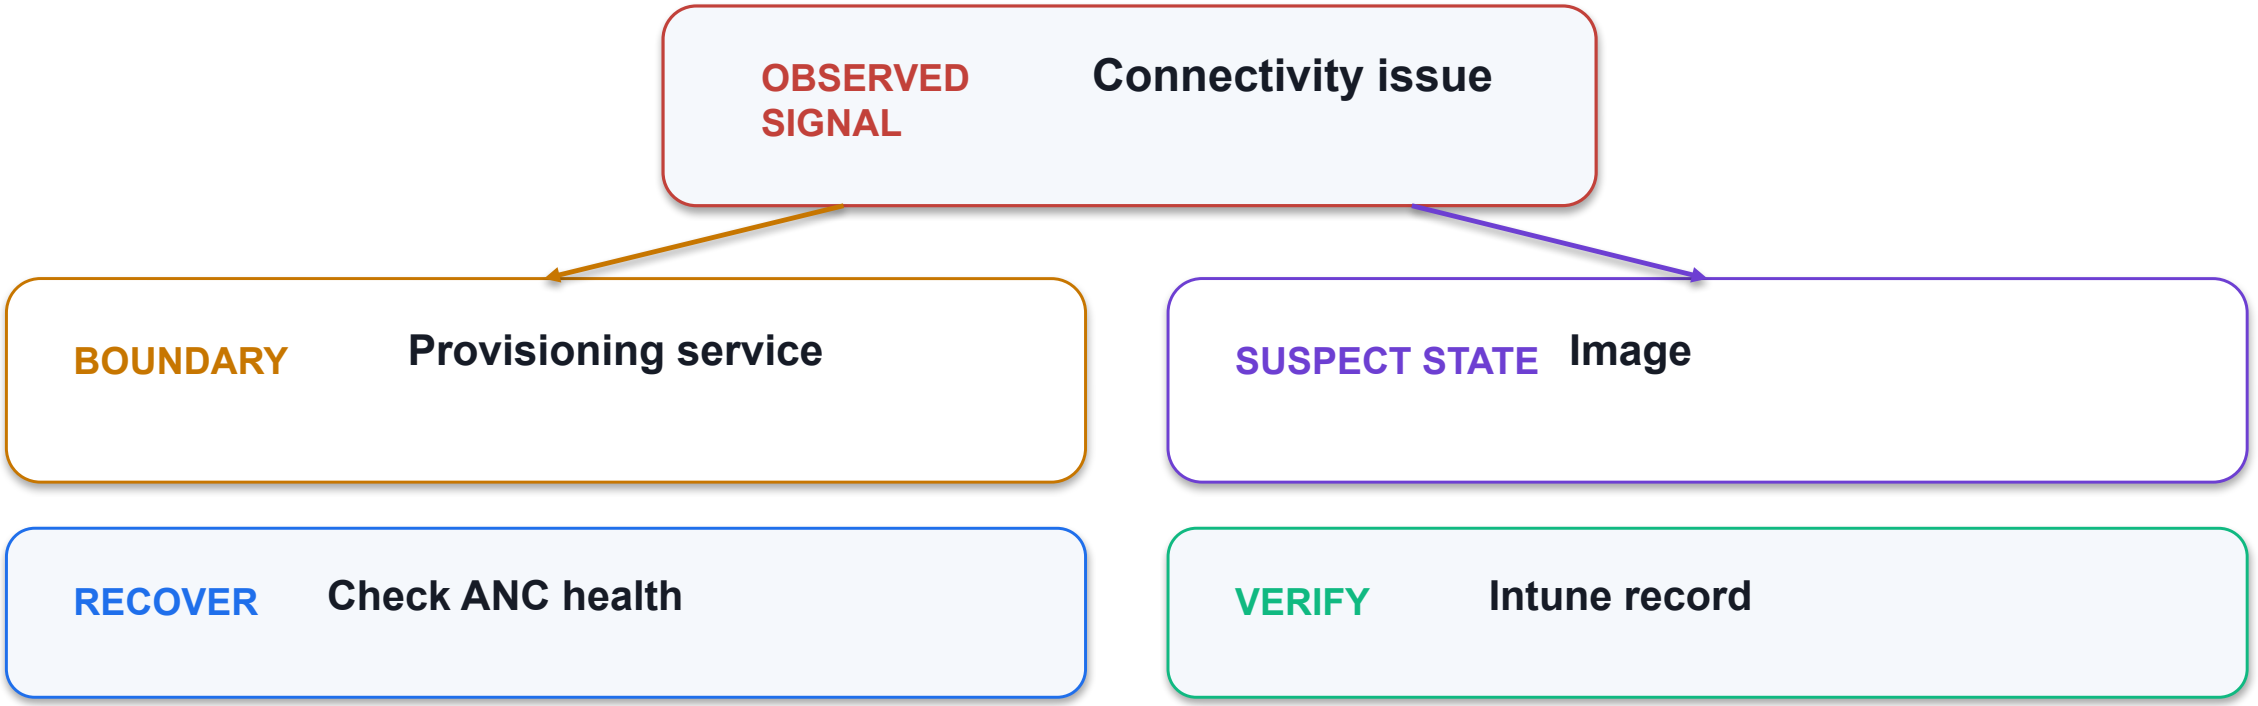

EVIDENCE THRESHOLD

Accept the recovery only when Intune record shows Cloud PC managed; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Data loss risk — diagnostic trace



BOUNDARY · Management | SUSPECT · Resize/reprovision

SIGNAL Data loss risk

RECOVERY Understand reprovision impact

PROOF End-user test

EVIDENCE THRESHOLD

Accept the recovery only when End-user test shows Windows 365 connection; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Provision Windows 365 Cloud PCs — verification evidence

✓ **Provisioning state**	Succeeded
✓ **Connectivity check**	Healthy
✓ **Intune record**	Cloud PC managed
✓ **End-user test**	Windows 365 connection

LAB 4

Evidence standard

Capture the configured state, the observed result, the timestamp or correlation ID, and the interpretation.

PASS = REPRODUCIBLE

PRACTICE BRIDGE

Full click paths, commands, expected outputs and troubleshooting are in the Learner Guide and the individual lab folder.


© 2026 Tertiary Infotech Academy Pte Ltd

DAY 2

Tea break

Return at the time announced by the trainer.

Translate GPOs into Settings Catalog policy — mechanism

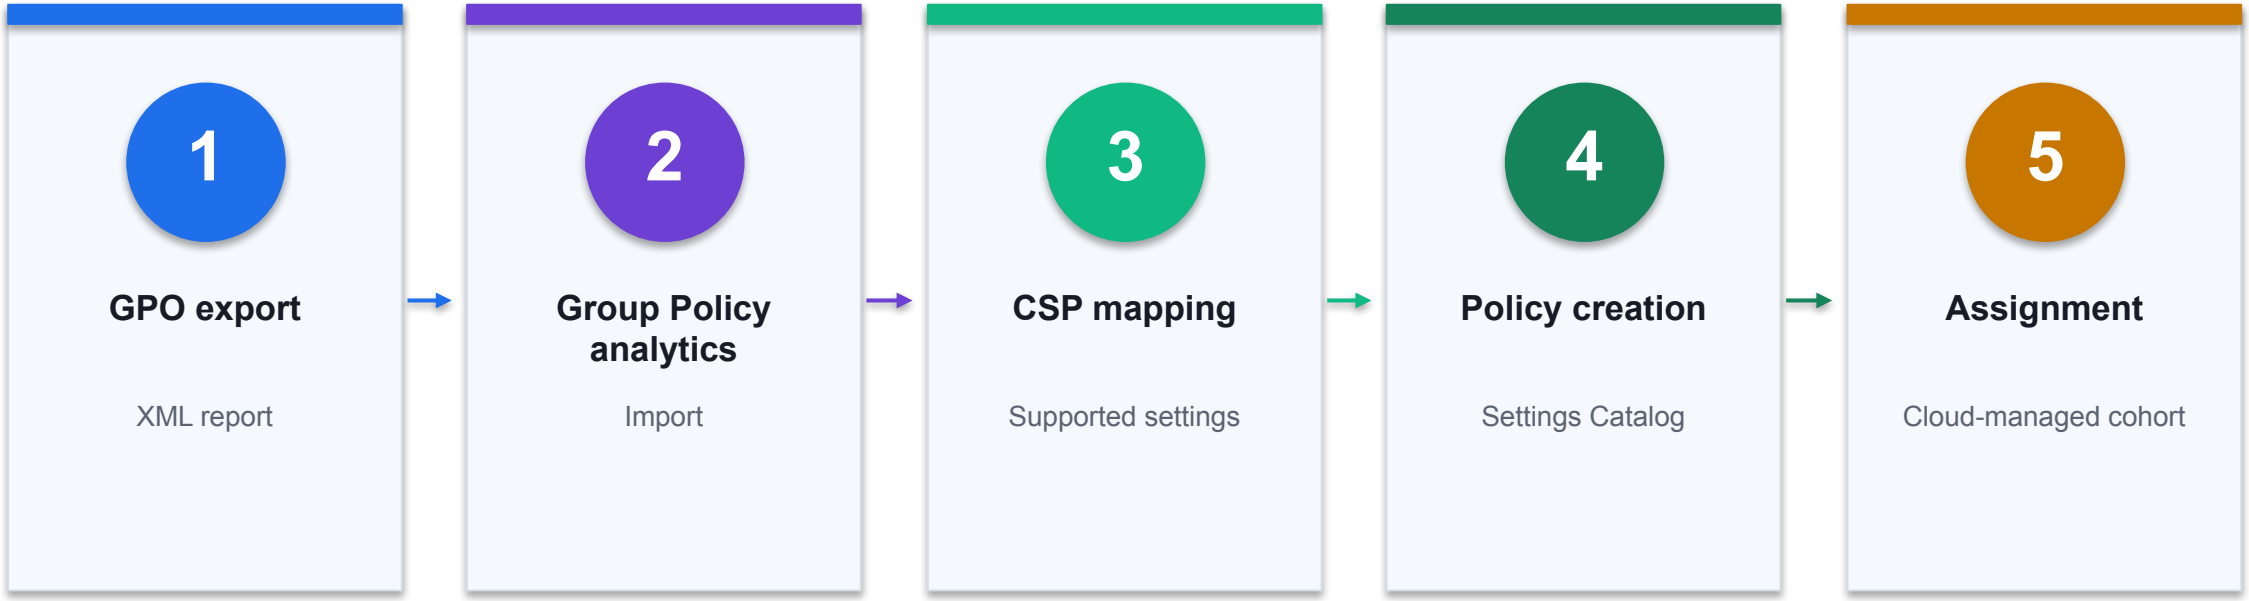

CONTROL POINT

Inspect the evidence at every transition; the first missing state is the most useful troubleshooting boundary. Lab 5 carries the full procedure.

© 2026 Tertiary Infotech Academy Pte Ltd

Translate GPOs into Settings Catalog policy — exact contract

1 Migration readiness

Supported · deprecated · unknown

FIELD / STATE

2 ADMX import

Custom administrative templates

FIELD / STATE

3 OMA-URI

Only when catalog lacks setting

FIELD / STATE

4 Conflict state

Multiple sources disagree

FIELD / STATE

DECISION RULE

Configuration is a contract: names, values, scope and resulting state must all agree.

© 2026 Tertiary Infotech Academy Pte Ltd

Migration readiness — control contract



BOUNDARY · GPO export

STATE **Migration readiness**

Supported · deprecated · unknown

RISK **Unsupported setting**

Redesign control

PROOF **Analytics report**


Migration percentage

CONTROL READING

The Migration readiness state is valid only when GPO export produces Analytics report; Unsupported setting requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

ADMX import — control contract

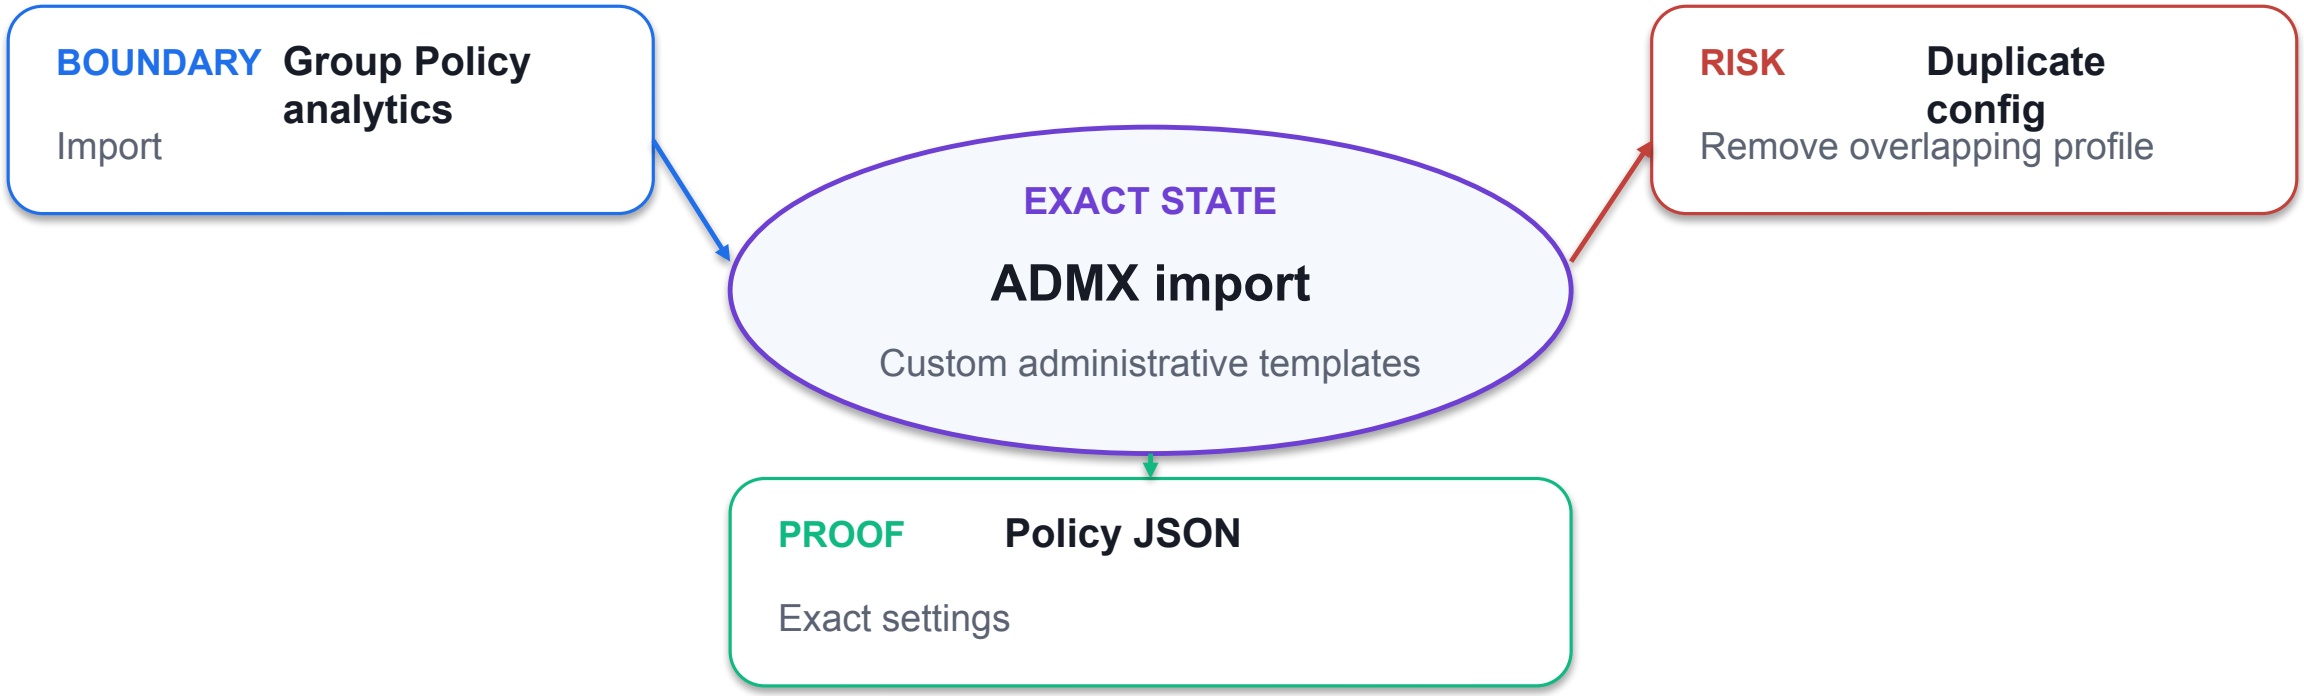

CONTROL READING

The ADMX import state is valid only when Group Policy analytics produces Policy JSON; Duplicate config requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

OMA-URI — control contract

1

BOUNDARY **CSP mapping**

Supported settings

2

EXACT STATE **OMA-URI**

Only when catalog lacks setting

3

CONTROL RISK **ADMX dependency**

Import parent first

4

PROOF **Per-setting status**

Success/conflict/error

CONTROL READING

The OMA-URI state is valid only when CSP mapping produces Per-setting status; ADMX dependency requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Conflict state — control contract

1	BOUNDARY	Policy creation	Settings Catalog
2	EXACT STATE	Conflict state	Multiple sources disagree
3	CONTROL RISK	Conflict	Trace per-setting source
4	PROOF	Client MDM report	Applied CSP

CONTROL READING

The Conflict state state is valid only when Policy creation produces Client MDM report; Conflict requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Translate GPOs into Settings Catalog policy — failure and recovery

1 Unsupported setting

Redesign control

DIAGNOSE → RECOVER

2 Duplicate config

Remove overlapping profile

DIAGNOSE → RECOVER

3 ADMX dependency

Import parent first

DIAGNOSE → RECOVER

4 Conflict

Trace per-setting source

DIAGNOSE → RECOVER

DECISION RULE

Treat the symptom as a pointer to a failed stage; collect evidence before changing policy.

© 2026 Tertiary Infotech Academy Pte Ltd

Unsupported setting — diagnostic trace

1	SIGNAL	**Unsupported setting**
2	BOUNDARY	Group Policy analytics
3	SUSPECT STATE	Migration readiness
4	RECOVERY	Redesign control
5	ACCEPTANCE	**Analytics report**

EVIDENCE THRESHOLD

Accept the recovery only when Analytics report shows Migration percentage; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Duplicate config — diagnostic trace



RECOVERY ACTION Remove overlapping profile


ACCEPTANCE PROOF Exact settings

EVIDENCE THRESHOLD

Accept the recovery only when Policy JSON shows Exact settings; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

ADMX dependency — diagnostic trace

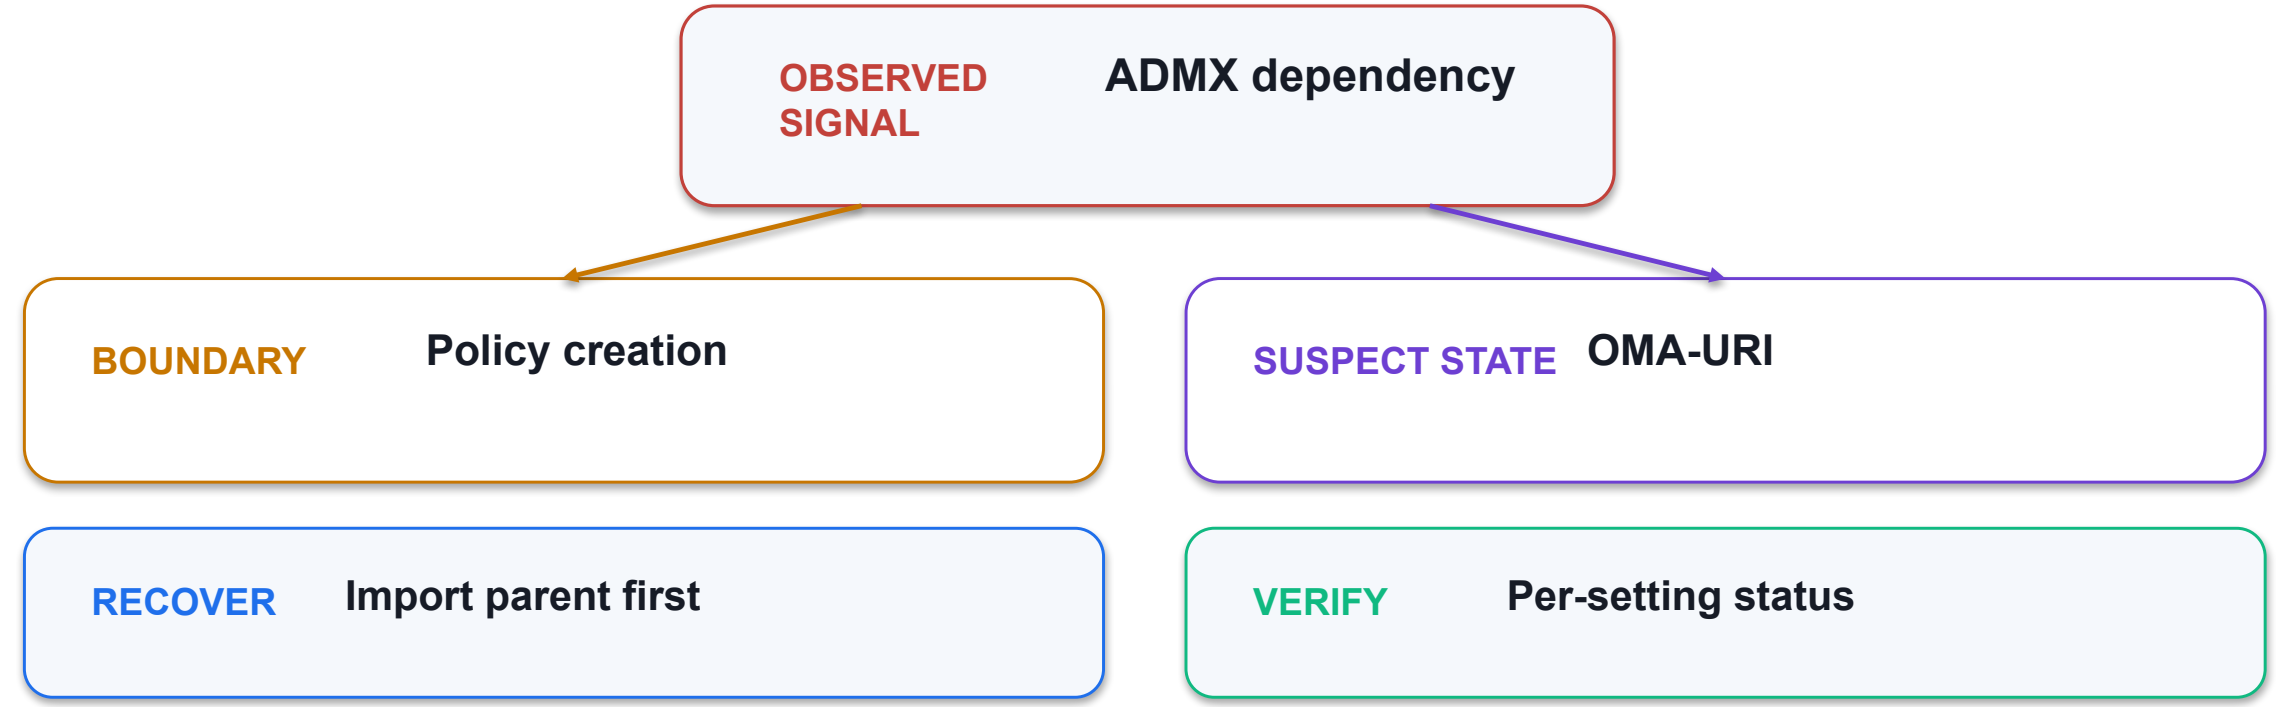

EVIDENCE THRESHOLD

Accept the recovery only when Per-setting status shows Success/conflict/error; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Conflict — diagnostic trace



BOUNDARY · Assignment | SUSPECT · Conflict state

SIGNAL Conflict

RECOVERY Trace per-setting source

PROOF Client MDM report

EVIDENCE THRESHOLD

Accept the recovery only when Client MDM report shows Applied CSP; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Translate GPOs into Settings Catalog policy — verification evidence

Analytics report	Migration percentage
Policy JSON	Exact settings
Per-setting status	Success/conflict/error
Client MDM report	Applied CSP

LAB 5

Evidence standard

Capture the configured state, the observed result, the timestamp or correlation ID, and the interpretation.


PASS = REPRODUCIBLE

PRACTICE BRIDGE

Full click paths, commands, expected outputs and troubleshooting are in the Learner Guide and the individual lab folder.

© 2026 Tertiary Infotech Academy Pte Ltd

Target profiles with filters and enrollment-time grouping — mechanism

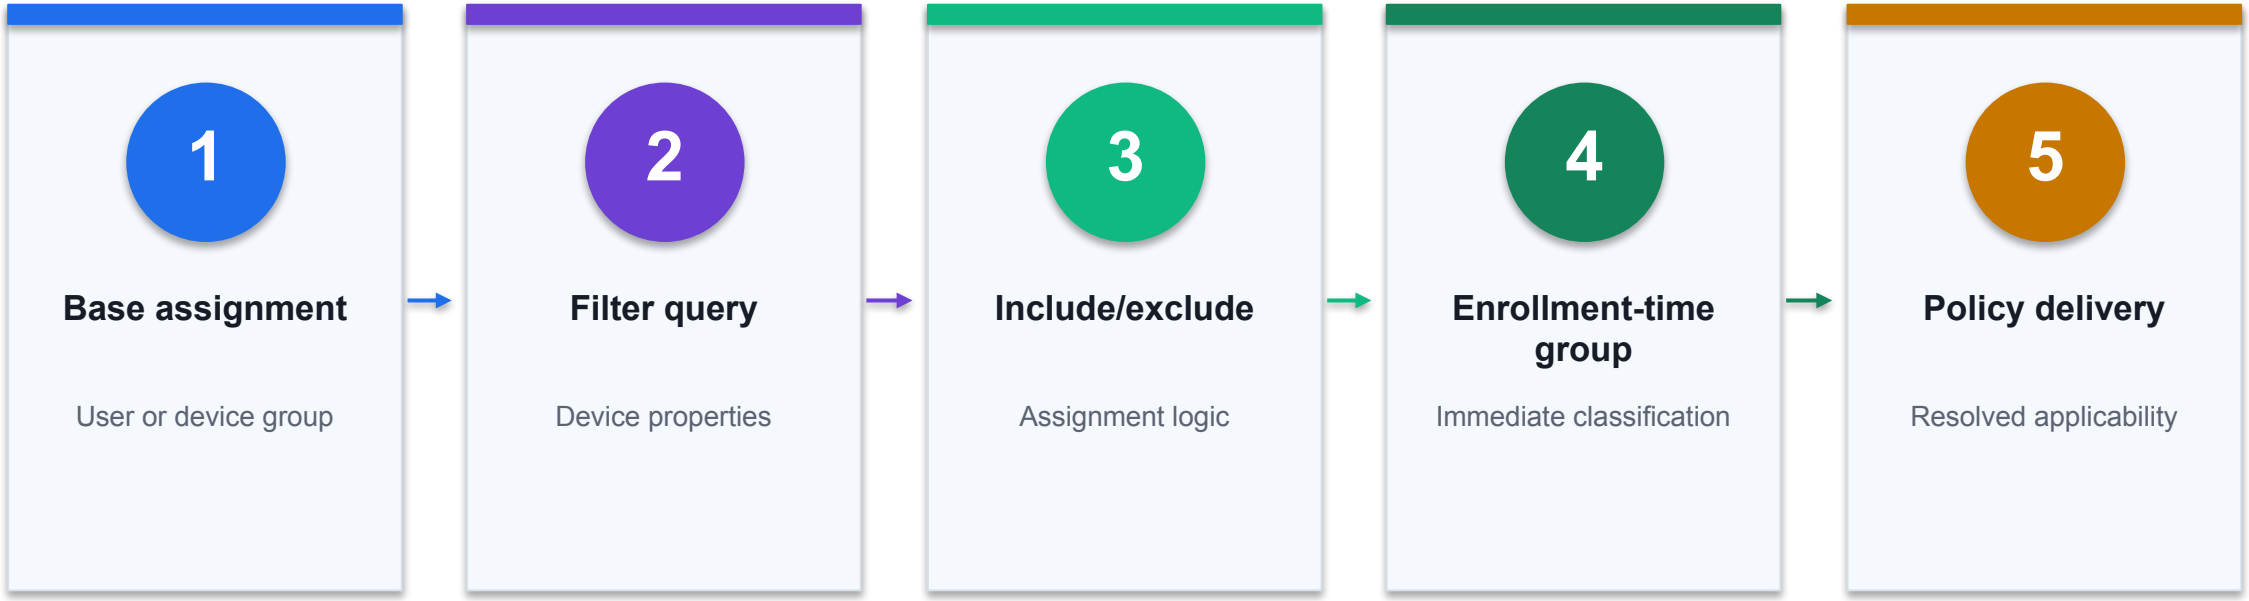

CONTROL POINT

Inspect the evidence at every transition; the first missing state is the most useful troubleshooting boundary. Lab 5 carries the full procedure.

© 2026 Tertiary Infotech Academy Pte Ltd

Target profiles with filters and enrollment-time grouping — exact contract

1 Filter mode

Include or exclude

FIELD / STATE

2 Property

manufacturer · model · ownership

FIELD / STATE

3 Evaluation

At assignment check

FIELD / STATE

4 Enrollment category

Provisioning-time cohort

FIELD / STATE

DECISION RULE

Configuration is a contract: names, values, scope and resulting state must all agree.

© 2026 Tertiary Infotech Academy Pte Ltd

Filter mode — control contract



BOUNDARY · Base assignment

STATE **Filter mode**

Include or exclude

RISK **Unsupported property**

Use filter schema

PROOF **Filter preview**


Expected match

CONTROL READING

The Filter mode state is valid only when Base assignment produces Filter preview; Unsupported property requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Property — control contract

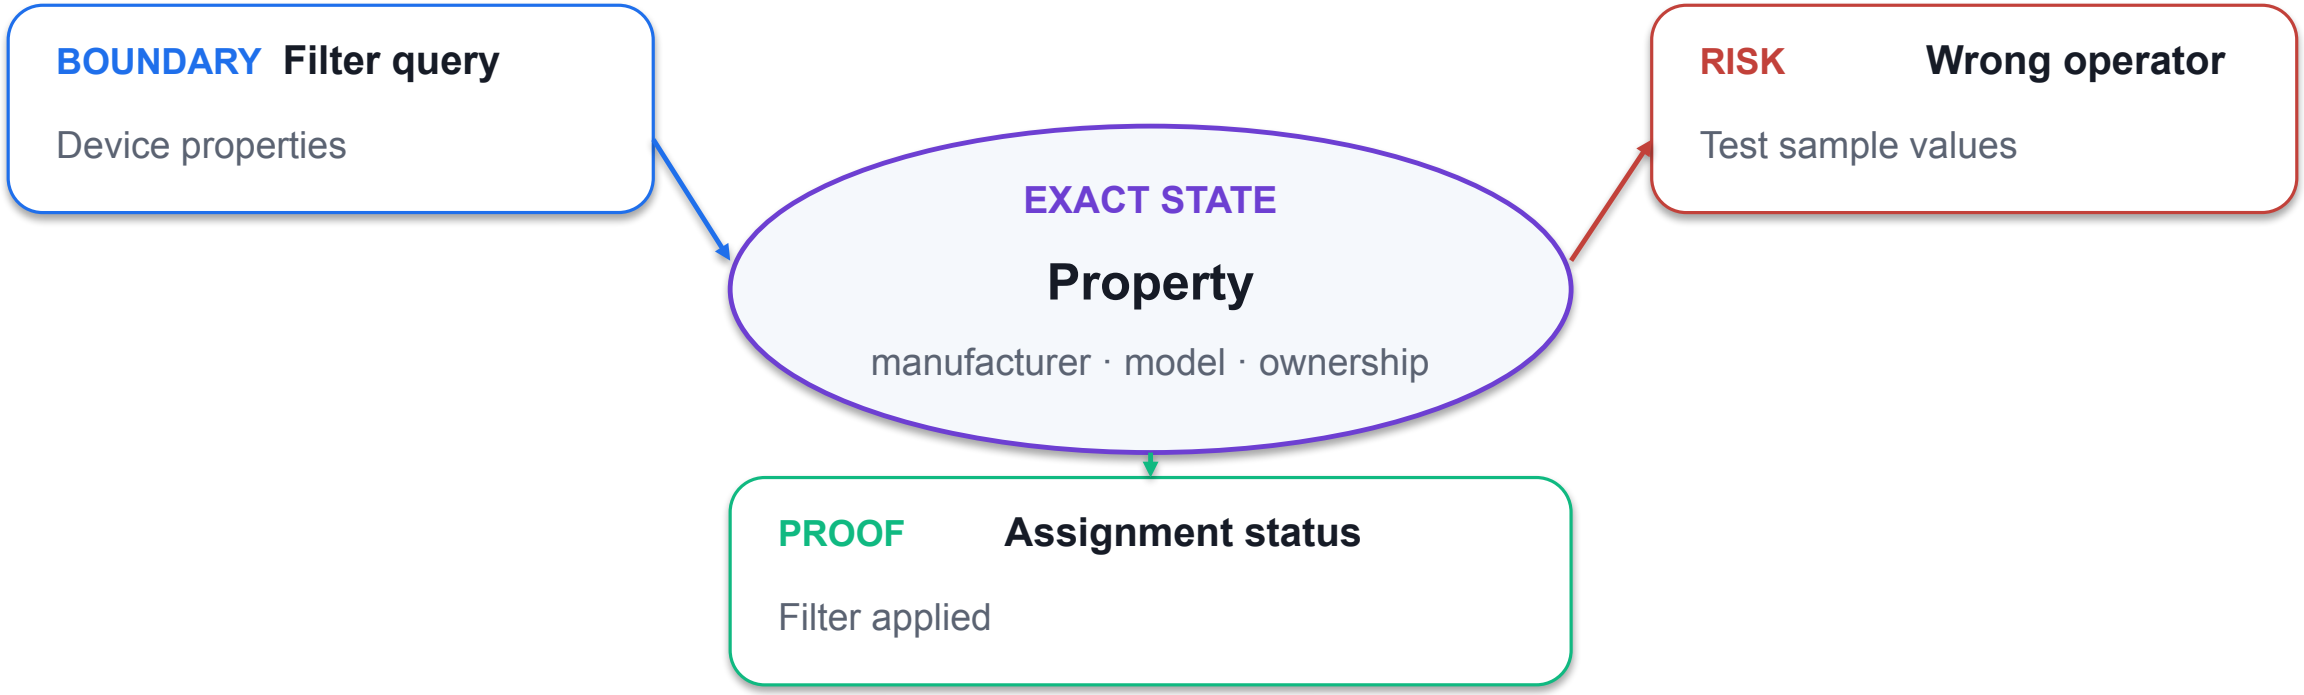

CONTROL READING

The Property state is valid only when Filter query produces Assignment status; Wrong operator requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Evaluation — control contract

1

BOUNDARY Include/exclude

Assignment logic

2

EXACT STATE Evaluation

At assignment check

3

CONTROL RISK User assignment mismatch

Know device filter context

4

PROOF Device property

Exact value

CONTROL READING

The Evaluation state is valid only when Include/exclude produces Device property; User assignment mismatch requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Enrollment category — control contract

1	BOUNDARY	Enrollment-time group	Immediate classification
2	EXACT STATE	Enrollment category	Provisioning-time cohort
3	CONTROL RISK	Race condition	Use enrollment-time grouping
4	PROOF	Policy result	Correct cohort only

CONTROL READING

The Enrollment category state is valid only when Enrollment-time group produces Policy result; Race condition requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Target profiles with filters and enrollment-time grouping — failure and recovery

1 Unsupported property

Use filter schema

DIAGNOSE → RECOVER

2 Wrong operator

Test sample values

DIAGNOSE → RECOVER

3 User assignment mismatch

Know device filter context

DIAGNOSE → RECOVER

4 Race condition

Use enrollment-time grouping

DIAGNOSE → RECOVER

DECISION RULE

Treat the symptom as a pointer to a failed stage; collect evidence before changing policy.

© 2026 Tertiary Infotech Academy Pte Ltd

Unsupported property — diagnostic trace

1	SIGNAL	**Unsupported property**
2	BOUNDARY	Filter query
3	SUSPECT STATE	Filter mode
4	RECOVERY	Use filter schema
5	ACCEPTANCE	**Filter preview**

EVIDENCE THRESHOLD

Accept the recovery only when Filter preview shows Expected match; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Wrong operator — diagnostic trace




RECOVERY ACTION	Test sample values
ACCEPTANCE PROOF	Filter applied

EVIDENCE THRESHOLD

Accept the recovery only when Assignment status shows Filter applied; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

User assignment mismatch — diagnostic trace

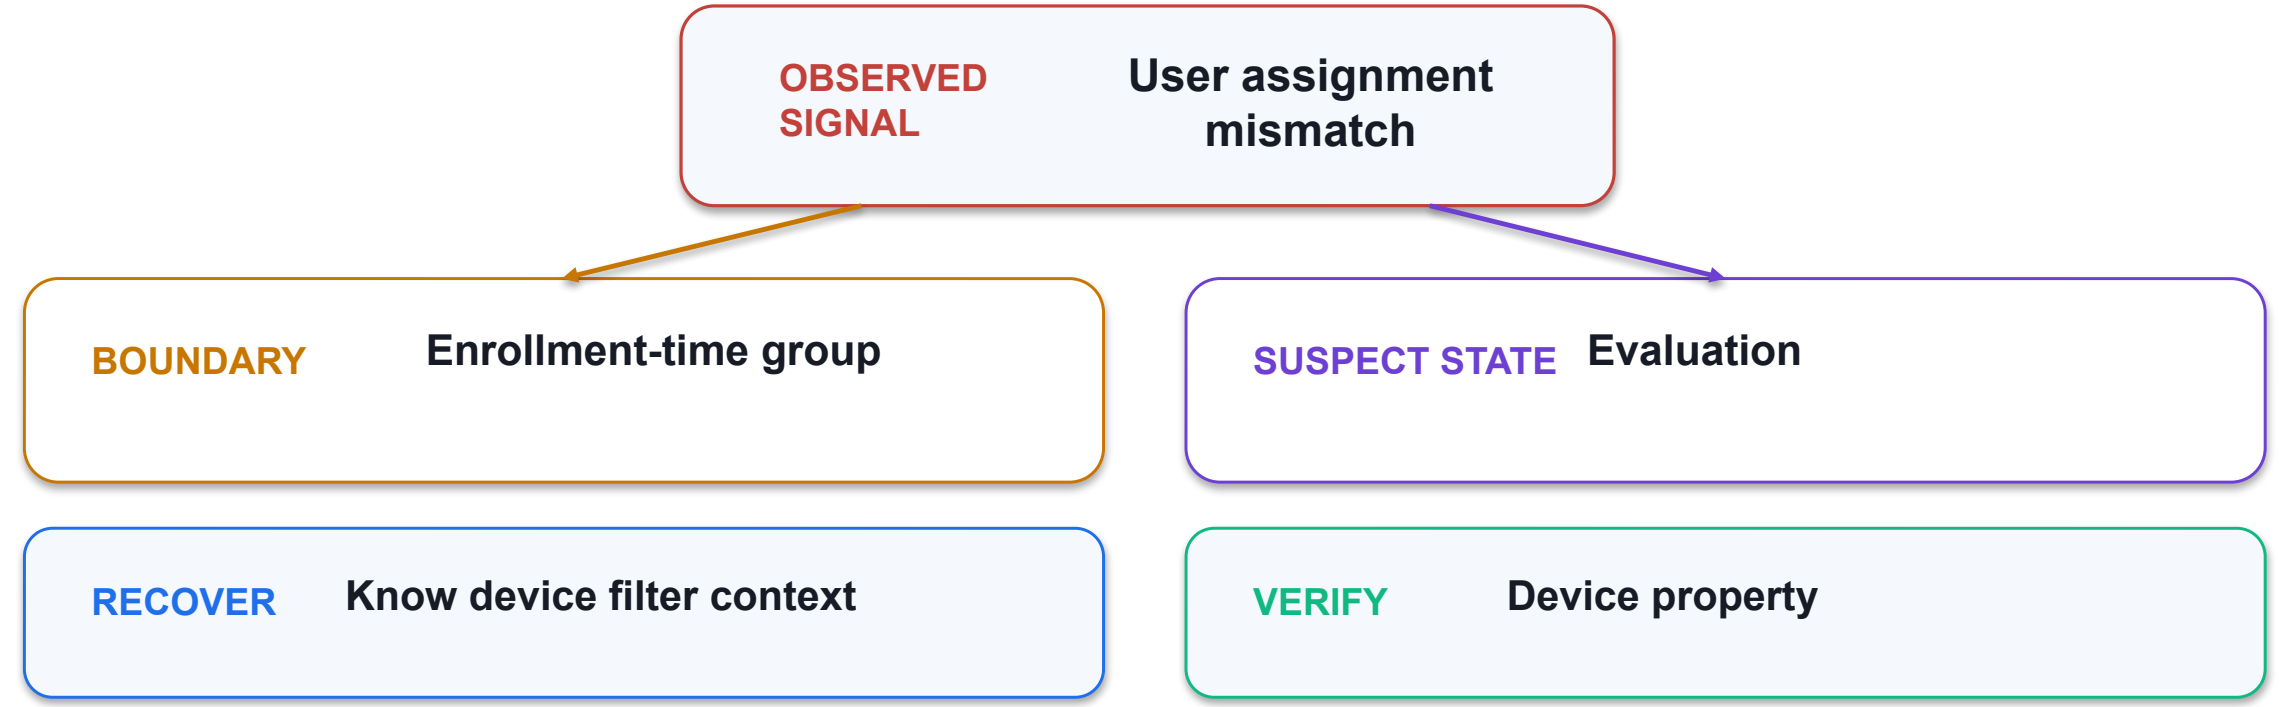

EVIDENCE THRESHOLD

Accept the recovery only when Device property shows Exact value; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Race condition — diagnostic trace



BOUNDARY · Policy delivery | SUSPECT · Enrollment category

SIGNAL	Race condition
RECOVERY	Use enrollment-time grouping
PROOF	Policy result

EVIDENCE THRESHOLD

Accept the recovery only when Policy result shows Correct cohort only; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Target profiles with filters and enrollment-time grouping — verification evidence

Filter preview	Expected match
Assignment status	Filter applied
Device property	Exact value
Policy result	Correct cohort only

LAB 5

Evidence standard

Capture the configured state, the observed result, the timestamp or correlation ID, and the interpretation.

PASS = REPRODUCIBLE

PRACTICE BRIDGE

Full click paths, commands, expected outputs and troubleshooting are in the Learner Guide and the individual lab folder.


© 2026 Tertiary Infotech Academy Pte Ltd

DAY 2

Lunch break

Return at the time announced by the trainer.

Apply Intune Suite controls — mechanism

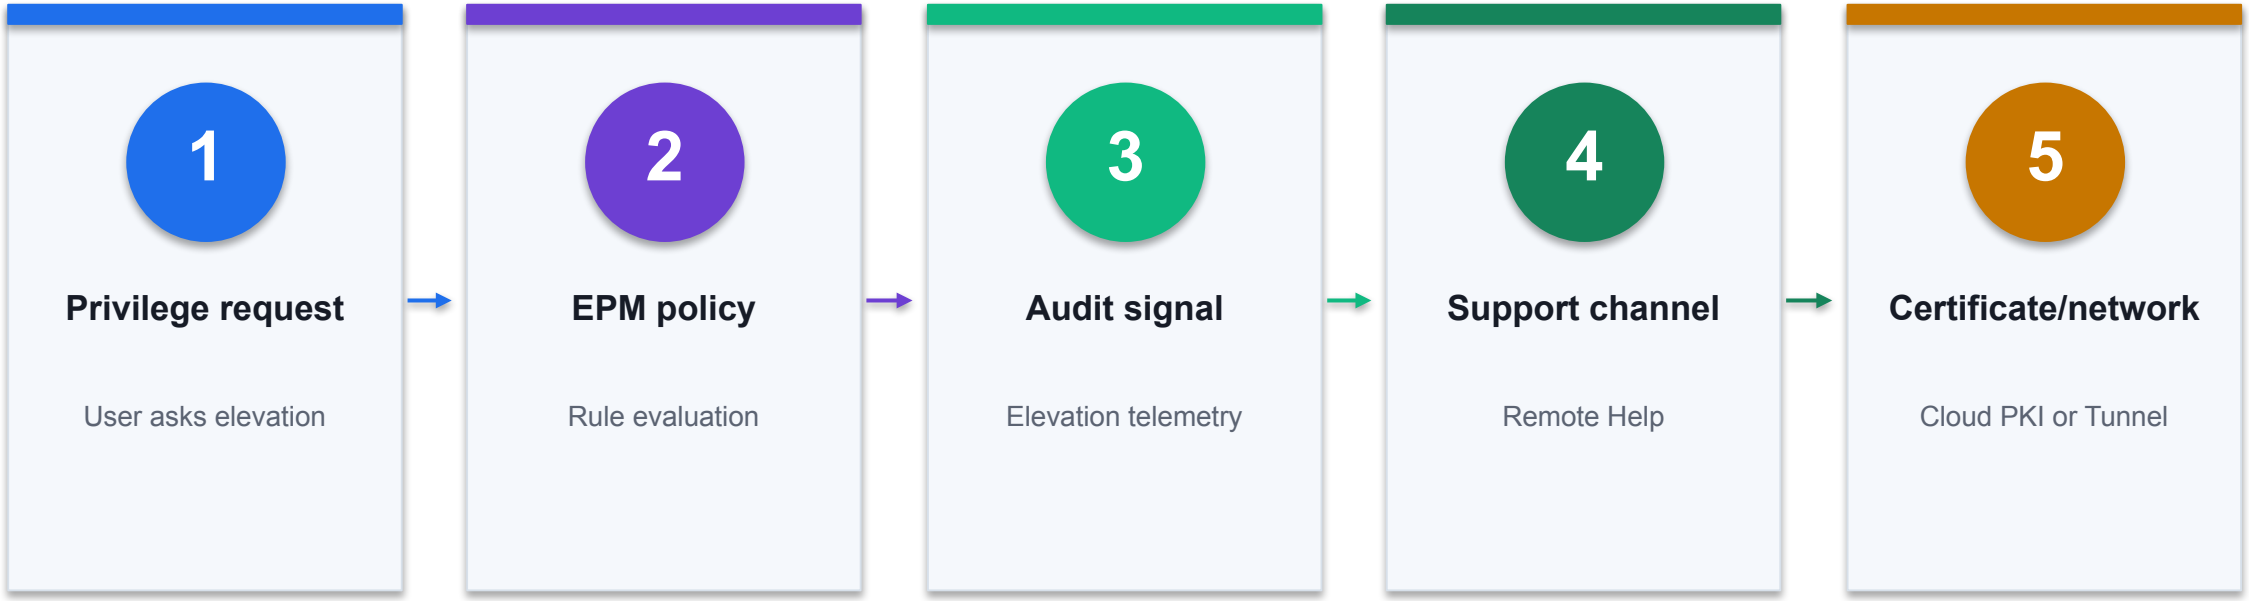

CONTROL POINT

Inspect the evidence at every transition; the first missing state is the most useful troubleshooting boundary. Lab 5 carries the full procedure.

© 2026 Tertiary Infotech Academy Pte Ltd

Apply Intune Suite controls — exact contract

1 EPM rule

File hash · publisher · path

FIELD / STATE

2 Remote Help

RBAC and session consent

FIELD / STATE

3 Cloud PKI

Issuing CA + SCEP profile

FIELD / STATE

4 Tunnel for MAM

Per-app protected path

FIELD / STATE

DECISION RULE

Configuration is a contract: names, values, scope and resulting state must all agree.

© 2026 Tertiary Infotech Academy Pte Ltd

EPM rule — control contract



BOUNDARY · Privilege request

STATE **EPM rule**

File hash · publisher · path

RISK **Elevation denied**

Rule mismatch

PROOF **Elevation report**


File + user + rule

CONTROL READING

The EPM rule state is valid only when Privilege request produces Elevation report; Elevation denied requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Remote Help — control contract

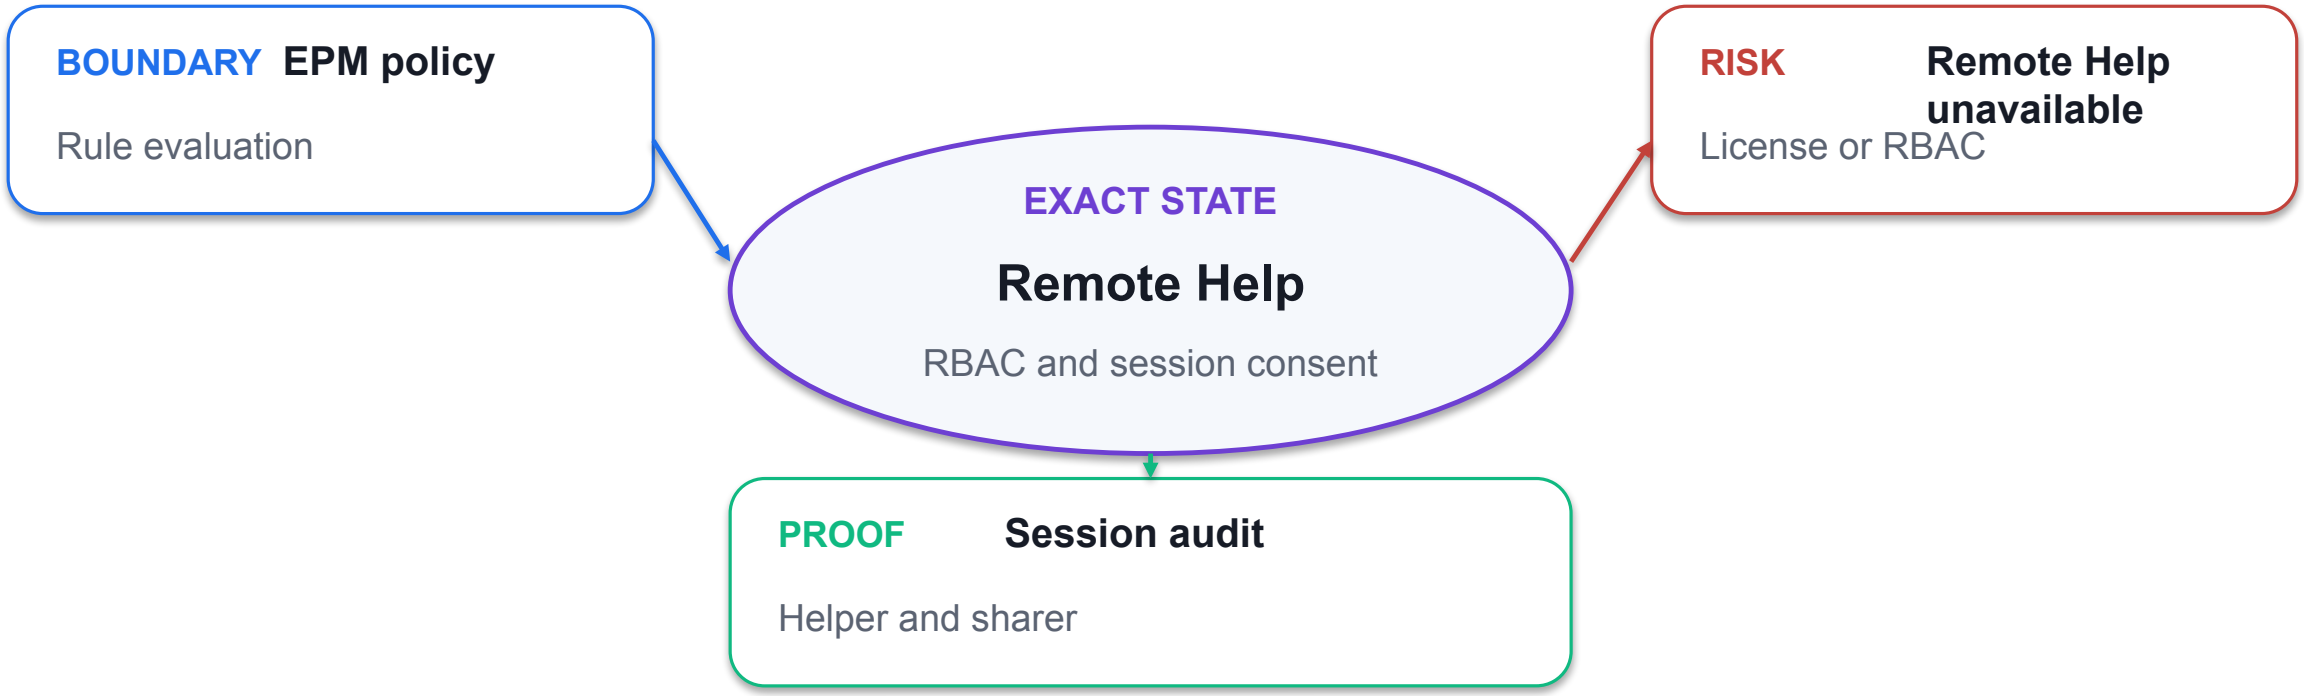

CONTROL READING

The Remote Help state is valid only when EPM policy produces Session audit; Remote Help unavailable requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Cloud PKI — control contract

1

BOUNDARY **Audit signal**

Elevation telemetry

2

EXACT STATE **Cloud PKI**

Issuing CA + SCEP profile

3

CONTROL RISK **Certificate failure**

Chain or connector health

4

PROOF **Certificate profile**

Issued identity

CONTROL READING

The Cloud PKI state is valid only when Audit signal produces Certificate profile; Certificate failure requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Tunnel for MAM — control contract

1	BOUNDARY	Support channel	Remote Help
2	EXACT STATE	Tunnel for MAM	Per-app protected path
3	CONTROL RISK	Tunnel offline	Gateway health and routing
4	PROOF	Tunnel report	Connection and gateway

CONTROL READING

The Tunnel for MAM state is valid only when Support channel produces Tunnel report; Tunnel offline requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Apply Intune Suite controls — failure and recovery

1 Elevation denied

Rule mismatch

DIAGNOSE → RECOVER

2 Remote Help unavailable

License or RBAC

DIAGNOSE → RECOVER

3 Certificate failure

Chain or connector health

DIAGNOSE → RECOVER

4 Tunnel offline

Gateway health and routing

DIAGNOSE → RECOVER

DECISION RULE

Treat the symptom as a pointer to a failed stage; collect evidence before changing policy.

© 2026 Tertiary Infotech Academy Pte Ltd

Elevation denied — diagnostic trace

1	SIGNAL	**Elevation denied**
2	BOUNDARY	EPM policy
3	SUSPECT STATE	EPM rule
4	RECOVERY	Rule mismatch
5	ACCEPTANCE	**Elevation report**

EVIDENCE THRESHOLD

Accept the recovery only when Elevation report shows File + user + rule; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Remote Help unavailable — diagnostic trace




RECOVERY ACTION	License or RBAC
ACCEPTANCE PROOF	Helper and sharer

EVIDENCE THRESHOLD

Accept the recovery only when Session audit shows Helper and sharer; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Certificate failure — diagnostic trace

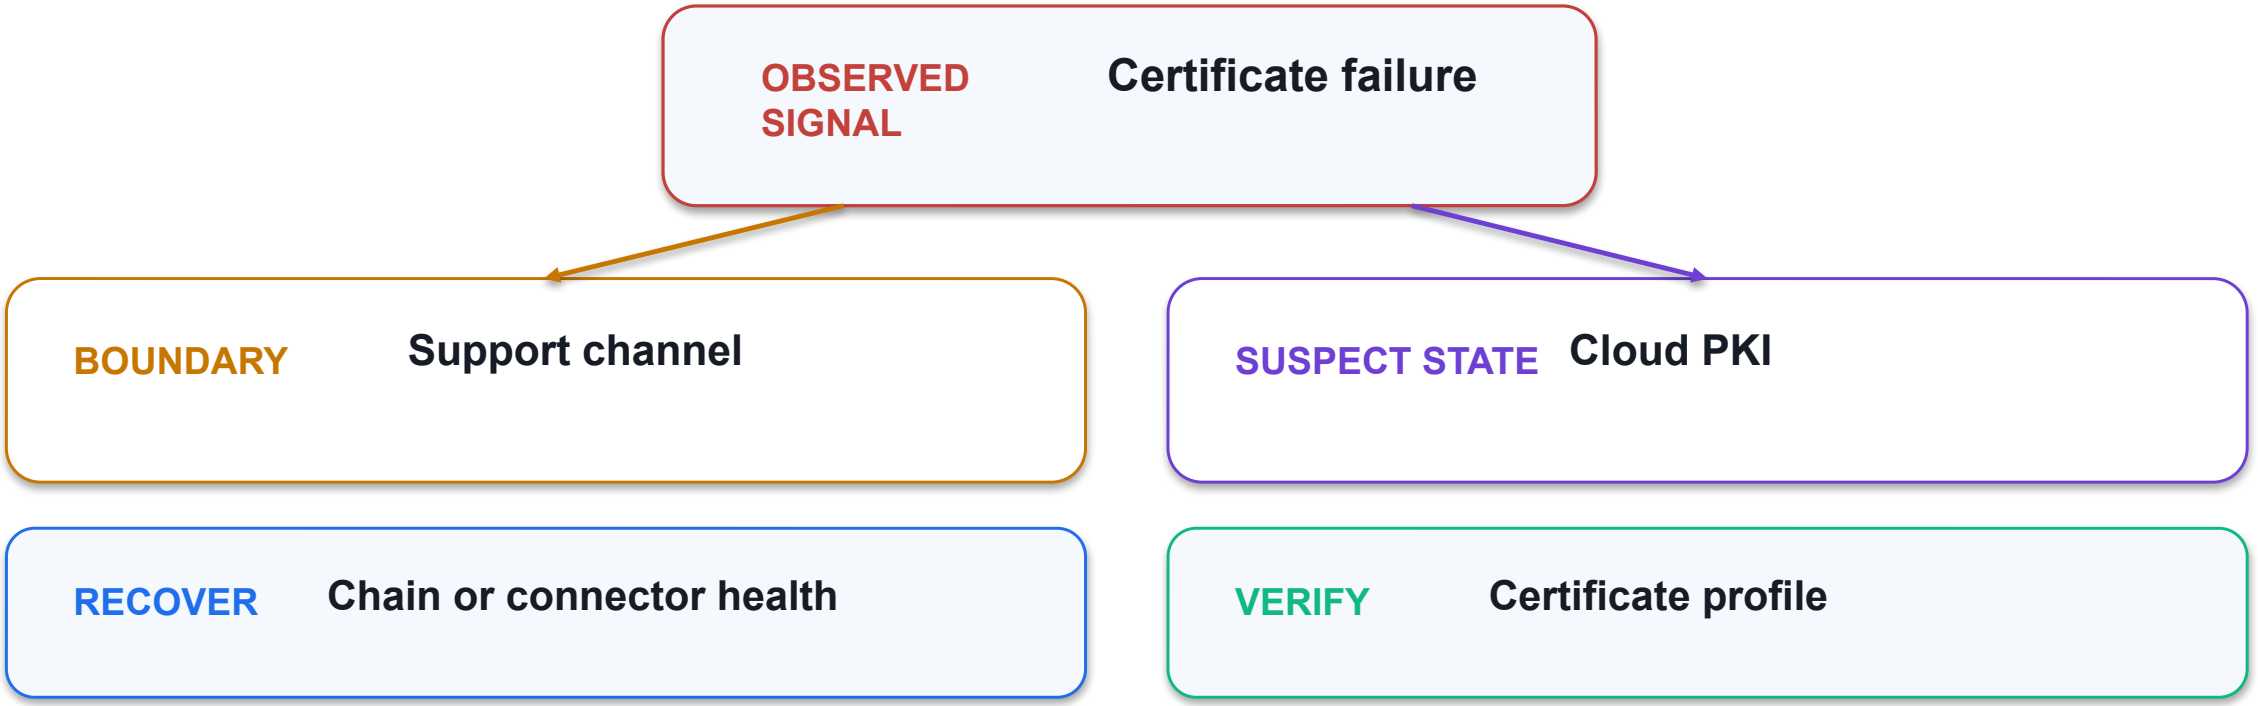

EVIDENCE THRESHOLD

Accept the recovery only when Certificate profile shows Issued identity; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Tunnel offline — diagnostic trace



BOUNDARY · Certificate/network | SUSPECT · Tunnel for MAM

SIGNAL Tunnel offline

RECOVERY Gateway health and routing

PROOF Tunnel report

EVIDENCE THRESHOLD

Accept the recovery only when Tunnel report shows Connection and gateway; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Apply Intune Suite controls — verification evidence

Elevation report	File + user + rule
Session audit	Helper and sharer
Certificate profile	Issued identity
Tunnel report	Connection and gateway

LAB 5

Evidence standard

Capture the configured state, the observed result, the timestamp or correlation ID, and the interpretation.


PASS = REPRODUCIBLE

PRACTICE BRIDGE

Full click paths, commands, expected outputs and troubleshooting are in the Learner Guide and the individual lab folder.

© 2026 Tertiary Infotech Academy Pte Ltd

Perform remote actions and live device query — mechanism

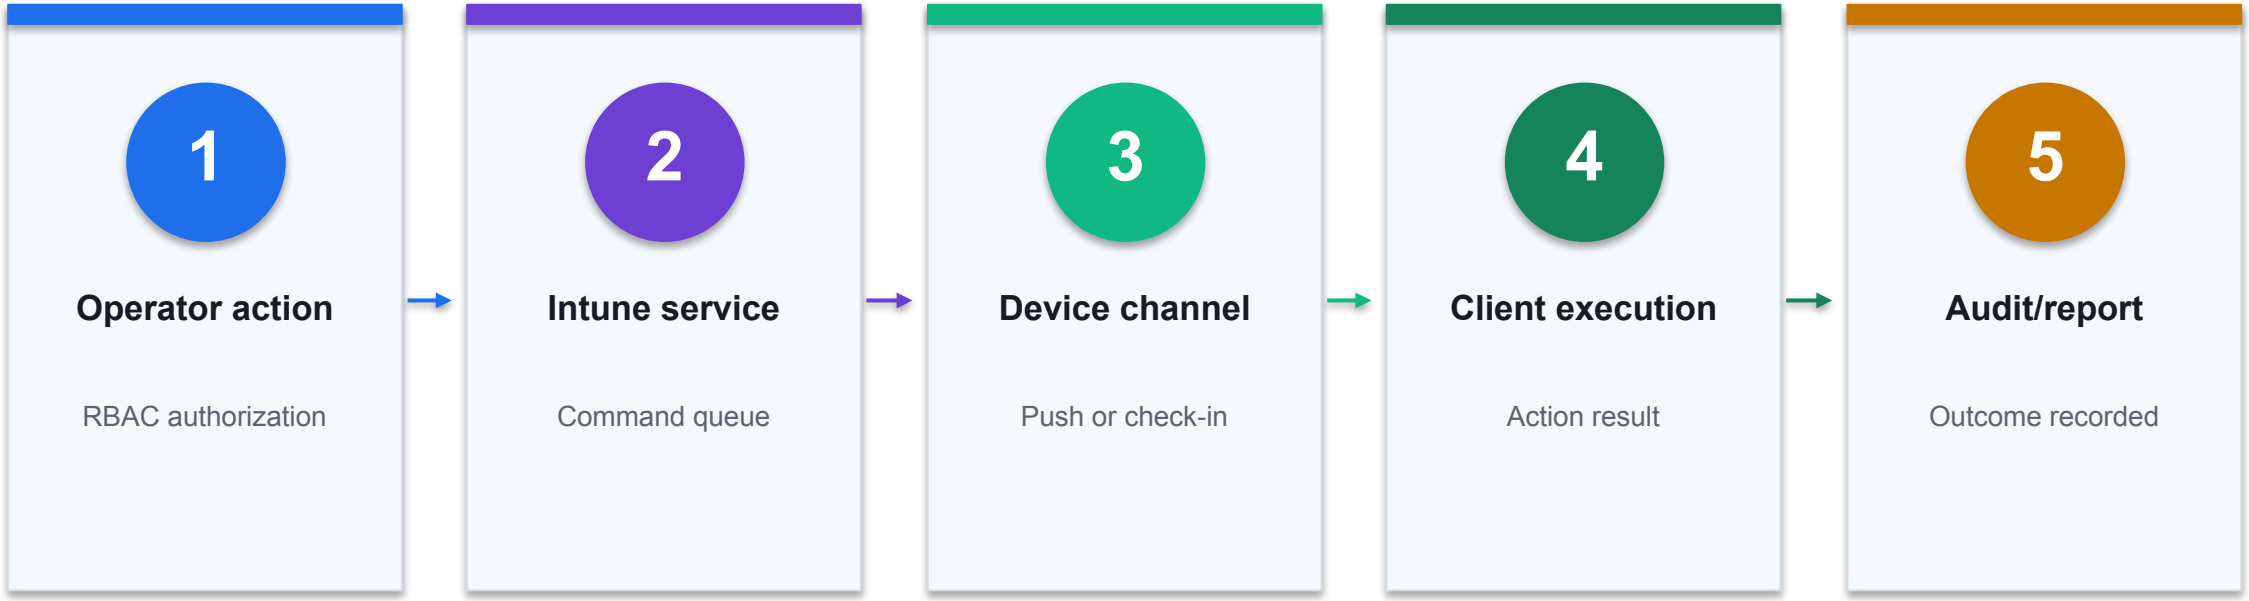

CONTROL POINT

Inspect the evidence at every transition; the first missing state is the most useful troubleshooting boundary. Lab 9 carries the full procedure.

© 2026 Tertiary Infotech Academy Pte Ltd

Perform remote actions and live device query — exact contract

1 Retire

Remove company data

FIELD / STATE

2 Wipe

Reset device

FIELD / STATE

3 Fresh Start

Reinstall Windows

FIELD / STATE

4 Device query

KQL against live device data

FIELD / STATE

DECISION RULE

Configuration is a contract: names, values, scope and resulting state must all agree.

© 2026 Tertiary Infotech Academy Pte Ltd

Retire — control contract



BOUNDARY · Operator action

STATE **Retire**

Remove company data

RISK **Action pending**

Device offline

PROOF **Action status**


Pending/succeeded/failed

CONTROL READING

The Retire state is valid only when Operator action produces Action status; Action pending requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Wipe — control contract

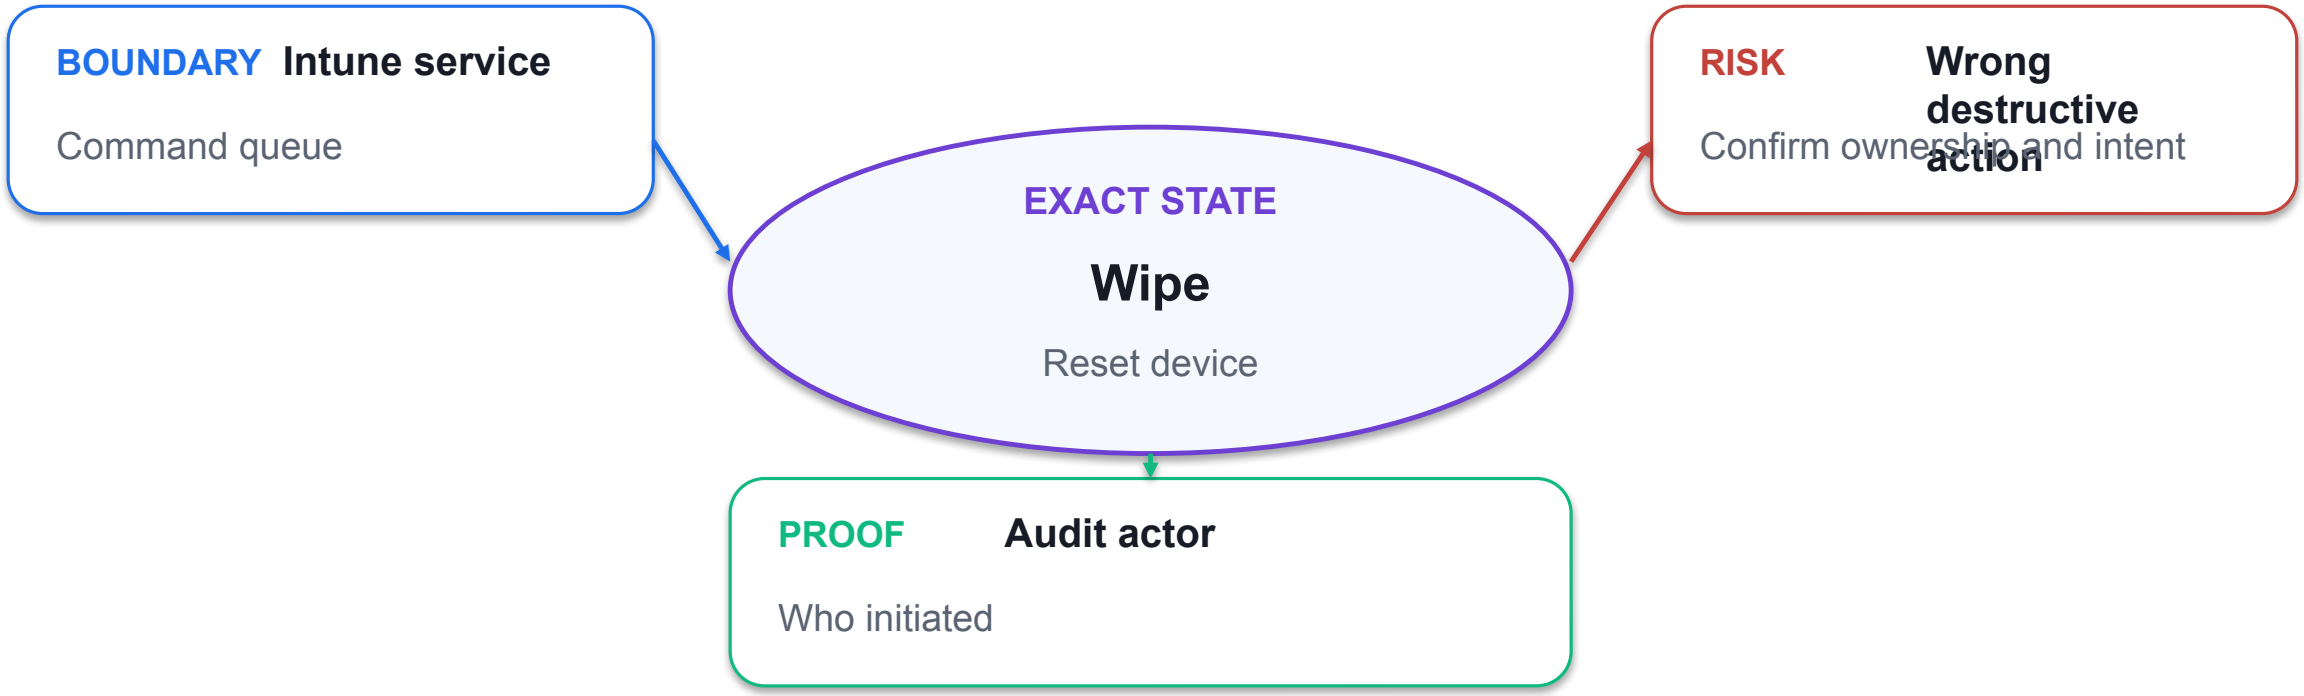

CONTROL READING

The Wipe state is valid only when Intune service produces Audit actor; Wrong destructive action requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Fresh Start — control contract

1

BOUNDARY **Device channel**

Push or check-in

2

EXACT STATE **Fresh Start**

Reinstall Windows

3

CONTROL RISK **Query unavailable**

Check supported platform/license

4

PROOF **Query result**

Named columns and timestamp

CONTROL READING

The Fresh Start state is valid only when Device channel produces Query result; Query unavailable requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Device query — control contract

1	BOUNDARY	Client execution	Action result
2	EXACT STATE	Device query	KQL against live device data
3	CONTROL RISK	BitLocker rotation fail	Verify escrow state
4	PROOF	Diagnostics bundle	Collected logs

CONTROL READING

The Device query state is valid only when Client execution produces Diagnostics bundle; BitLocker rotation fail requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Perform remote actions and live device query — failure and recovery

1 Action pending

Device offline

DIAGNOSE → RECOVER

2 Wrong destructive action

Confirm ownership and intent

DIAGNOSE → RECOVER

3 Query unavailable

Check supported platform/license

DIAGNOSE → RECOVER

4 BitLocker rotation fail

Verify escrow state

DIAGNOSE → RECOVER

DECISION RULE

Treat the symptom as a pointer to a failed stage; collect evidence before changing policy.

© 2026 Tertiary Infotech Academy Pte Ltd

Action pending — diagnostic trace

1	SIGNAL	**Action pending**
2	BOUNDARY	Intune service
3	SUSPECT STATE	Retire
4	RECOVERY	Device offline
5	ACCEPTANCE	**Action status**

EVIDENCE THRESHOLD

Accept the recovery only when Action status shows Pending/succeeded/failed; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Wrong destructive action — diagnostic trace




RECOVERY ACTION	Confirm ownership and intent
ACCEPTANCE PROOF	Who initiated

EVIDENCE THRESHOLD

Accept the recovery only when Audit actor shows Who initiated; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Query unavailable — diagnostic trace

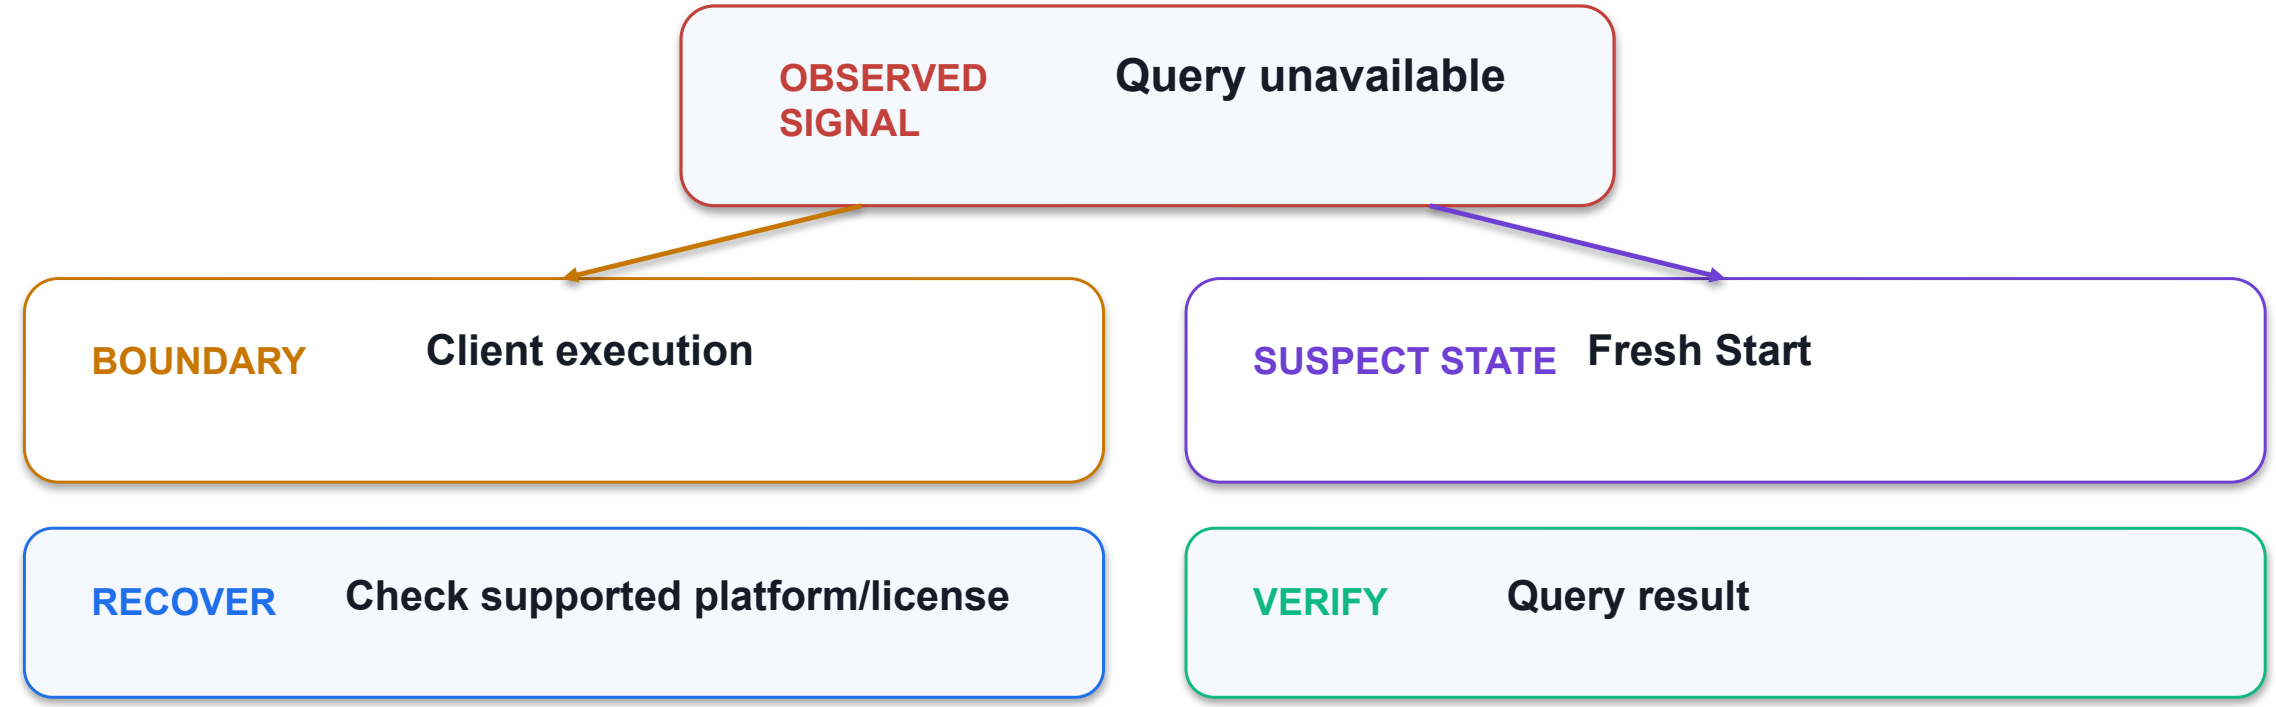

EVIDENCE THRESHOLD

Accept the recovery only when Query result shows Named columns and timestamp; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

BitLocker rotation fail — diagnostic trace



BOUNDARY · Audit/report | SUSPECT · Device query

SIGNAL BitLocker rotation fail

RECOVERY Verify escrow state

PROOF Diagnostics bundle

EVIDENCE THRESHOLD

Accept the recovery only when Diagnostics bundle shows Collected logs; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Perform remote actions and live device query — verification evidence

✓ **Action status**	Pending/succeeded/failed
✓ **Audit actor**	Who initiated
✓ **Query result**	Named columns and timestamp
✓ **Diagnostics bundle**	Collected logs

LAB 9

Evidence standard

Capture the configured state, the observed result, the timestamp or correlation ID, and the interpretation.


PASS = REPRODUCIBLE

PRACTICE BRIDGE

Full click paths, commands, expected outputs and troubleshooting are in the Learner Guide and the individual lab folder.

© 2026 Tertiary Infotech Academy Pte Ltd

Diagnose policy conflicts from device evidence — mechanism

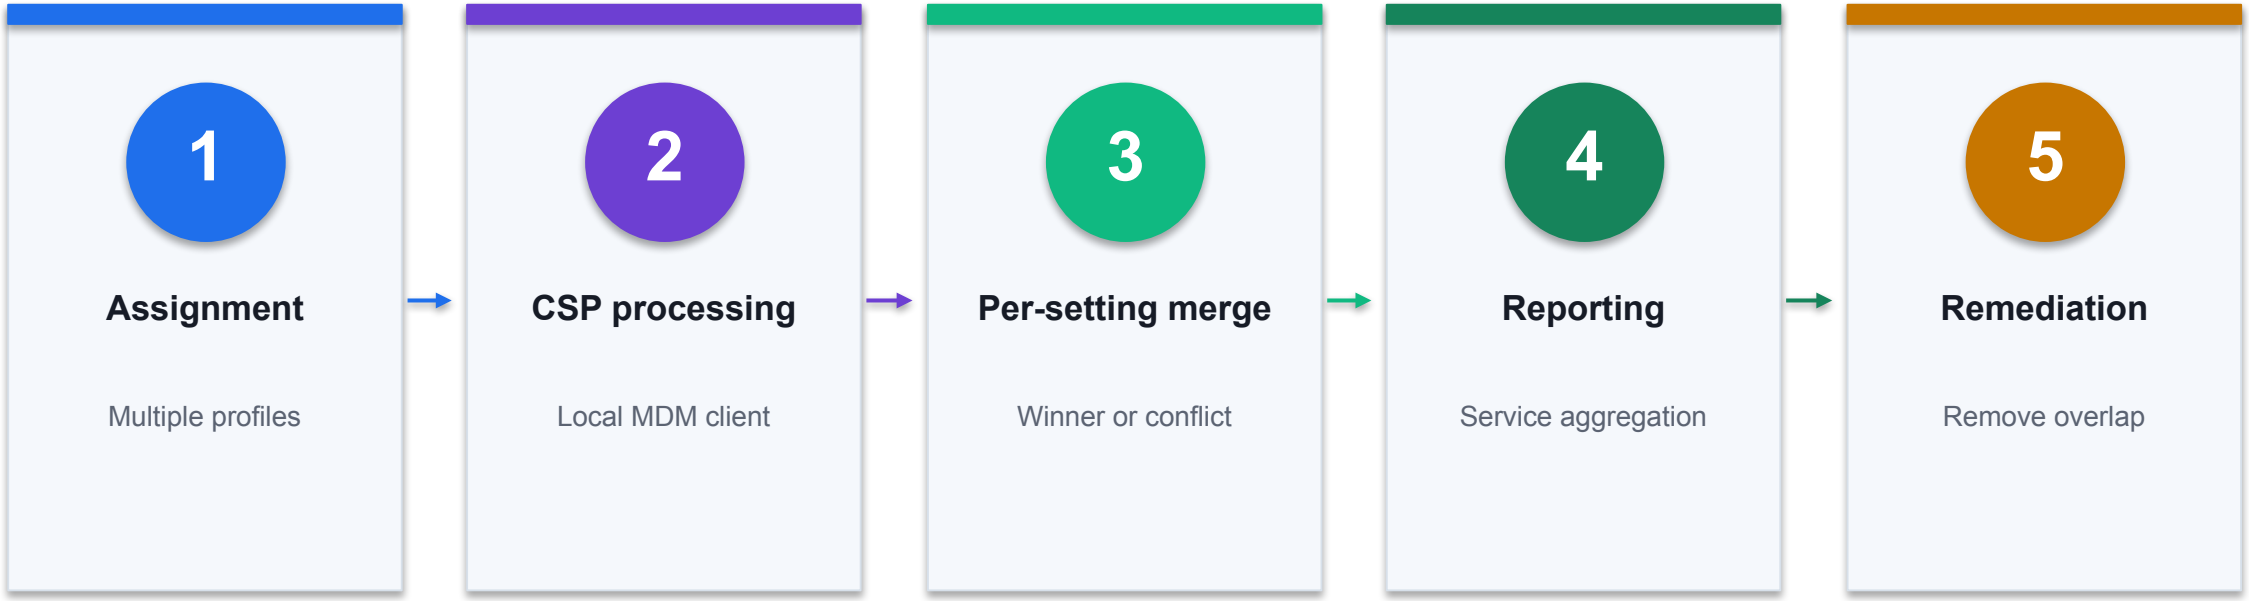

CONTROL POINT

Inspect the evidence at every transition; the first missing state is the most useful troubleshooting boundary. Lab 5 carries the full procedure.

© 2026 Tertiary Infotech Academy Pte Ltd

Diagnose policy conflicts from device evidence — exact contract

1 Client report

MDMDiagReport.html

FIELD / STATE

2 Policy view

Per-setting status

FIELD / STATE

3 Registry path

PolicyManager current values

FIELD / STATE

4 Event log

Enterprise-Diagnostics-Provider

FIELD / STATE

DECISION RULE

Configuration is a contract: names, values, scope and resulting state must all agree.

© 2026 Tertiary Infotech Academy Pte Ltd

Client report — control contract



BOUNDARY · Assignment

STATE **Client report**

MDMDiagReport.html

RISK **Conflict**

Two profiles set different values

PROOF **Setting name**


Exact CSP

CONTROL READING

The Client report state is valid only when Assignment produces Setting name; Conflict requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Policy view — control contract

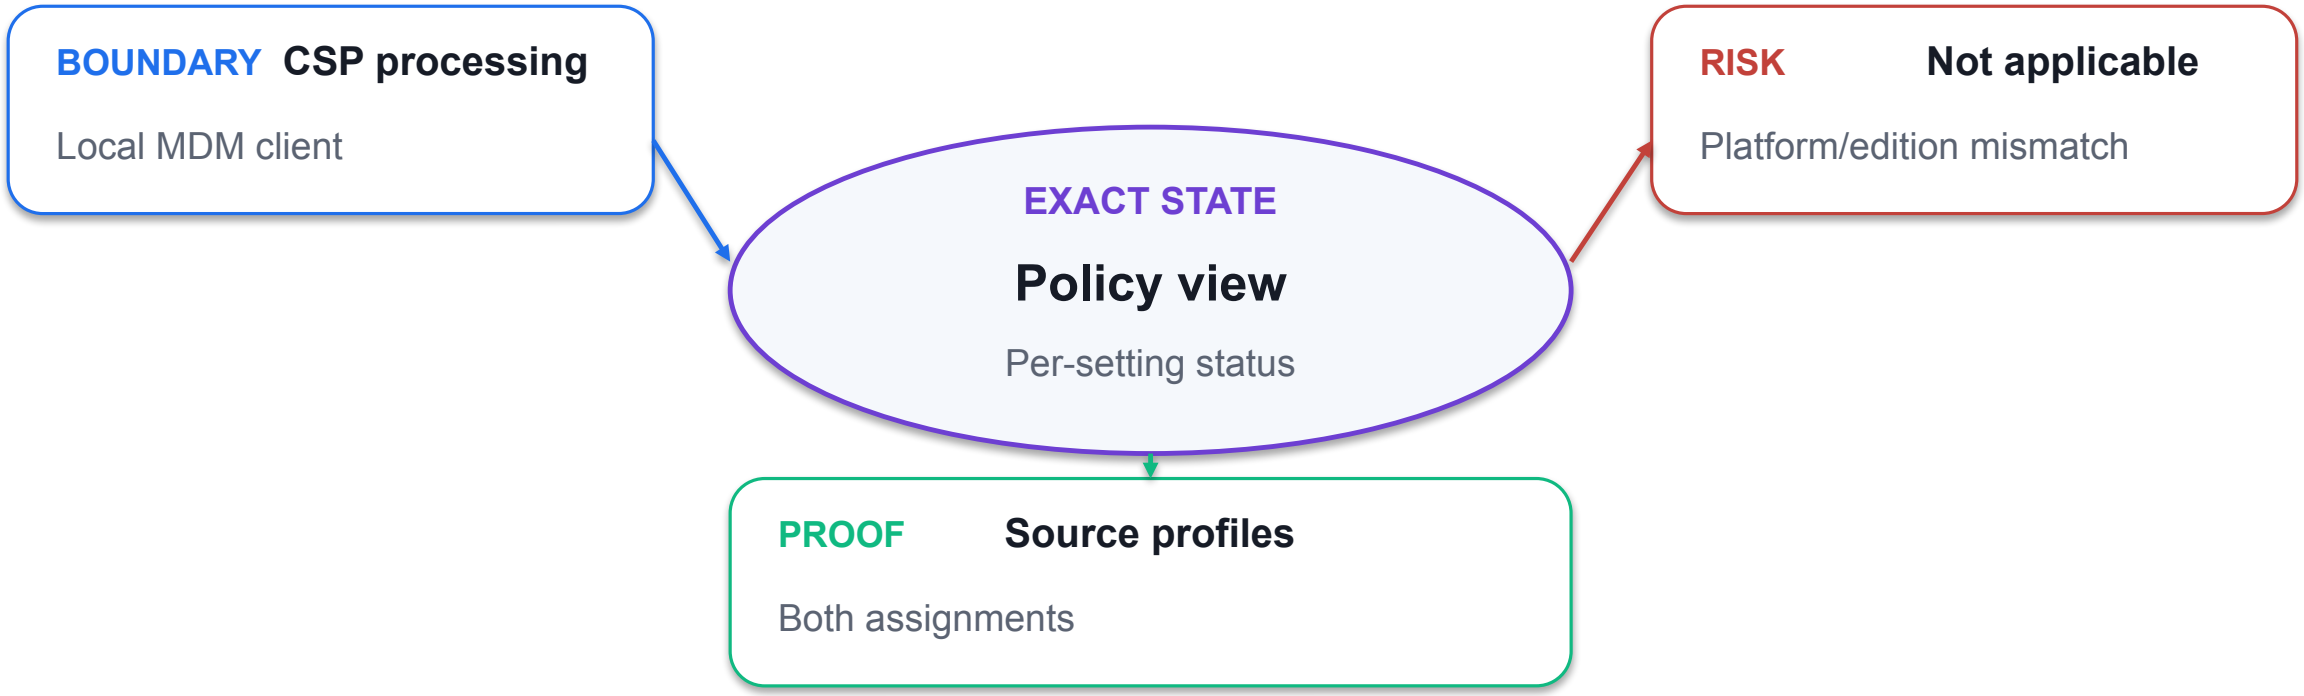

CONTROL READING

The Policy view state is valid only when CSP processing produces Source profiles; Not applicable requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Registry path — control contract

1

BOUNDARY **Per-setting merge**

Winner or conflict

2

EXACT STATE **Registry path**

PolicyManager current values

3

CONTROL RISK **Error**

CSP rejected value

4

PROOF **Client event**

Error code

CONTROL READING

The Registry path state is valid only when Per-setting merge produces Client event; Error requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Event log — control contract

1	BOUNDARY	Reporting	Service aggregation
2	EXACT STATE	Event log	Enterprise-Diagnostics-Provider
3	CONTROL RISK	Pending	No recent device check-in
4	PROOF	Retest	Success after consolidation

CONTROL READING

The Event log state is valid only when Reporting produces Retest; Pending requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Diagnose policy conflicts from device evidence — failure and recovery

1 Conflict

Two profiles set different values

DIAGNOSE → RECOVER

2 Not applicable

Platform/edition mismatch

DIAGNOSE → RECOVER

3 Error

CSP rejected value

DIAGNOSE → RECOVER

4 Pending

No recent device check-in

DIAGNOSE → RECOVER

DECISION RULE

Treat the symptom as a pointer to a failed stage; collect evidence before changing policy.

© 2026 Tertiary Infotech Academy Pte Ltd

Conflict — diagnostic trace


1	SIGNAL	**Conflict**
2	BOUNDARY	CSP processing
3	SUSPECT STATE	Client report
4	RECOVERY	Two profiles set different values
5	ACCEPTANCE	**Setting name**

EVIDENCE THRESHOLD

Accept the recovery only when Setting name shows Exact CSP; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Not applicable — diagnostic trace

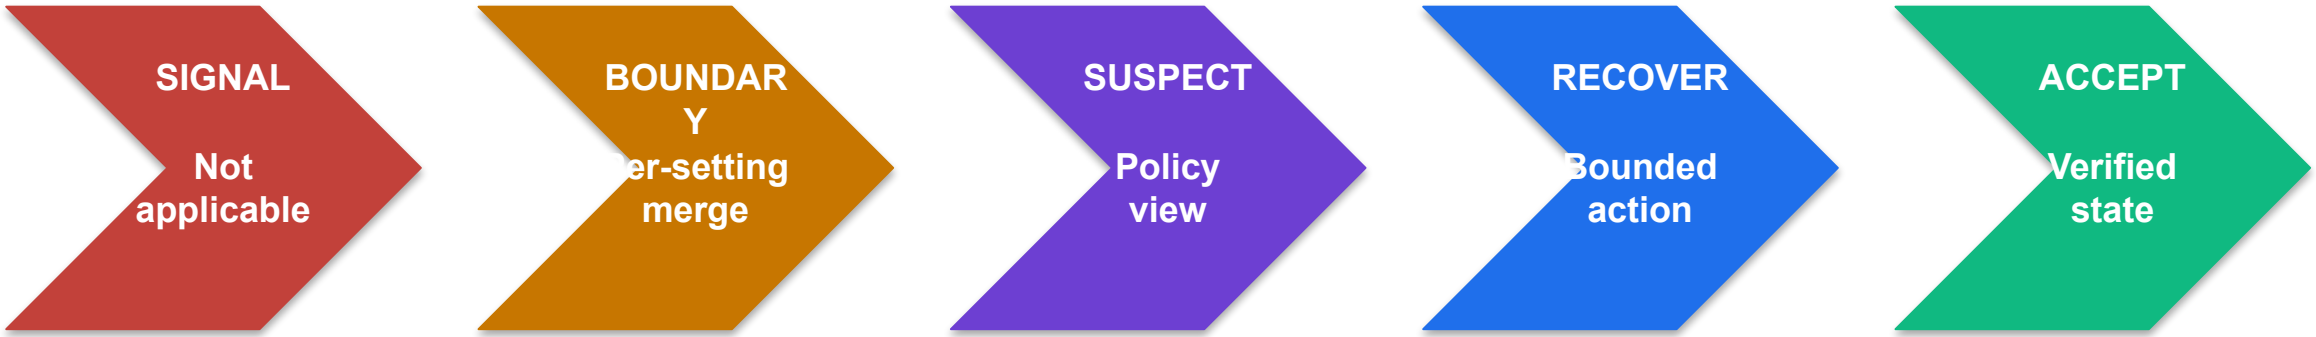


RECOVERY ACTION	Platform/edition mismatch
ACCEPTANCE PROOF	Both assignments

EVIDENCE THRESHOLD

Accept the recovery only when Source profiles shows Both assignments; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Error — diagnostic trace

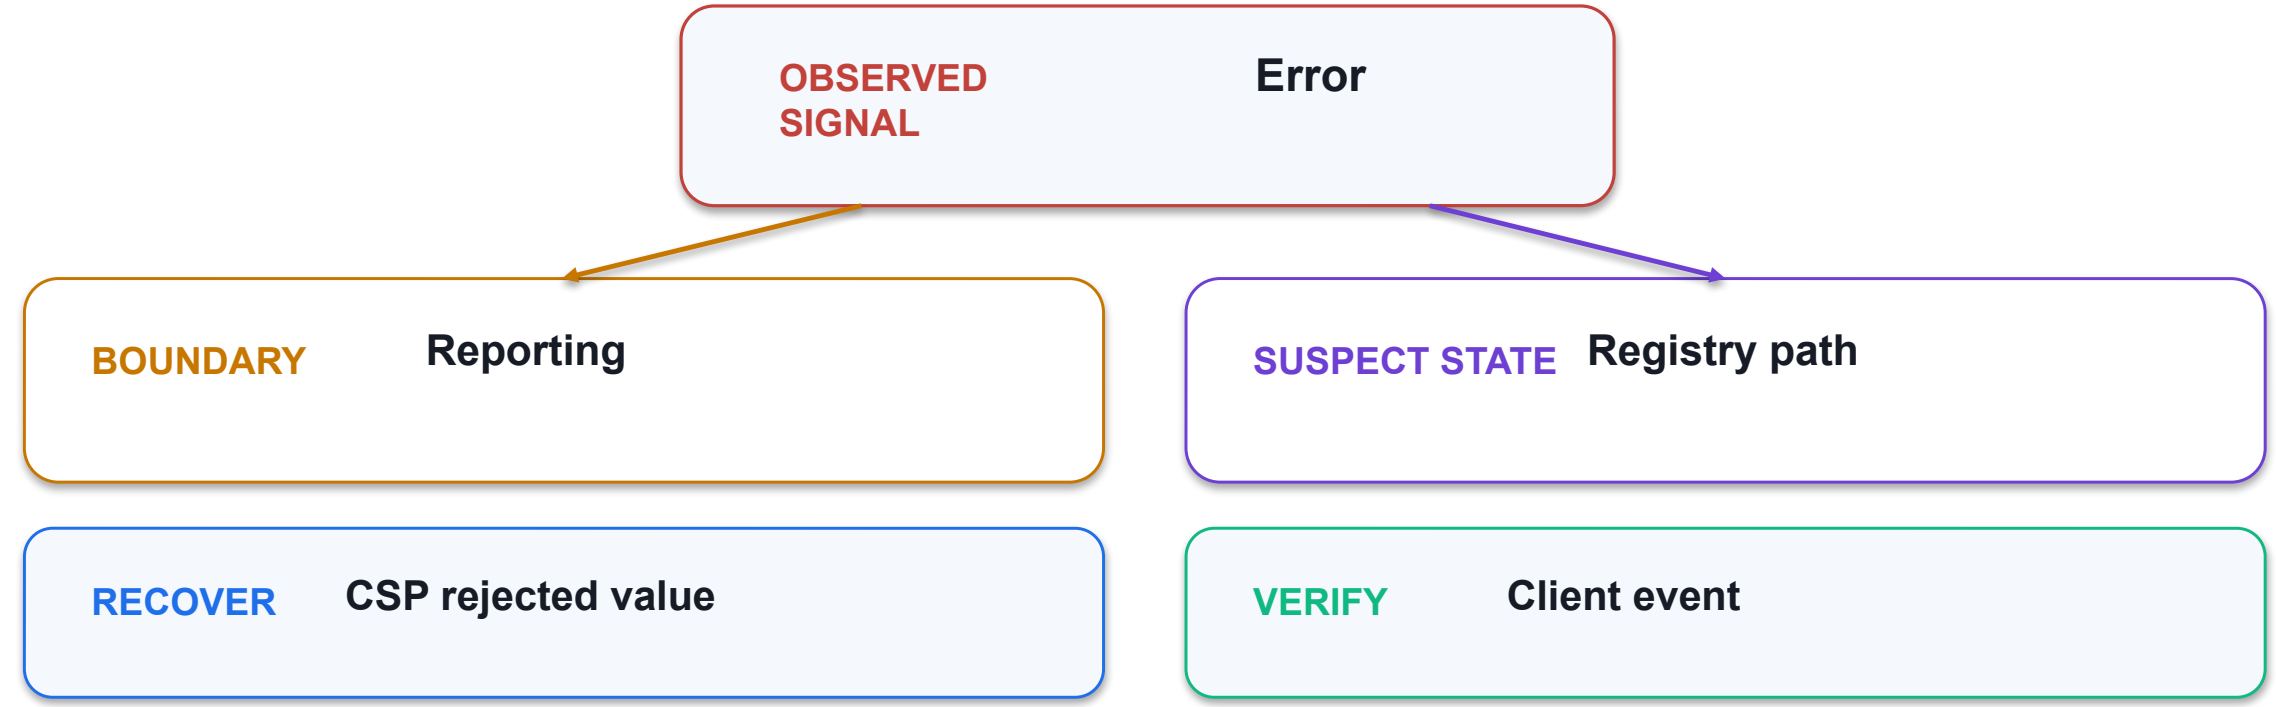

EVIDENCE THRESHOLD

Accept the recovery only when Client event shows Error code; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Pending — diagnostic trace



BOUNDARY · Remediation | SUSPECT · Event log

SIGNAL Pending

RECOVERY No recent device check-in

PROOF Retest

EVIDENCE THRESHOLD

Accept the recovery only when Retest shows Success after consolidation; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Diagnose policy conflicts from device evidence — verification evidence

✓ **Setting name**	Exact CSP
✓ **Source profiles**	Both assignments
✓ **Client event**	Error code
✓ **Retest**	Success after consolidation

LAB 5

Evidence standard

Capture the configured state, the observed result, the timestamp or correlation ID, and the interpretation.

PASS = REPRODUCIBLE

PRACTICE BRIDGE

Full click paths, commands, expected outputs and troubleshooting are in the Learner Guide and the individual lab folder.

© 2026 Tertiary Infotech Academy Pte Ltd

HANDS-ON · 115 MIN

Lab 3: Compliance, Conditional Access, Windows Hello and LAPS

SCENARIO

Contoso must implement the control, prove the observed state, diagnose one seeded failure, and retain an auditable evidence pack.



YOU'LL PRODUCE

Compliance/CA decision trace, WHfB state and auditable LAPS recovery/rotation evidence

© 2026 Tertiary Infotech Academy Pte Ltd

LO2 · K3 · K4 · A4 · A6

Lab 3 — acceptance and evidence

Configured state

Policy/profile/assignment values are visible and scoped to the intended cohort.

EVIDENCE REQUIRED

Observed result

The device, app or identity shows the expected service and client-side outcome.

EVIDENCE REQUIRED

Failure diagnosis

The seeded issue is tied to an error, log, report or missing state—not a guess.

EVIDENCE REQUIRED

Recovery proof

A post-change retest demonstrates the corrected state with timestamp/correlation evidence.

EVIDENCE REQUIRED

SUBMISSION

Save the evidence under labs/lab-03-compliance-ca-whfb-laps/evidence/. Detailed steps are in the Learner Guide.

© 2026 Tertiary Infotech Academy Pte Ltd

HANDS-ON · 115 MIN

Lab 4: Autopilot, device preparation and Windows 365 provisioning

SCENARIO

Contoso must implement the control, prove the observed state, diagnose one seeded failure, and retain an auditable evidence pack.



YOU'LL PRODUCE

Deployment decision, profile/ESP design, readiness evidence and Cloud PC provisioning check

© 2026 Tertiary Infotech Academy Pte Ltd

LO1 · LO4 · K1 · K5 · A2 · A7

Lab 4 — acceptance and evidence

Configured state

Policy/profile/assignment values are visible and scoped to the intended cohort.

EVIDENCE REQUIRED

Observed result

The device, app or identity shows the expected service and client-side outcome.

EVIDENCE REQUIRED

Failure diagnosis

The seeded issue is tied to an error, log, report or missing state—not a guess.

EVIDENCE REQUIRED

Recovery proof

A post-change retest demonstrates the corrected state with timestamp/correlation evidence.

EVIDENCE REQUIRED

SUBMISSION

Save the evidence under labs/lab-04-autopilot-device-prep-windows365/evidence/. Detailed steps are in the Learner Guide.

© 2026 Tertiary Infotech Academy Pte Ltd

HANDS-ON · 110 MIN

Lab 5: Settings Catalog, ADMX migration and assignment filters

SCENARIO

Contoso must implement the control, prove the observed state, diagnose one seeded failure, and retain an auditable evidence pack.



YOU'LL PRODUCE

Migrated settings policy, filter preview, conflict diagnosis and corrected per-setting result

© 2026 Tertiary Infotech Academy Pte Ltd

LO2 · K2 · K4 · A2 · A4

Lab 5 — acceptance and evidence

Configured state

Policy/profile/assignment values are visible and scoped to the intended cohort.

EVIDENCE REQUIRED

Observed result

The device, app or identity shows the expected service and client-side outcome.

EVIDENCE REQUIRED

Failure diagnosis

The seeded issue is tied to an error, log, report or missing state—not a guess.

EVIDENCE REQUIRED

Recovery proof

A post-change retest demonstrates the corrected state with timestamp/correlation evidence.

EVIDENCE REQUIRED

SUBMISSION

Save the evidence under labs/lab-05-configuration-admx-filters/evidence/. Detailed steps are in the Learner Guide.

© 2026 Tertiary Infotech Academy Pte Ltd

RETRIEVE · DIAGNOSE · EXPLAIN

Day 2 technical recap

1 Checkpoint 1

- Select Windows Autopilot or device preparation
- Control Autopilot with ESP and naming

2 Checkpoint 2

- Upgrade Windows 11 with deployment rings
- Provision Windows 365 Cloud PCs

3 Checkpoint 3

- Translate GPOs into Settings Catalog policy
- Target profiles with filters and enrollment-time grouping

4 Checkpoint 4

- Apply Intune Suite controls
- Perform remote actions and live device query

REMEMBER

For each checkpoint, name the architecture boundary, exact contract, failure evidence and acceptance state.


© 2026 Tertiary Infotech Academy Pte Ltd

DAY 3 · 8 HOURS

Endpoint protection and updates

Defender; BitLocker; firewall; ASR; baselines; update operations · 15–20% · LO2 · LO3 · K3 · K4 · A4 · A5 · A6

Protect devices — indicative operational signal

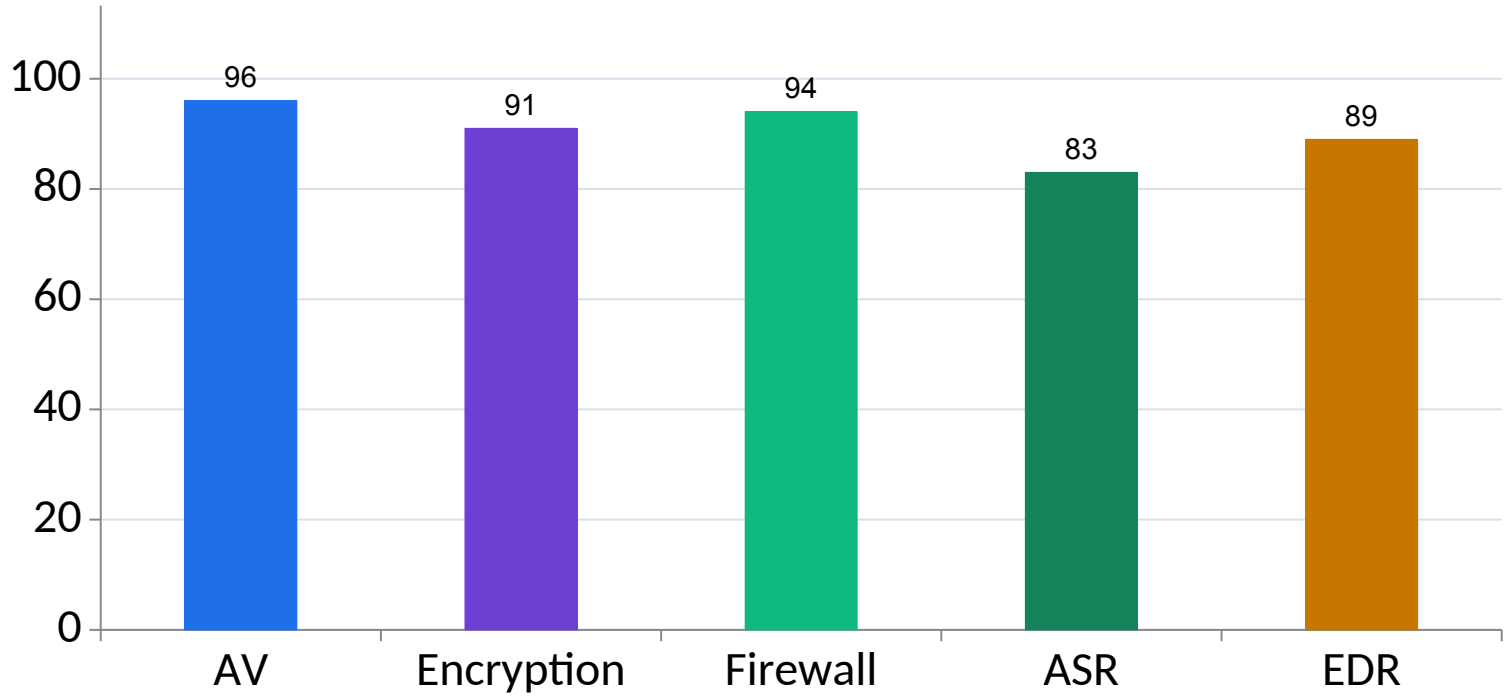

15–20%

CURRENT EXAM WEIGHT

LO2 · LO3

K3 · K4 · A4 · A5 · A6


Indicative teaching data

WHAT THE DATA SHOWS

A single weak control can dominate endpoint risk; investigate the lowest control.

© 2026 Tertiary Infotech Academy Pte Ltd

Configure Defender Antivirus policy — mechanism

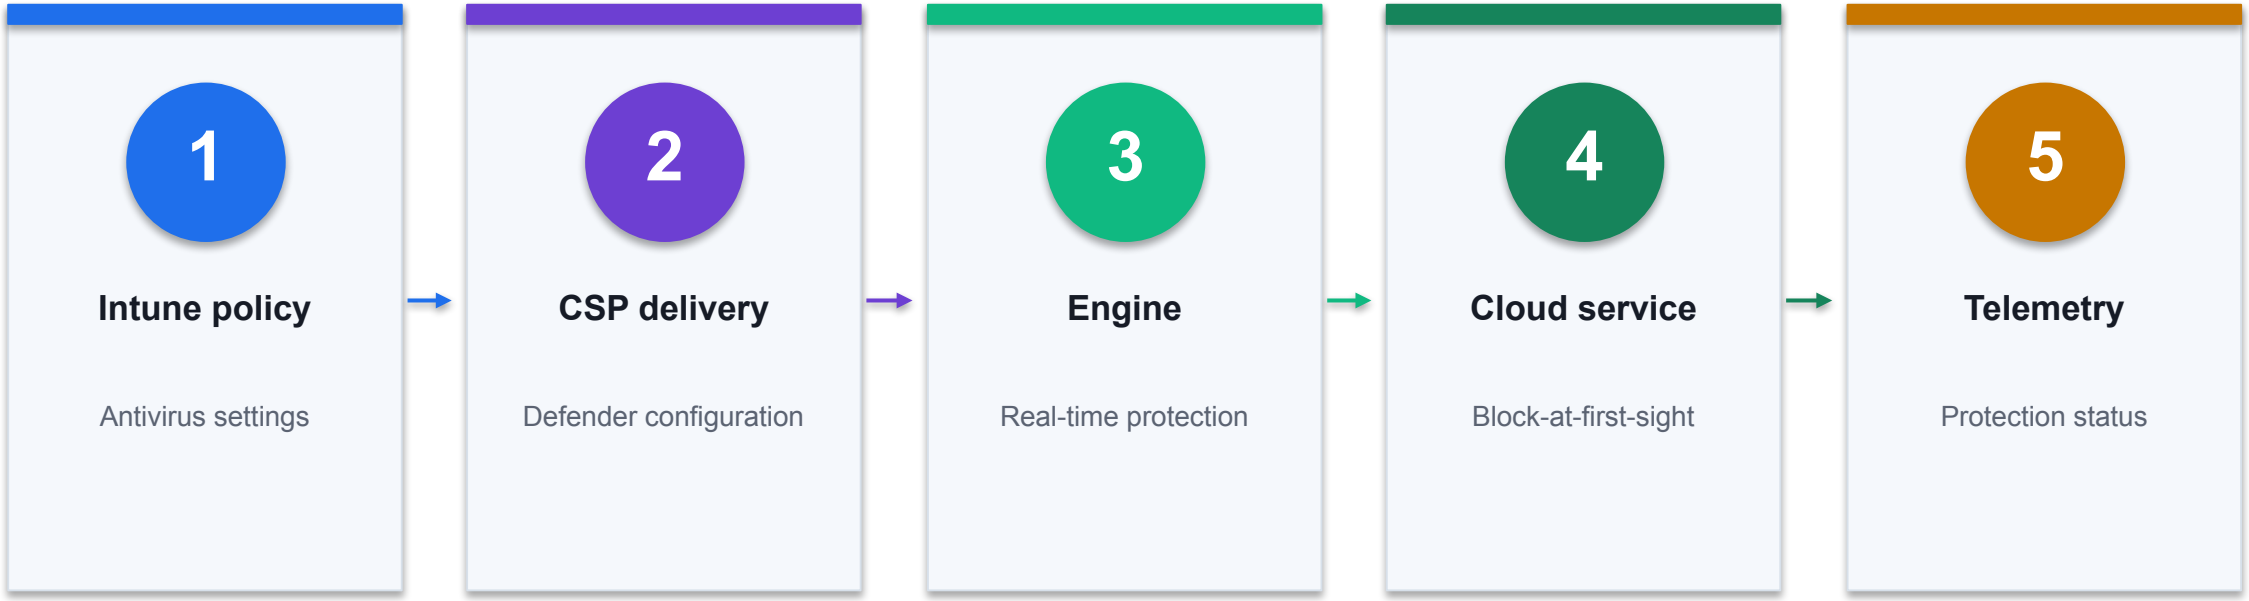

CONTROL POINT

Inspect the evidence at every transition; the first missing state is the most useful troubleshooting boundary. Lab 6 carries the full procedure.

© 2026 Tertiary Infotech Academy Pte Ltd

Configure Defender Antivirus policy — exact contract

1 Cloud protection

Enabled

FIELD / STATE

2 Sample submission

Safe samples automatically

FIELD / STATE

3 PUA

Block

FIELD / STATE

4 Tamper protection

On through security management

FIELD / STATE

DECISION RULE

Configuration is a contract: names, values, scope and resulting state must all agree.

© 2026 Tertiary Infotech Academy Pte Ltd

Cloud protection — control contract



BOUNDARY · Intune policy

STATE **Cloud protection**

Enabled

RISK **Setting locked**

Tamper protection

PROOF **Get-MpComputerStatus**


Engine + signature

CONTROL READING

The Cloud protection state is valid only when Intune policy produces Get-MpComputerStatus; Setting locked requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Sample submission — control contract

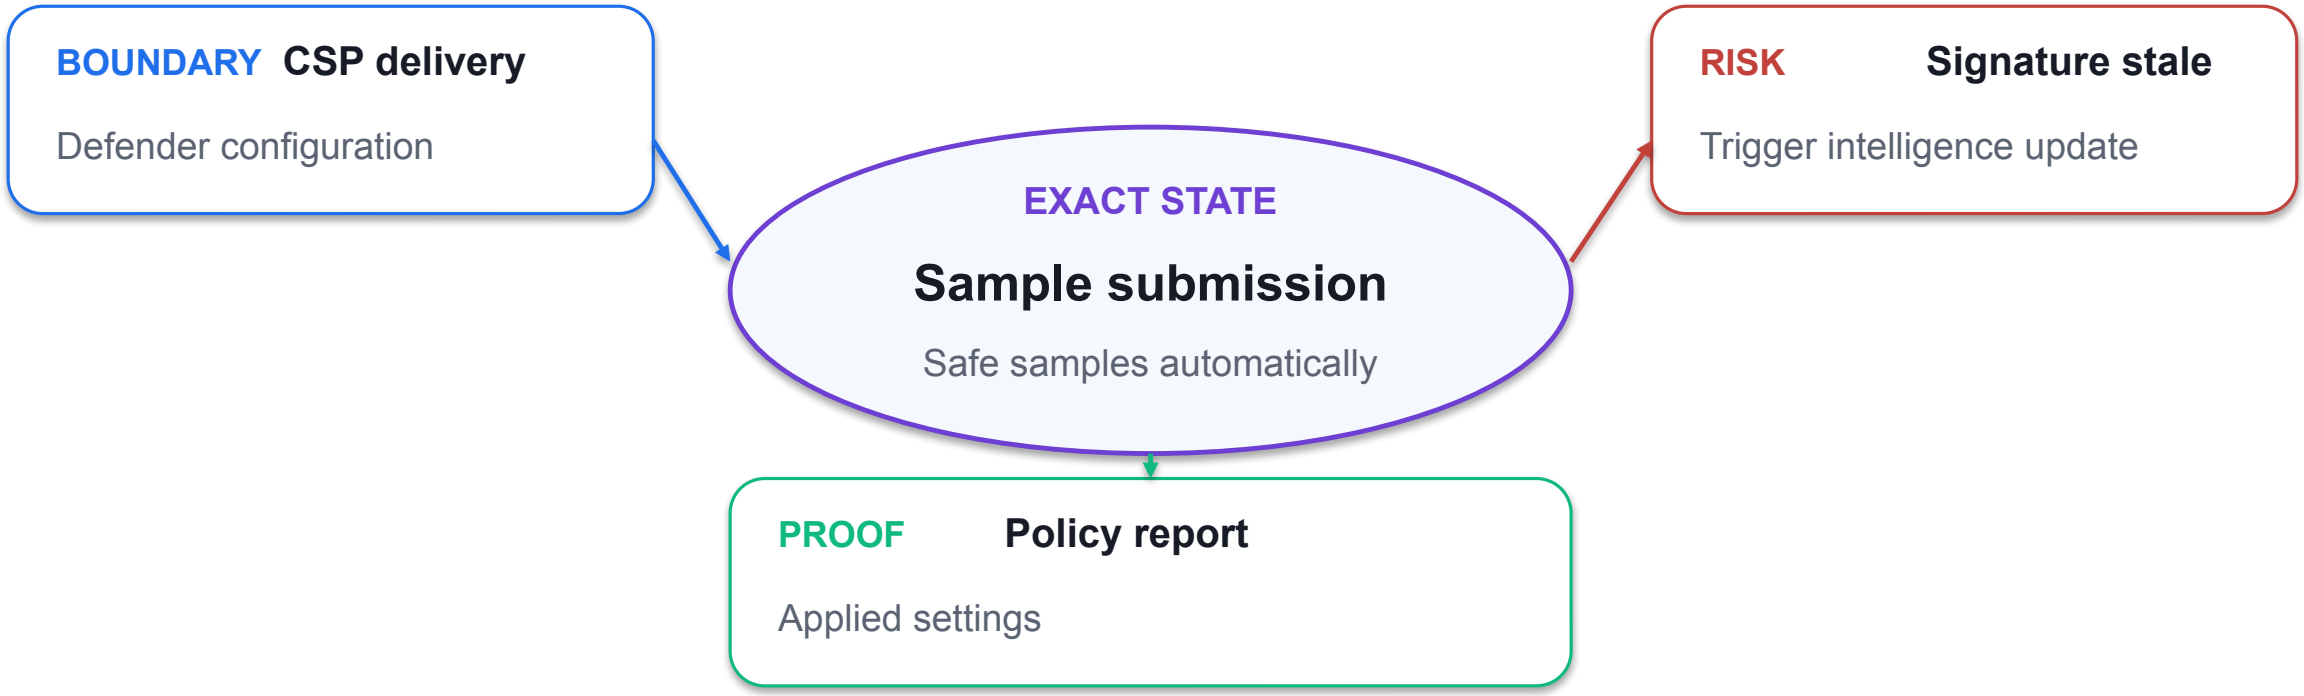

CONTROL READING

The Sample submission state is valid only when CSP delivery produces Policy report; Signature stale requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

PUA — control contract

1

BOUNDARY **Engine**

Real-time protection

2

EXACT STATE **PUA**

Block

3

CONTROL RISK **Policy conflict**

Security policy vs profile

4

PROOF **Device timeline**

Detection evidence

CONTROL READING

The PUA state is valid only when Engine produces Device timeline; Policy conflict requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Tamper protection — control contract

1	BOUNDARY	Cloud service	Block-at-first-sight
2	EXACT STATE	Tamper protection	On through security management
3	CONTROL RISK	Sensor unhealthy	Collect Defender diagnostics
4	PROOF	Security intelligence	Current version

CONTROL READING

The Tamper protection state is valid only when Cloud service produces Security intelligence; Sensor unhealthy requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Configure Defender Antivirus policy — failure and recovery

1 Setting locked

Tamper protection

DIAGNOSE → RECOVER

2 Signature stale

Trigger intelligence update

DIAGNOSE → RECOVER

3 Policy conflict

Security policy vs profile

DIAGNOSE → RECOVER

4 Sensor unhealthy

Collect Defender diagnostics

DIAGNOSE → RECOVER

DECISION RULE

Treat the symptom as a pointer to a failed stage; collect evidence before changing policy.

© 2026 Tertiary Infotech Academy Pte Ltd

Setting locked — diagnostic trace


1	SIGNAL	**Setting locked**
2	BOUNDARY	CSP delivery
3	SUSPECT STATE	Cloud protection
4	RECOVERY	Tamper protection
5	ACCEPTANCE	**Get-MpComputerStatus**

EVIDENCE THRESHOLD

Accept the recovery only when Get-MpComputerStatus shows Engine + signature; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Signature stale — diagnostic trace

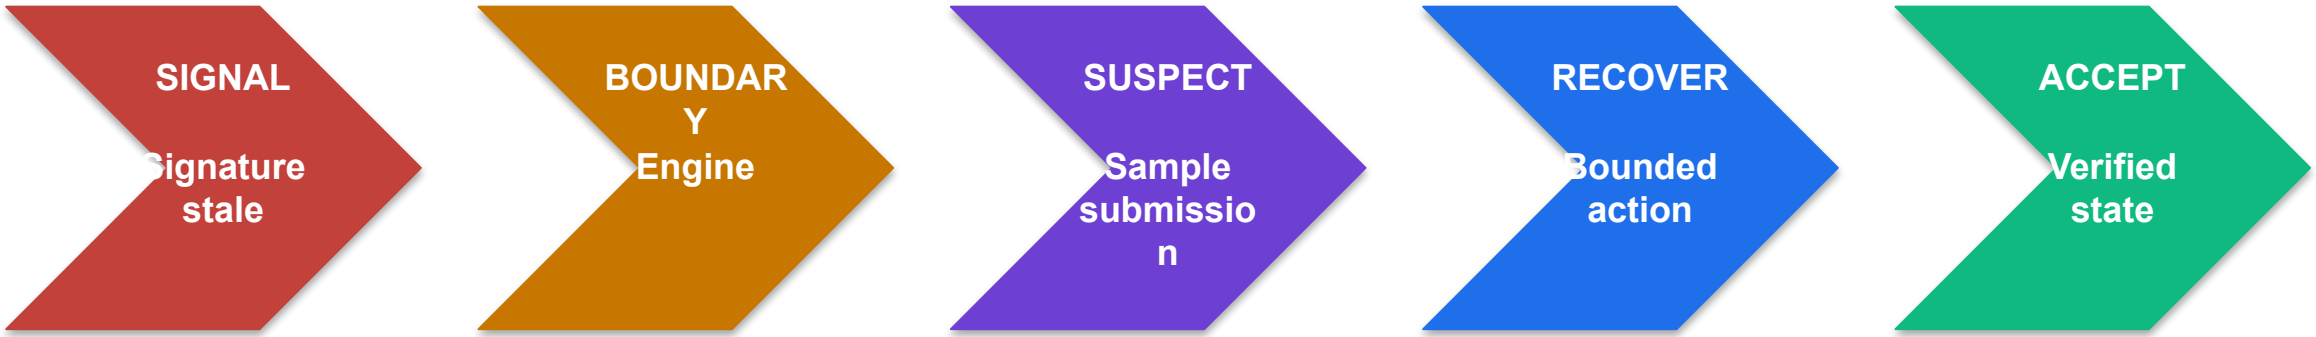


RECOVERY ACTION	Trigger intelligence update
ACCEPTANCE PROOF	Applied settings

EVIDENCE THRESHOLD

Accept the recovery only when Policy report shows Applied settings; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Policy conflict — diagnostic trace

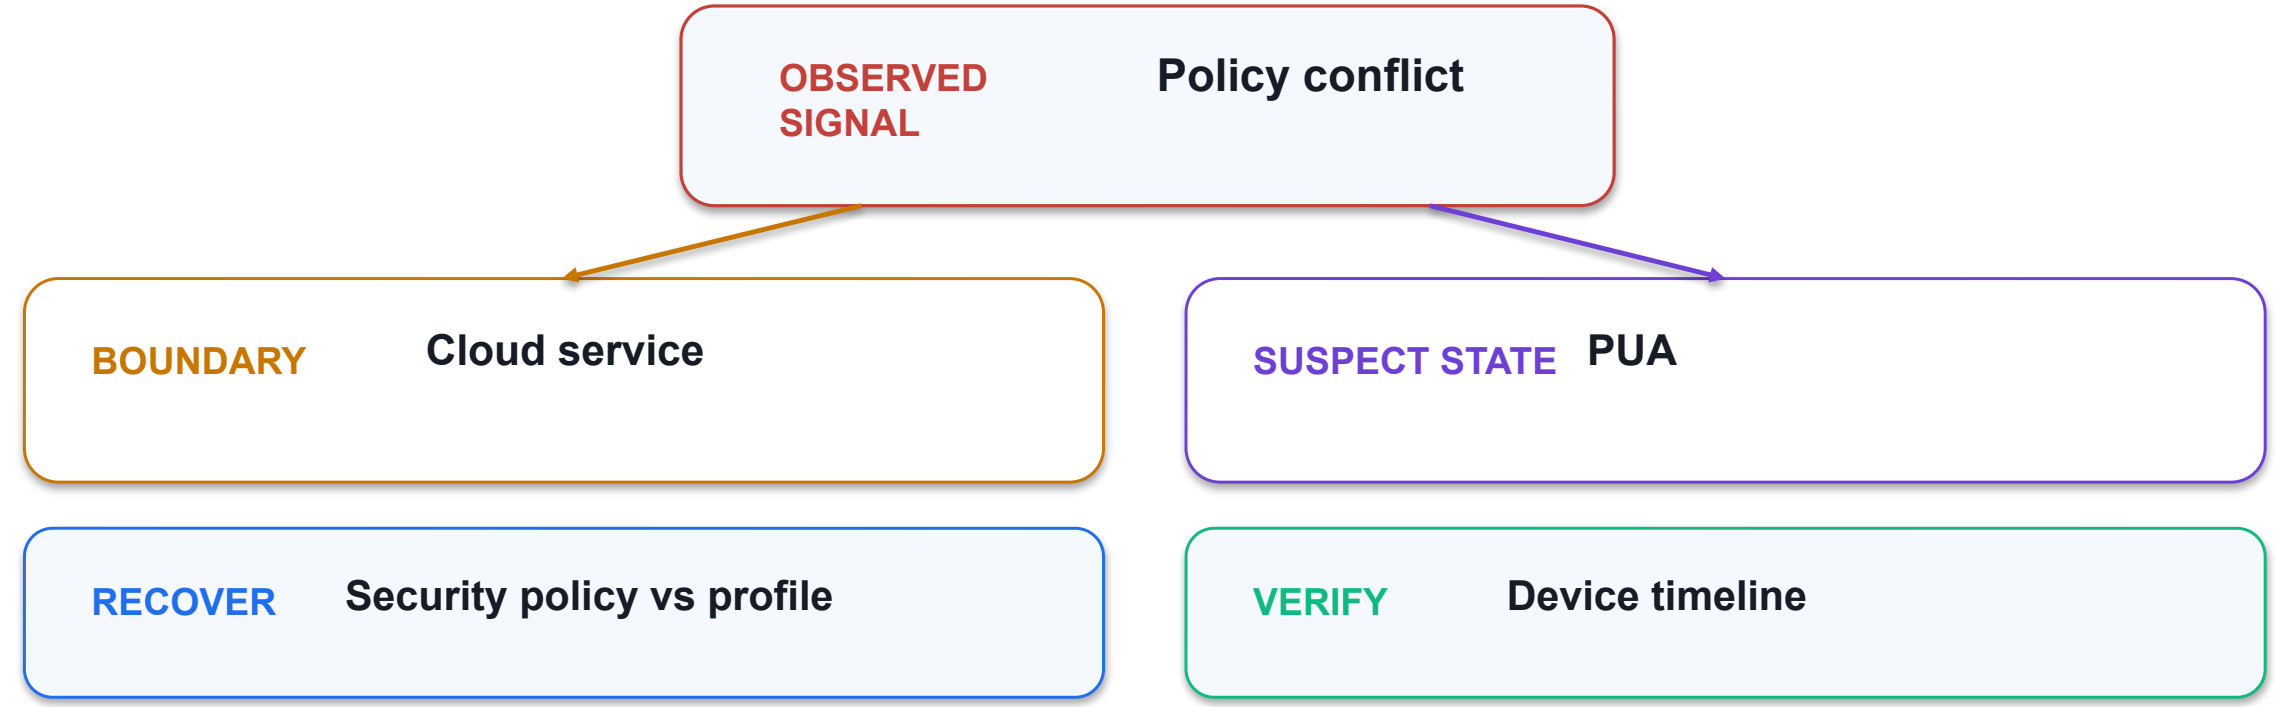

EVIDENCE THRESHOLD

Accept the recovery only when Device timeline shows Detection evidence; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Sensor unhealthy — diagnostic trace



BOUNDARY · Telemetry | SUSPECT · Tamper protection

SIGNAL Sensor unhealthy

RECOVERY Collect Defender diagnostics

PROOF Security intelligence

EVIDENCE THRESHOLD

Accept the recovery only when Security intelligence shows Current version; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Configure Defender Antivirus policy — verification evidence

✓ **Get-MpComputerStatus**	Engine + signature
✓ **Policy report**	Applied settings
✓ **Device timeline**	Detection evidence
✓ **Security intelligence**	Current version

LAB 6

Evidence standard

Capture the configured state, the observed result, the timestamp or correlation ID, and the interpretation.


PASS = REPRODUCIBLE

PRACTICE BRIDGE

Full click paths, commands, expected outputs and troubleshooting are in the Learner Guide and the individual lab folder.

© 2026 Tertiary Infotech Academy Pte Ltd

Manage BitLocker encryption and recovery — mechanism

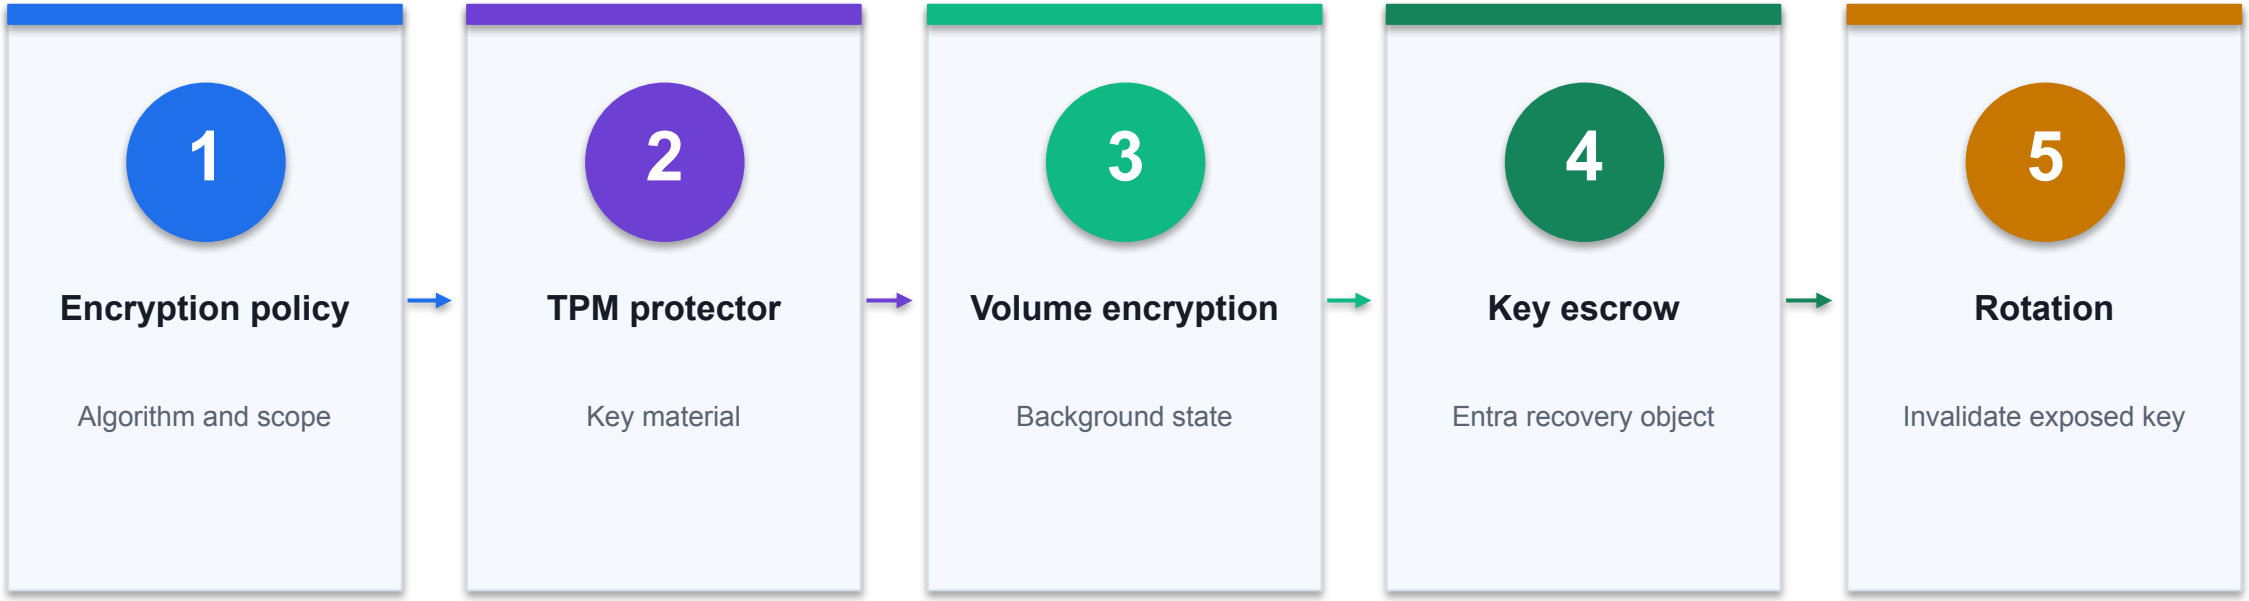

CONTROL POINT

Inspect the evidence at every transition; the first missing state is the most useful troubleshooting boundary. Lab 6 carries the full procedure.

© 2026 Tertiary Infotech Academy Pte Ltd

Manage BitLocker encryption and recovery — exact contract

1 Silent enablement

Standard user allowed

FIELD / STATE

2 Recovery escrow

Before encryption required

FIELD / STATE

3 Algorithm

XTS-AES

FIELD / STATE

4 Rotation

After key use

FIELD / STATE

DECISION RULE

Configuration is a contract: names, values, scope and resulting state must all agree.

© 2026 Tertiary Infotech Academy Pte Ltd

Silent enablement — control contract



BOUNDARY · Encryption policy

STATE **Silent enablement**

Standard user allowed

RISK **No escrow**

Check device join and permissions

PROOF **manage-bde -status**


Protection state

CONTROL READING

The Silent enablement state is valid only when Encryption policy produces manage-bde -status; No escrow requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Recovery escrow — control contract

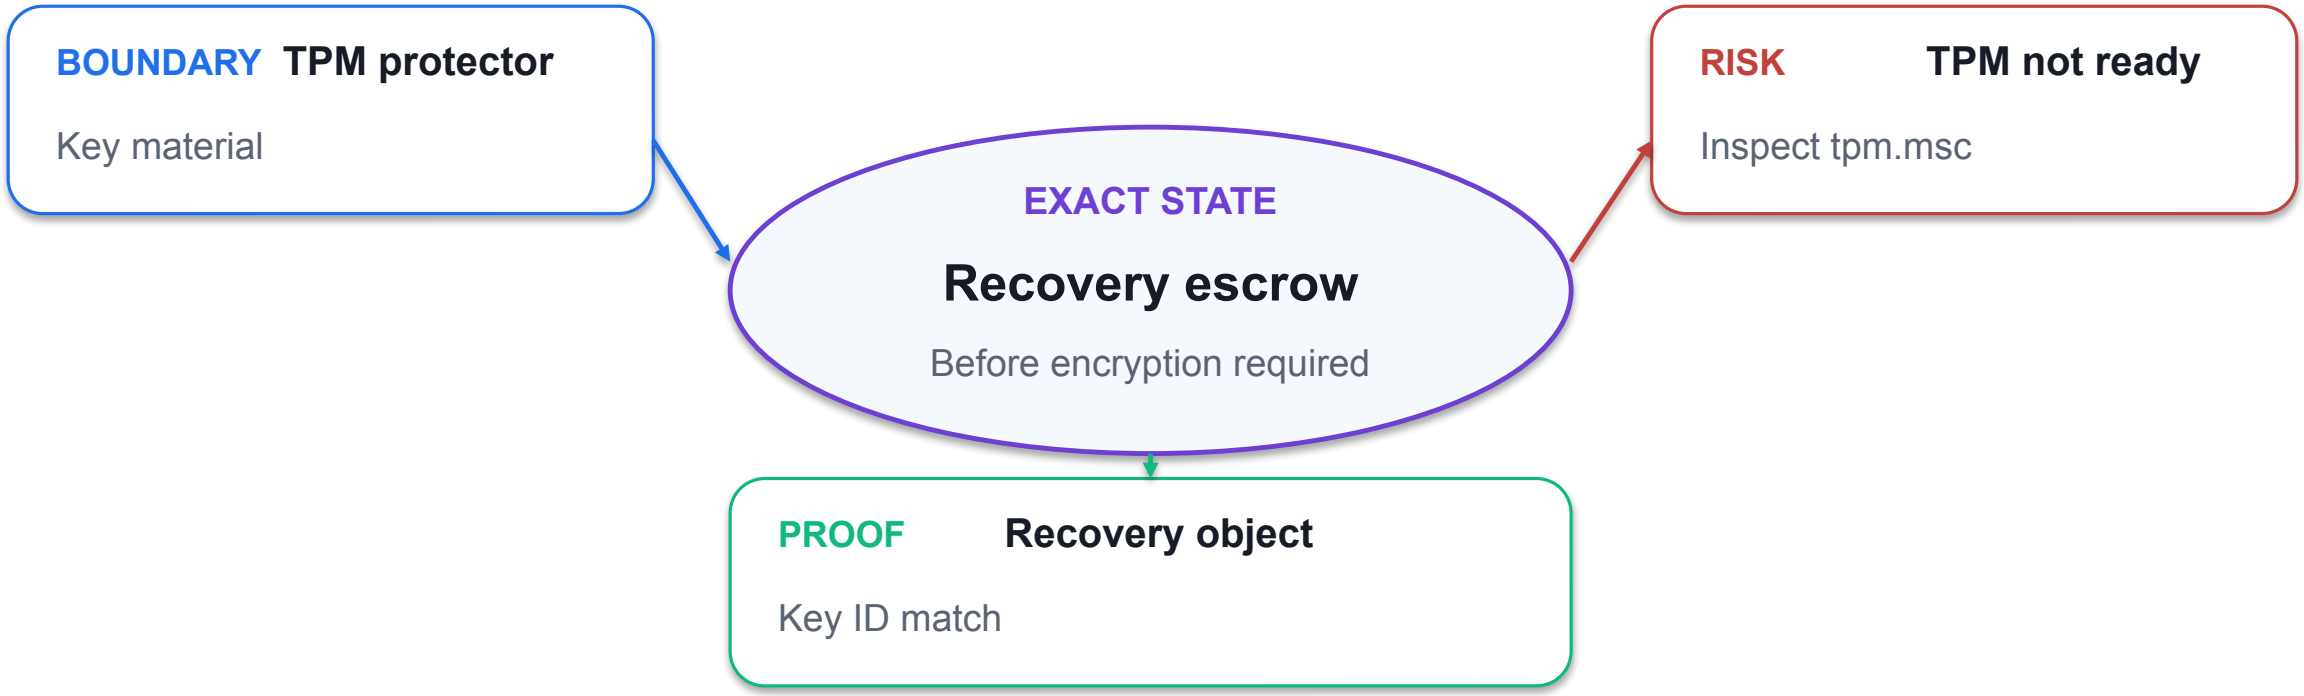

CONTROL READING

The Recovery escrow state is valid only when TPM protector produces Recovery object; TPM not ready requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Algorithm — control contract

1

BOUNDARY Volume encryption

Background state

2

EXACT STATE Algorithm

XTS-AES

3

CONTROL RISK Encryption suspended

Resume protectors

4

PROOF Encryption report

Compliant volume

CONTROL READING

The Algorithm state is valid only when Volume encryption produces Encryption report; Encryption suspended requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Rotation — control contract

1	BOUNDARY	Key escrow	Entra recovery object
2	EXACT STATE	Rotation	After key use
3	CONTROL RISK	Recovery key exposed	Rotate from Intune
4	PROOF	Rotation audit	New key timestamp

CONTROL READING

The Rotation state is valid only when Key escrow produces Rotation audit; Recovery key exposed requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Manage BitLocker encryption and recovery — failure and recovery

1 No escrow

Check device join and permissions

DIAGNOSE → RECOVER

2 TPM not ready

Inspect tpm.msc

DIAGNOSE → RECOVER

3 Encryption suspended

Resume protectors

DIAGNOSE → RECOVER

4 Recovery key exposed

Rotate from Intune

DIAGNOSE → RECOVER

DECISION RULE

Treat the symptom as a pointer to a failed stage; collect evidence before changing policy.

© 2026 Tertiary Infotech Academy Pte Ltd

No escrow — diagnostic trace

1	SIGNAL	**No escrow**
2	BOUNDARY	TPM protector
3	SUSPECT STATE	Silent enablement
4	RECOVERY	Check device join and permissions
5	ACCEPTANCE	**manage-bde -status**

EVIDENCE THRESHOLD

Accept the recovery only when manage-bde -status shows Protection state; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

TPM not ready — diagnostic trace



RECOVERY ACTION Inspect tpm.msc


ACCEPTANCE PROOF Key ID match

EVIDENCE THRESHOLD

Accept the recovery only when Recovery object shows Key ID match; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Encryption suspended — diagnostic trace

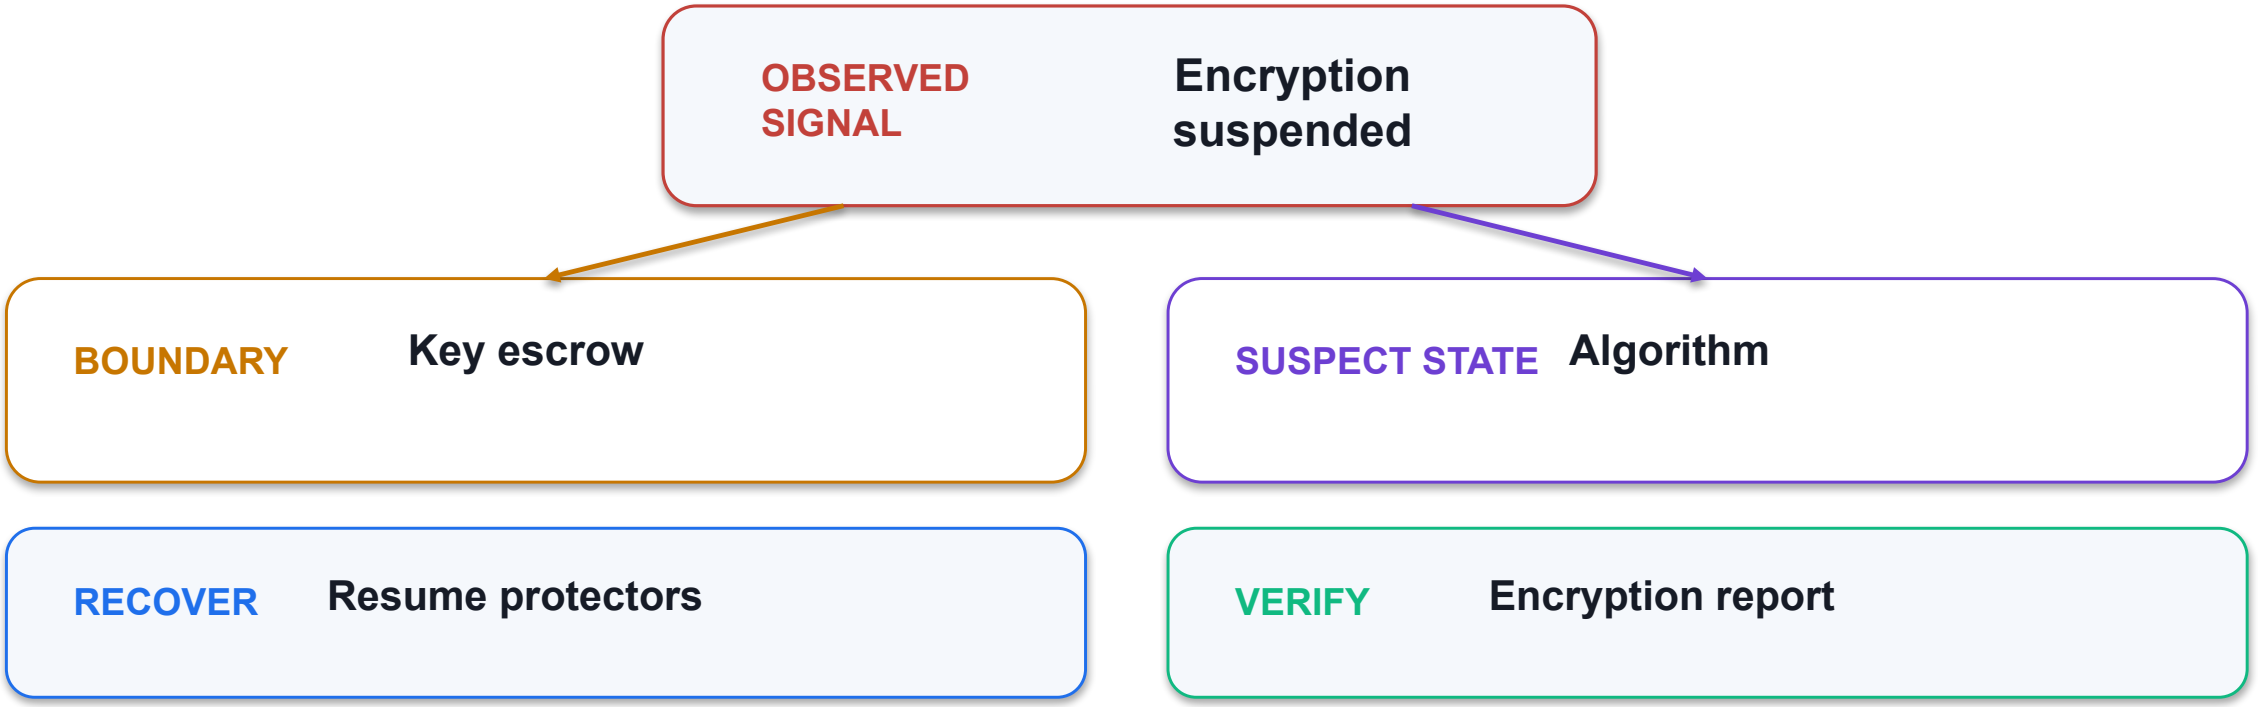

EVIDENCE THRESHOLD

Accept the recovery only when Encryption report shows Compliant volume; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Recovery key exposed — diagnostic trace



BOUNDARY · Rotation | SUSPECT · Rotation

SIGNAL Recovery key exposed

RECOVERY Rotate from Intune

PROOF Rotation audit

EVIDENCE THRESHOLD

Accept the recovery only when Rotation audit shows New key timestamp; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Manage BitLocker encryption and recovery — verification evidence

✓	**manage-bde -status**	Protection state
✓	**Recovery object**	Key ID match
✓	**Encryption report**	Compliant volume
✓	**Rotation audit**	New key timestamp

LAB 6

Evidence standard

Capture the configured state, the observed result, the timestamp or correlation ID, and the interpretation.


PASS = REPRODUCIBLE

PRACTICE BRIDGE

Full click paths, commands, expected outputs and troubleshooting are in the Learner Guide and the individual lab folder.

© 2026 Tertiary Infotech Academy Pte Ltd

Enforce Windows Firewall policy — mechanism

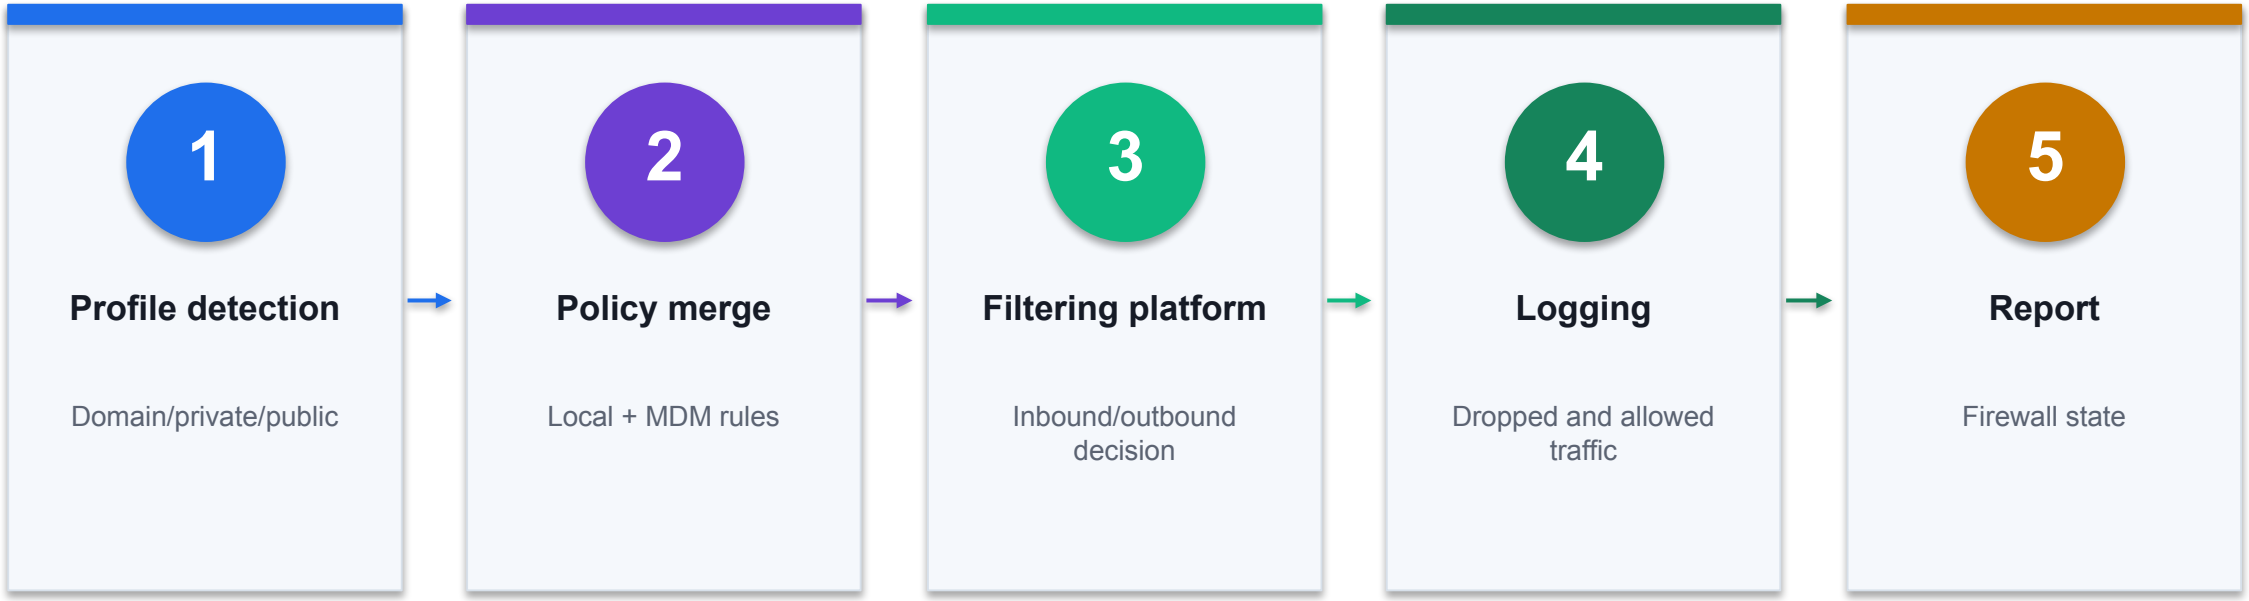

CONTROL POINT

Inspect the evidence at every transition; the first missing state is the most useful troubleshooting boundary. Lab 6 carries the full procedure.

© 2026 Tertiary Infotech Academy Pte Ltd

Enforce Windows Firewall policy — exact contract

1 Default inbound

Block

FIELD / STATE

2 Rule scope

Program · port · address

FIELD / STATE

3 Local merge

Disable where required

FIELD / STATE

4 Log path

pfirewall.log

FIELD / STATE

DECISION RULE

Configuration is a contract: names, values, scope and resulting state must all agree.

© 2026 Tertiary Infotech Academy Pte Ltd

Default inbound — control contract



BOUNDARY · Profile detection

STATE **Default inbound**

Block

RISK **Wrong profile**

Inspect active network category

PROOF **Get-NetFirewallProfile**


Enabled state

CONTROL READING

The Default inbound state is valid only when Profile detection produces Get-NetFirewallProfile; Wrong profile requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Rule scope — control contract

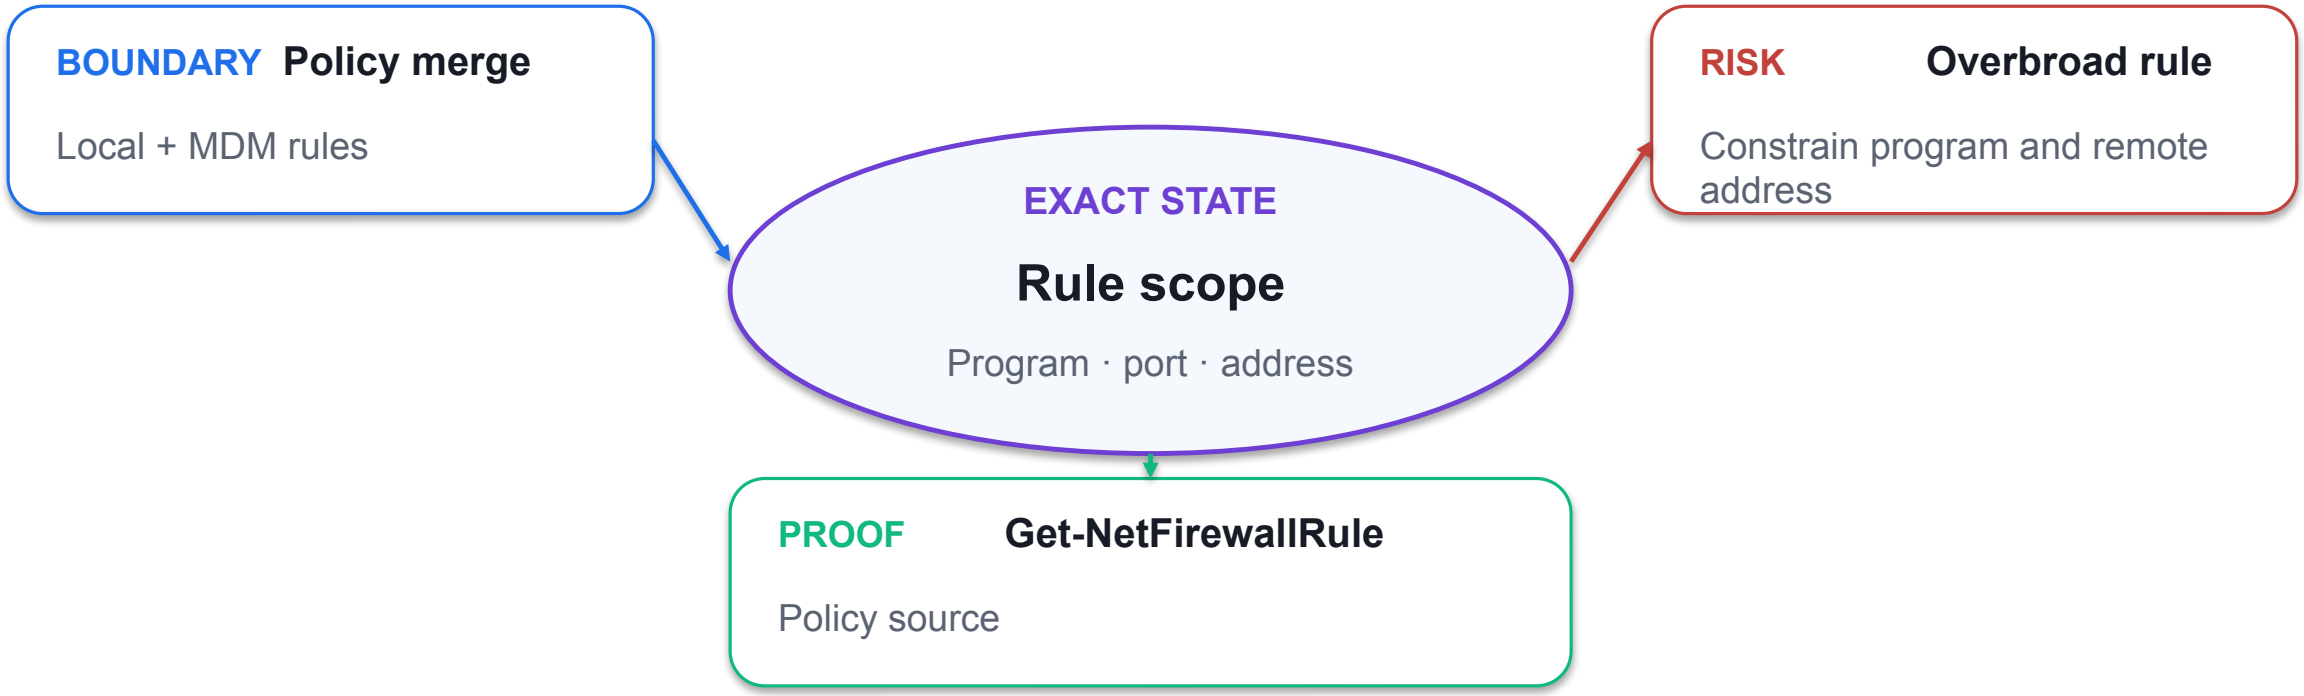

CONTROL READING

The Rule scope state is valid only when Policy merge produces Get-NetFirewallRule; Overbroad rule requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Local merge — control contract

1

BOUNDARY Filtering platform

Inbound/outbound decision

2

EXACT STATE Local merge

Disable where required

3

CONTROL RISK Rule conflict

Review policy stores

4

PROOF Firewall log

Dropped packet

CONTROL READING

The Local merge state is valid only when Filtering platform produces Firewall log; Rule conflict requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Log path — control contract

1	BOUNDARY	Logging	Dropped and allowed traffic
2	EXACT STATE	Log path	pfirewall.log
3	CONTROL RISK	No log	Enable successful/dropped logging
4	PROOF	Intune report	Profile applied

CONTROL READING

The Log path state is valid only when Logging produces Intune report; No log requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Enforce Windows Firewall policy — failure and recovery

1 Wrong profile

Inspect active network category

DIAGNOSE → RECOVER

2 Overbroad rule

Constrain program and remote address

DIAGNOSE → RECOVER

3 Rule conflict

Review policy stores

DIAGNOSE → RECOVER

4 No log

Enable successful/dropped logging

DIAGNOSE → RECOVER

DECISION RULE

Treat the symptom as a pointer to a failed stage; collect evidence before changing policy.

© 2026 Tertiary Infotech Academy Pte Ltd

Wrong profile — diagnostic trace


1	SIGNAL	**Wrong profile**
2	BOUNDARY	Policy merge
3	SUSPECT STATE	Default inbound
4	RECOVERY	Inspect active network category
5	ACCEPTANCE	**Get-NetFirewallProfile**

EVIDENCE THRESHOLD

Accept the recovery only when Get-NetFirewallProfile shows Enabled state; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Overbroad rule — diagnostic trace

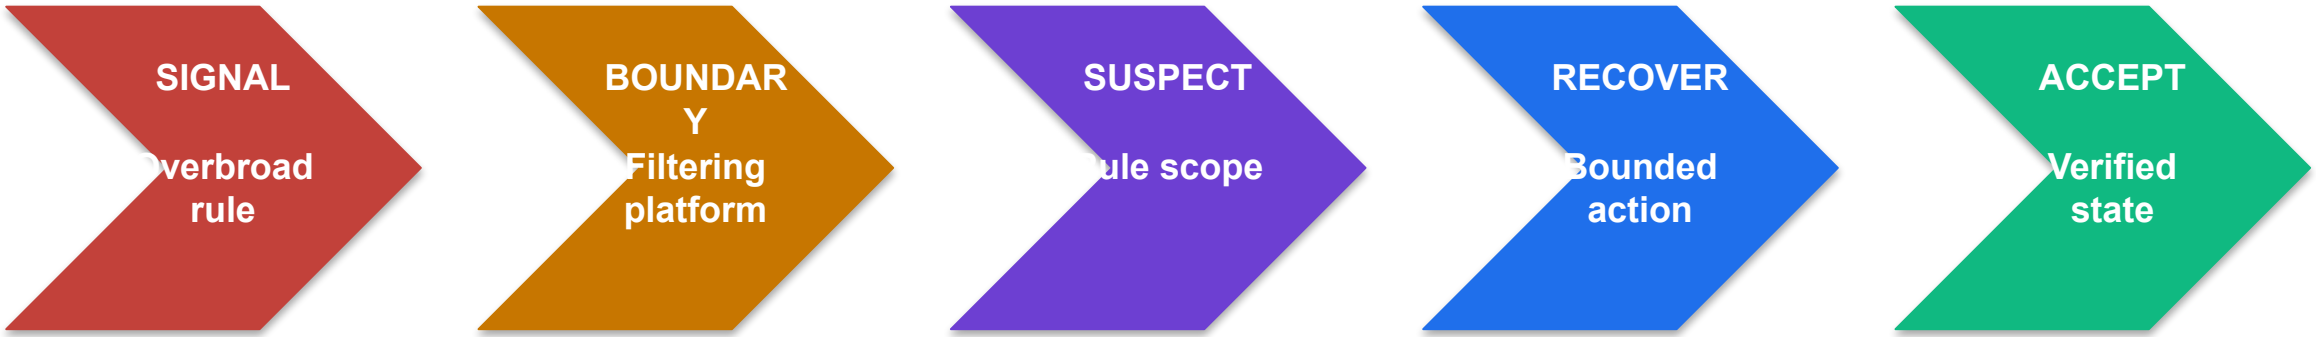


RECOVERY ACTION	Constrain program and remote address
ACCEPTANCE PROOF	Policy source

EVIDENCE THRESHOLD

Accept the recovery only when Get-NetFirewallRule shows Policy source; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Rule conflict — diagnostic trace

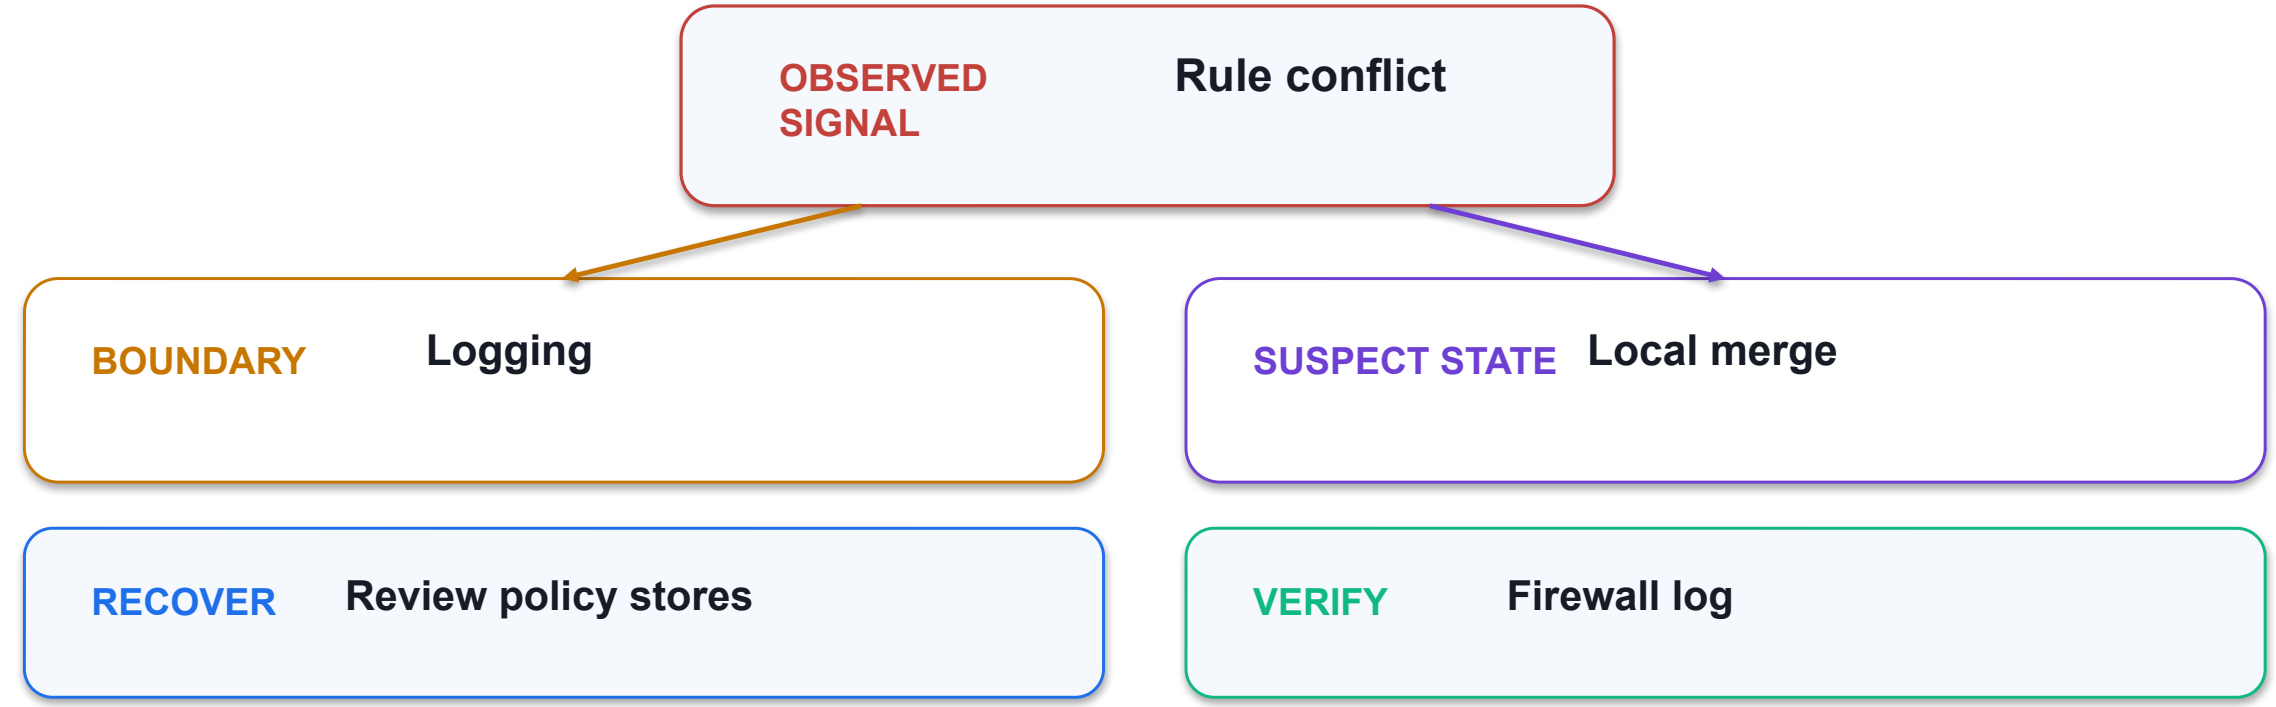

EVIDENCE THRESHOLD

Accept the recovery only when Firewall log shows Dropped packet; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

No log — diagnostic trace



BOUNDARY · Report | SUSPECT · Log path

SIGNAL No log

RECOVERY Enable successful/dropped logging

PROOF Intune report

EVIDENCE THRESHOLD

Accept the recovery only when Intune report shows Profile applied; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Enforce Windows Firewall policy — verification evidence

Get-NetFirewallProfile	Enabled state
Get-NetFirewallRule	Policy source
Firewall log	Dropped packet
Intune report	Profile applied

LAB 6

Evidence standard

Capture the configured state, the observed result, the timestamp or correlation ID, and the interpretation.


PASS = REPRODUCIBLE

PRACTICE BRIDGE

Full click paths, commands, expected outputs and troubleshooting are in the Learner Guide and the individual lab folder.

© 2026 Tertiary Infotech Academy Pte Ltd

Reduce attack surface with ASR and Zero Trust — mechanism

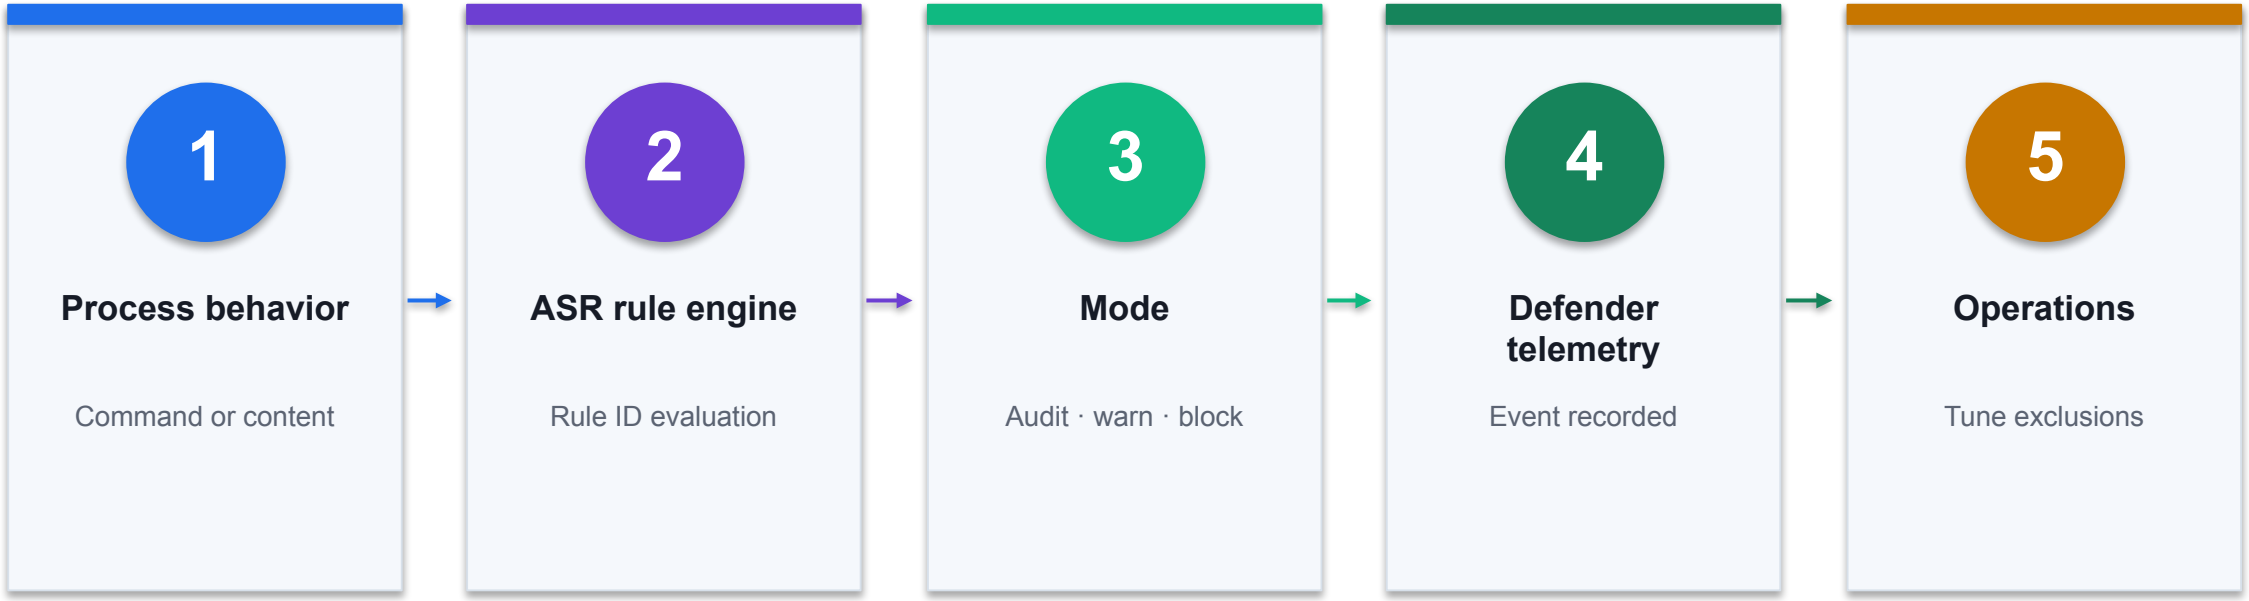

CONTROL POINT

Inspect the evidence at every transition; the first missing state is the most useful troubleshooting boundary. Lab 6 carries the full procedure.

© 2026 Tertiary Infotech Academy Pte Ltd

Reduce attack surface with ASR and Zero Trust — exact contract

1 Phased rollout

Audit then warn then block

FIELD / STATE

2 Rule ID

Stable GUID

FIELD / STATE

3 Exclusion

Narrow and justified

FIELD / STATE

4 Zero Trust

Verify explicitly and limit impact

FIELD / STATE

DECISION RULE

Configuration is a contract: names, values, scope and resulting state must all agree.

© 2026 Tertiary Infotech Academy Pte Ltd

Phased rollout — control contract



BOUNDARY · Process behavior

STATE **Phased rollout**

Audit then warn then block

RISK **Business app blocked**

Use event evidence

PROOF **Event 1121**


Blocked action

CONTROL READING

The Phased rollout state is valid only when Process behavior produces Event 1121; Business app blocked requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Rule ID — control contract

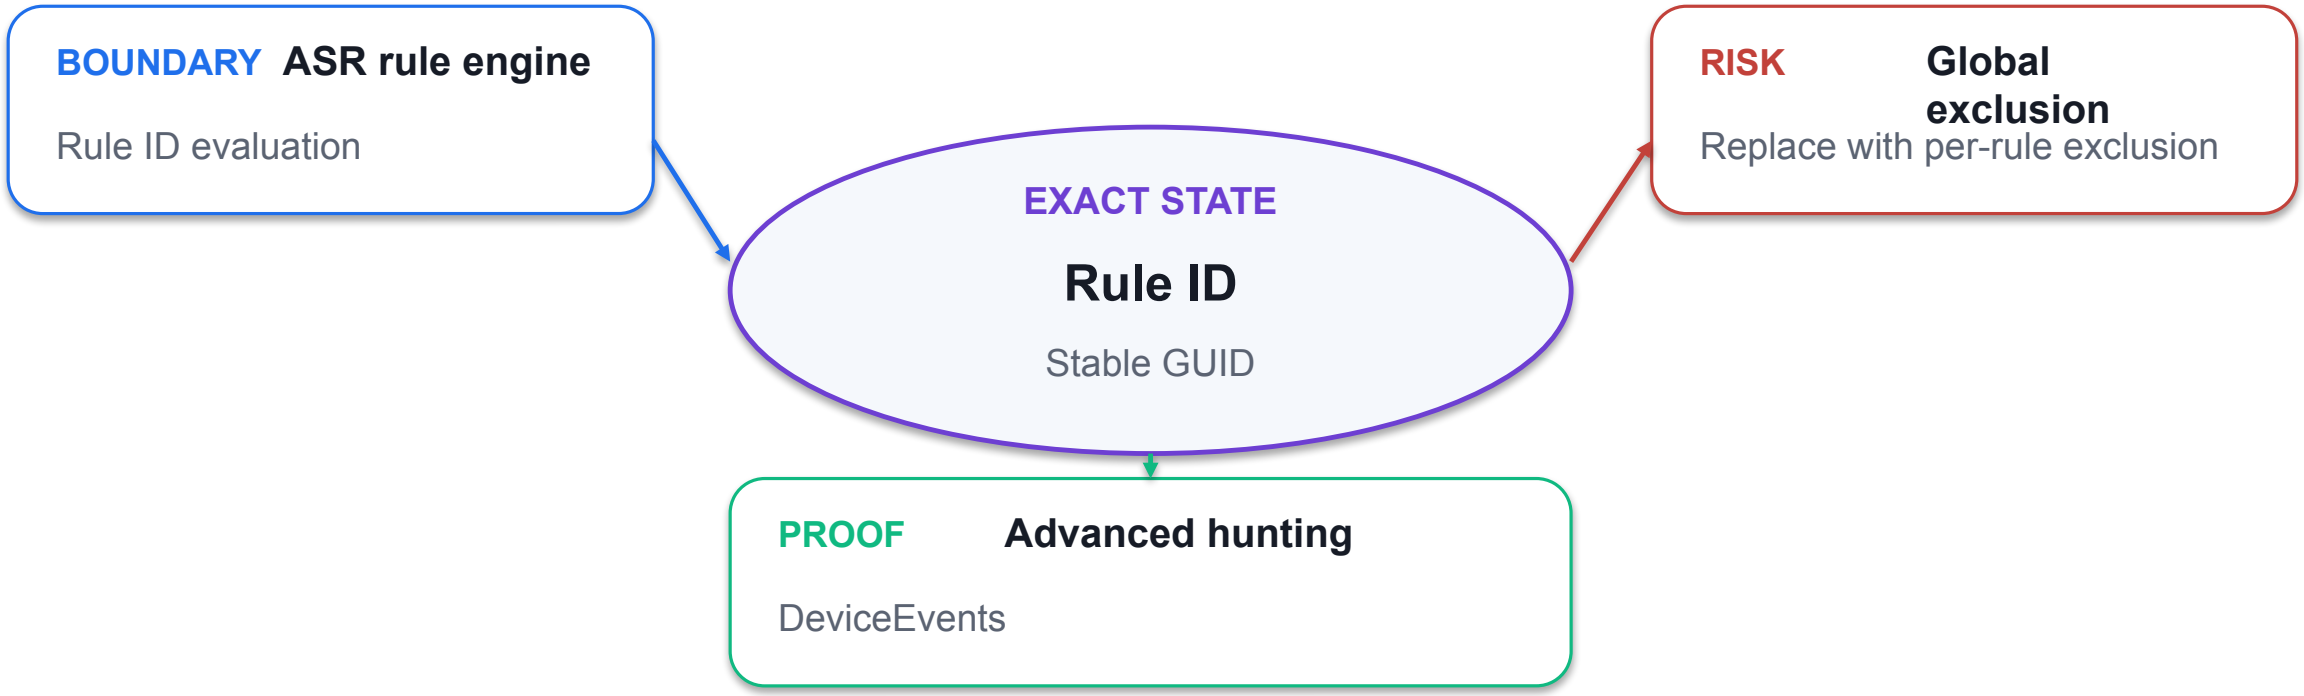

CONTROL READING

The Rule ID state is valid only when ASR rule engine produces Advanced hunting; Global exclusion requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Exclusion — control contract

1

BOUNDARY **Mode**

Audit · warn · block

2

EXACT STATE **Exclusion**

Narrow and justified

3

CONTROL RISK **No telemetry**

Verify cloud protection

4

PROOF **ASR report**

Rule and device

CONTROL READING

The Exclusion state is valid only when Mode produces ASR report; No telemetry requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Zero Trust — control contract

1	BOUNDARY	Defender telemetry	Event recorded
2	EXACT STATE	Zero Trust	Verify explicitly and limit impact
3	CONTROL RISK	Rule not active	Check edition and policy precedence
4	PROOF	Exception register	Owner + expiry

CONTROL READING

The Zero Trust state is valid only when Defender telemetry produces Exception register; Rule not active requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Reduce attack surface with ASR and Zero Trust — failure and recovery

1 Business app blocked

Use event evidence

DIAGNOSE → RECOVER

2 Global exclusion

Replace with per-rule exclusion

DIAGNOSE → RECOVER

3 No telemetry

Verify cloud protection

DIAGNOSE → RECOVER

4 Rule not active

Check edition and policy precedence

DIAGNOSE → RECOVER

DECISION RULE

Treat the symptom as a pointer to a failed stage; collect evidence before changing policy.

© 2026 Tertiary Infotech Academy Pte Ltd

Business app blocked — diagnostic trace


1	SIGNAL	**Business app blocked**
2	BOUNDARY	ASR rule engine
3	SUSPECT STATE	Phased rollout
4	RECOVERY	Use event evidence
5	ACCEPTANCE	**Event 1121**

EVIDENCE THRESHOLD

Accept the recovery only when Event 1121 shows Blocked action; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Global exclusion — diagnostic trace

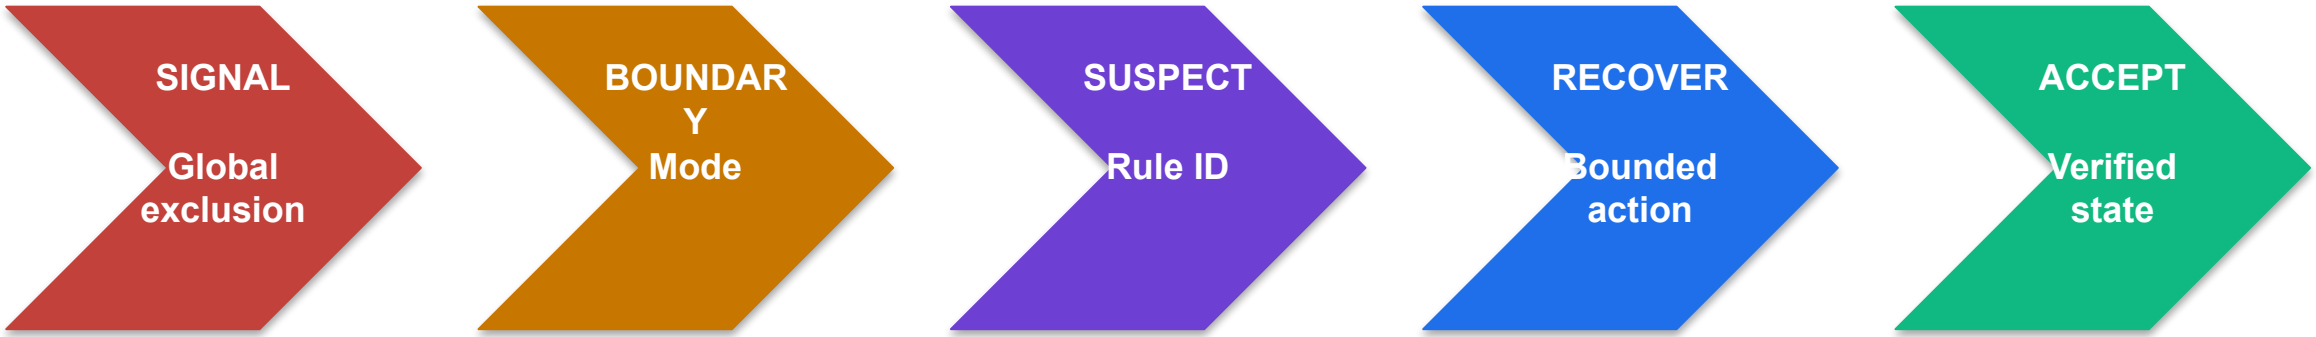


RECOVERY ACTION	Replace with per-rule exclusion
ACCEPTANCE PROOF	DeviceEvents

EVIDENCE THRESHOLD

Accept the recovery only when Advanced hunting shows DeviceEvents; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

No telemetry — diagnostic trace

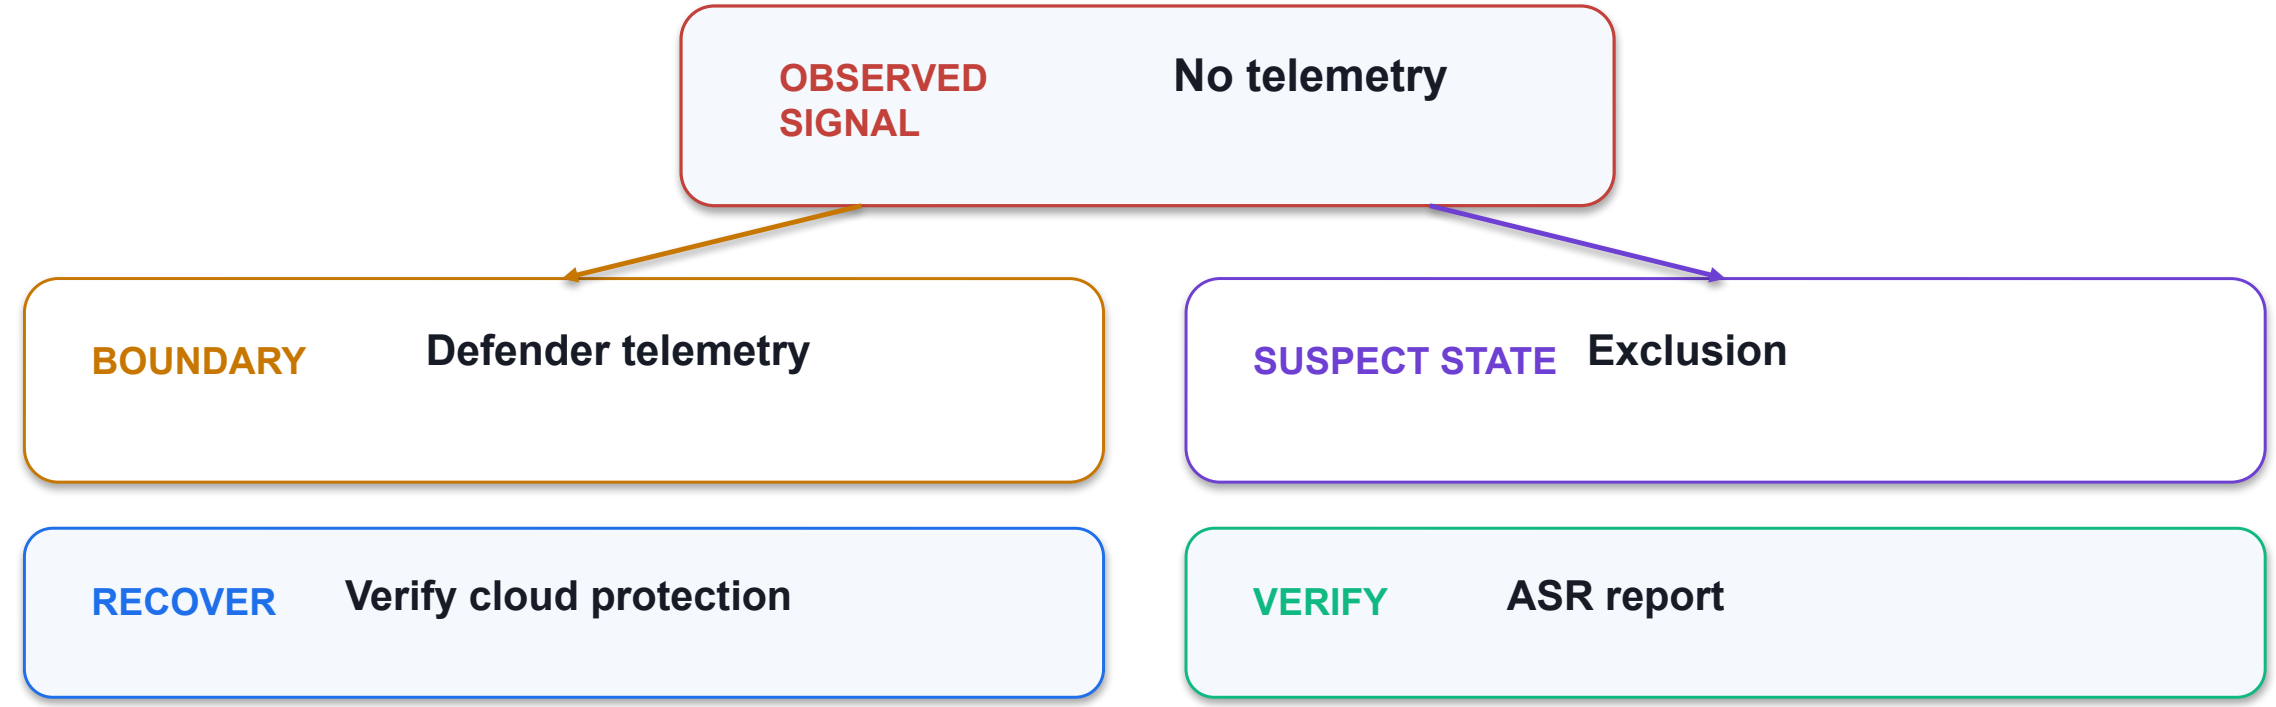

EVIDENCE THRESHOLD

Accept the recovery only when ASR report shows Rule and device; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Rule not active — diagnostic trace



BOUNDARY · Operations | SUSPECT · Zero Trust

SIGNAL Rule not active

RECOVERY Check edition and policy precedence

PROOF Exception register

EVIDENCE THRESHOLD

Accept the recovery only when Exception register shows Owner + expiry; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Reduce attack surface with ASR and Zero Trust — verification evidence

Event 1121	Blocked action
Advanced hunting	DeviceEvents
ASR report	Rule and device
Exception register	Owner + expiry

LAB 6

Evidence standard

Capture the configured state, the observed result, the timestamp or correlation ID, and the interpretation.

PASS = REPRODUCIBLE

PRACTICE BRIDGE

Full click paths, commands, expected outputs and troubleshooting are in the Learner Guide and the individual lab folder.


© 2026 Tertiary Infotech Academy Pte Ltd

DAY 3

Tea break

Return at the time announced by the trainer.

Apply security baselines without configuration drift — mechanism

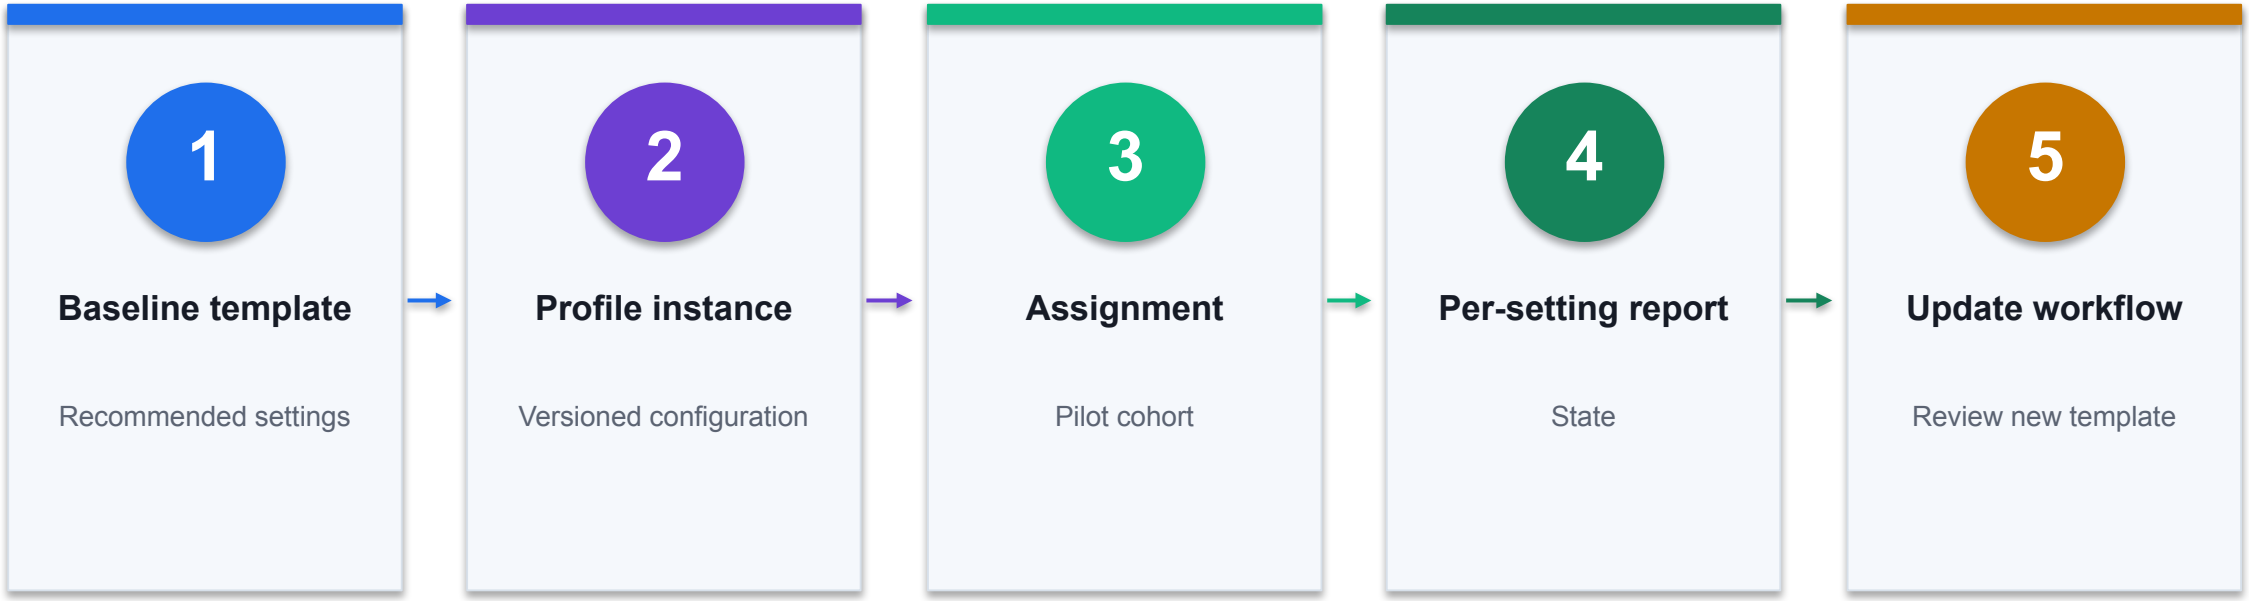

CONTROL POINT

Inspect the evidence at every transition; the first missing state is the most useful troubleshooting boundary. Lab 6 carries the full procedure.

© 2026 Tertiary Infotech Academy Pte Ltd

Apply security baselines without configuration drift — exact contract

1 Baseline version

Immutable template snapshot

FIELD / STATE

2 Pilot

Representative devices

FIELD / STATE

3 Exception

Documented deviation

FIELD / STATE

4 Migration

Create new profile then retire old

FIELD / STATE

DECISION RULE

Configuration is a contract: names, values, scope and resulting state must all agree.

© 2026 Tertiary Infotech Academy Pte Ltd

Baseline version — control contract



BOUNDARY · Baseline template

STATE **Baseline version**

Immutable template snapshot

RISK **Conflict**

Same setting in another profile

PROOF **Per-setting status**


Success/conflict

CONTROL READING

The Baseline version state is valid only when Baseline template produces Per-setting status; Conflict requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Pilot — control contract

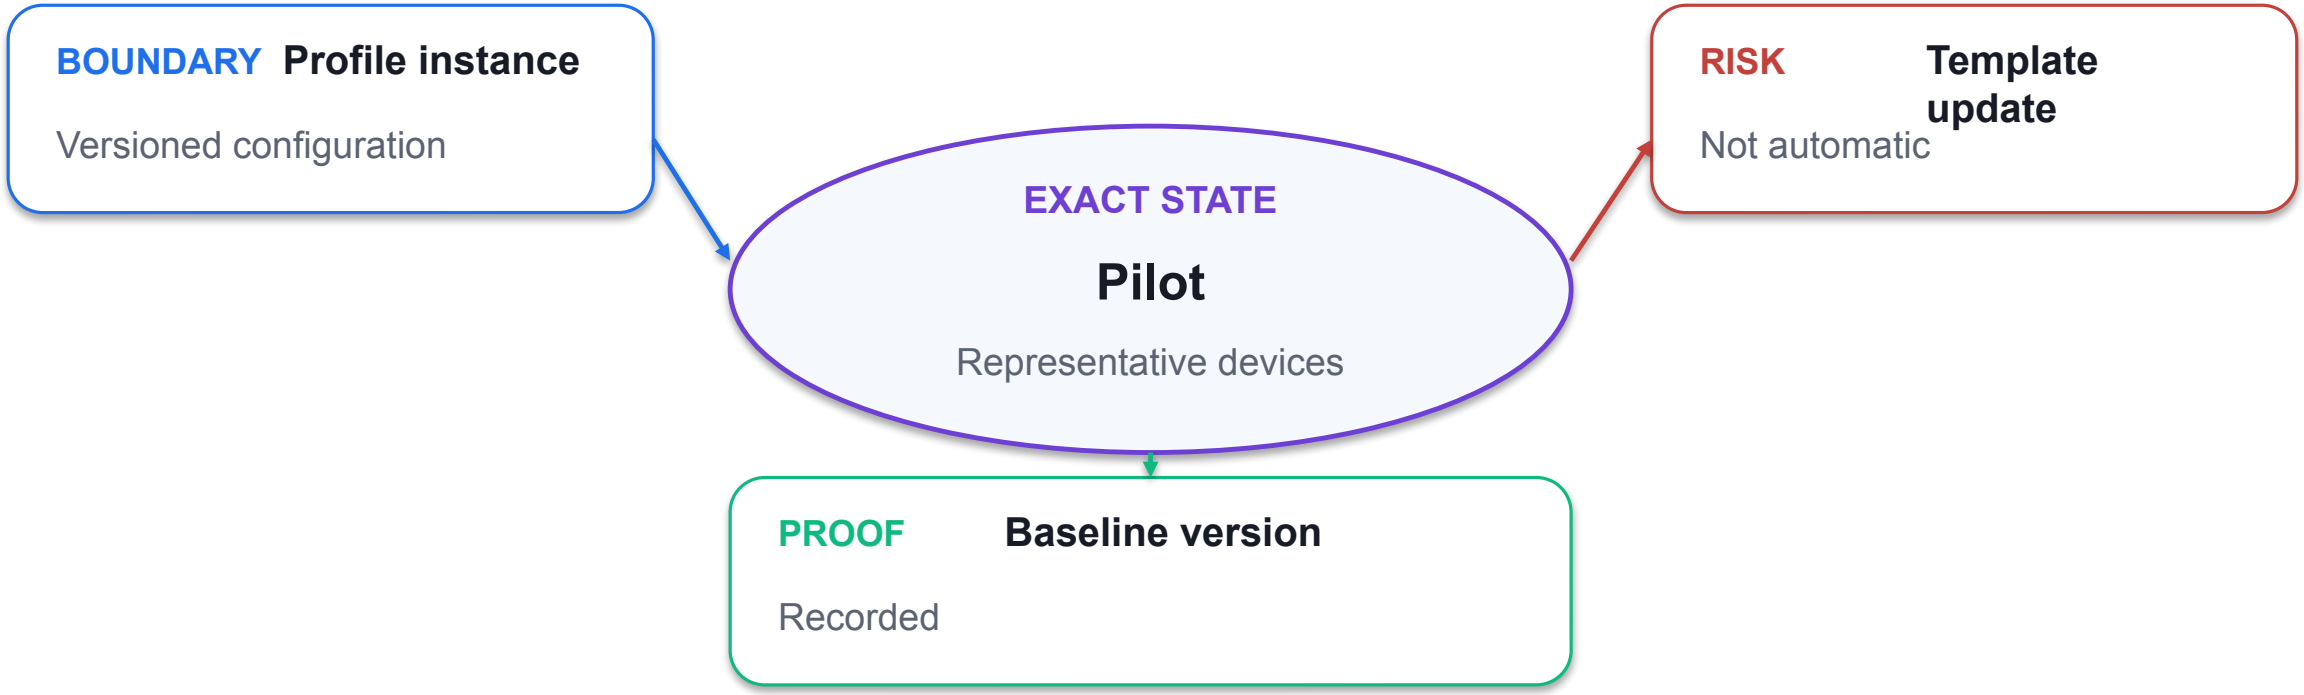

CONTROL READING

The Pilot state is valid only when Profile instance produces Baseline version; Template update requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Exception — control contract

1

BOUNDARY Assignment

Pilot cohort

2

EXACT STATE Exception

Documented deviation

3

CONTROL RISK Legacy setting

Unsupported on current OS

4

PROOF Pilot acceptance

Security + productivity

CONTROL READING

The Exception state is valid only when Assignment produces Pilot acceptance; Legacy setting requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Migration — control contract

1	BOUNDARY	Per-setting report	State
2	EXACT STATE	Migration	Create new profile then retire old
3	CONTROL RISK	Overhardening	Validate business workload
4	PROOF	Exception evidence	Approved control

CONTROL READING

The Migration state is valid only when Per-setting report produces Exception evidence; Overhardening requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Apply security baselines without configuration drift — failure and recovery

1 Conflict

Same setting in another profile

DIAGNOSE → RECOVER

2 Template update

Not automatic

DIAGNOSE → RECOVER

3 Legacy setting

Unsupported on current OS

DIAGNOSE → RECOVER

4 Overhardening

Validate business workload

DIAGNOSE → RECOVER

DECISION RULE

Treat the symptom as a pointer to a failed stage; collect evidence before changing policy.

© 2026 Tertiary Infotech Academy Pte Ltd

Conflict — diagnostic trace


1	SIGNAL	**Conflict**
2	BOUNDARY	Profile instance
3	SUSPECT STATE	Baseline version
4	RECOVERY	Same setting in another profile
5	ACCEPTANCE	**Per-setting status**

EVIDENCE THRESHOLD

Accept the recovery only when Per-setting status shows Success/conflict; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Template update — diagnostic trace

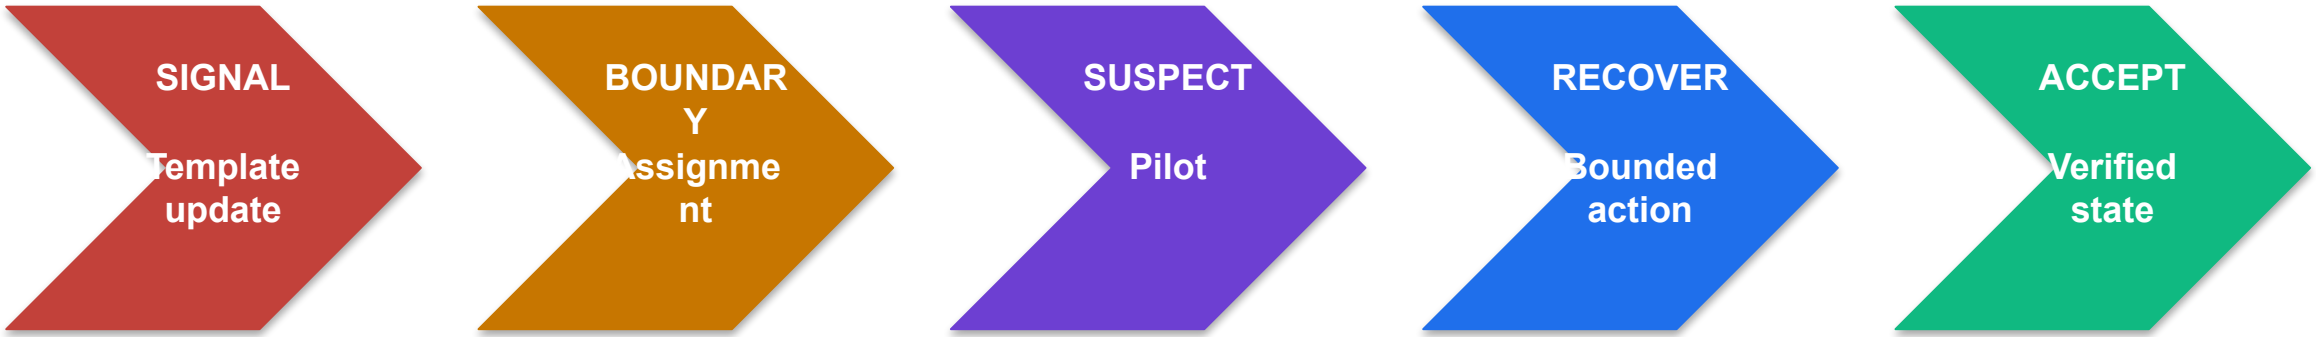


RECOVERY ACTION	Not automatic
ACCEPTANCE PROOF	Recorded

EVIDENCE THRESHOLD

Accept the recovery only when Baseline version shows Recorded; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Legacy setting — diagnostic trace

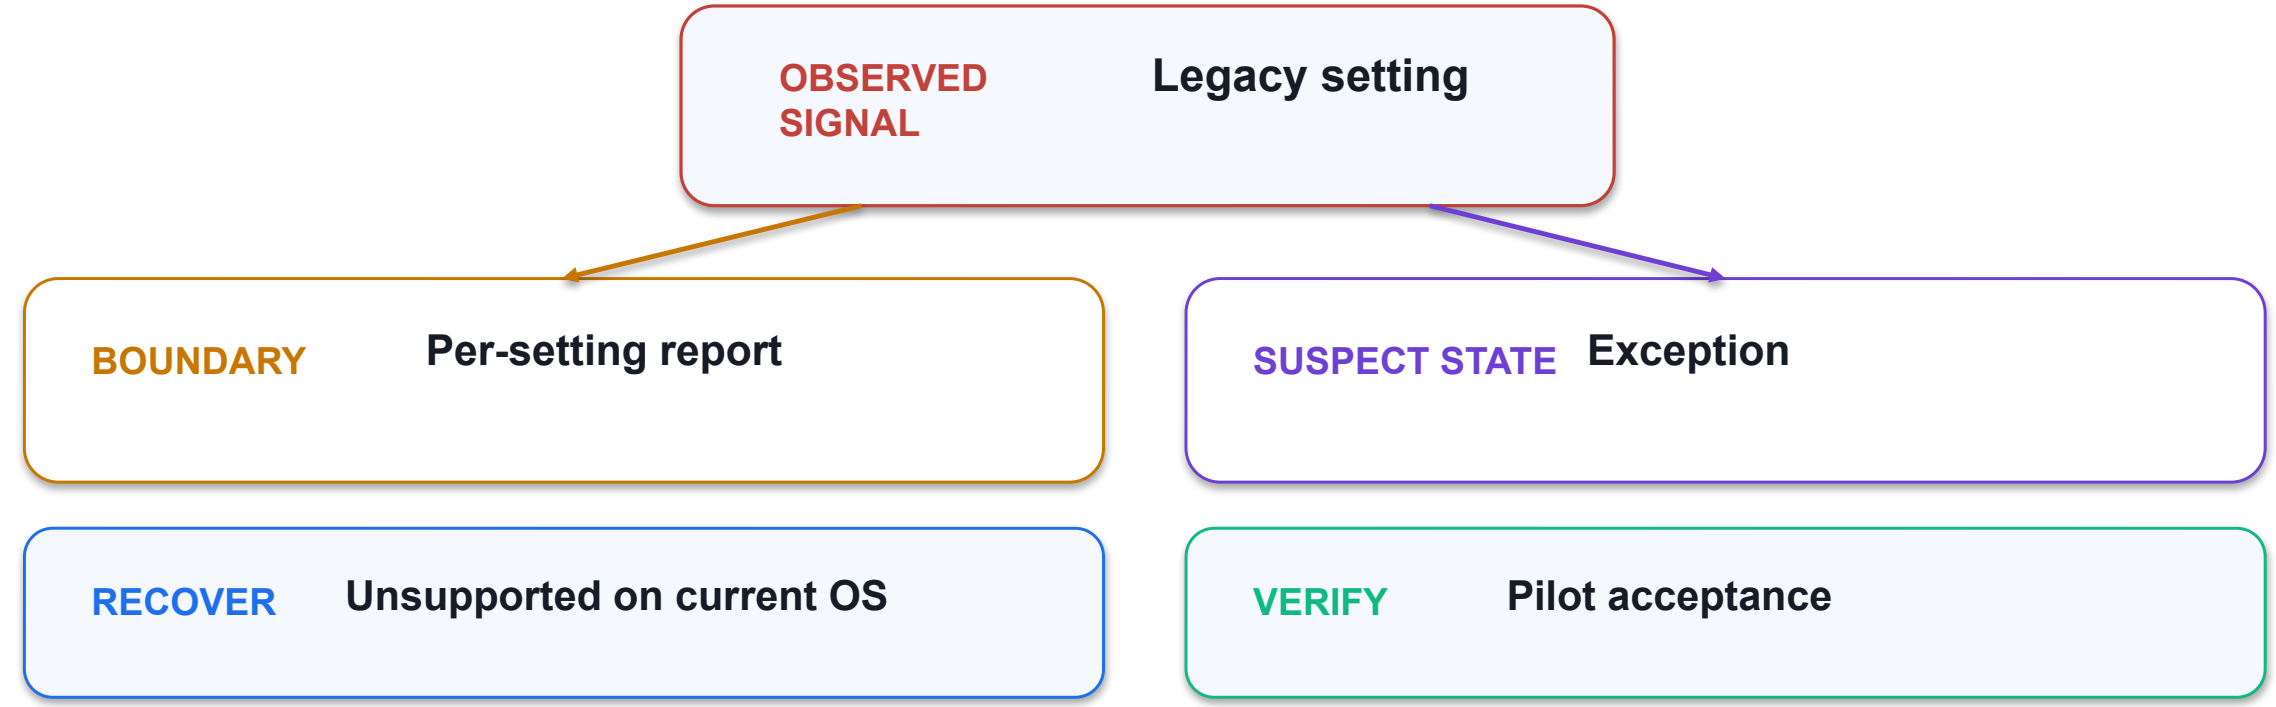

EVIDENCE THRESHOLD

Accept the recovery only when Pilot acceptance shows Security + productivity; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Overhardening — diagnostic trace



BOUNDARY · Update workflow | SUSPECT · Migration

SIGNAL	Overhardening
RECOVERY	Validate business workload
PROOF	Exception evidence

EVIDENCE THRESHOLD

Accept the recovery only when Exception evidence shows Approved control; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Apply security baselines without configuration drift — verification evidence

Per-setting status	Success/conflict
Baseline version	Recorded
Pilot acceptance	Security + productivity
Exception evidence	Approved control

LAB 6

Evidence standard

Capture the configured state, the observed result, the timestamp or correlation ID, and the interpretation.


PASS = REPRODUCIBLE

PRACTICE BRIDGE

Full click paths, commands, expected outputs and troubleshooting are in the Learner Guide and the individual lab folder.

© 2026 Tertiary Infotech Academy Pte Ltd

Integrate Intune with Defender for Endpoint — mechanism

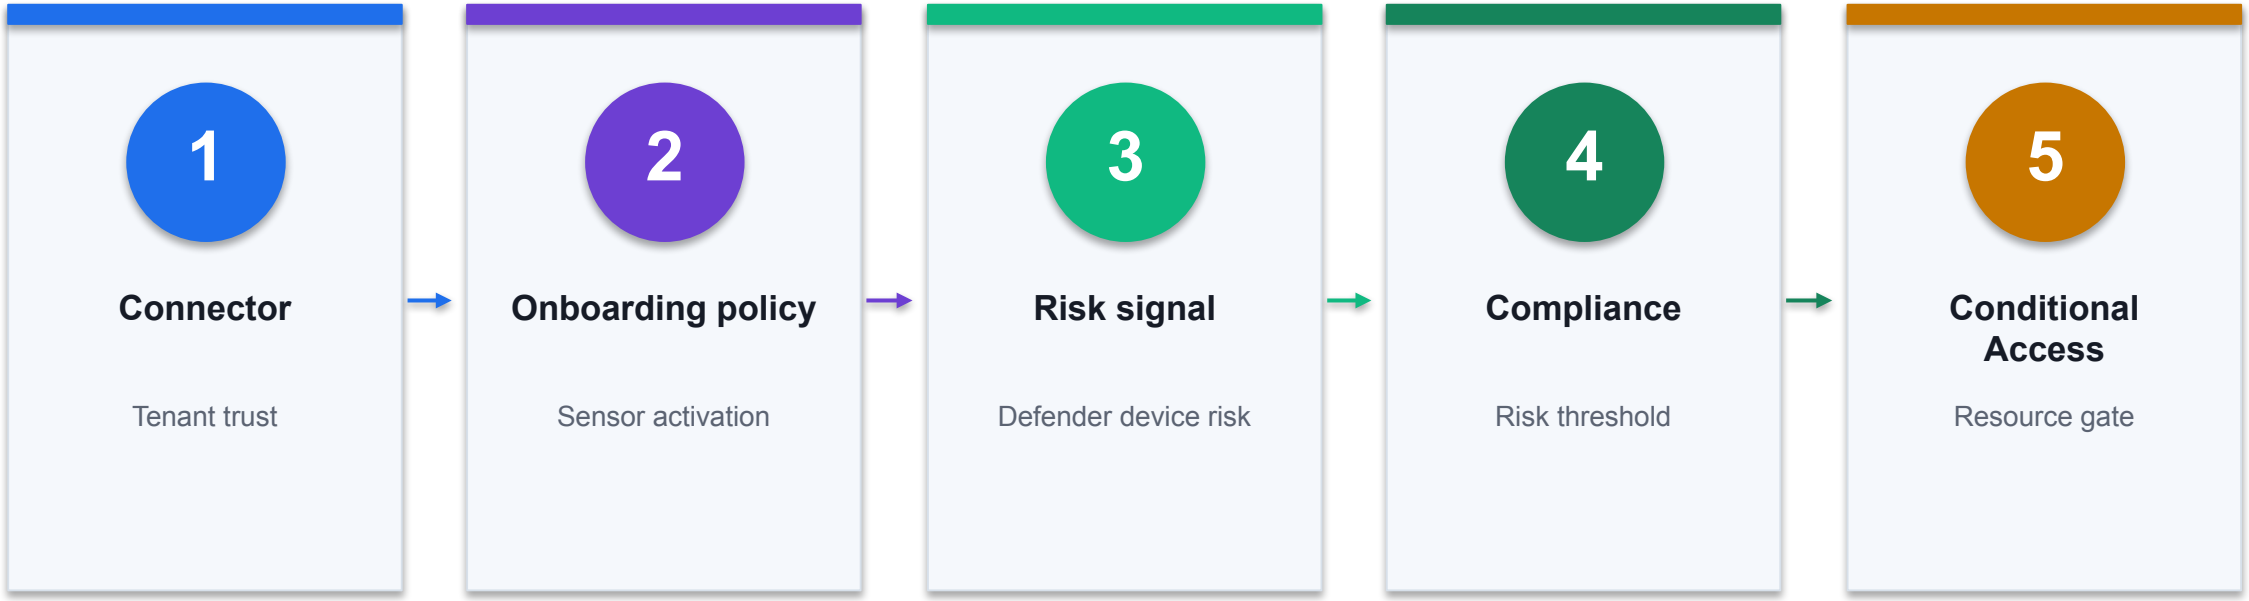

CONTROL POINT

Inspect the evidence at every transition; the first missing state is the most useful troubleshooting boundary. Lab 6 carries the full procedure.

© 2026 Tertiary Infotech Academy Pte Ltd

Integrate Intune with Defender for Endpoint — exact contract

1 Connector status

Active

FIELD / STATE

2 EDR policy

Onboard blob

FIELD / STATE

3 Risk level

Clear · low · medium · high

FIELD / STATE

4 Compliance rule

Require below threshold

FIELD / STATE

DECISION RULE

Configuration is a contract: names, values, scope and resulting state must all agree.

© 2026 Tertiary Infotech Academy Pte Ltd

Connector status — control contract



BOUNDARY · Connector

STATE — **Connector status**

Active

RISK — **Device not onboarded**

Check Sense service

PROOF — **MDE device page**


Sensor health

CONTROL READING

The Connector status state is valid only when Connector produces MDE device page; Device not onboarded requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

EDR policy — control contract

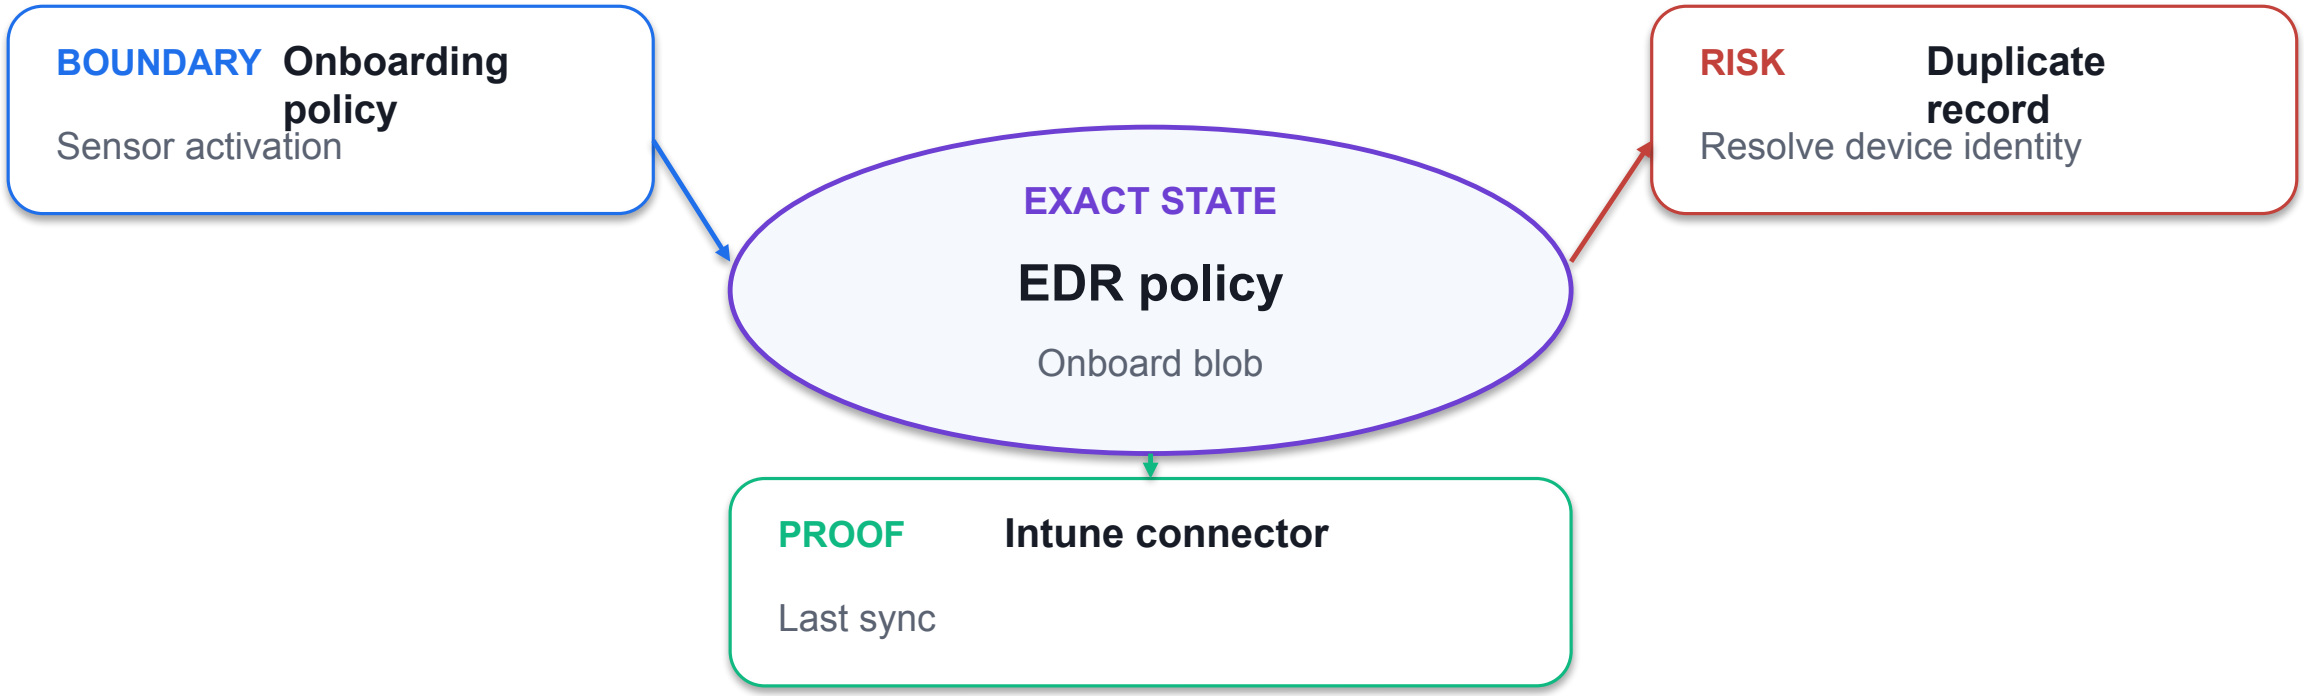

CONTROL READING

The EDR policy state is valid only when Onboarding policy produces Intune connector; Duplicate record requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Risk level — control contract

1

BOUNDARY **Risk signal**

Defender device risk

2

EXACT STATE **Risk level**

Clear · low · medium · high

3

CONTROL RISK **Risk not flowing**

Check connector scope

4

PROOF **Compliance detail**

Machine risk

CONTROL READING

The Risk level state is valid only when Risk signal produces Compliance detail; Risk not flowing requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Compliance rule — control contract

1	BOUNDARY	Compliance	Risk threshold
2	EXACT STATE	Compliance rule	Require below threshold
3	CONTROL RISK	Access unexpectedly blocked	Inspect CA and risk timeline
4	PROOF	Sign-in result	Risk-based block

CONTROL READING

The Compliance rule state is valid only when Compliance produces Sign-in result; Access unexpectedly blocked requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Integrate Intune with Defender for Endpoint — failure and recovery

1 Device not onboarded

Check Sense service

DIAGNOSE → RECOVER

2 Duplicate record

Resolve device identity

DIAGNOSE → RECOVER

3 Risk not flowing

Check connector scope

DIAGNOSE → RECOVER

4 Access unexpectedly blocked

Inspect CA and risk timeline

DIAGNOSE → RECOVER

DECISION RULE

Treat the symptom as a pointer to a failed stage; collect evidence before changing policy.

© 2026 Tertiary Infotech Academy Pte Ltd

Device not onboarded — diagnostic trace

1	SIGNAL	**Device not onboarded**
2	BOUNDARY	Onboarding policy
3	SUSPECT STATE	Connector status
4	RECOVERY	Check Sense service
5	ACCEPTANCE	**MDE device page**

EVIDENCE THRESHOLD

Accept the recovery only when MDE device page shows Sensor health; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Duplicate record — diagnostic trace



RECOVERY ACTION Resolve device identity


ACCEPTANCE PROOF Last sync

EVIDENCE THRESHOLD

Accept the recovery only when Intune connector shows Last sync; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Risk not flowing — diagnostic trace

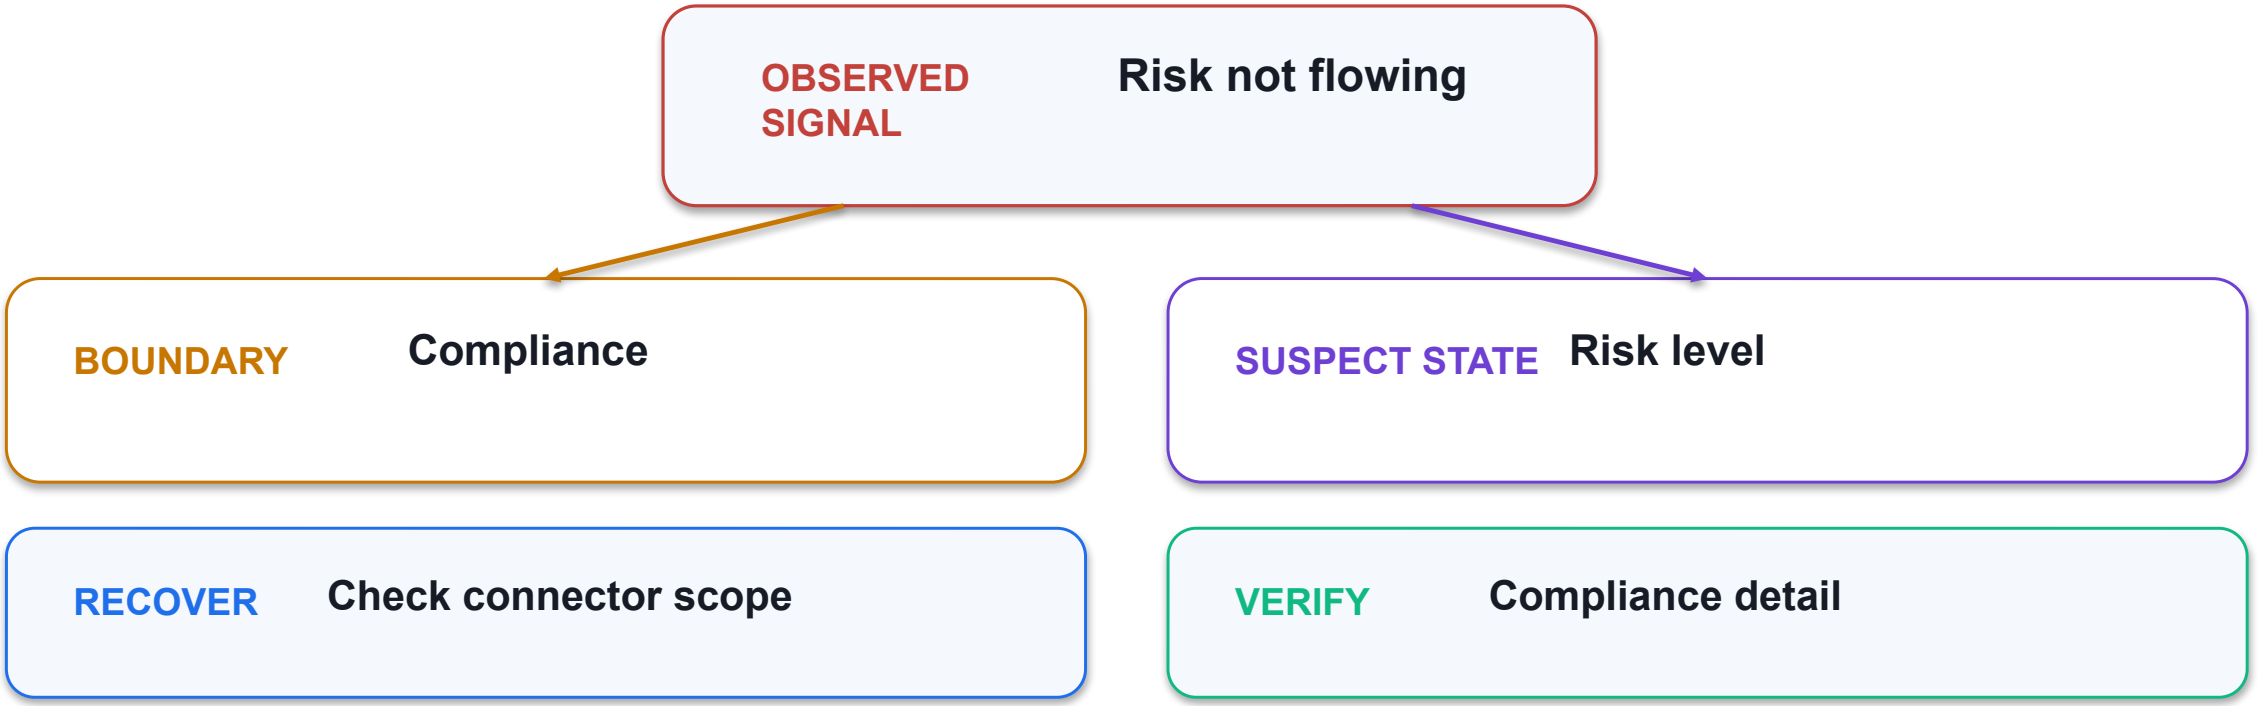

EVIDENCE THRESHOLD

Accept the recovery only when Compliance detail shows Machine risk; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Access unexpectedly blocked — diagnostic trace



BOUNDARY · Conditional Access | SUSPECT · Compliance rule

SIGNAL	**Access unexpectedly blocked**
RECOVERY	**Inspect CA and risk timeline**
PROOF	**Sign-in result**

EVIDENCE THRESHOLD

Accept the recovery only when Sign-in result shows Risk-based block; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Integrate Intune with Defender for Endpoint — verification evidence

MDE device page	Sensor health
Intune connector	Last sync
Compliance detail	Machine risk
Sign-in result	Risk-based block

LAB 6

Evidence standard

Capture the configured state, the observed result, the timestamp or correlation ID, and the interpretation.

PASS = REPRODUCIBLE

PRACTICE BRIDGE

Full click paths, commands, expected outputs and troubleshooting are in the Learner Guide and the individual lab folder.


© 2026 Tertiary Infotech Academy Pte Ltd

DAY 3

Lunch break

Return at the time announced by the trainer.

Control application execution with App Control — mechanism

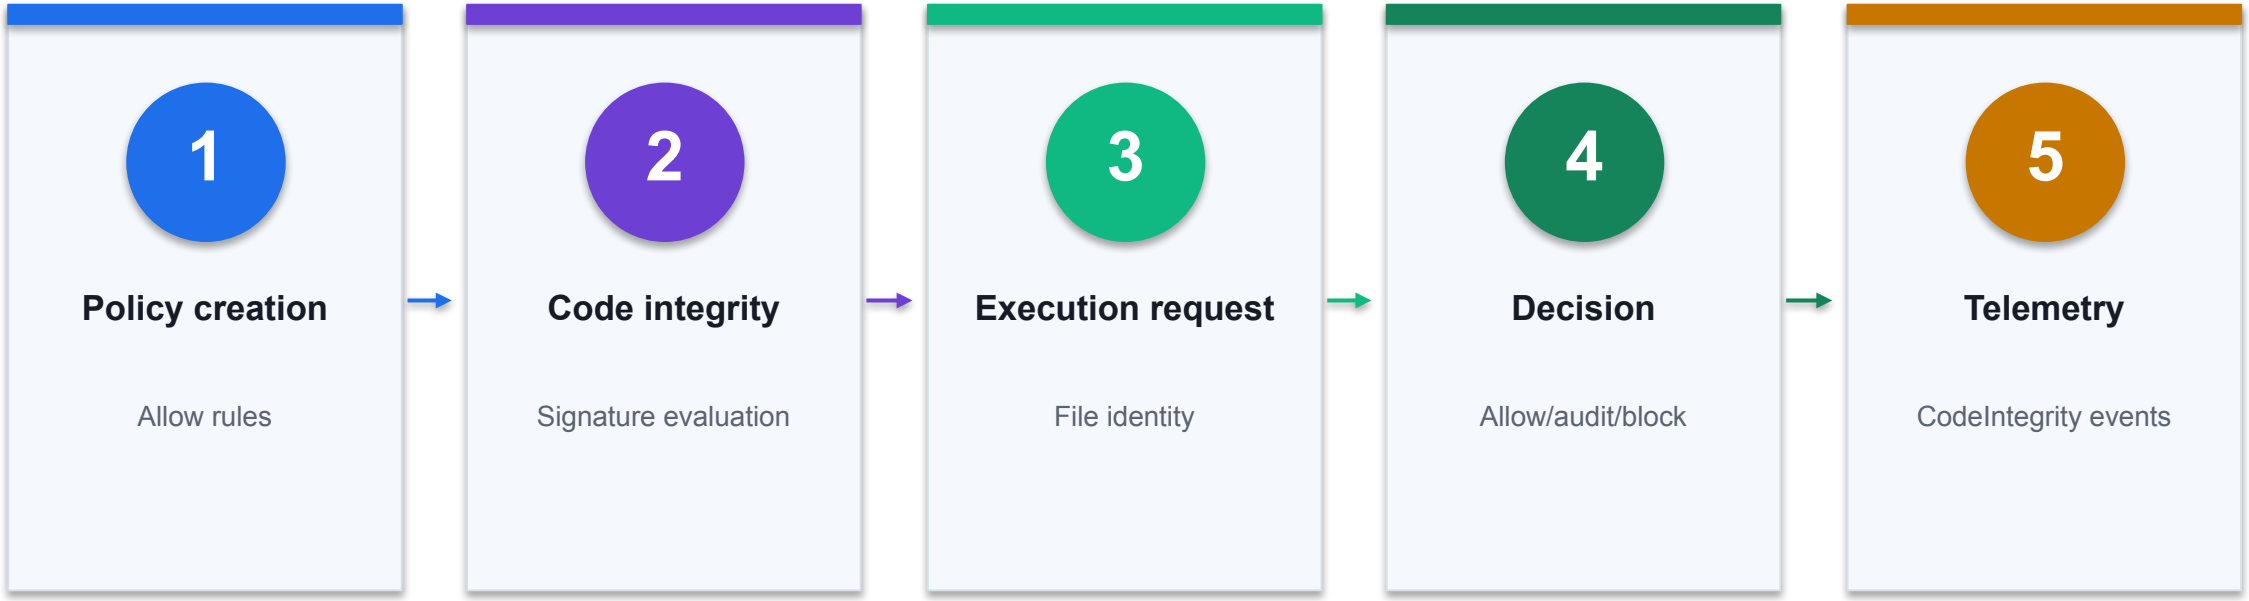

CONTROL POINT

Inspect the evidence at every transition; the first missing state is the most useful troubleshooting boundary. Lab 6 carries the full procedure.

© 2026 Tertiary Infotech Academy Pte Ltd

Control application execution with App Control — exact contract

1 Base policy

Trusted estate

FIELD / STATE

2 Supplemental policy

Scoped extension

FIELD / STATE

3 Audit mode

Inventory before enforcement

FIELD / STATE

4 Managed installer

Trust tagged deployment source

FIELD / STATE

DECISION RULE

Configuration is a contract: names, values, scope and resulting state must all agree.

© 2026 Tertiary Infotech Academy Pte Ltd

Base policy — control contract



BOUNDARY · Policy creation

STATE **Base policy**

Trusted estate

RISK **Unsigned business app**

Create publisher/file rule

PROOF **CodeIntegrity event**


File and signer

CONTROL READING

The Base policy state is valid only when Policy creation produces CodeIntegrity event; Unsigned business app requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Supplemental policy — control contract

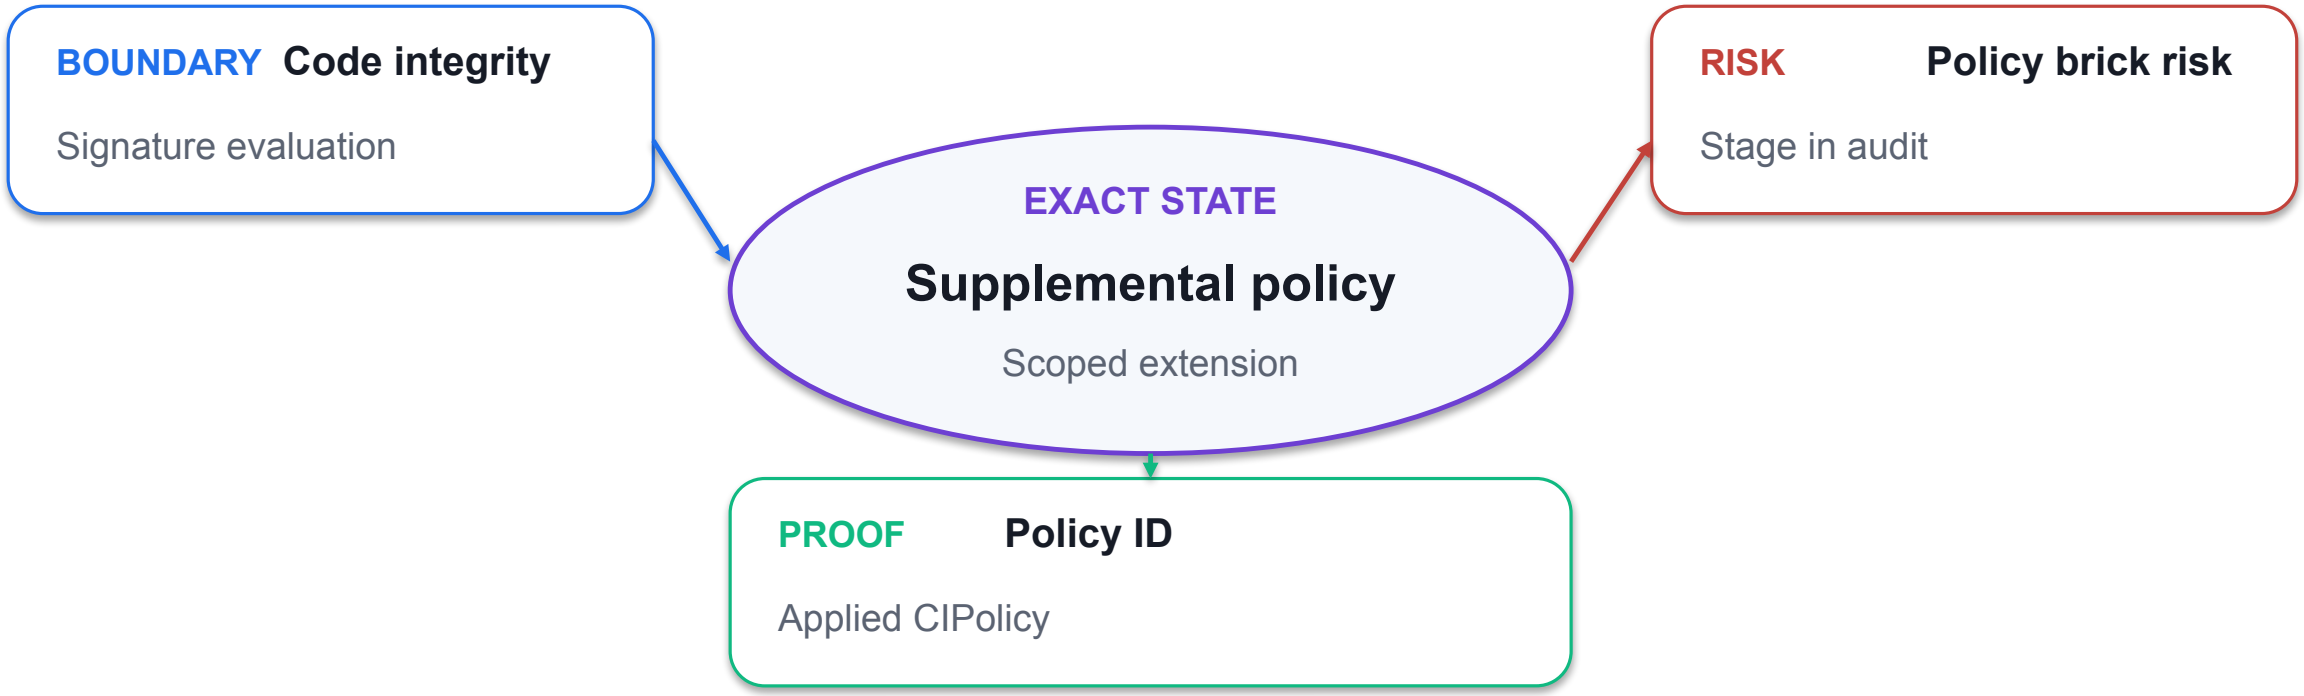

CONTROL READING

The Supplemental policy state is valid only when Code integrity produces Policy ID; Policy brick risk requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Audit mode — control contract

1

BOUNDARY **Execution request**

File identity

2

EXACT STATE **Audit mode**

Inventory before enforcement

3

CONTROL RISK **Rule too broad**

Avoid path trust where writable

4

PROOF **Audit inventory**

Required exceptions

CONTROL READING

The Audit mode state is valid only when Execution request produces Audit inventory; Rule too broad requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Managed installer — control contract

1	BOUNDARY	Decision	Allow/audit/block
2	EXACT STATE	Managed installer	Trust tagged deployment source
3	CONTROL RISK	Rollback unavailable	Maintain recovery plan
4	PROOF	Block test	Unauthorized binary denied

CONTROL READING

The Managed installer state is valid only when Decision produces Block test; Rollback unavailable requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Control application execution with App Control — failure and recovery

1 Unsigned business app

Create publisher/file rule

DIAGNOSE → RECOVER

2 Policy brick risk

Stage in audit

DIAGNOSE → RECOVER

3 Rule too broad

Avoid path trust where writable

DIAGNOSE → RECOVER

4 Rollback unavailable

Maintain recovery plan

DIAGNOSE → RECOVER

DECISION RULE

Treat the symptom as a pointer to a failed stage; collect evidence before changing policy.

© 2026 Tertiary Infotech Academy Pte Ltd

Unsigned business app — diagnostic trace

1	SIGNAL	**Unsigned business app**
2	BOUNDARY	Code integrity
3	SUSPECT STATE	Base policy
4	RECOVERY	Create publisher/file rule
5	ACCEPTANCE	**CodeIntegrity event**

EVIDENCE THRESHOLD

Accept the recovery only when CodeIntegrity event shows File and signer; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Policy brick risk — diagnostic trace




RECOVERY ACTION	Stage in audit
ACCEPTANCE PROOF	Applied CIPolicy

EVIDENCE THRESHOLD

Accept the recovery only when Policy ID shows Applied CIPolicy; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Rule too broad — diagnostic trace

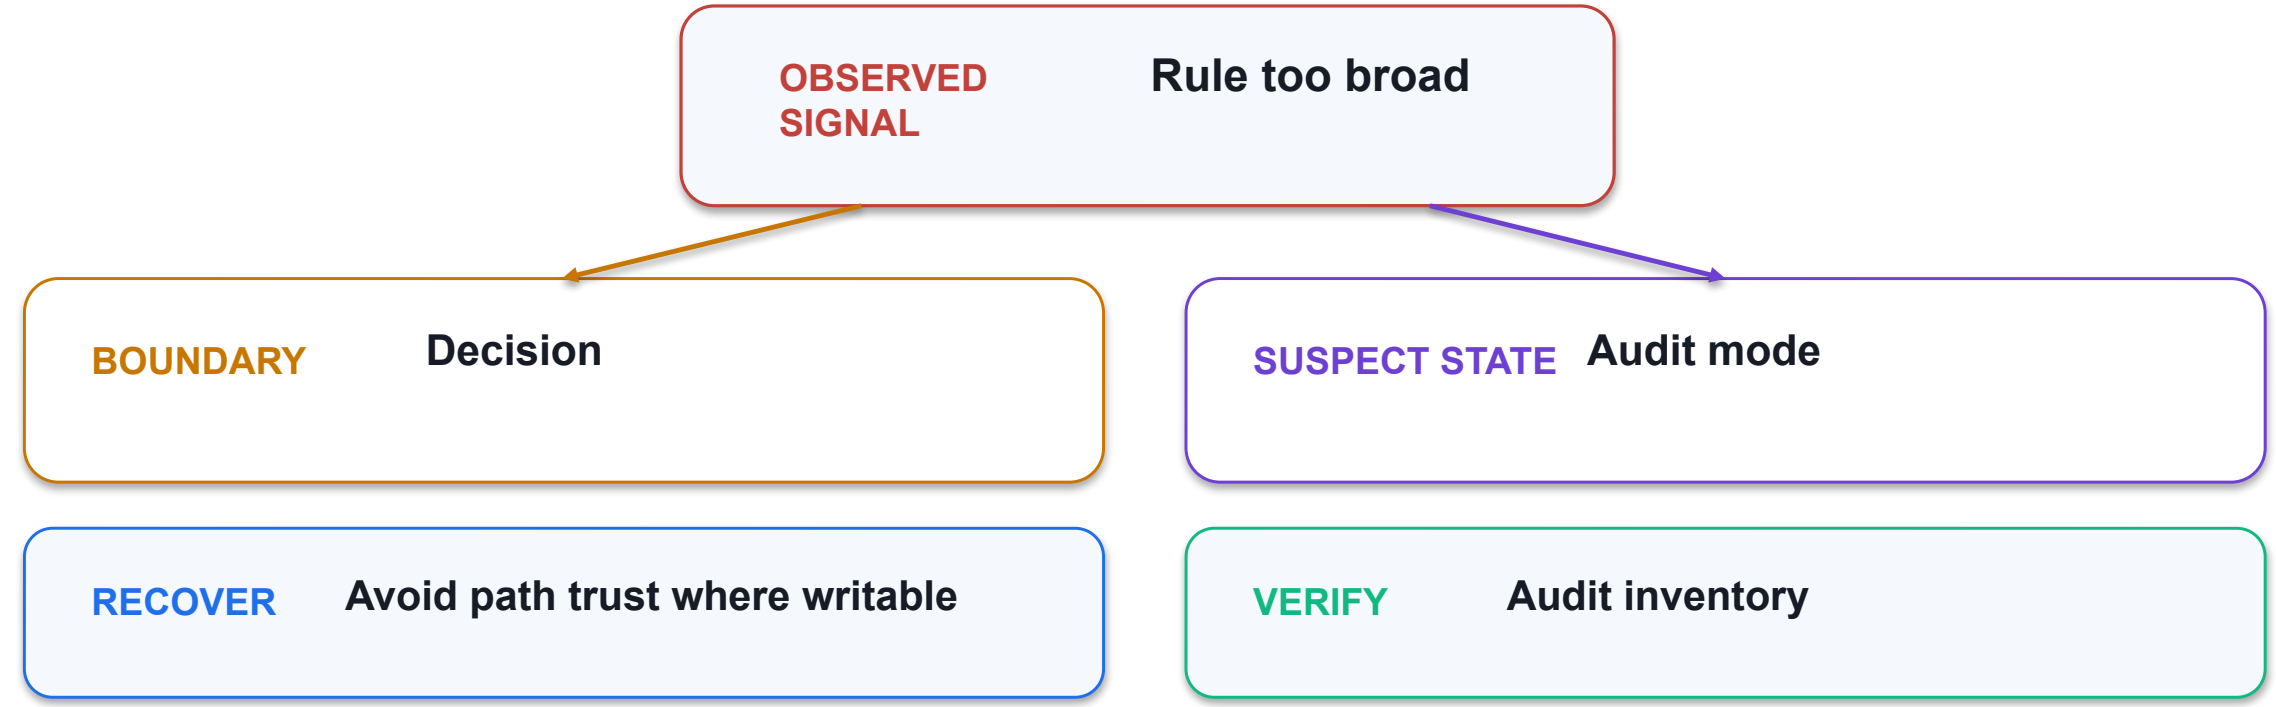

EVIDENCE THRESHOLD

Accept the recovery only when Audit inventory shows Required exceptions; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Rollback unavailable — diagnostic trace



BOUNDARY · Telemetry | SUSPECT · Managed installer

SIGNAL Rollback unavailable

RECOVERY Maintain recovery plan

PROOF Block test

EVIDENCE THRESHOLD

Accept the recovery only when Block test shows Unauthorized binary denied; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Control application execution with App Control — verification evidence

✓ **CodeIntegrity event**	File and signer
✓ **Policy ID**	Applied CIPolicy
✓ **Audit inventory**	Required exceptions
✓ **Block test**	Unauthorized binary denied

LAB 6

Evidence standard

Capture the configured state, the observed result, the timestamp or correlation ID, and the interpretation.


PASS = REPRODUCIBLE

PRACTICE BRIDGE

Full click paths, commands, expected outputs and troubleshooting are in the Learner Guide and the individual lab folder.

© 2026 Tertiary Infotech Academy Pte Ltd

Operate update rings, Autopatch and Hotpatch — mechanism

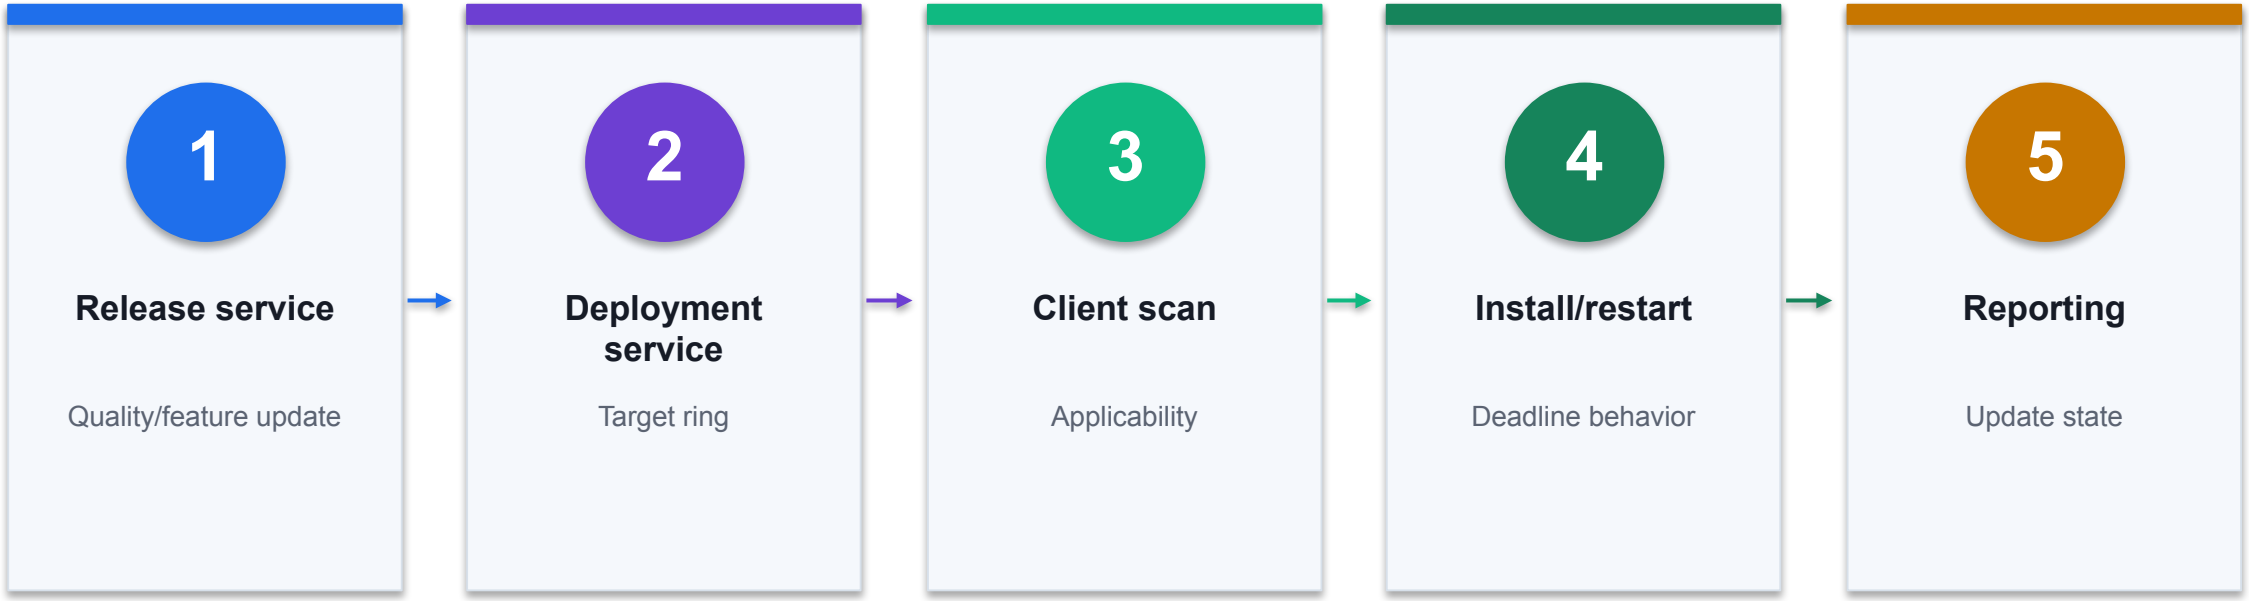

CONTROL POINT

Inspect the evidence at every transition; the first missing state is the most useful troubleshooting boundary. Lab 7 carries the full procedure.

© 2026 Tertiary Infotech Academy Pte Ltd

Operate update rings, Autopatch and Hotpatch — exact contract

1 Ring

Deferral + deadline

FIELD / STATE

2 Feature policy

Pinned version

FIELD / STATE

3 Autopatch

Service-managed rings

FIELD / STATE

4 Hotpatch

Eligible baseline + quarterly refresh

FIELD / STATE

DECISION RULE

Configuration is a contract: names, values, scope and resulting state must all agree.

© 2026 Tertiary Infotech Academy Pte Ltd

Ring — control contract



BOUNDARY · Release service

STATE **Ring**

Deferral + deadline

RISK **Offer not received**

Check safeguards and policy

PROOF **Update report**


Offer/install state

CONTROL READING

The Ring state is valid only when Release service produces Update report; Offer not received requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Feature policy — control contract

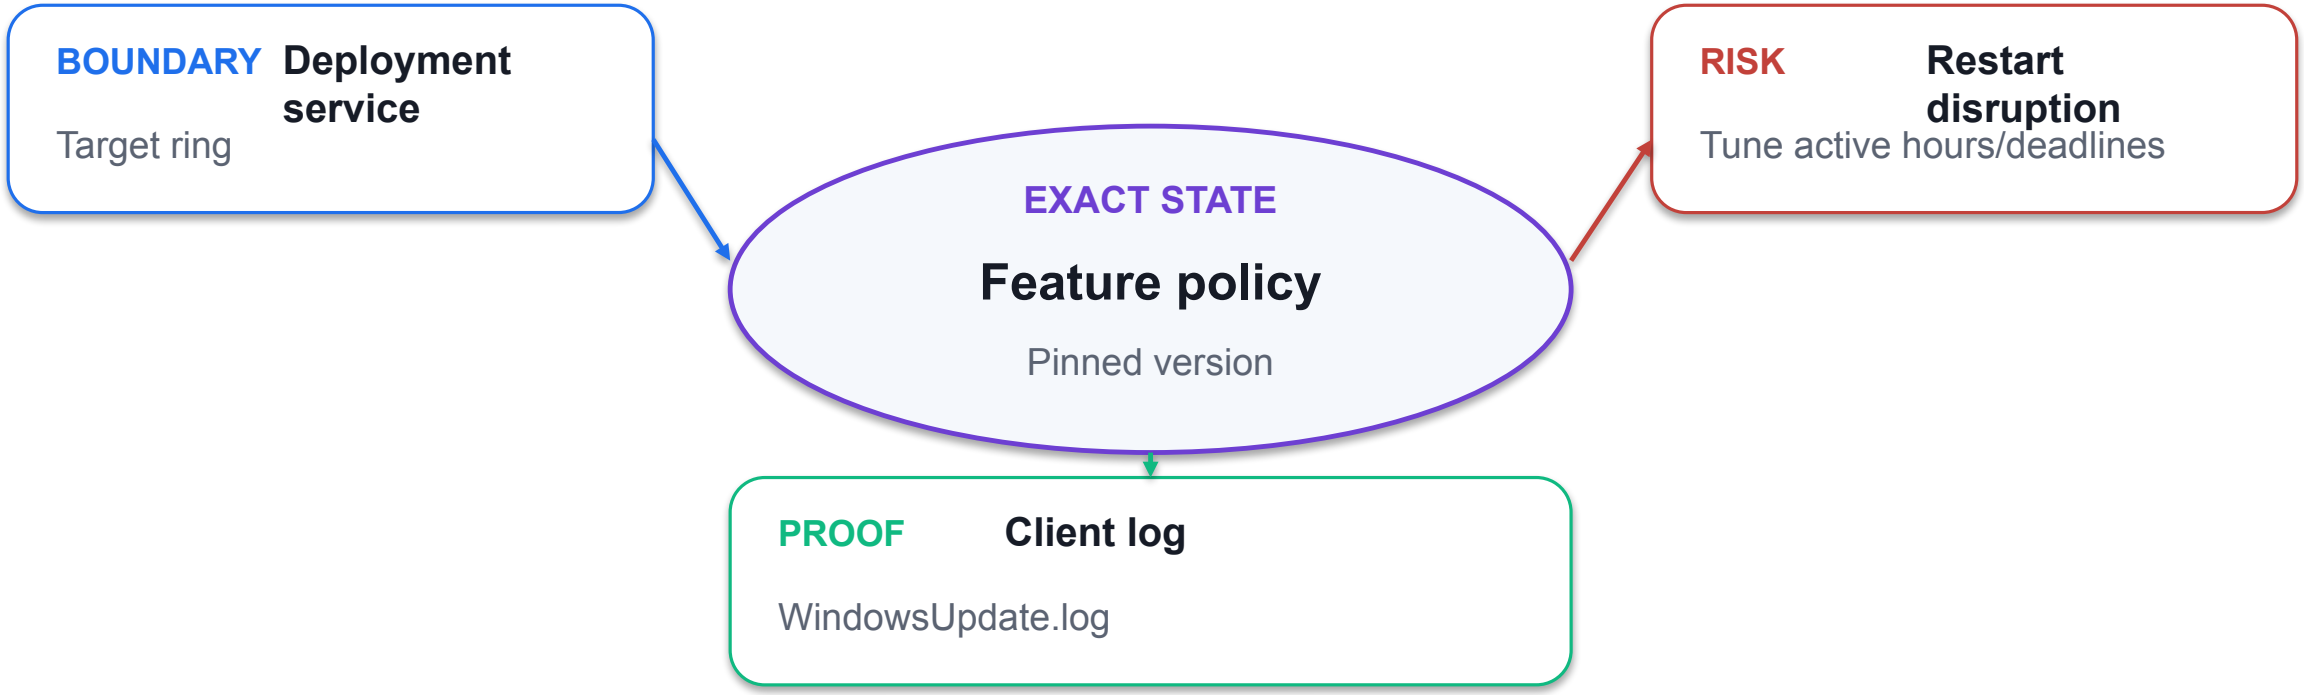

CONTROL READING

The Feature policy state is valid only when Deployment service produces Client log; Restart disruption requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Autopatch — control contract

1

BOUNDARY Client scan

Applicability

2

EXACT STATE Autopatch

Service-managed rings

3

CONTROL RISK Conflicting policies

Consolidate update source

4

PROOF Autopatch status

Release phase

CONTROL READING

The Autopatch state is valid only when Client scan produces Autopatch status; Conflicting policies requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Hotpatch — control contract

1	BOUNDARY	Install/restart	Deadline behavior
2	EXACT STATE	Hotpatch	Eligible baseline + quarterly refresh
3	CONTROL RISK	Hotpatch ineligible	Validate edition and baseline
4	PROOF	KPI	Compliance by deadline

CONTROL READING

The Hotpatch state is valid only when Install/restart produces KPI; Hotpatch ineligible requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Operate update rings, Autopatch and Hotpatch — failure and recovery

1 Offer not received

Check safeguards and policy

DIAGNOSE → RECOVER

2 Restart disruption

Tune active hours/deadlines

DIAGNOSE → RECOVER

3 Conflicting policies

Consolidate update source

DIAGNOSE → RECOVER

4 Hotpatch ineligible

Validate edition and baseline

DIAGNOSE → RECOVER

DECISION RULE

Treat the symptom as a pointer to a failed stage; collect evidence before changing policy.

© 2026 Tertiary Infotech Academy Pte Ltd

Offer not received — diagnostic trace

1	SIGNAL	**Offer not received**
2	BOUNDARY	Deployment service
3	SUSPECT STATE	Ring
4	RECOVERY	Check safeguards and policy
5	ACCEPTANCE	**Update report**

EVIDENCE THRESHOLD

Accept the recovery only when Update report shows Offer/install state; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Restart disruption — diagnostic trace




RECOVERY ACTION	Tune active hours/deadlines
ACCEPTANCE PROOF	WindowsUpdate.log

EVIDENCE THRESHOLD

Accept the recovery only when Client log shows WindowsUpdate.log; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Conflicting policies — diagnostic trace

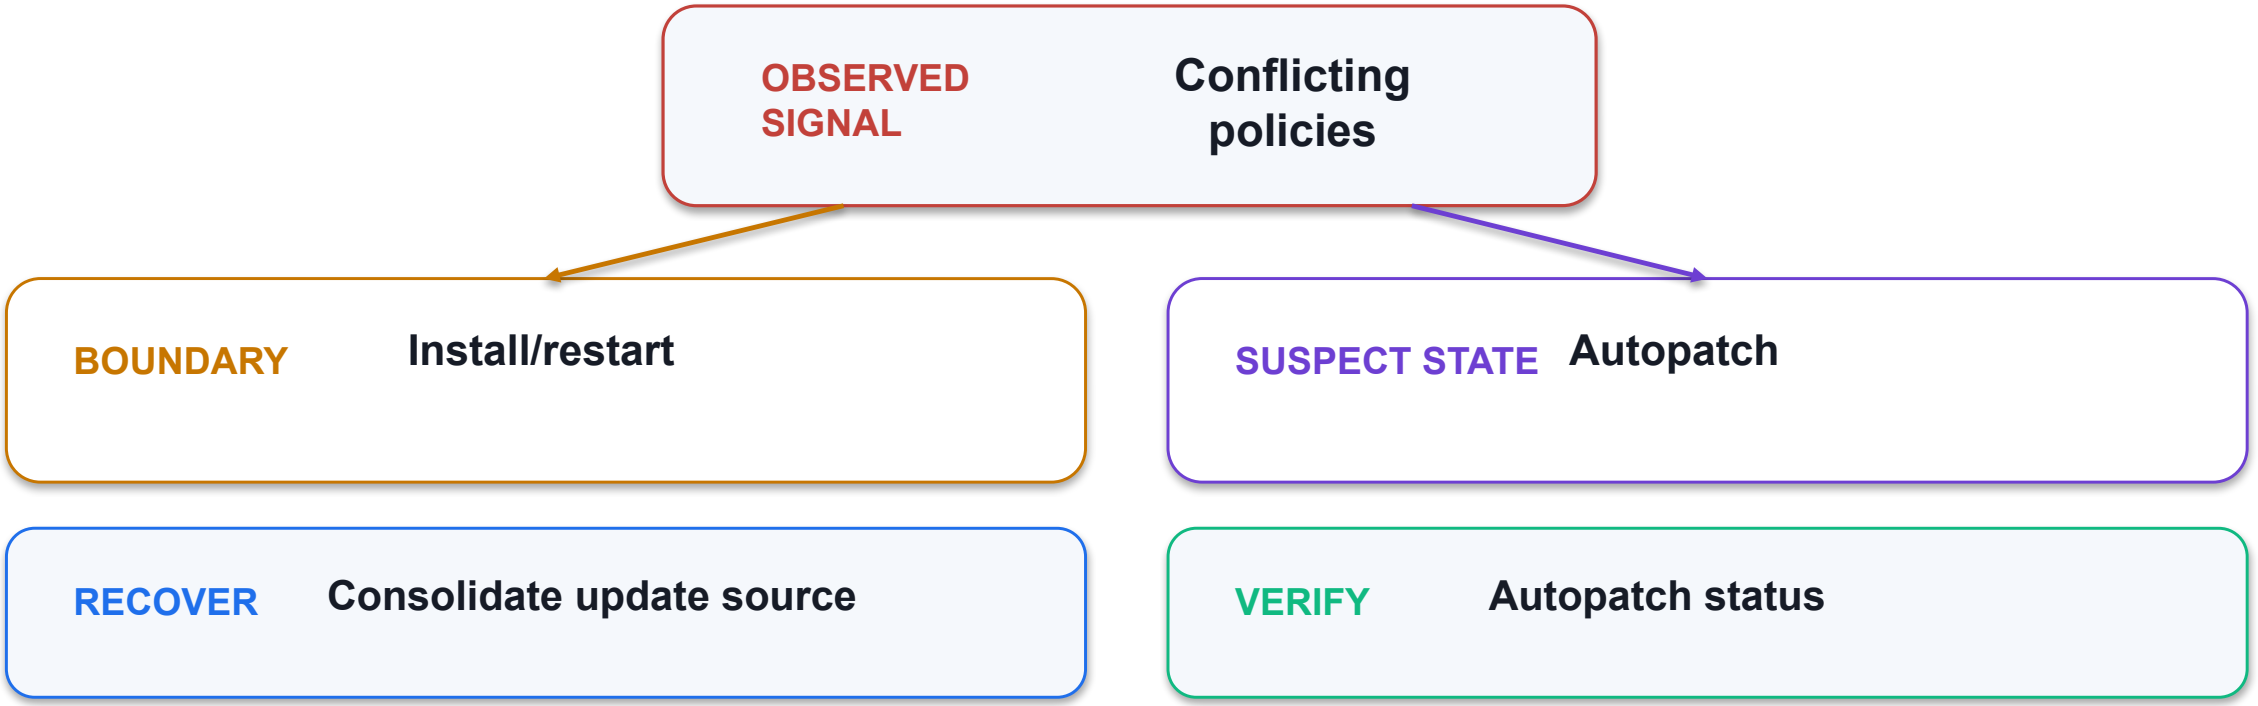

EVIDENCE THRESHOLD

Accept the recovery only when Autopatch status shows Release phase; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Hotpatch ineligible — diagnostic trace



BOUNDARY · Reporting | SUSPECT · Hotpatch

SIGNAL	Hotpatch ineligible
RECOVERY	Validate edition and baseline
PROOF	KPI

EVIDENCE THRESHOLD

Accept the recovery only when KPI shows Compliance by deadline; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Operate update rings, Autopatch and Hotpatch — verification evidence

Update report	Offer/install state
Client log	WindowsUpdate.log
Autopatch status	Release phase
KPI	Compliance by deadline

LAB 7

Evidence standard

Capture the configured state, the observed result, the timestamp or correlation ID, and the interpretation.

PASS = REPRODUCIBLE

PRACTICE BRIDGE

Full click paths, commands, expected outputs and troubleshooting are in the Learner Guide and the individual lab folder.

© 2026 Tertiary Infotech Academy Pte Ltd

HANDS-ON · 120 MIN

Lab 6: Endpoint security, Defender, BitLocker, firewall and ASR

SCENARIO Contoso must implement the control, prove the observed state, diagnose one seeded failure, and retain an auditable evidence pack.



YOU'LL PRODUCE

Security control set with Defender/BitLocker/firewall/ASR verification and exception record

© 2026 Tertiary Infotech Academy Pte Ltd

LO2 · LO3 · K3 · K4 · A4 · A5 · A6

Lab 6 — acceptance and evidence

Configured state

Policy/profile/assignment values are visible and scoped to the intended cohort.

EVIDENCE REQUIRED

Observed result

The device, app or identity shows the expected service and client-side outcome.

EVIDENCE REQUIRED

Failure diagnosis

The seeded issue is tied to an error, log, report or missing state—not a guess.

EVIDENCE REQUIRED

Recovery proof

A post-change retest demonstrates the corrected state with timestamp/correlation evidence.

EVIDENCE REQUIRED

SUBMISSION

Save the evidence under labs/lab-06-endpoint-security-defender/evidence/. Detailed steps are in the Learner Guide.

© 2026 Tertiary Infotech Academy Pte Ltd

HANDS-ON · 110 MIN

Lab 7: Update rings, feature updates, Autopatch, Hotpatch and Delivery Optimization

SCENARIO Contoso must implement the control, prove the observed state, diagnose one seeded failure, and retain an auditable evidence pack.



YOU'LL PRODUCE

Staged update design, eligibility checks, rollout metrics and rollback decision evidence

© 2026 Tertiary Infotech Academy Pte Ltd

LO1 · LO2 · K1 · K2 · A2 · A5

Lab 7 — acceptance and evidence

Configured state

Policy/profile/assignment values are visible and scoped to the intended cohort.

EVIDENCE REQUIRED

Observed result

The device, app or identity shows the expected service and client-side outcome.

EVIDENCE REQUIRED

Failure diagnosis

The seeded issue is tied to an error, log, report or missing state—not a guess.

EVIDENCE REQUIRED

Recovery proof

A post-change retest demonstrates the corrected state with timestamp/correlation evidence.

EVIDENCE REQUIRED

SUBMISSION

Save the evidence under labs/lab-07-updates-autopatch-hotpatch/evidence/. Detailed steps are in the Learner Guide.

© 2026 Tertiary Infotech Academy Pte Ltd

RETRIEVE · DIAGNOSE · EXPLAIN

Day 3 technical recap

1 Checkpoint 1

- Configure Defender Antivirus policy
- Manage BitLocker encryption and recovery

2 Checkpoint 2

- Enforce Windows Firewall policy
- Reduce attack surface with ASR and Zero Trust

3 Checkpoint 3

- Apply security baselines without configuration drift
- Integrate Intune with Defender for Endpoint

4 Checkpoint 4

- Control application execution with App Control
- Operate update rings, Autopatch and Hotpatch

REMEMBER

For each checkpoint, name the architecture boundary, exact contract, failure evidence and acceptance state.


© 2026 Tertiary Infotech Academy Pte Ltd

DAY 4 · 8 HOURS

Application lifecycle and data protection

Win32 and Microsoft 365 Apps; MAM; app configuration; troubleshooting · 15–20% · LO2 · LO3 · K2 · K3 · A2 · A5

Manage and secure applications — indicative operational signal

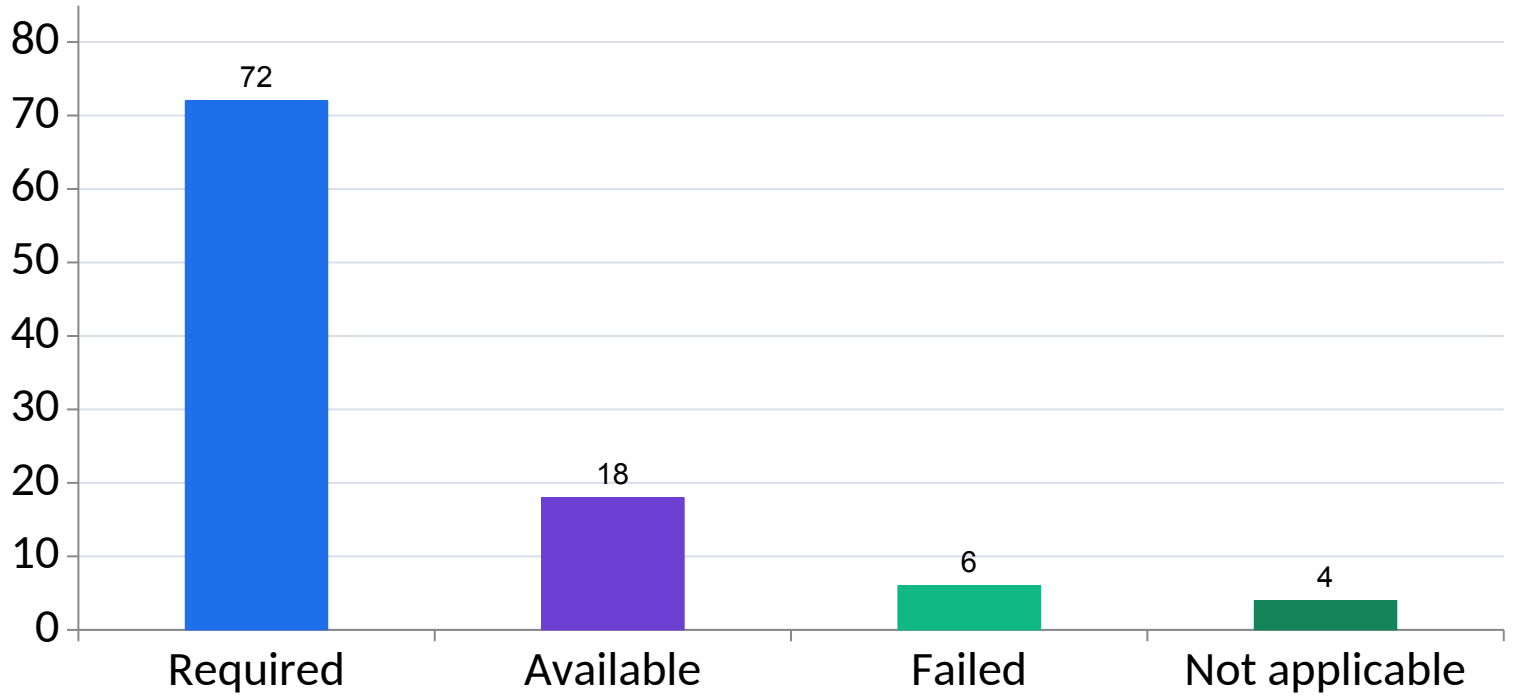

15–20%

CURRENT EXAM WEIGHT

LO2 · LO3

K2 · K3 · A2 · A5


Indicative teaching data

WHAT THE DATA SHOWS

Separate true failures from not-applicable devices before changing an application.

© 2026 Tertiary Infotech Academy Pte Ltd

Package and deploy Win32 applications — mechanism

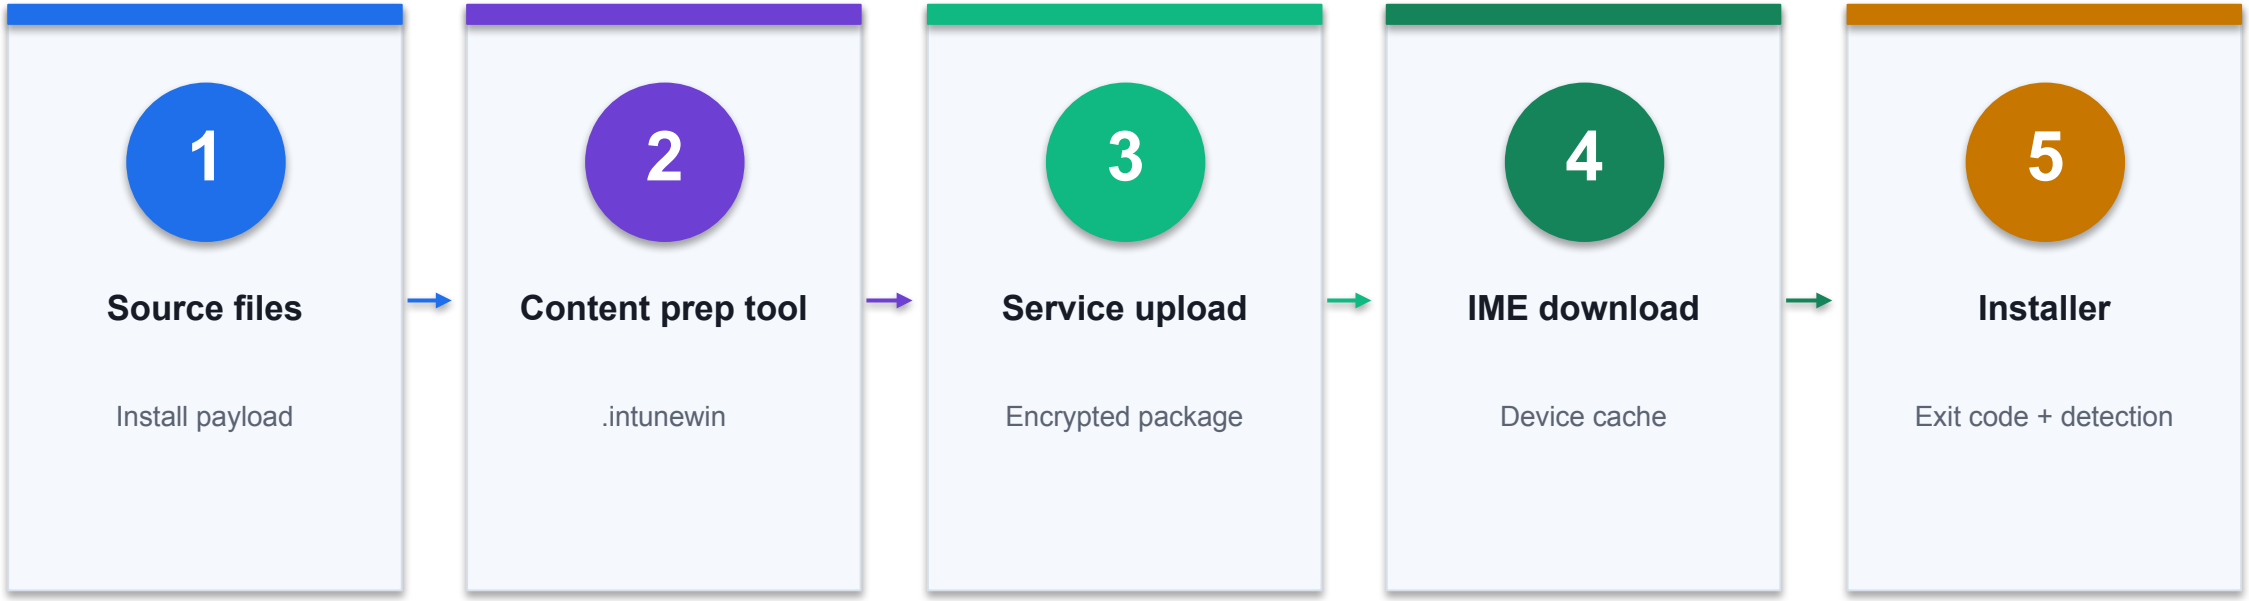

CONTROL POINT

Inspect the evidence at every transition; the first missing state is the most useful troubleshooting boundary. Lab 8 carries the full procedure.

© 2026 Tertiary Infotech Academy Pte Ltd

Package and deploy Win32 applications — exact contract

1 Install command

Silent and idempotent

FIELD / STATE

2 Detection

MSI · file · registry · script

FIELD / STATE

3 Requirements

Architecture and OS

FIELD / STATE

4 Return codes

Success · retry · reboot


FIELD / STATE

DECISION RULE

Configuration is a contract: names, values, scope and resulting state must all agree.

© 2026 Tertiary Infotech Academy Pte Ltd

Install command — control contract

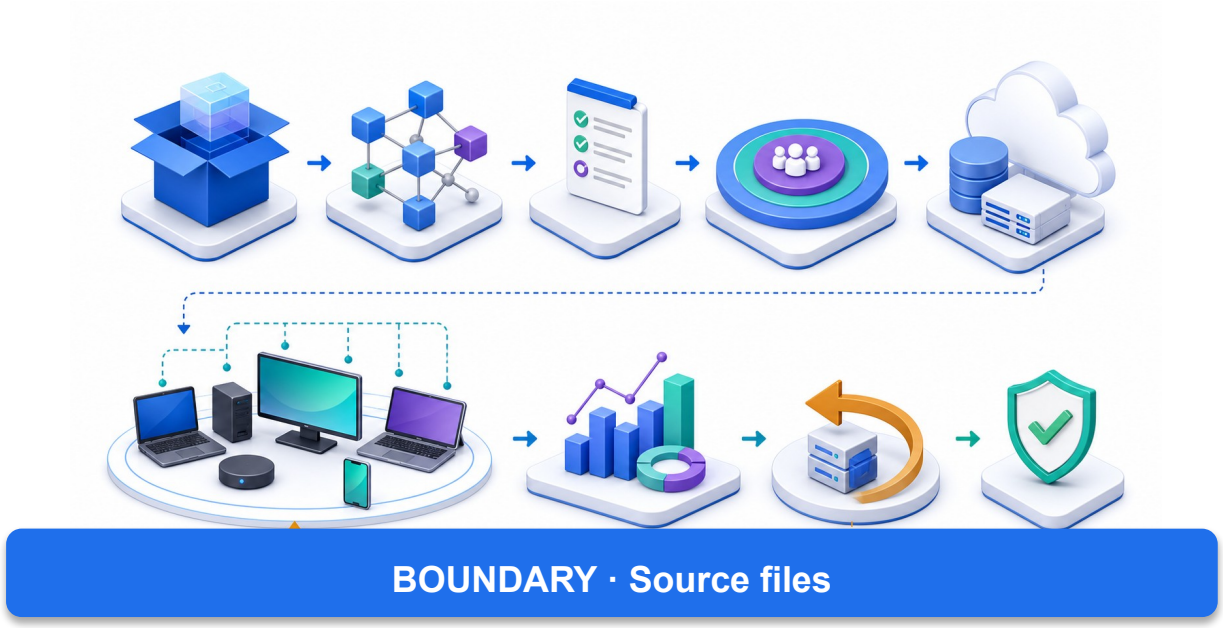

STATE **Install command**

Silent and idempotent

RISK **0x87D30067**

Detection failed after install

PROOF **IME log**


IntuneManagementExtension.log

CONTROL READING

The Install command state is valid only when Source files produces IME log; 0x87D30067 requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Detection — control contract

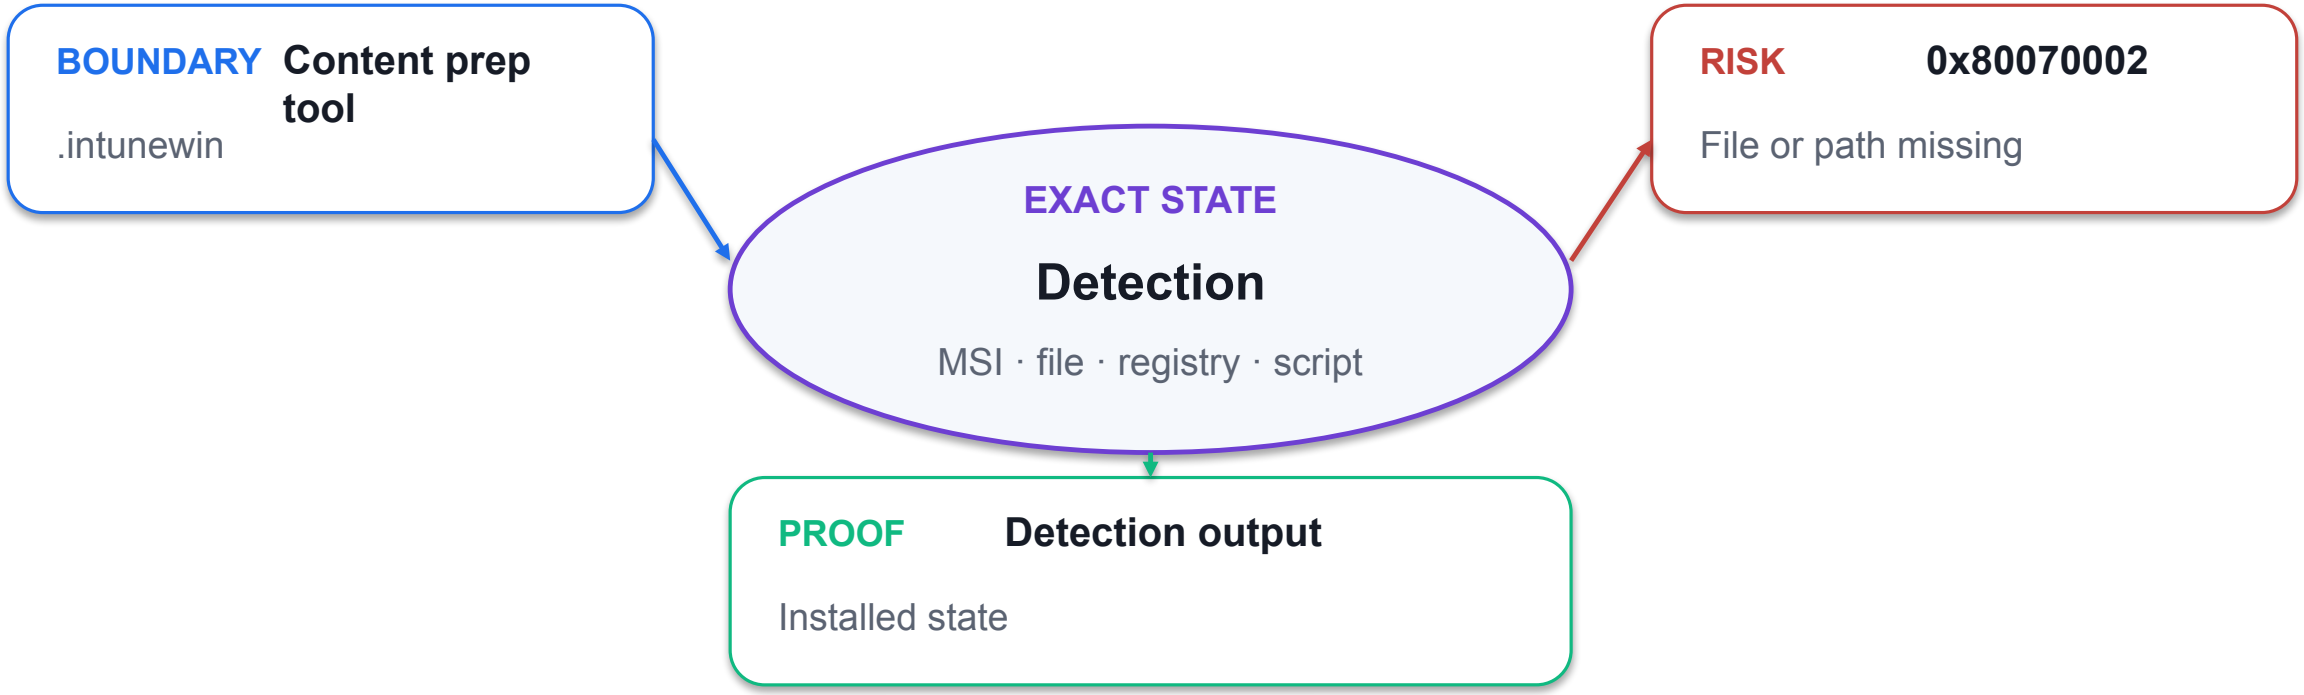

CONTROL READING

The Detection state is valid only when Content prep tool produces Detection output; 0x80070002 requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Requirements — control contract

1

BOUNDARY **Service upload**

Encrypted package

2

EXACT STATE **Requirements**

Architecture and OS

3

CONTROL RISK **Installer context**

System vs user mismatch

4

PROOF **App report**

Device install status

CONTROL READING

The Requirements state is valid only when Service upload produces App report; Installer context requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Return codes — control contract

1	BOUNDARY	IME download	Device cache
2	EXACT STATE	Return codes	Success · retry · reboot
3	CONTROL RISK	Reboot loop	Map return codes correctly
4	PROOF	Exit code	Mapped result

CONTROL READING

The Return codes state is valid only when IME download produces Exit code; Reboot loop requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Package and deploy Win32 applications — failure and recovery

1 0x87D30067

Detection failed after install

DIAGNOSE → RECOVER

2 0x80070002

File or path missing

DIAGNOSE → RECOVER

3 Installer context

System vs user mismatch

DIAGNOSE → RECOVER

4 Reboot loop

Map return codes correctly

DIAGNOSE → RECOVER

DECISION RULE

Treat the symptom as a pointer to a failed stage; collect evidence before changing policy.

© 2026 Tertiary Infotech Academy Pte Ltd

0x87D30067 — diagnostic trace

1	SIGNAL	**0x87D30067**
2	BOUNDARY	Content prep tool
3	SUSPECT STATE	Install command
4	RECOVERY	Detection failed after install
5	ACCEPTANCE	**IME log**

EVIDENCE THRESHOLD

Accept the recovery only when IME log shows IntuneManagementExtension.log; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

0x80070002 — diagnostic trace



RECOVERY ACTION File or path missing


ACCEPTANCE PROOF Installed state

EVIDENCE THRESHOLD

Accept the recovery only when Detection output shows Installed state; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Installer context — diagnostic trace

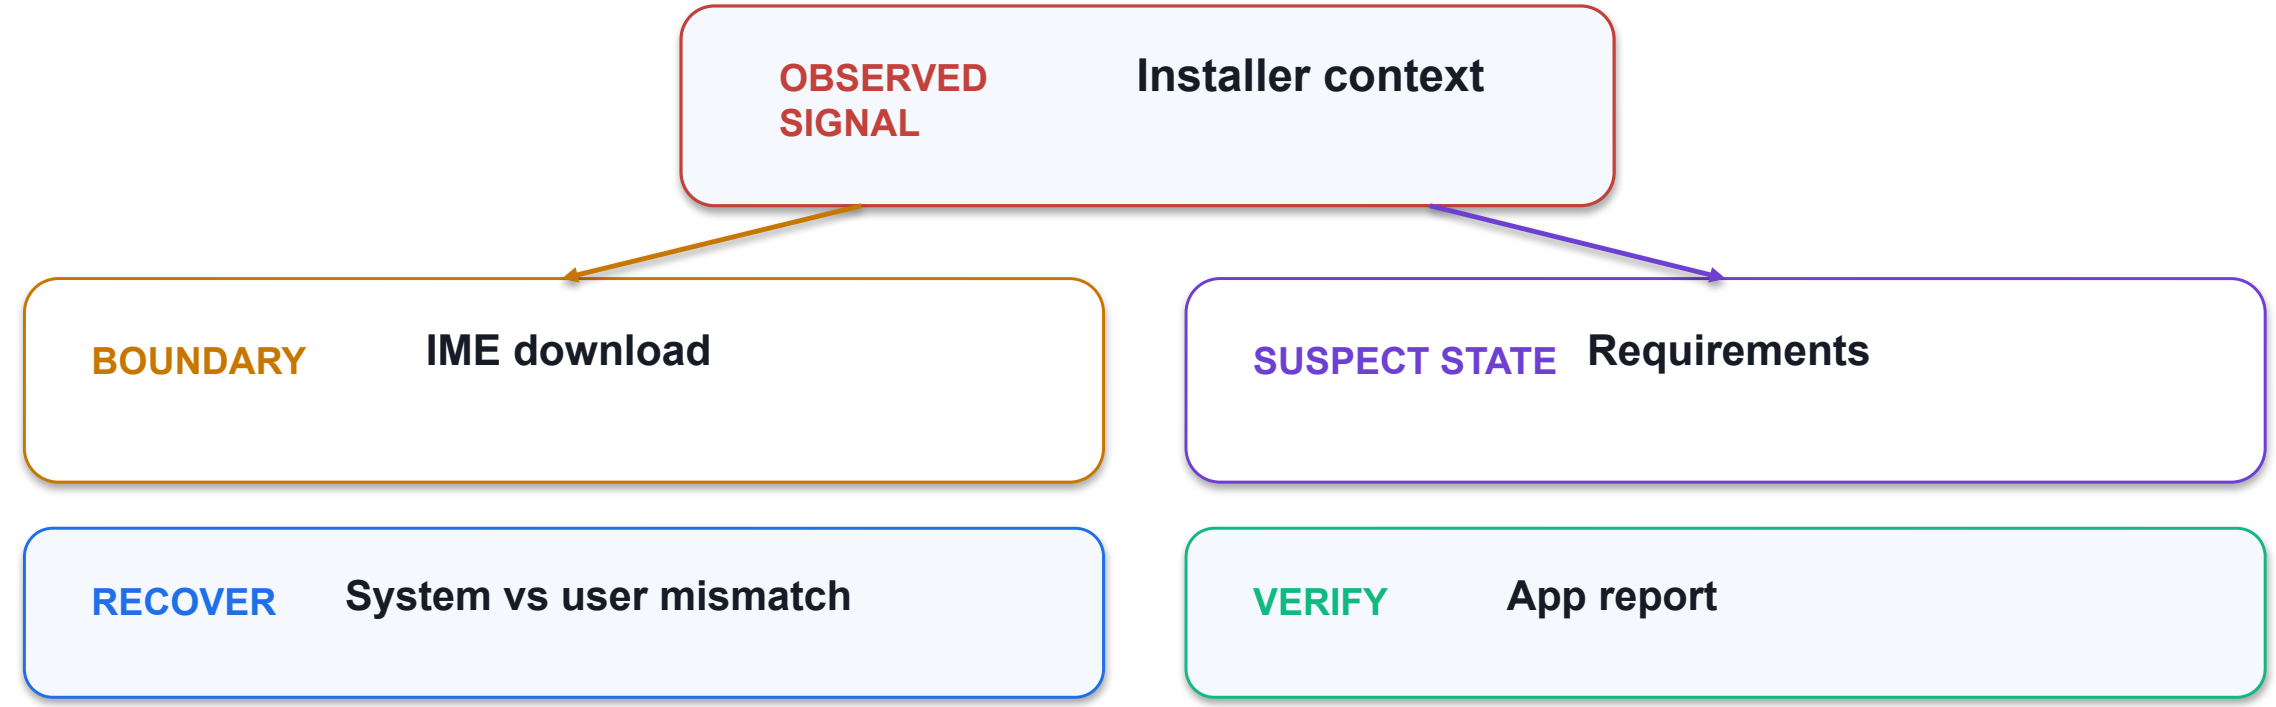


EVIDENCE THRESHOLD

Accept the recovery only when App report shows Device install status; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Reboot loop — diagnostic trace

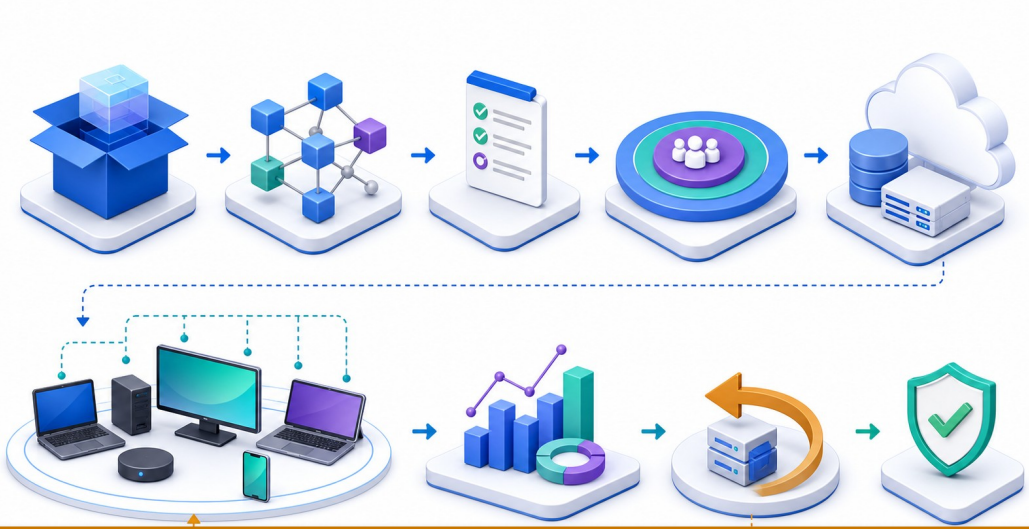

BOUNDARY · Installer | SUSPECT · Return codes

SIGNAL Reboot loop

RECOVERY Map return codes correctly

PROOF Exit code

EVIDENCE THRESHOLD

Accept the recovery only when Exit code shows Mapped result; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Package and deploy Win32 applications — verification evidence

✓ **IME log**	IntuneManagementExtension.log
✓ **Detection output**	Installed state
✓ **App report**	Device install status
✓ **Exit code**	Mapped result

LAB 8

Evidence standard

Capture the configured state, the observed result, the timestamp or correlation ID, and the interpretation.


PASS = REPRODUCIBLE

PRACTICE BRIDGE

Full click paths, commands, expected outputs and troubleshooting are in the Learner Guide and the individual lab folder.

© 2026 Tertiary Infotech Academy Pte Ltd

Sequence apps with dependencies and supersedence — mechanism

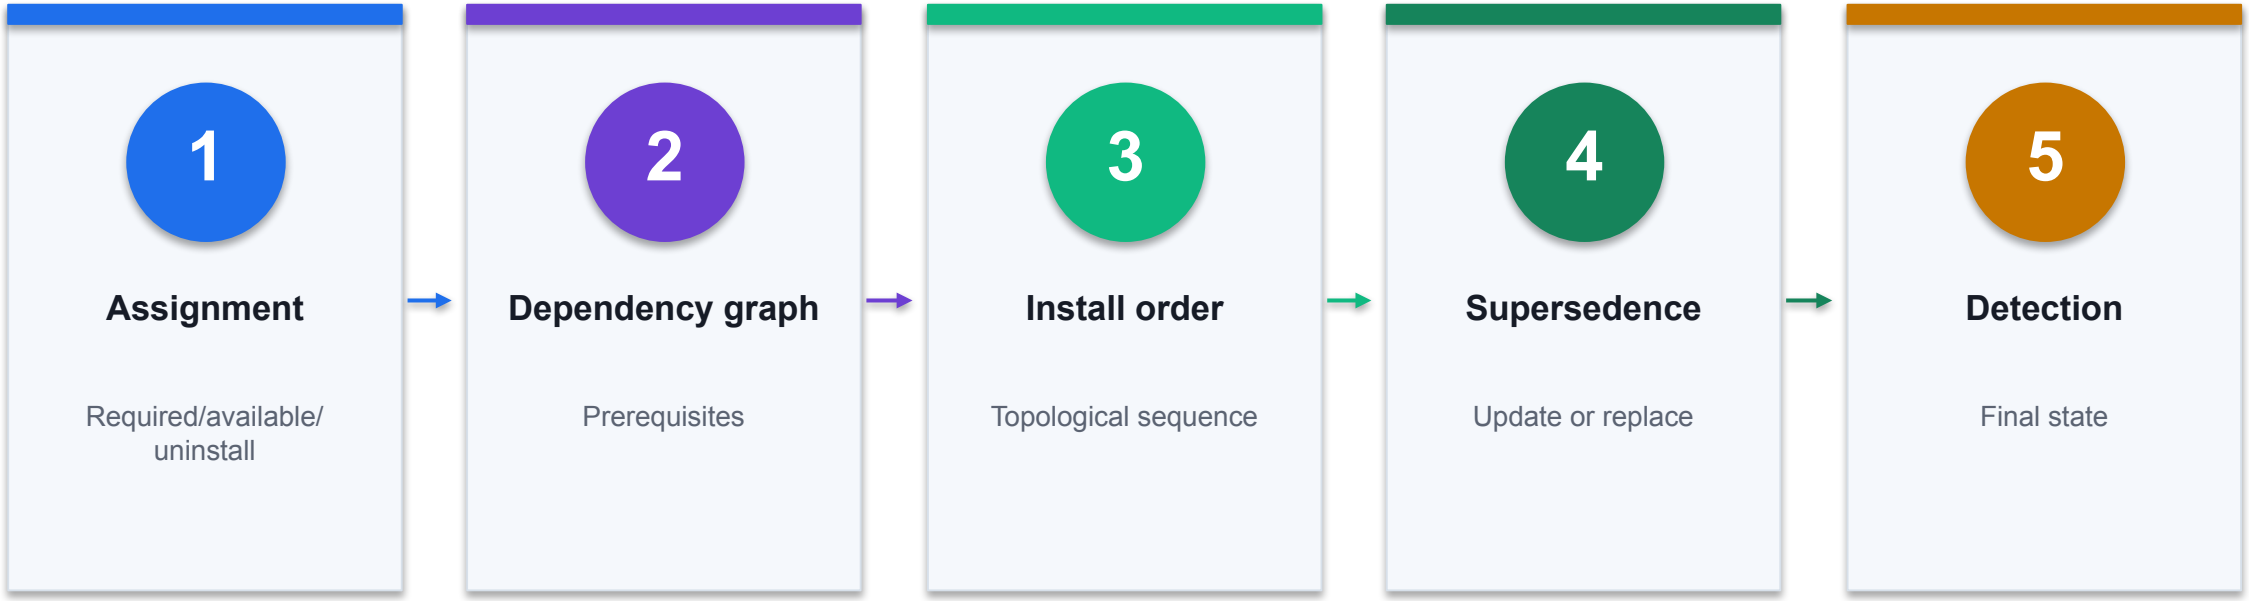

CONTROL POINT

Inspect the evidence at every transition; the first missing state is the most useful troubleshooting boundary. Lab 8 carries the full procedure.

© 2026 Tertiary Infotech Academy Pte Ltd

Sequence apps with dependencies and supersedence — exact contract

1 Dependency

Auto-install prerequisite

FIELD / STATE

2 Supersedence

Update or uninstall previous

FIELD / STATE

3 Requirement

Gate by device state

FIELD / STATE

4 Availability

Company Portal intent


FIELD / STATE

DECISION RULE

Configuration is a contract: names, values, scope and resulting state must all agree.

© 2026 Tertiary Infotech Academy Pte Ltd

Dependency — control contract

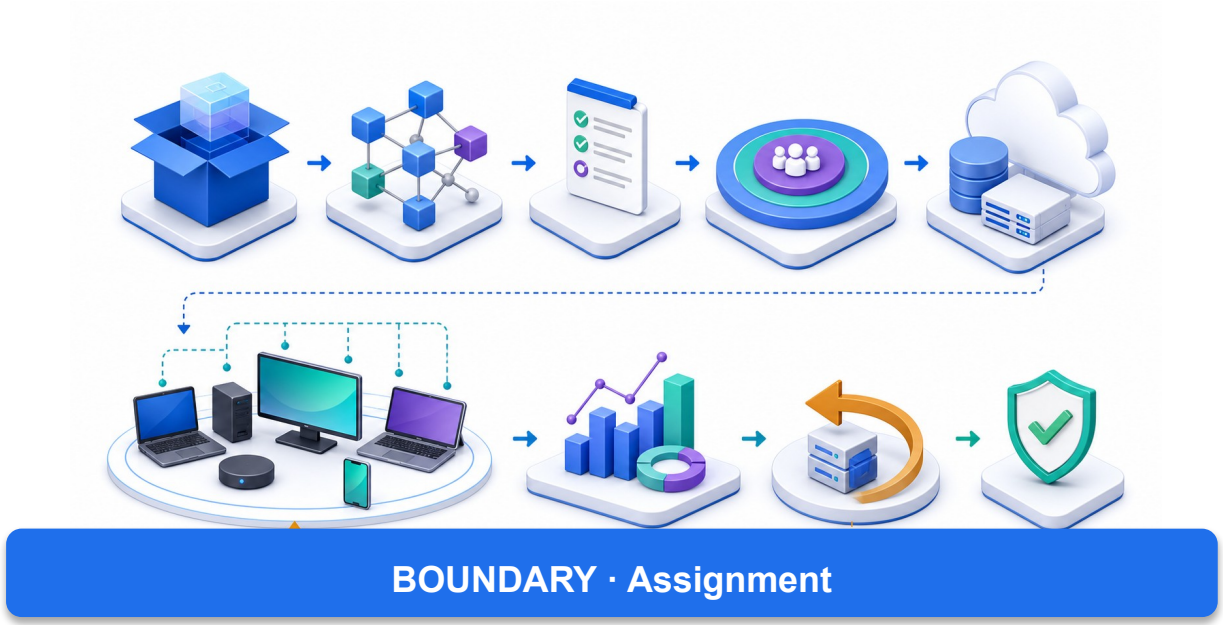

STATE **Dependency**

Auto-install prerequisite

RISK **Cycle**

Remove circular dependency

PROOF **Dependency graph**


Expected sequence

CONTROL READING

The Dependency state is valid only when Assignment produces Dependency graph; Cycle requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Supersedence — control contract

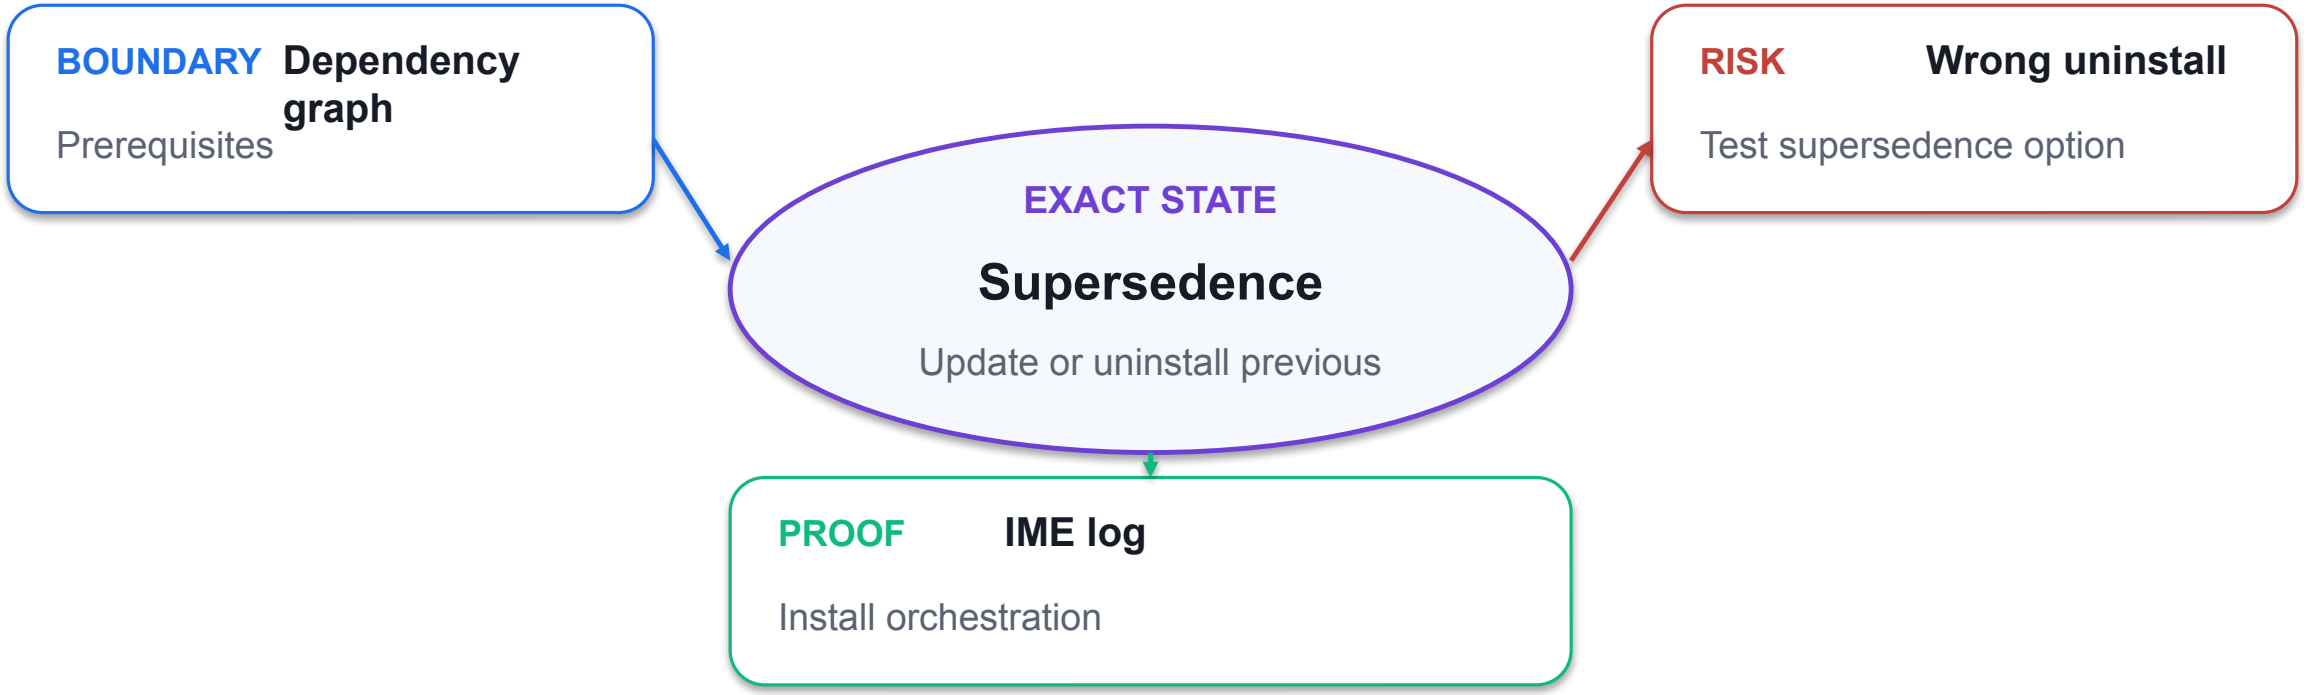

CONTROL READING

The Supersedence state is valid only when Dependency graph produces IME log; Wrong uninstall requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Requirement — control contract

1

BOUNDARY **Install order**

Topological sequence

2

EXACT STATE **Requirement**

Gate by device state

3

CONTROL RISK **Detection overlap**

Use version-aware rule

4

PROOF **App version**

New build detected

CONTROL READING

The Requirement state is valid only when Install order produces App version; Detection overlap requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Availability — control contract

1	BOUNDARY	**Supersedence**	Update or replace
2	EXACT STATE	**Availability**	Company Portal intent
3	CONTROL RISK	**Assignment conflict**	Resolve required vs uninstall
4	PROOF	**Report**	No stale required failure

CONTROL READING

The Availability state is valid only when Supersedence produces Report; Assignment conflict requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Sequence apps with dependencies and supersedence — failure and recovery

1 Cycle

Remove circular dependency

DIAGNOSE → RECOVER

2 Wrong uninstall

Test supersedence option

DIAGNOSE → RECOVER

3 Detection overlap

Use version-aware rule

DIAGNOSE → RECOVER

4 Assignment conflict

Resolve required vs uninstall

DIAGNOSE → RECOVER

DECISION RULE

Treat the symptom as a pointer to a failed stage; collect evidence before changing policy.

© 2026 Tertiary Infotech Academy Pte Ltd

Cycle — diagnostic trace

1	SIGNAL	**Cycle**
2	BOUNDARY	Dependency graph
3	SUSPECT STATE	Dependency
4	RECOVERY	Remove circular dependency
5	ACCEPTANCE	**Dependency graph**

EVIDENCE THRESHOLD

Accept the recovery only when Dependency graph shows Expected sequence; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Wrong uninstall — diagnostic trace




RECOVERY ACTION	Test supersedence option
ACCEPTANCE PROOF	Install orchestration

EVIDENCE THRESHOLD

Accept the recovery only when IME log shows Install orchestration; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Detection overlap — diagnostic trace

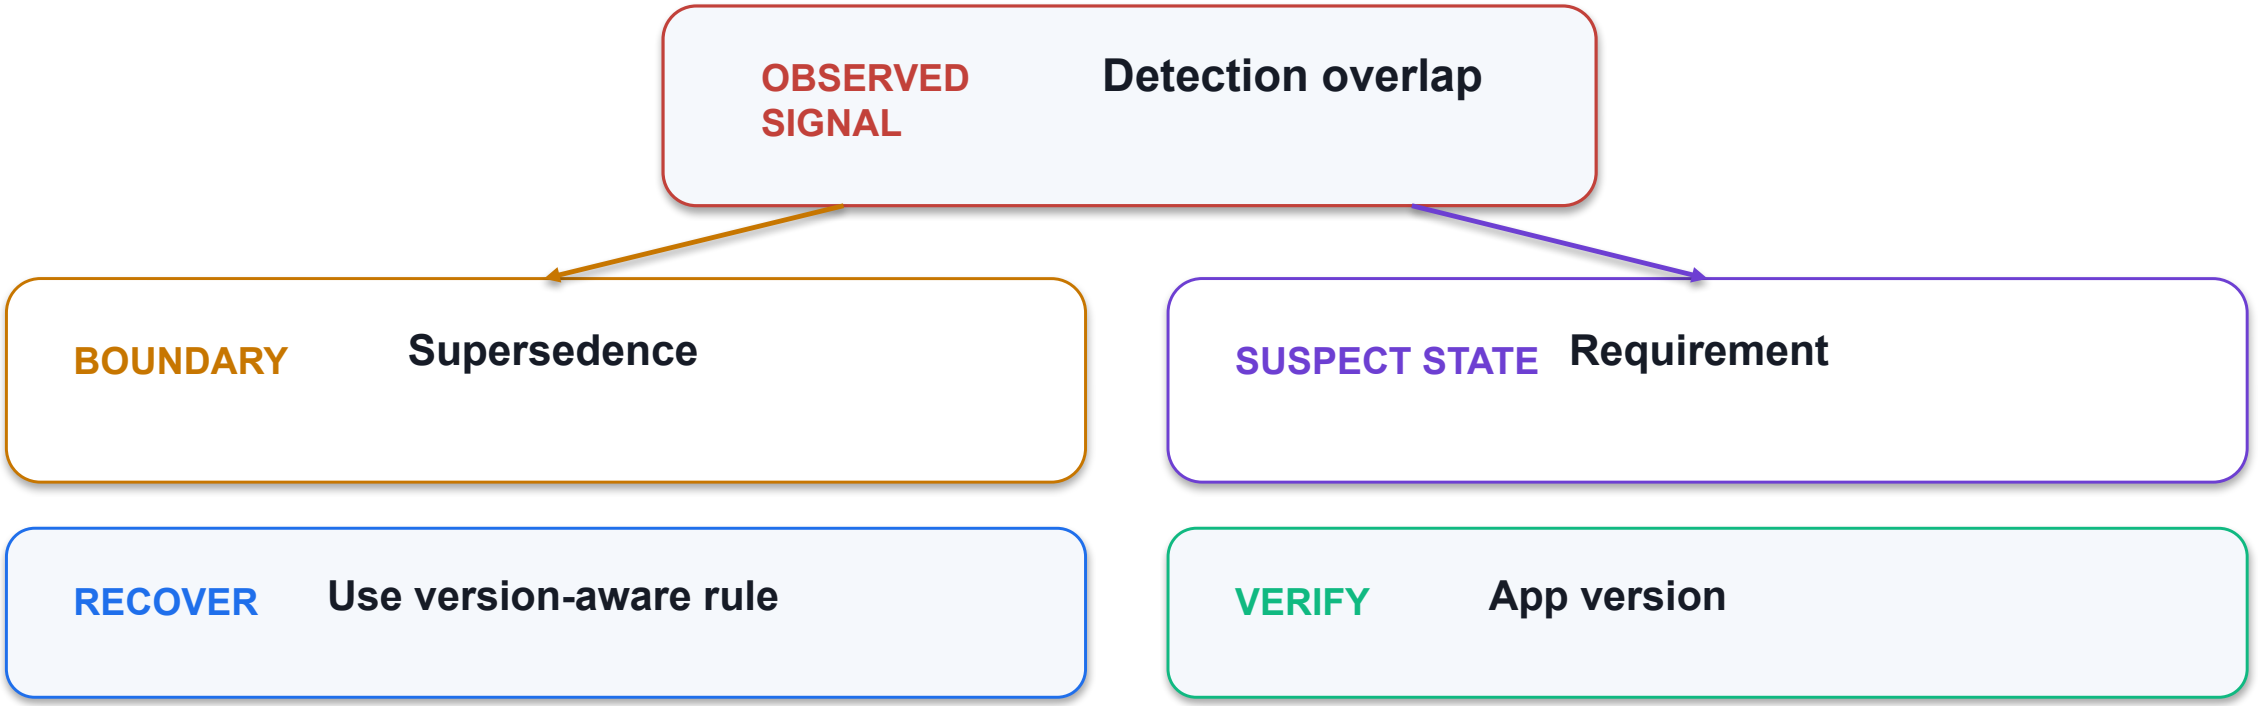


EVIDENCE THRESHOLD

Accept the recovery only when App version shows New build detected; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Assignment conflict — diagnostic trace

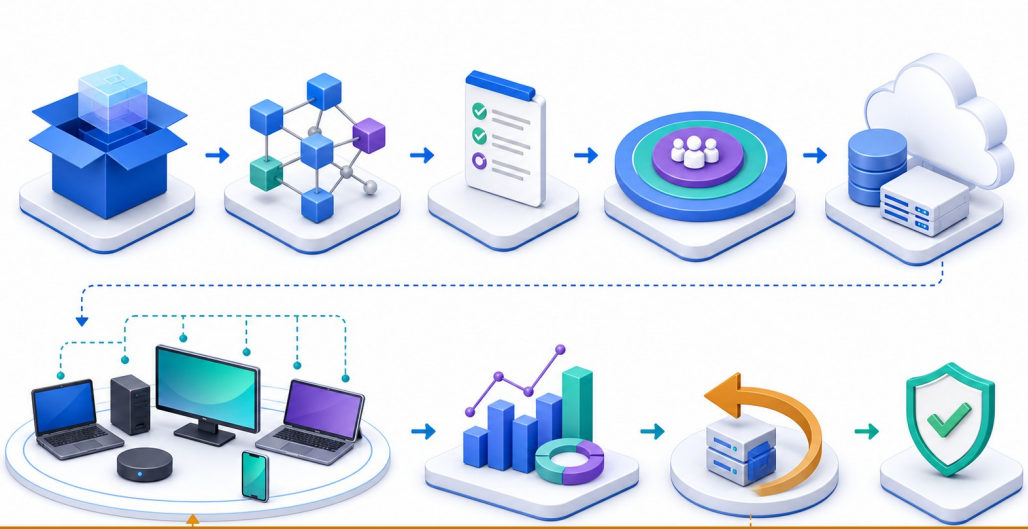

BOUNDARY · Detection | SUSPECT · Availability

SIGNAL Assignment conflict

RECOVERY Resolve required vs uninstall

PROOF Report

EVIDENCE THRESHOLD

Accept the recovery only when Report shows No stale required failure; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Sequence apps with dependencies and supersedence — verification evidence

✓ **Dependency graph**	Expected sequence
✓ **IME log**	Install orchestration
✓ **App version**	New build detected
✓ **Report**	No stale required failure

LAB 8

Evidence standard

Capture the configured state, the observed result, the timestamp or correlation ID, and the interpretation.


PASS = REPRODUCIBLE

PRACTICE BRIDGE

Full click paths, commands, expected outputs and troubleshooting are in the Learner Guide and the individual lab folder.

© 2026 Tertiary Infotech Academy Pte Ltd

Deploy Microsoft 365 Apps — mechanism

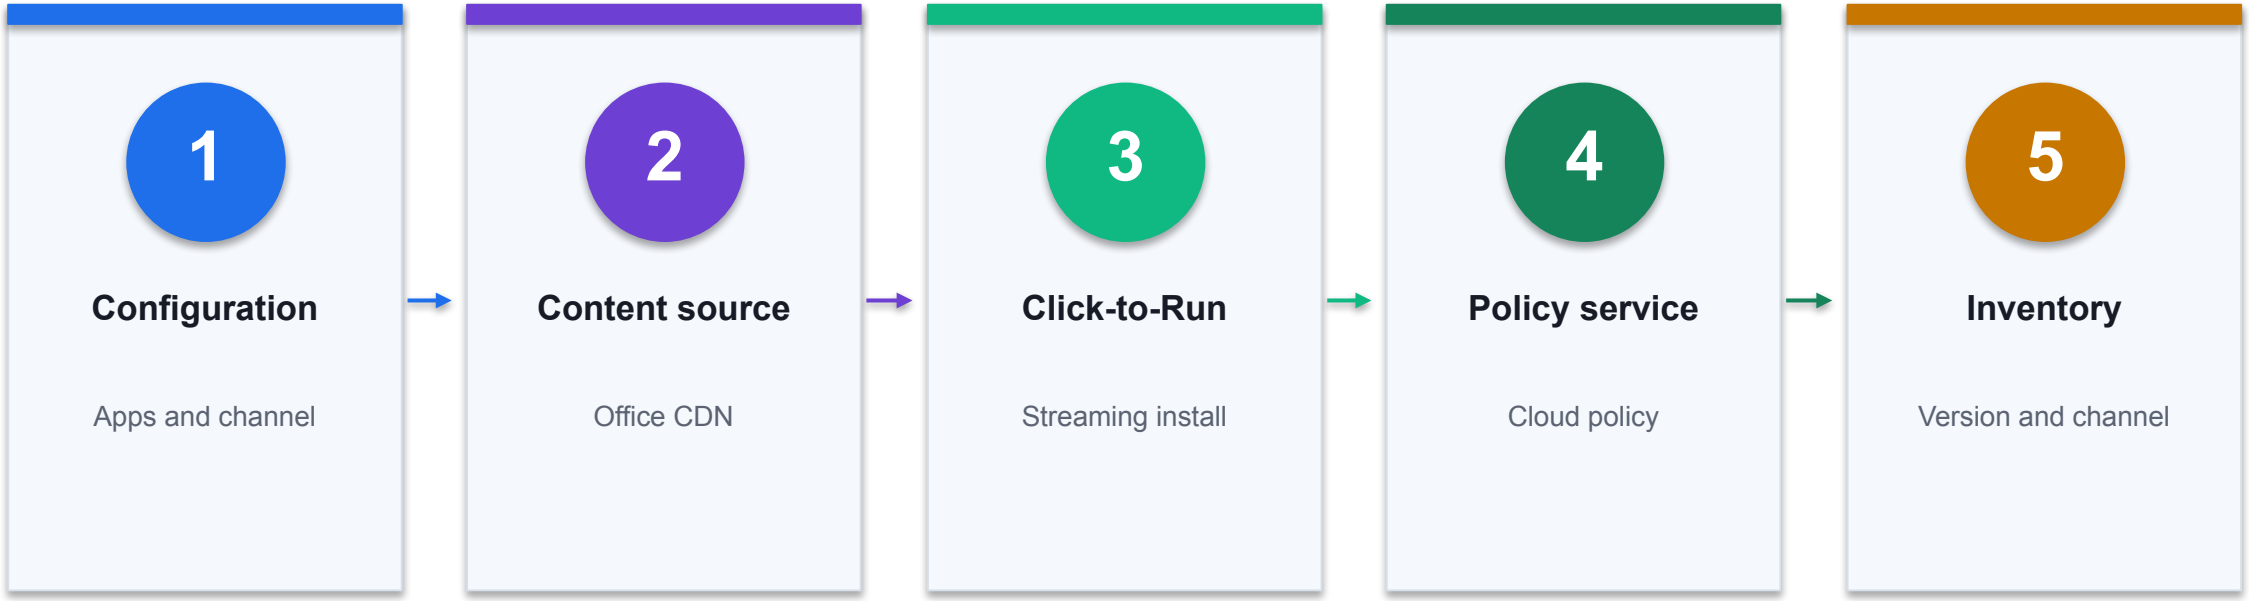

CONTROL POINT

Inspect the evidence at every transition; the first missing state is the most useful troubleshooting boundary. Lab 8 carries the full procedure.

© 2026 Tertiary Infotech Academy Pte Ltd

Deploy Microsoft 365 Apps — exact contract

1 Update channel

Current Enterprise or selected channel

FIELD / STATE

2 Architecture

64-bit by default

FIELD / STATE

3 ODT XML

Product · language · updates

FIELD / STATE

4 Policy priority

Cloud policy vs local

FIELD / STATE

DECISION RULE

Configuration is a contract: names, values, scope and resulting state must all agree.

© 2026 Tertiary Infotech Academy Pte Ltd

Update channel — control contract



STATE **Update channel**

Current Enterprise or selected channel

RISK **Channel mismatch**

Review CDNBaseUrl

PROOF **OfficeC2RClient**


Version/channel

CONTROL READING

The Update channel state is valid only when Configuration produces OfficeC2RClient; Channel mismatch requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Architecture — control contract

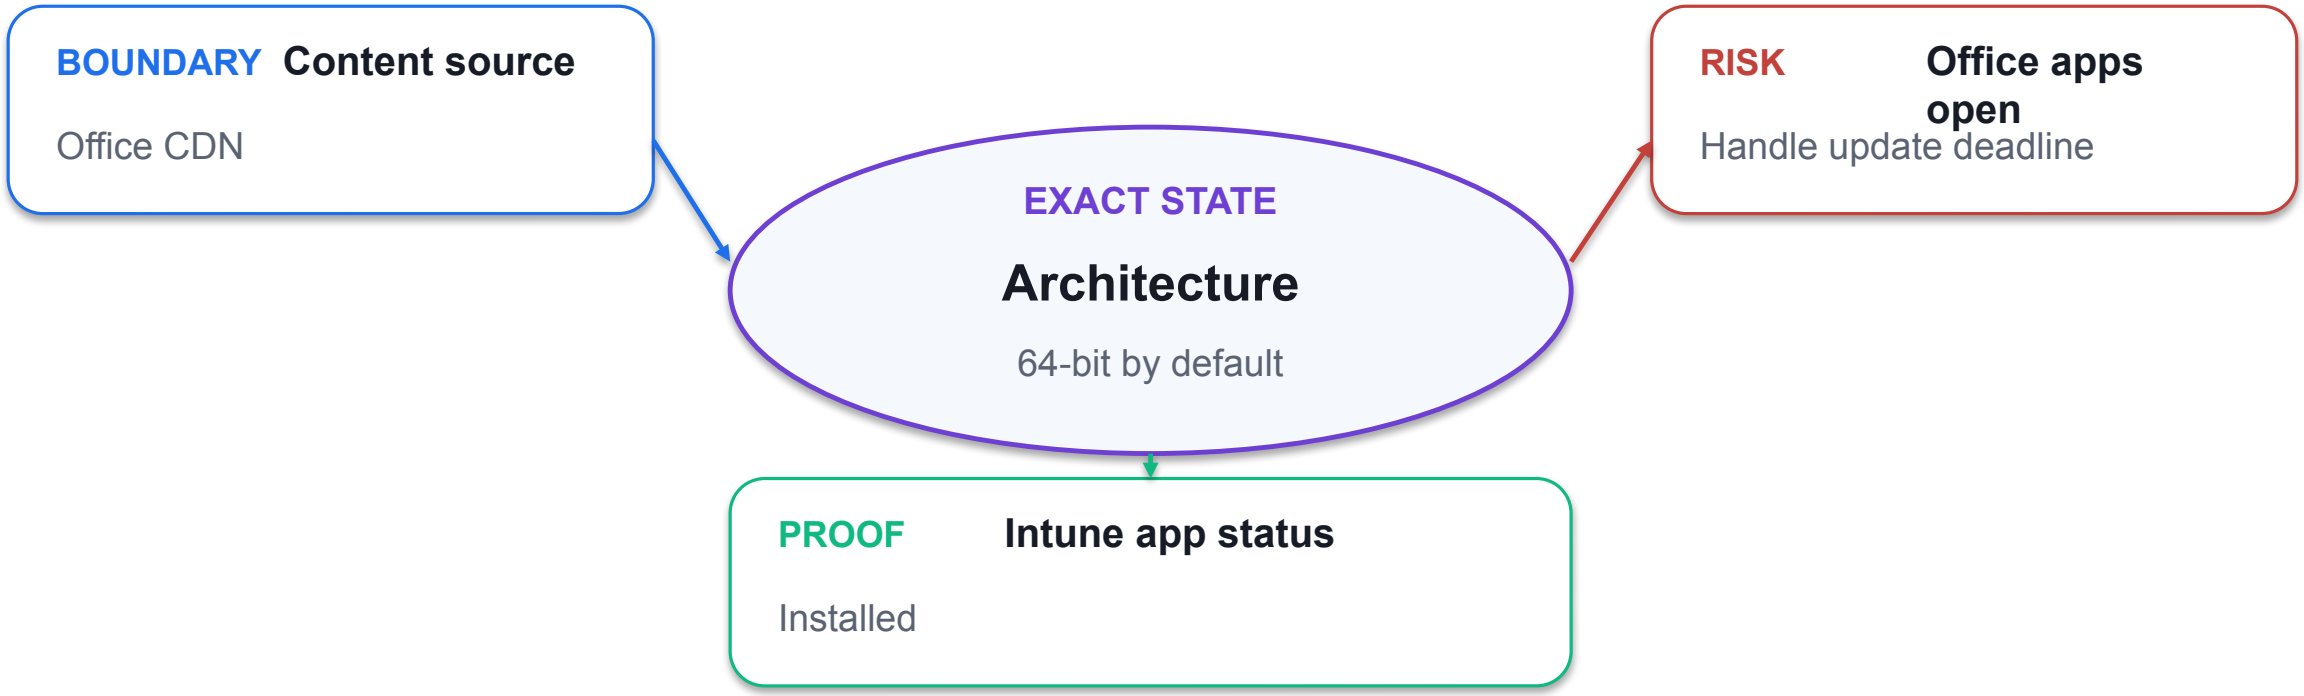

CONTROL READING

The Architecture state is valid only when Content source produces Intune app status; Office apps open requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

ODT XML — control contract

1

BOUNDARY Click-to-Run

Streaming install

2

EXACT STATE ODT XML

Product · language · updates

3

CONTROL RISK Network optimization

Use Delivery Optimization

4

PROOF Apps admin center

Inventory

CONTROL READING

The ODT XML state is valid only when Click-to-Run produces Apps admin center; Network optimization requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Policy priority — control contract

1	BOUNDARY	Policy service	Cloud policy
2	EXACT STATE	Policy priority	Cloud policy vs local
3	CONTROL RISK	Policy conflict	Inspect cloud policy status
4	PROOF	Policy report	Applied Office settings

CONTROL READING

The Policy priority state is valid only when Policy service produces Policy report; Policy conflict requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Deploy Microsoft 365 Apps — failure and recovery

1 Channel mismatch

Review CDNBaseUrl

DIAGNOSE → RECOVER

2 Office apps open

Handle update deadline

DIAGNOSE → RECOVER

3 Network optimization

Use Delivery Optimization

DIAGNOSE → RECOVER

4 Policy conflict

Inspect cloud policy status

DIAGNOSE → RECOVER

DECISION RULE

Treat the symptom as a pointer to a failed stage; collect evidence before changing policy.

© 2026 Tertiary Infotech Academy Pte Ltd

Channel mismatch — diagnostic trace


1	SIGNAL	**Channel mismatch**
2	BOUNDARY	Content source
3	SUSPECT STATE	Update channel
4	RECOVERY	Review CDNBaseUrl
5	ACCEPTANCE	**OfficeC2RClient**

EVIDENCE THRESHOLD

Accept the recovery only when OfficeC2RClient shows Version/channel; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Office apps open — diagnostic trace

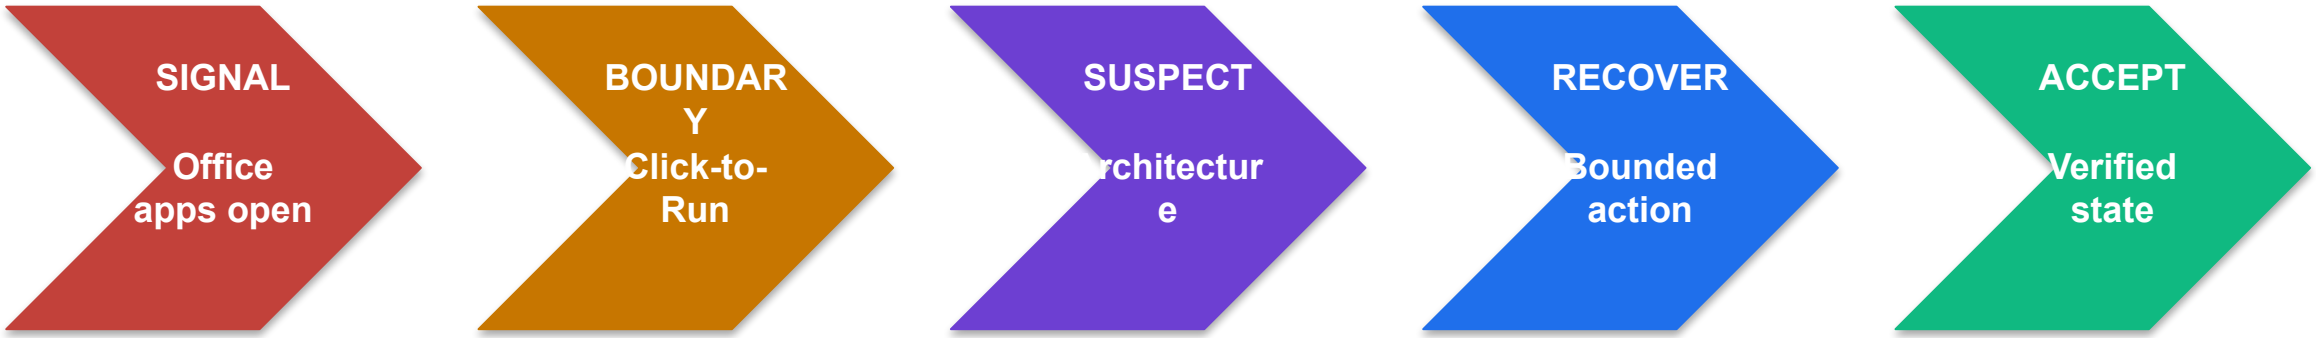

RECOVERY ACTION Handle update deadline


ACCEPTANCE PROOF Installed

EVIDENCE THRESHOLD

Accept the recovery only when Intune app status shows Installed; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Network optimization — diagnostic trace

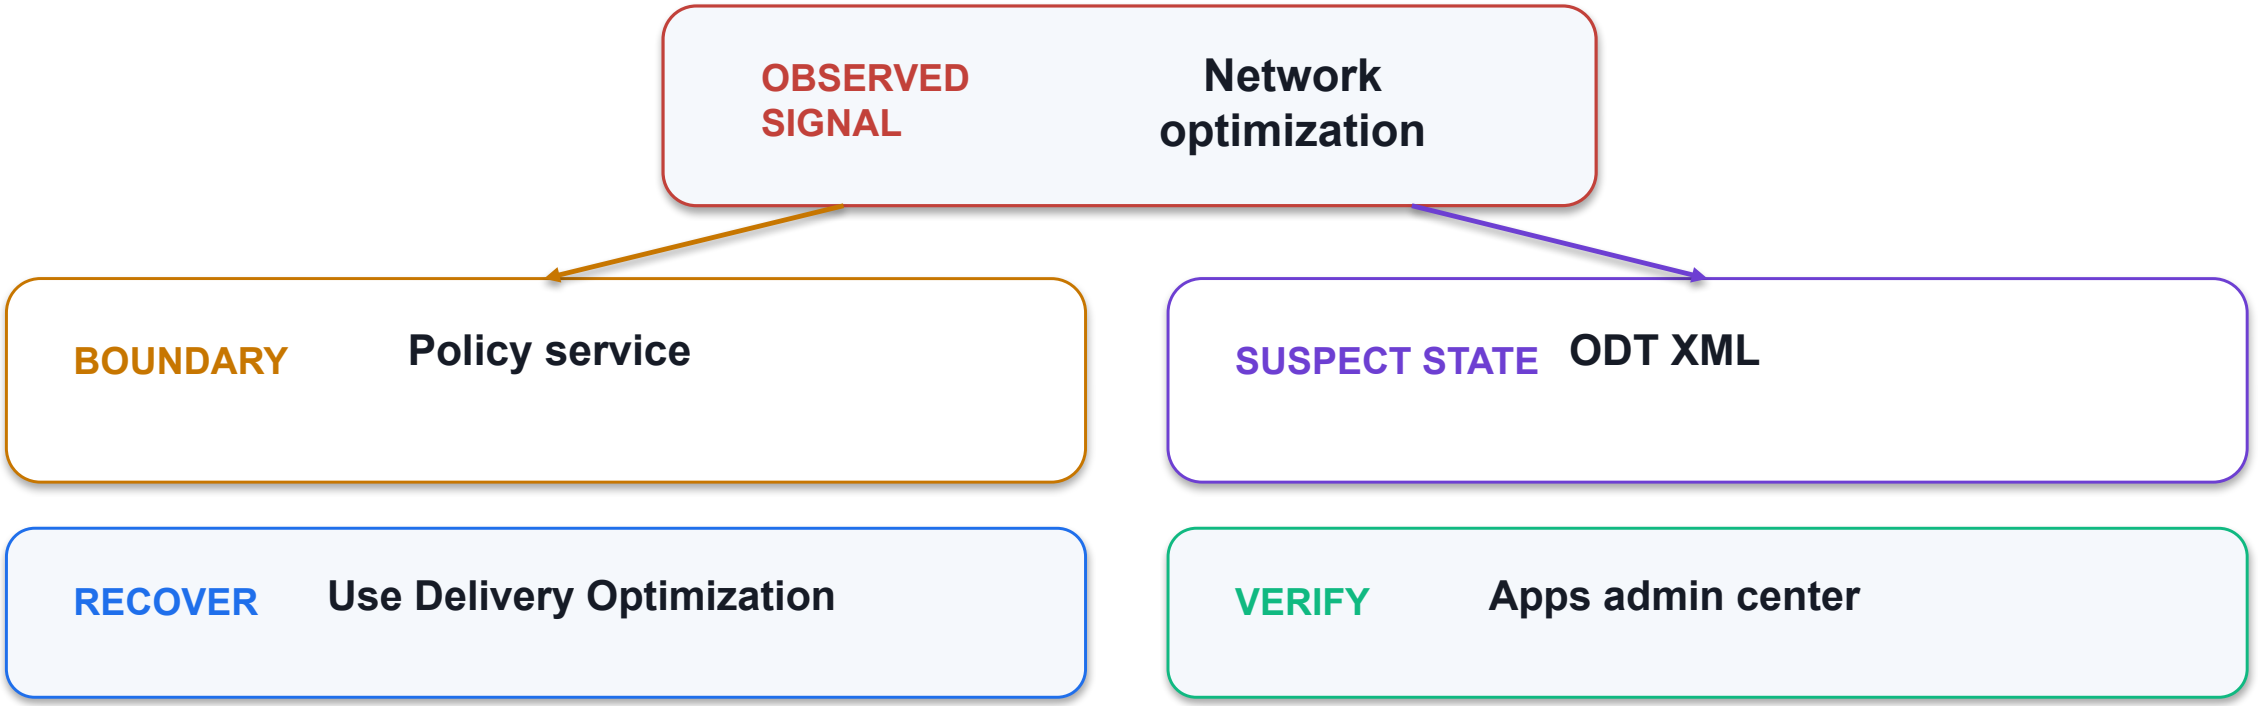


EVIDENCE THRESHOLD

Accept the recovery only when Apps admin center shows Inventory; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Policy conflict — diagnostic trace

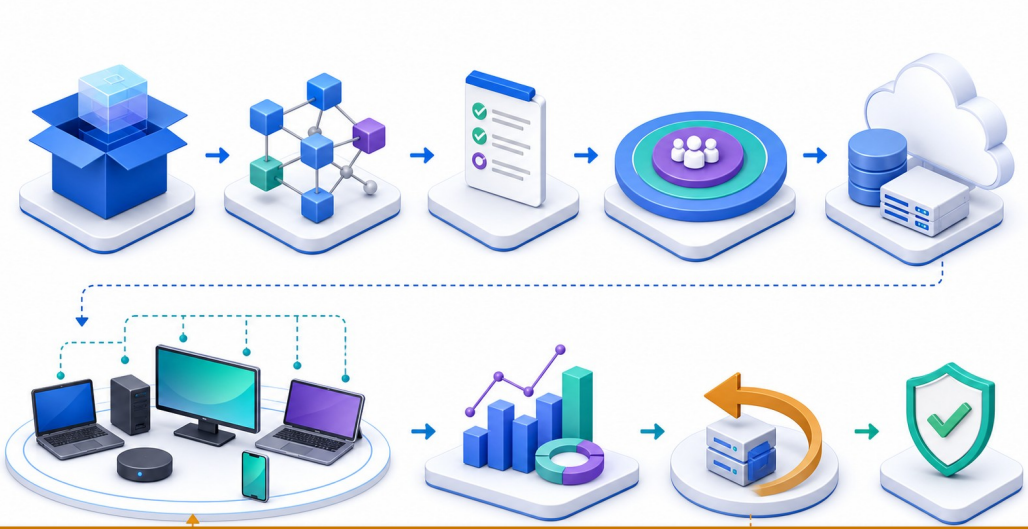

BOUNDARY · Inventory | SUSPECT · Policy priority

SIGNAL Policy conflict

RECOVERY Inspect cloud policy status

PROOF Policy report

EVIDENCE THRESHOLD

Accept the recovery only when Policy report shows Applied Office settings; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Deploy Microsoft 365 Apps — verification evidence

OfficeC2RClient	Version/channel
Intune app status	Installed
Apps admin center	Inventory
Policy report	Applied Office settings

LAB 8

Evidence standard

Capture the configured state, the observed result, the timestamp or correlation ID, and the interpretation.


PASS = REPRODUCIBLE

PRACTICE BRIDGE

Full click paths, commands, expected outputs and troubleshooting are in the Learner Guide and the individual lab folder.

© 2026 Tertiary Infotech Academy Pte Ltd

Integrate Apple and Managed Google Play stores — mechanism

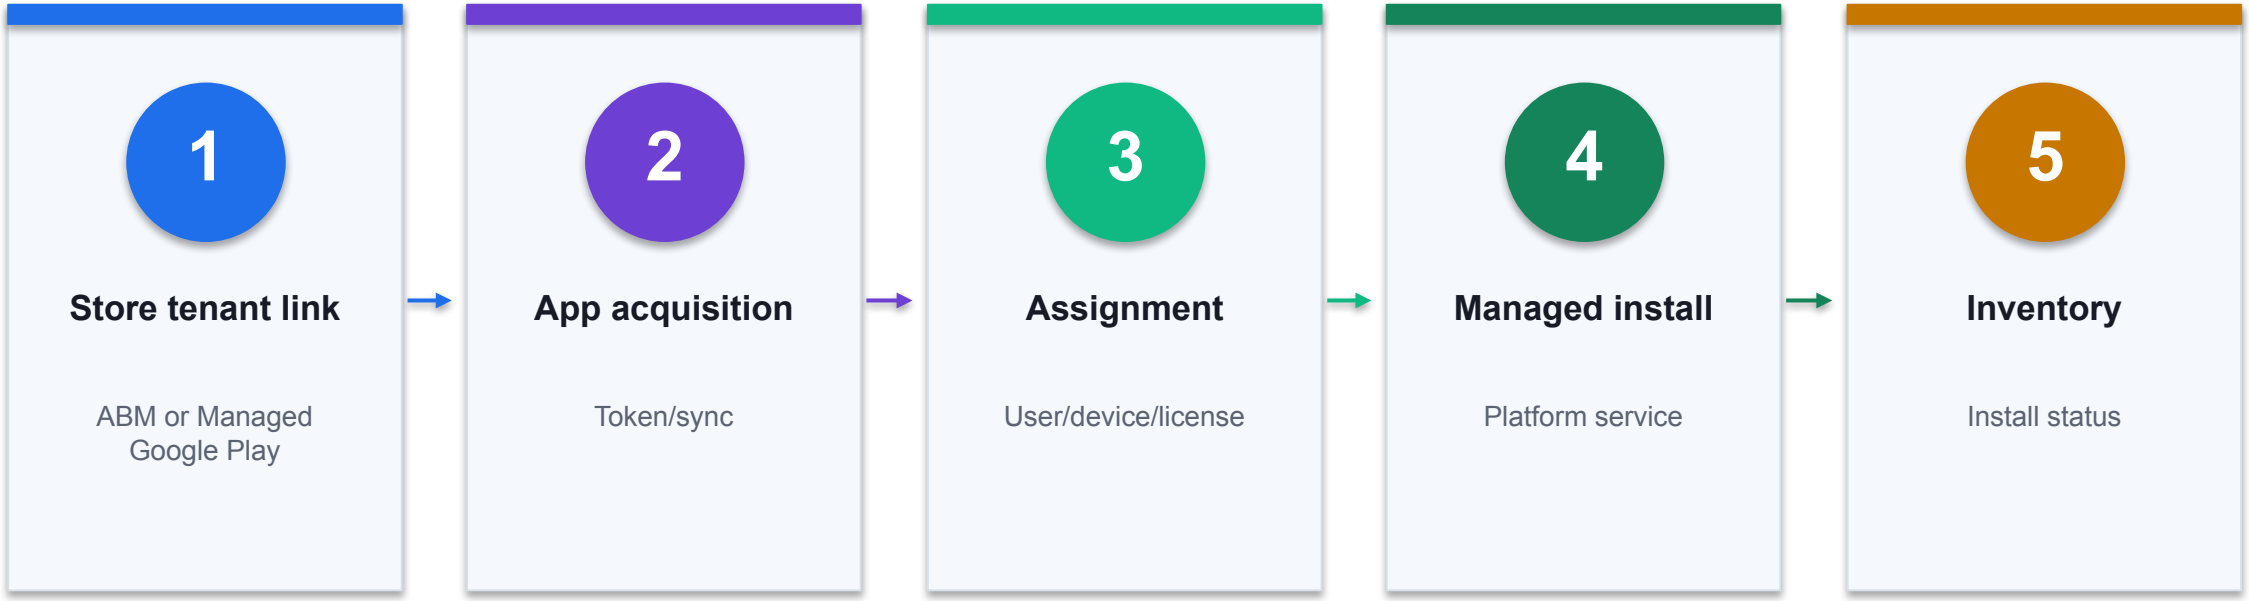

CONTROL POINT

Inspect the evidence at every transition; the first missing state is the most useful troubleshooting boundary. Lab 8 carries the full procedure.

© 2026 Tertiary Infotech Academy Pte Ltd

Integrate Apple and Managed Google Play stores — exact contract

1 Apple VPP token

Location-specific and renewable

FIELD / STATE

2 Managed Google Play

Enterprise bind

FIELD / STATE

3 App type

Managed store app

FIELD / STATE

4 Licensing

Device or user where supported

FIELD / STATE

DECISION RULE

Configuration is a contract: names, values, scope and resulting state must all agree.

© 2026 Tertiary Infotech Academy Pte Ltd

Apple VPP token — control contract



STATE **Apple VPP token**

Location-specific and renewable

RISK **Token expired**

Renew with same account

PROOF **Connector health**


Last successful sync

CONTROL READING

The Apple VPP token state is valid only when Store tenant link produces Connector health; Token expired requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Managed Google Play — control contract

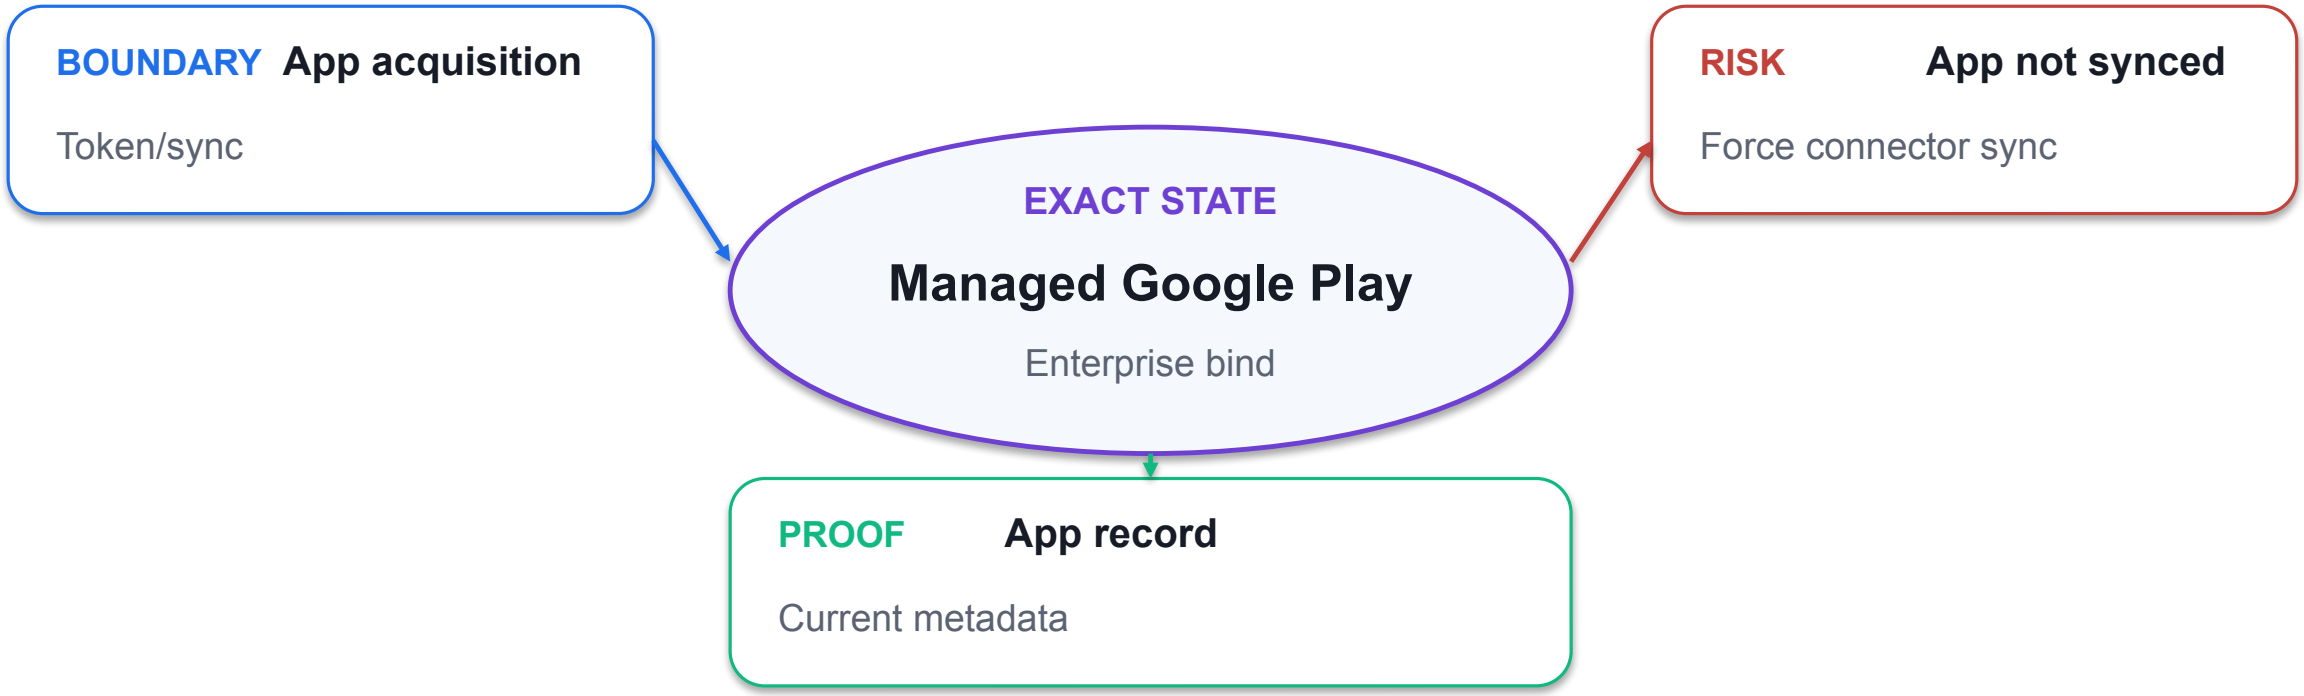

CONTROL READING

The Managed Google Play state is valid only when App acquisition produces App record; App not synced requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

App type — control contract

1

BOUNDARY **Assignment**

User/device/license

2

EXACT STATE **App type**

Managed store app

3

CONTROL RISK **License exhausted**

Acquire more licenses

4

PROOF **License count**

Assigned/available

CONTROL READING

The App type state is valid only when Assignment produces License count; License exhausted requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Licensing — control contract

1	BOUNDARY	Managed install	Platform service
2	EXACT STATE	Licensing	Device or user where supported
3	CONTROL RISK	Wrong storefront	Verify tenant binding
4	PROOF	Device report	Managed install

CONTROL READING

The Licensing state is valid only when Managed install produces Device report; Wrong storefront requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Integrate Apple and Managed Google Play stores — failure and recovery

1 Token expired

Renew with same account

DIAGNOSE → RECOVER

2 App not synced

Force connector sync

DIAGNOSE → RECOVER

3 License exhausted

Acquire more licenses

DIAGNOSE → RECOVER

4 Wrong storefront

Verify tenant binding

DIAGNOSE → RECOVER

DECISION RULE

Treat the symptom as a pointer to a failed stage; collect evidence before changing policy.

© 2026 Tertiary Infotech Academy Pte Ltd

Token expired — diagnostic trace

1	SIGNAL	**Token expired**
2	BOUNDARY	App acquisition
3	SUSPECT STATE	Apple VPP token
4	RECOVERY	Renew with same account
5	ACCEPTANCE	**Connector health**

EVIDENCE THRESHOLD

Accept the recovery only when Connector health shows Last successful sync; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

App not synced — diagnostic trace




RECOVERY ACTION	Force connector sync
ACCEPTANCE PROOF	Current metadata

EVIDENCE THRESHOLD

Accept the recovery only when App record shows Current metadata; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

License exhausted — diagnostic trace

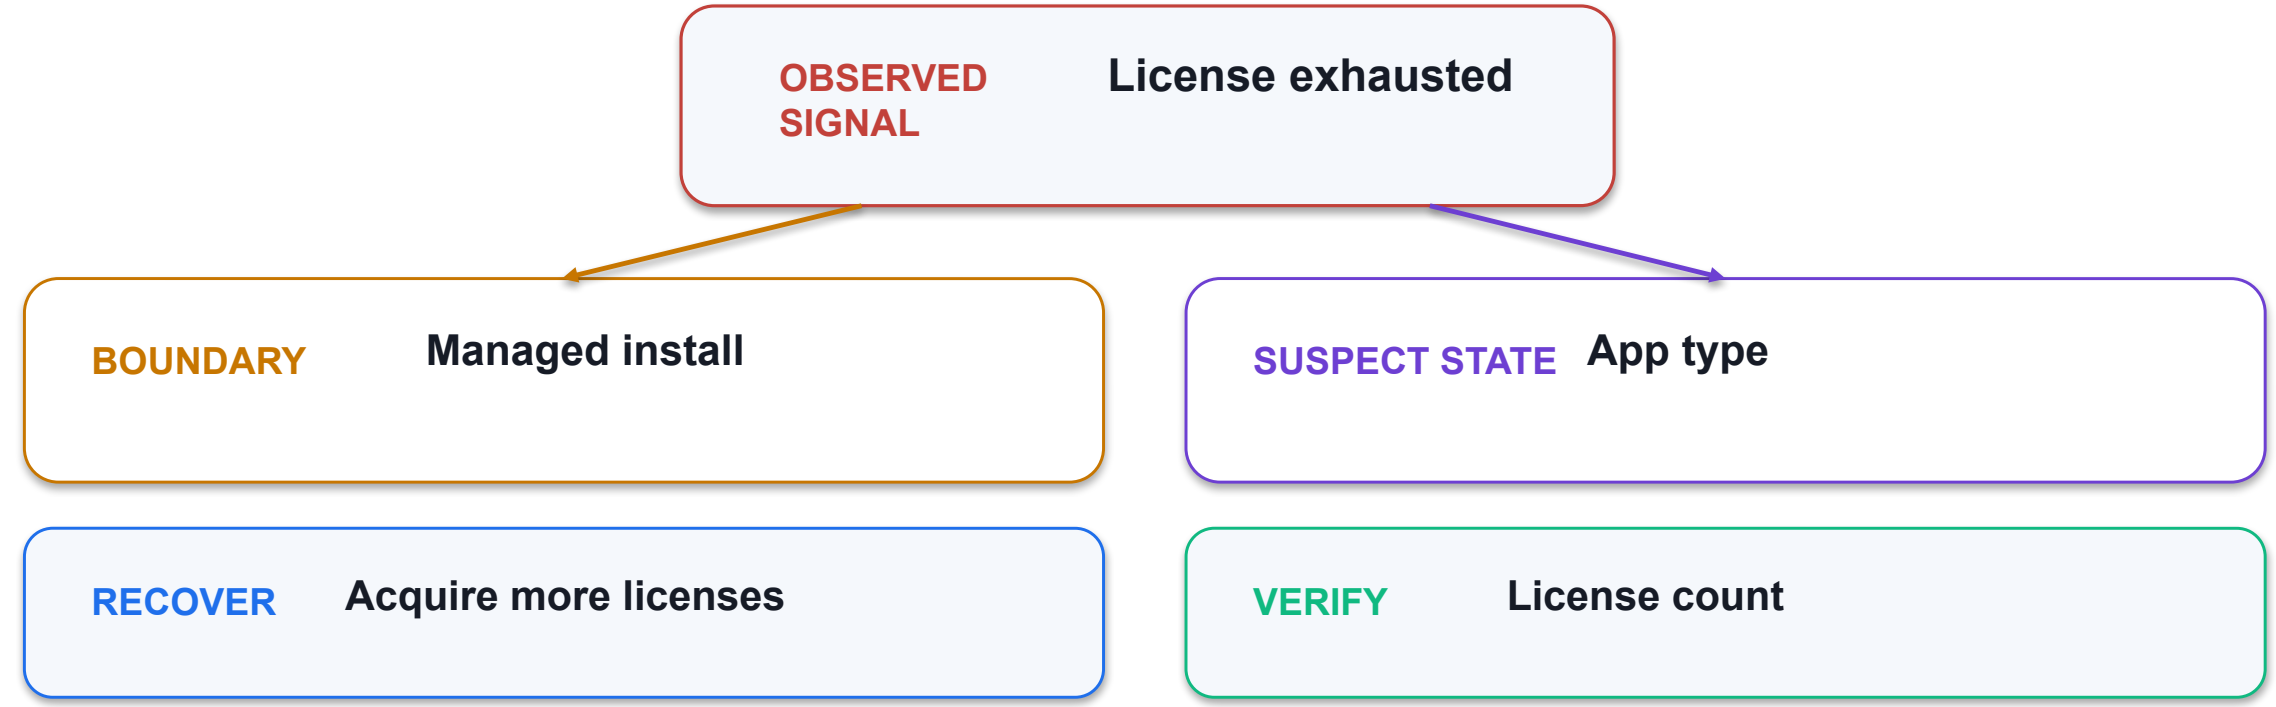


EVIDENCE THRESHOLD

Accept the recovery only when License count shows Assigned/available; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Wrong storefront — diagnostic trace

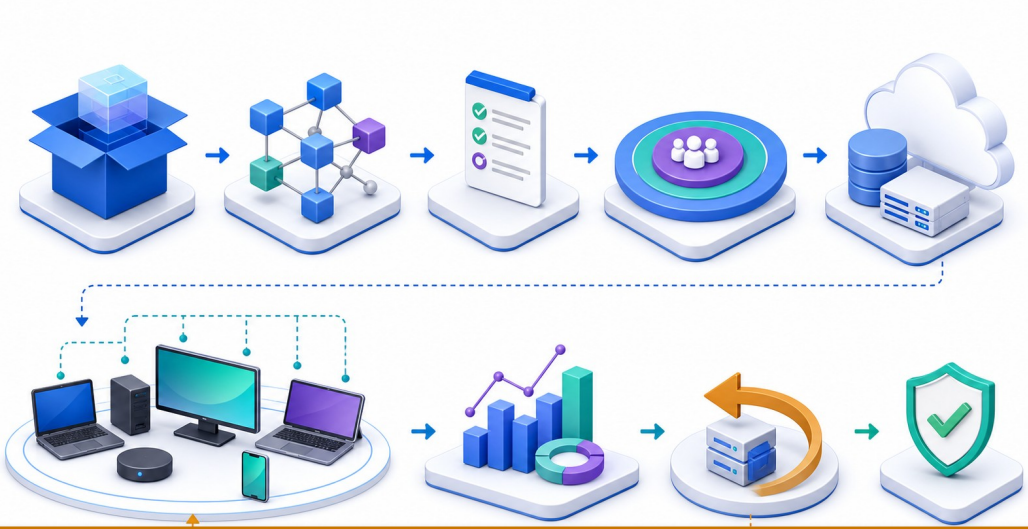

BOUNDARY · Inventory | SUSPECT · Licensing

SIGNAL Wrong storefront

RECOVERY Verify tenant binding

PROOF Device report

EVIDENCE THRESHOLD

Accept the recovery only when Device report shows Managed install; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Integrate Apple and Managed Google Play stores — verification evidence

Connector health	Last successful sync
App record	Current metadata
License count	Assigned/available
Device report	Managed install

LAB 8

Evidence standard

Capture the configured state, the observed result, the timestamp or correlation ID, and the interpretation.

PASS = REPRODUCIBLE

PRACTICE BRIDGE

Full click paths, commands, expected outputs and troubleshooting are in the Learner Guide and the individual lab folder.


© 2026 Tertiary Infotech Academy Pte Ltd

DAY 4

Tea break

Return at the time announced by the trainer.

Protect corporate data with MAM — mechanism

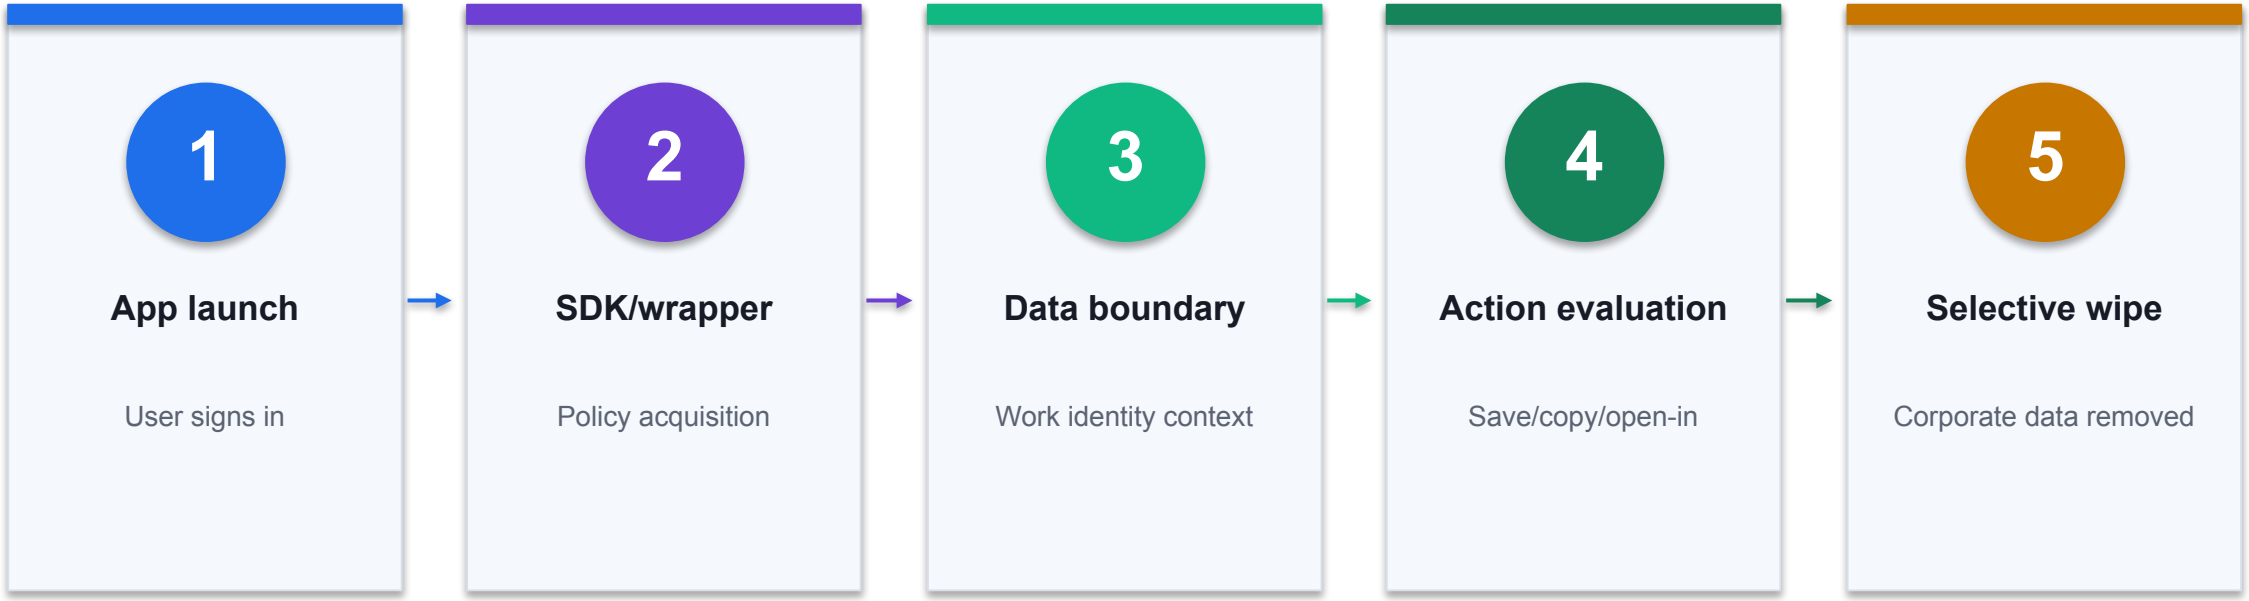

CONTROL POINT

Inspect the evidence at every transition; the first missing state is the most useful troubleshooting boundary. Lab 8 carries the full procedure.

© 2026 Tertiary Infotech Academy Pte Ltd

Protect corporate data with MAM — exact contract

1 Data transfer

Policy-managed apps only

FIELD / STATE

2 Encryption

Organizational data

FIELD / STATE

3 Access requirement

PIN + threat condition

FIELD / STATE

4 Wipe

User or device scoped

FIELD / STATE

DECISION RULE

Configuration is a contract: names, values, scope and resulting state must all agree.

© 2026 Tertiary Infotech Academy Pte Ltd

Data transfer — control contract



BOUNDARY · App launch

STATE **Data transfer**

Policy-managed apps only

RISK **App not protected**

Unsupported app or wrong identity

PROOF **App protection status**


User + app + device

CONTROL READING

The Data transfer state is valid only when App launch produces App protection status; App not protected requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Encryption — control contract

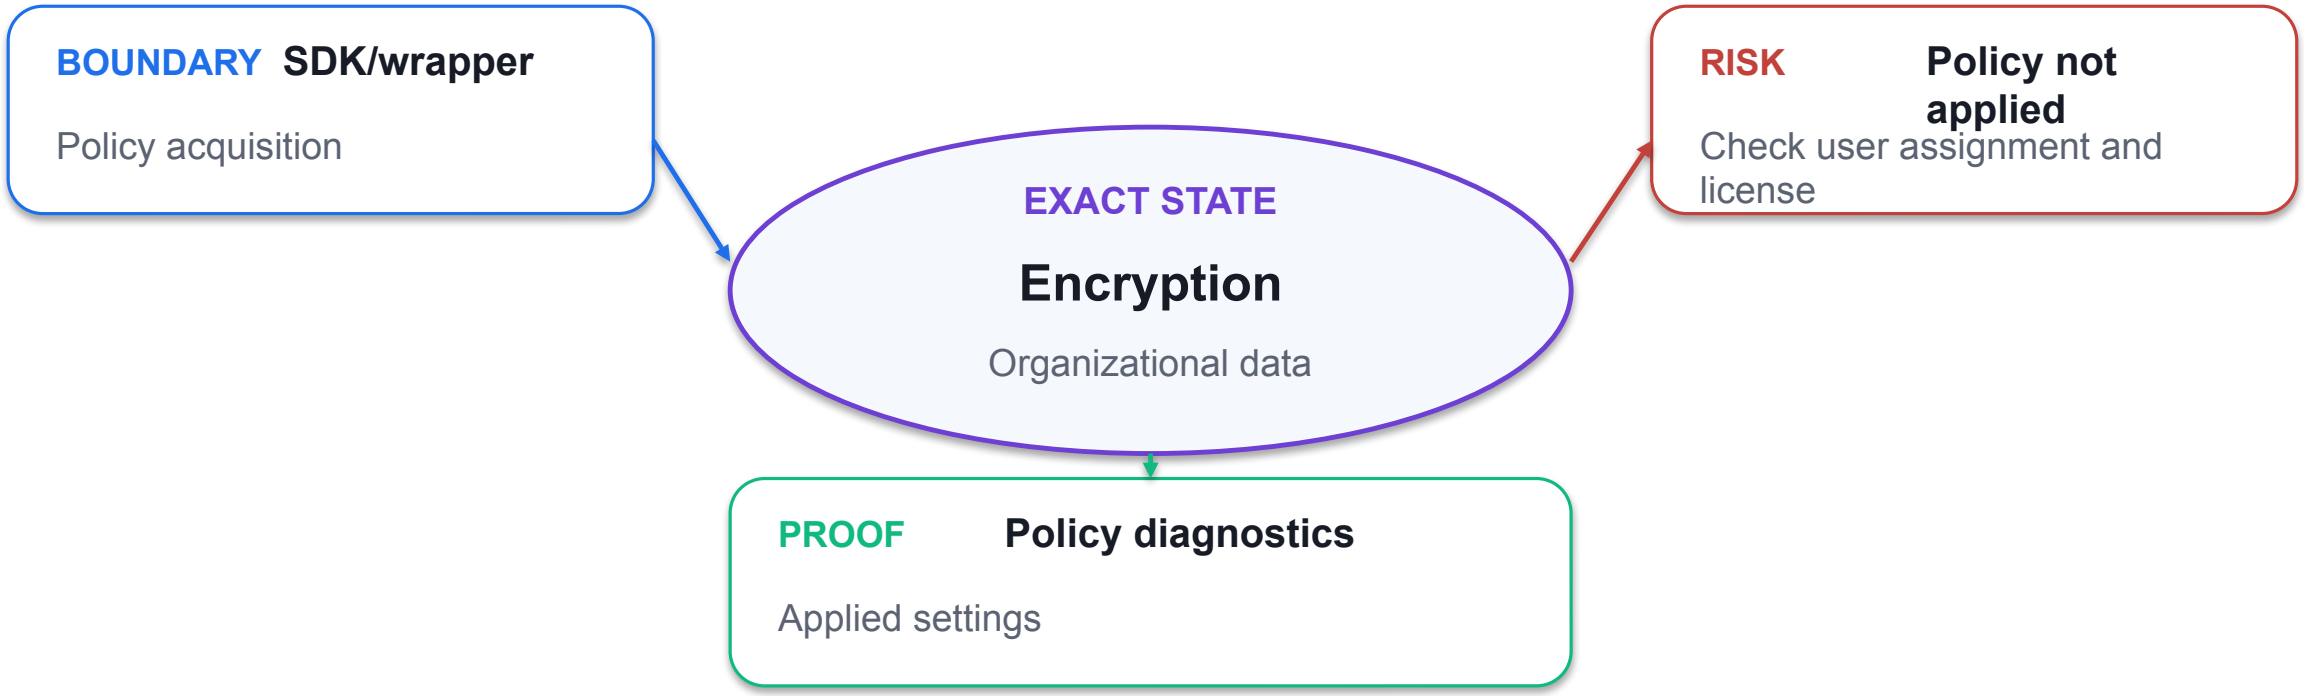

CONTROL READING

The Encryption state is valid only when SDK/wrapper produces Policy diagnostics; Policy not applied requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Access requirement — control contract

1

BOUNDARY **Data boundary**

Work identity context

2

EXACT STATE **Access requirement**

PIN + threat condition

3

CONTROL RISK **Copy blocked unexpectedly**

Review exempt apps

4

PROOF **Selective wipe report**

Completed

CONTROL READING

The Access requirement state is valid only when Data boundary produces Selective wipe report; Copy blocked unexpectedly requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Wipe — control contract

1	BOUNDARY	**Action evaluation**	Save/copy/open-in
2	EXACT STATE	**Wipe**	User or device scoped
3	CONTROL RISK	**Wipe pending**	App must check in
4	PROOF	**CA result**	Require app protection

CONTROL READING

The Wipe state is valid only when Action evaluation produces CA result; Wipe pending requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Protect corporate data with MAM — failure and recovery

1 App not protected

Unsupported app or wrong identity

DIAGNOSE → RECOVER

2 Policy not applied

Check user assignment and license

DIAGNOSE → RECOVER

3 Copy blocked unexpectedly

Review exempt apps

DIAGNOSE → RECOVER

4 Wipe pending

App must check in

DIAGNOSE → RECOVER

DECISION RULE

Treat the symptom as a pointer to a failed stage; collect evidence before changing policy.

© 2026 Tertiary Infotech Academy Pte Ltd

App not protected — diagnostic trace


1	SIGNAL	**App not protected**
2	BOUNDARY	SDK/wrapper
3	SUSPECT STATE	Data transfer
4	RECOVERY	Unsupported app or wrong identity
5	ACCEPTANCE	**App protection status**

EVIDENCE THRESHOLD

Accept the recovery only when App protection status shows User + app + device; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Policy not applied — diagnostic trace

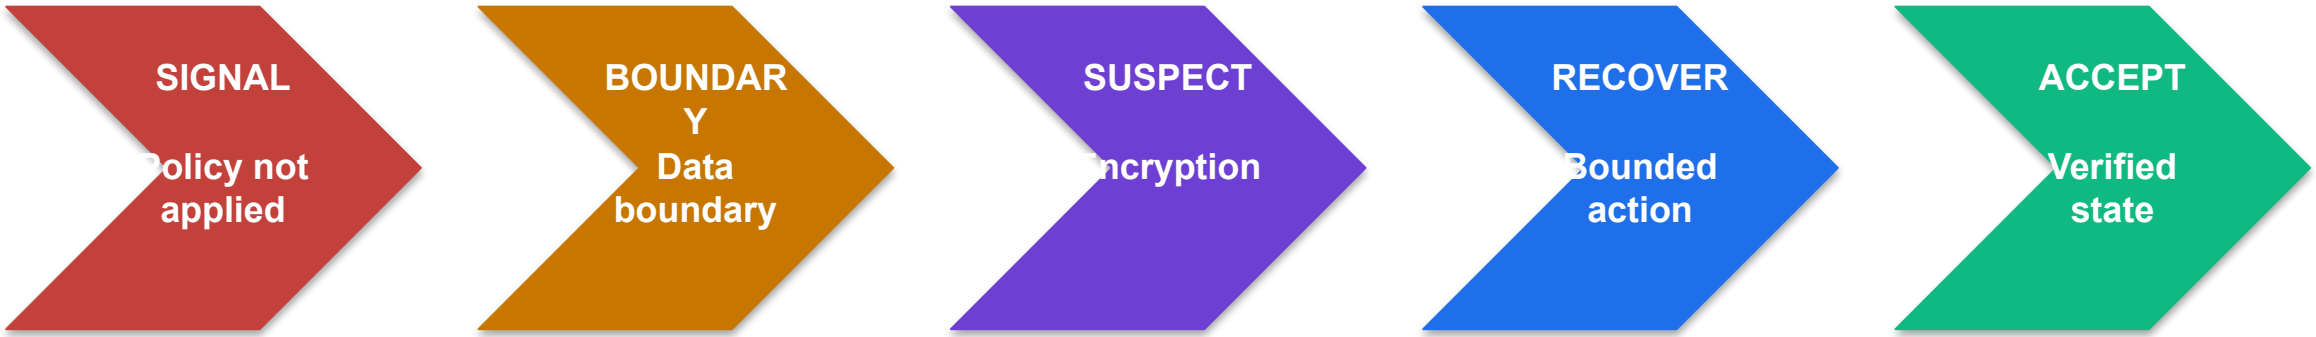


RECOVERY ACTION	Check user assignment and license
ACCEPTANCE PROOF	Applied settings

EVIDENCE THRESHOLD

Accept the recovery only when Policy diagnostics shows Applied settings; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Copy blocked unexpectedly — diagnostic trace

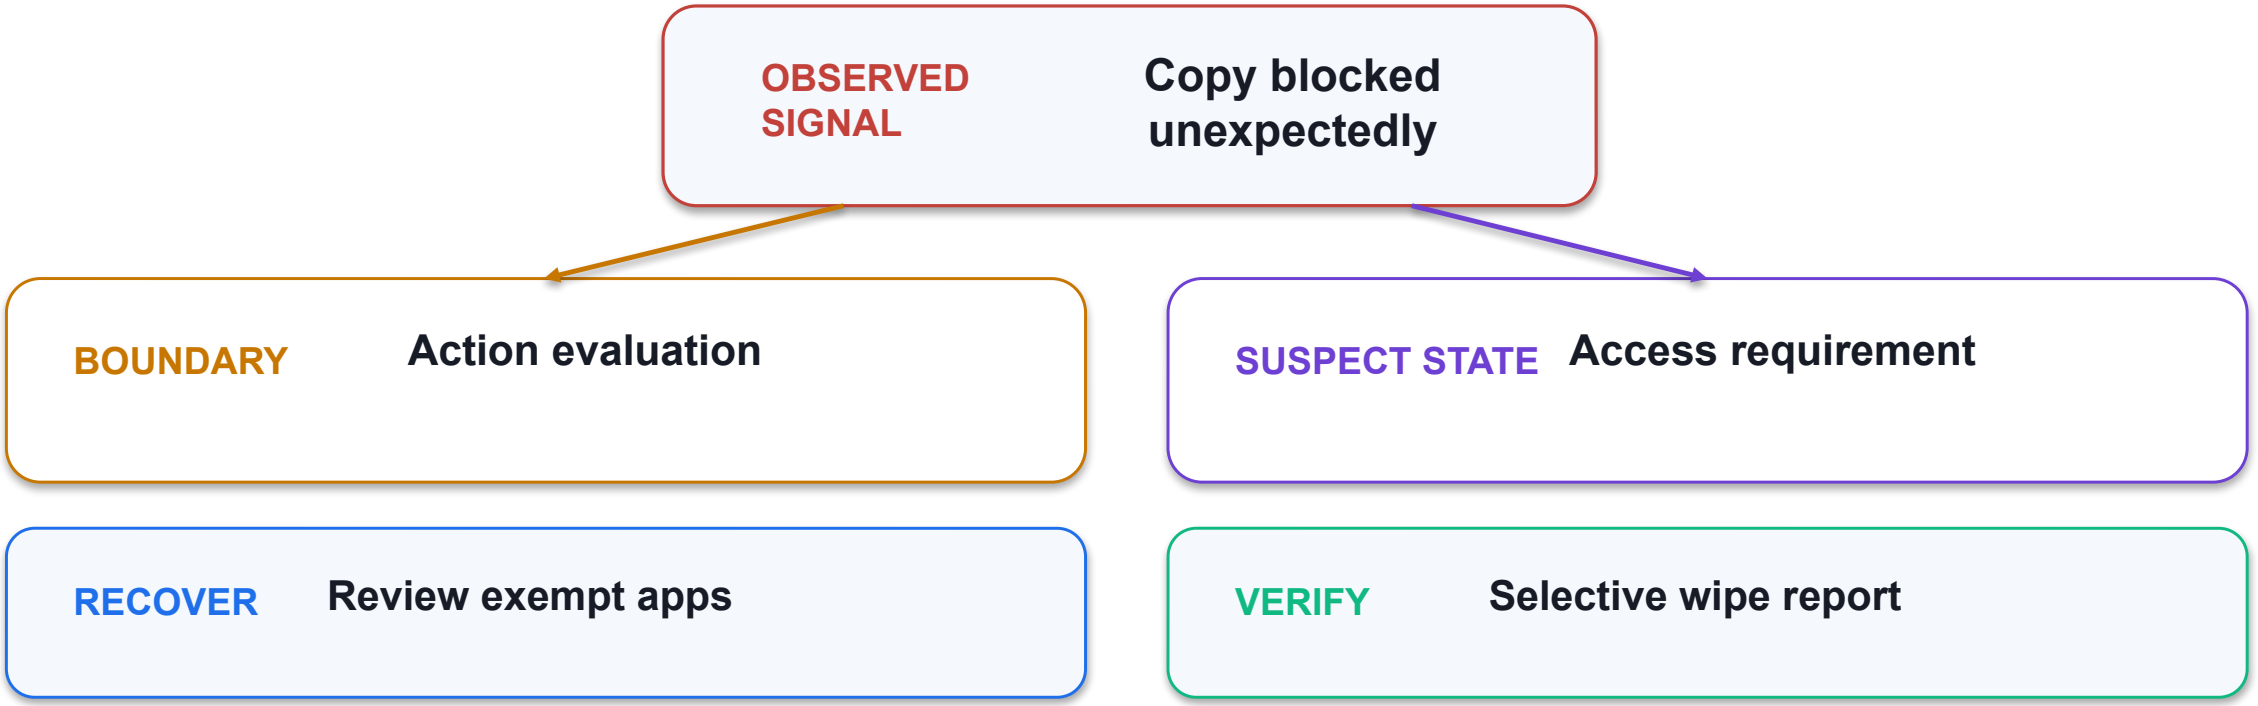


EVIDENCE THRESHOLD

Accept the recovery only when Selective wipe report shows Completed; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Wipe pending — diagnostic trace

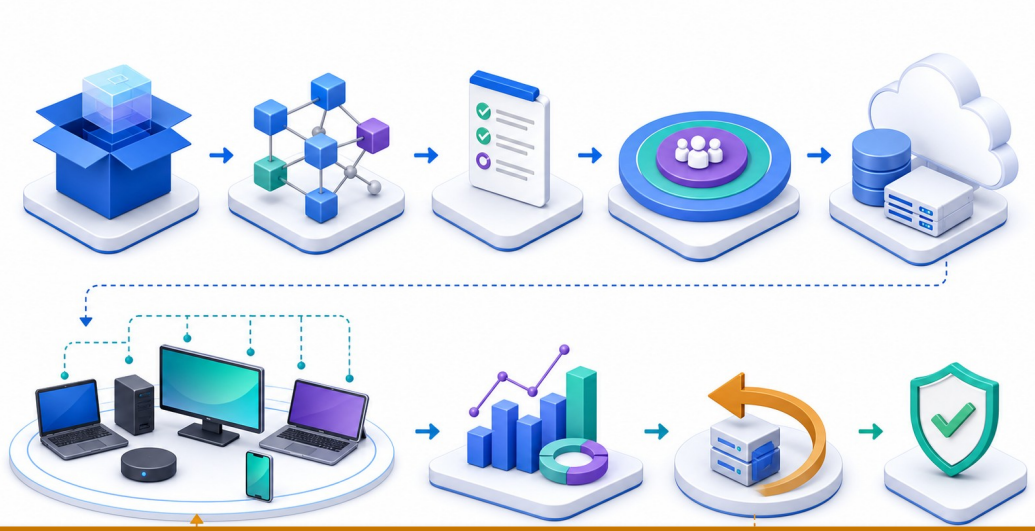

BOUNDARY · Selective wipe | SUSPECT · Wipe

SIGNAL Wipe pending

RECOVERY App must check in

PROOF CA result

EVIDENCE THRESHOLD

Accept the recovery only when CA result shows Require app protection; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Protect corporate data with MAM — verification evidence

✓ **App protection status**	User + app + device
✓ **Policy diagnostics**	Applied settings
✓ **Selective wipe report**	Completed
✓ **CA result**	Require app protection

LAB 8

Evidence standard

Capture the configured state, the observed result, the timestamp or correlation ID, and the interpretation.


PASS = REPRODUCIBLE

PRACTICE BRIDGE

Full click paths, commands, expected outputs and troubleshooting are in the Learner Guide and the individual lab folder.

© 2026 Tertiary Infotech Academy Pte Ltd

Combine app protection with Conditional Access — mechanism

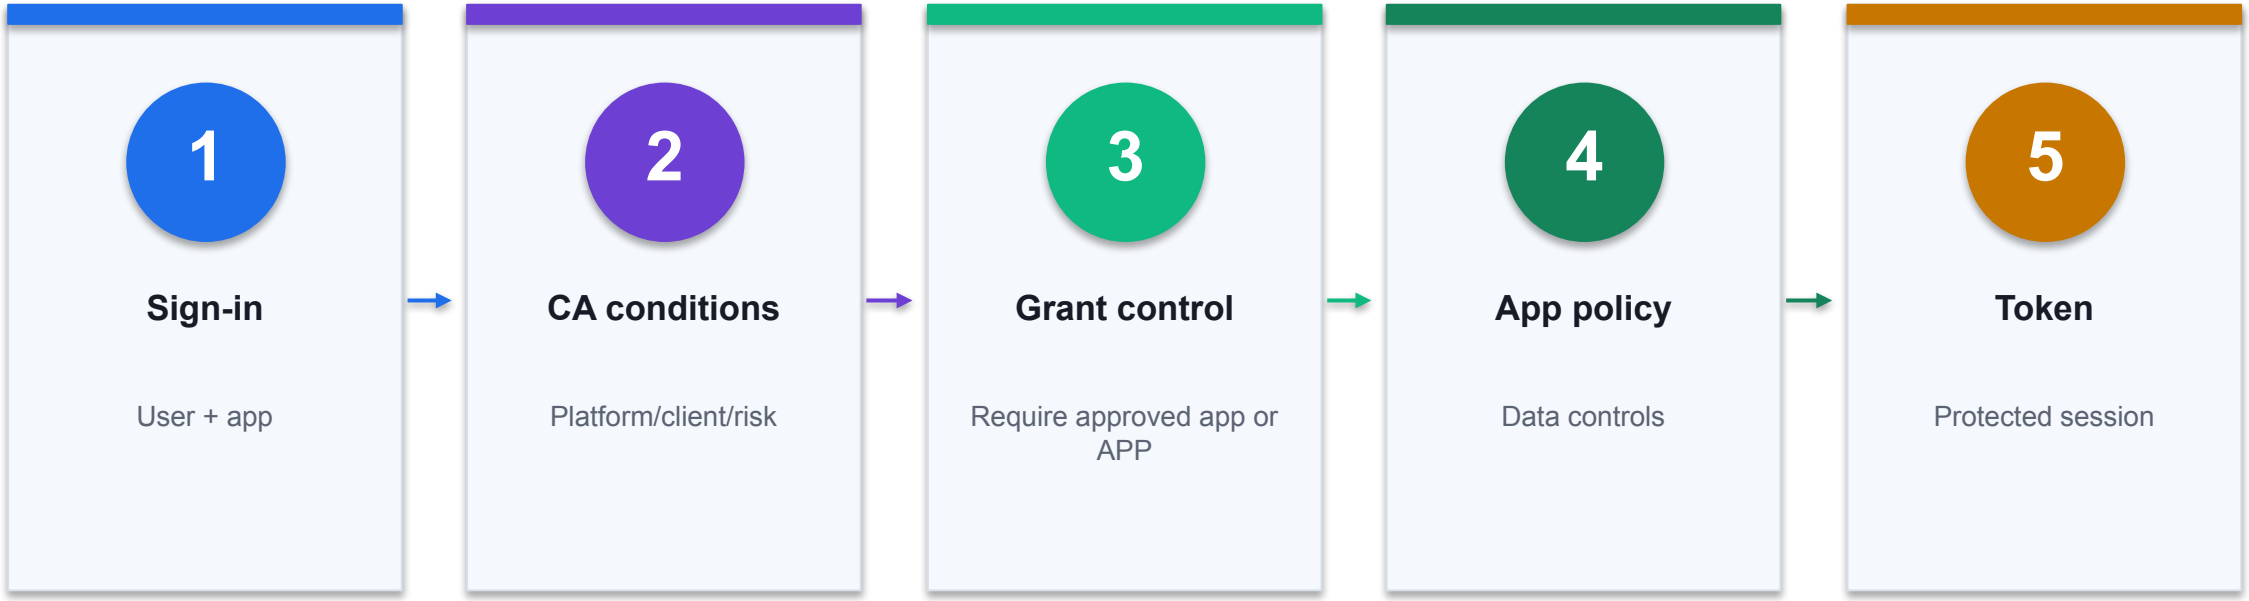

CONTROL POINT

Inspect the evidence at every transition; the first missing state is the most useful troubleshooting boundary. Lab 8 carries the full procedure.

© 2026 Tertiary Infotech Academy Pte Ltd

Combine app protection with Conditional Access — exact contract

1 Grant

Require app protection policy

FIELD / STATE

2 Client apps

Mobile apps and desktop clients

FIELD / STATE

3 Report-only

Validate before enforce

FIELD / STATE

4 Exclusion

Emergency access accounts

FIELD / STATE

DECISION RULE

Configuration is a contract: names, values, scope and resulting state must all agree.

© 2026 Tertiary Infotech Academy Pte Ltd

Grant — control contract



BOUNDARY · Sign-in

STATE **Grant**

Require app protection policy

RISK **Unsupported client**

Block or constrain

PROOF **Sign-in log**


CA policy result

CONTROL READING

The Grant state is valid only when Sign-in produces Sign-in log; Unsupported client requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Client apps — control contract

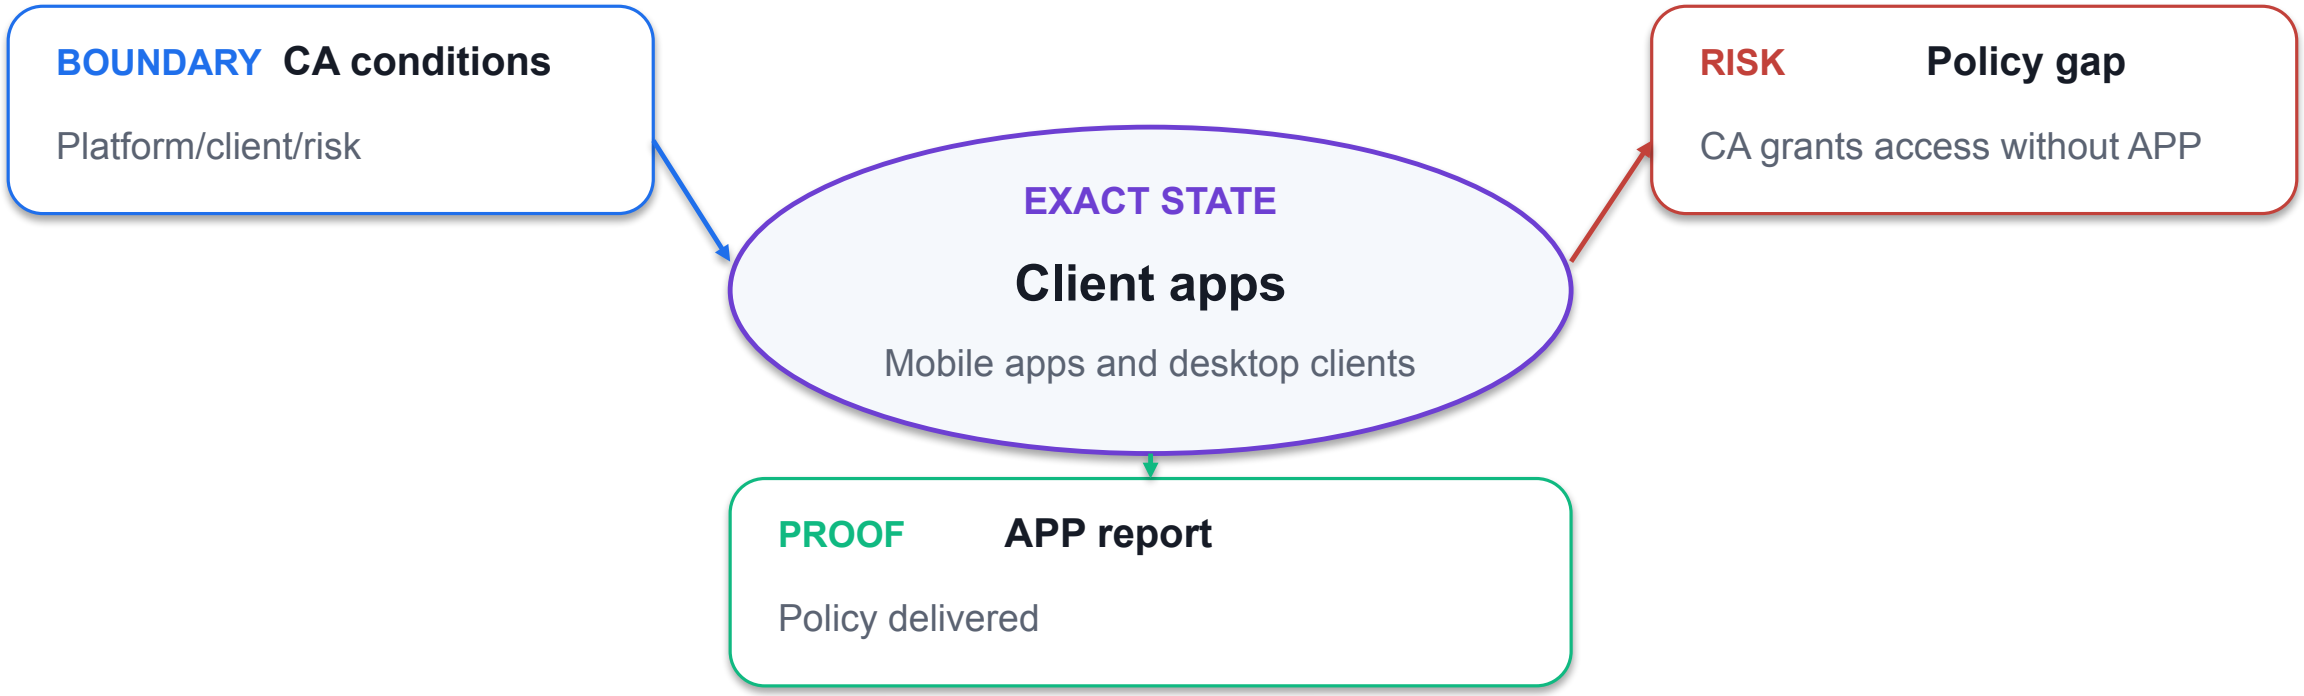

CONTROL READING

The Client apps state is valid only when CA conditions produces APP report; Policy gap requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Report-only — control contract

1 **BOUNDARY** **Grant control**

Require approved app or APP

2 **EXACT STATE** **Report-only**

Validate before enforce

3 **CONTROL RISK** **Lockout**

Use report-only and exclusions

4 **PROOF** **Token claim**

Client/app context

CONTROL READING

The Report-only state is valid only when Grant control produces Token claim; Lockout requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Exclusion — control contract

1	BOUNDARY	App policy	Data controls
2	EXACT STATE	Exclusion	Emergency access accounts
3	CONTROL RISK	Legacy auth	Block separately
4	PROOF	Test matrix	Managed/unmanaged × platform

CONTROL READING

The Exclusion state is valid only when App policy produces Test matrix; Legacy auth requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Combine app protection with Conditional Access — failure and recovery

1 Unsupported client

Block or constrain

DIAGNOSE → RECOVER

2 Policy gap

CA grants access without APP

DIAGNOSE → RECOVER

3 Lockout

Use report-only and exclusions

DIAGNOSE → RECOVER

4 Legacy auth

Block separately

DIAGNOSE → RECOVER

DECISION RULE

Treat the symptom as a pointer to a failed stage; collect evidence before changing policy.

© 2026 Tertiary Infotech Academy Pte Ltd

Unsupported client — diagnostic trace

1	SIGNAL	**Unsupported client**
2	BOUNDARY	CA conditions
3	SUSPECT STATE	Grant
4	RECOVERY	Block or constrain
5	ACCEPTANCE	**Sign-in log**

EVIDENCE THRESHOLD

Accept the recovery only when Sign-in log shows CA policy result; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Policy gap — diagnostic trace




RECOVERY ACTION	CA grants access without APP
ACCEPTANCE PROOF	Policy delivered

EVIDENCE THRESHOLD

Accept the recovery only when APP report shows Policy delivered; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Lockout — diagnostic trace

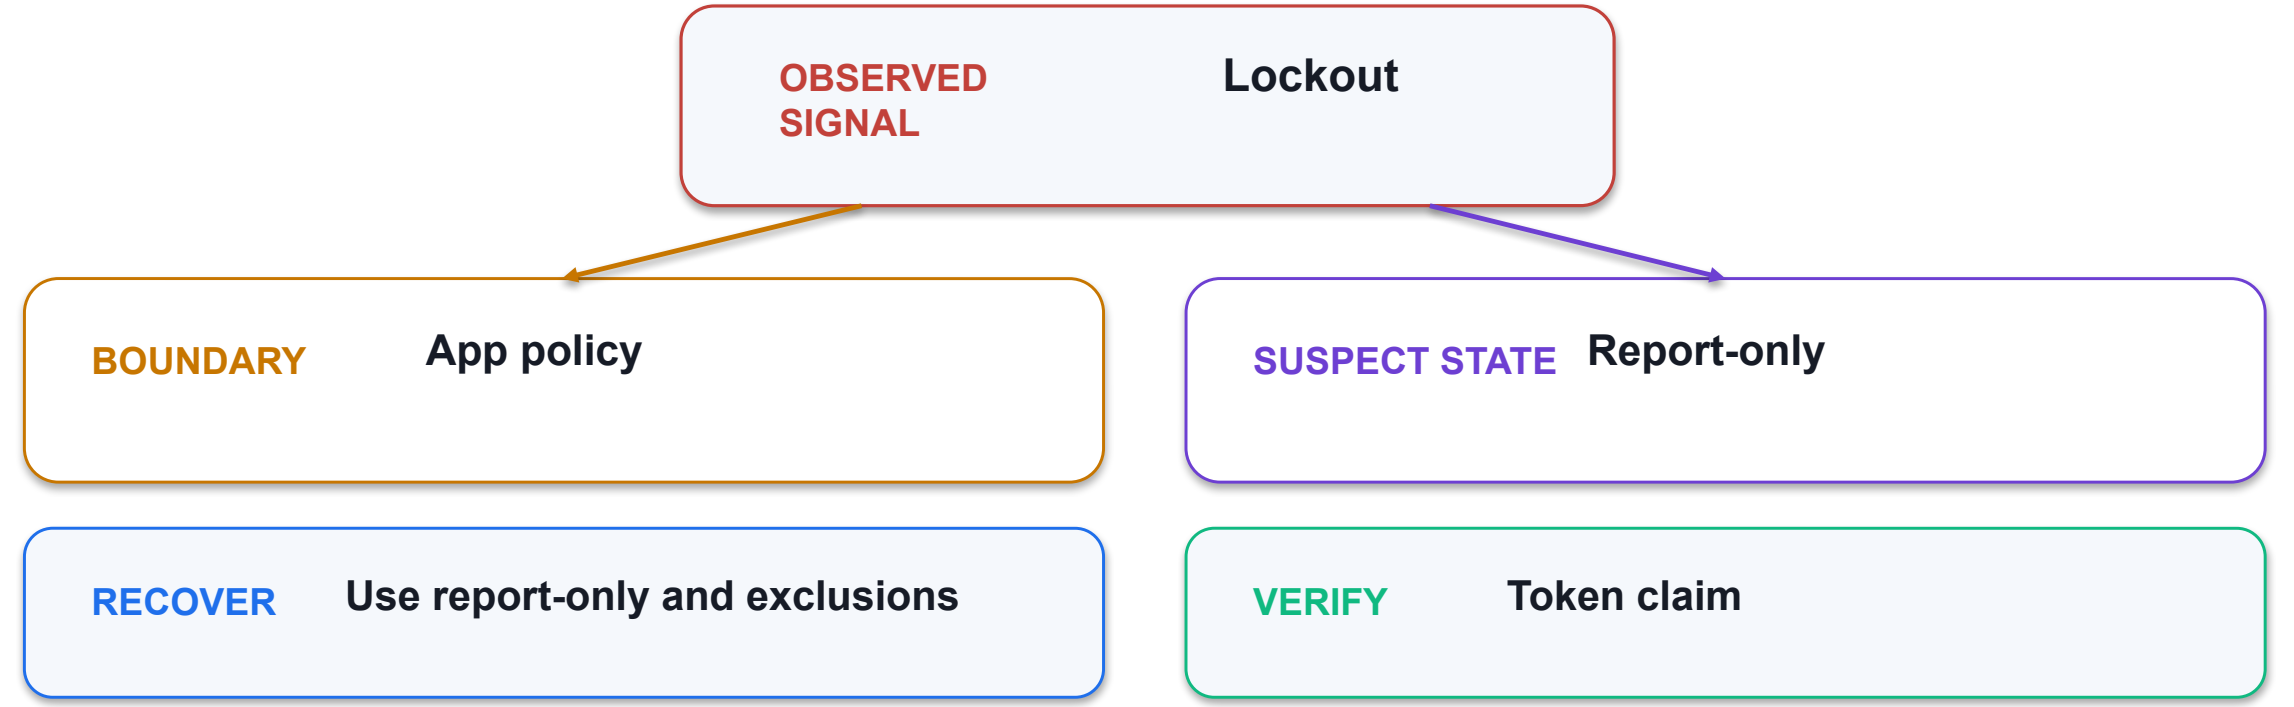


EVIDENCE THRESHOLD

Accept the recovery only when Token claim shows Client/app context; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Legacy auth — diagnostic trace

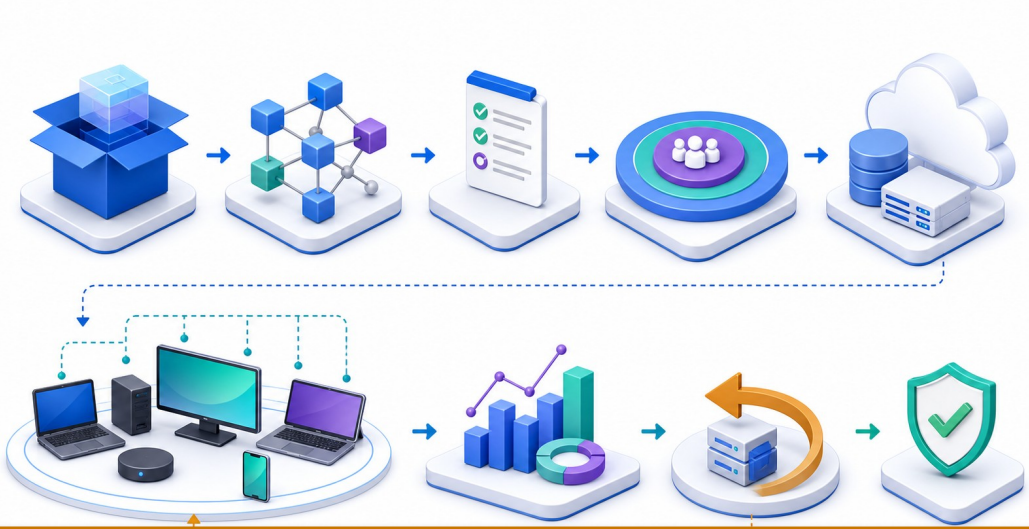

BOUNDARY · Token | SUSPECT · Exclusion

SIGNAL Legacy auth

RECOVERY Block separately

PROOF Test matrix

EVIDENCE THRESHOLD

Accept the recovery only when Test matrix shows Managed/unmanaged × platform; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Combine app protection with Conditional Access — verification evidence

✓ **Sign-in log**	CA policy result
✓ **APP report**	Policy delivered
✓ **Token claim**	Client/app context
✓ **Test matrix**	Managed/unmanaged × platform

LAB 8

Evidence standard

Capture the configured state, the observed result, the timestamp or correlation ID, and the interpretation.

PASS = REPRODUCIBLE

PRACTICE BRIDGE

Full click paths, commands, expected outputs and troubleshooting are in the Learner Guide and the individual lab folder.


© 2026 Tertiary Infotech Academy Pte Ltd

DAY 4

Lunch break

Return at the time announced by the trainer.

Deliver app configuration to managed and unmanaged apps — mechanism

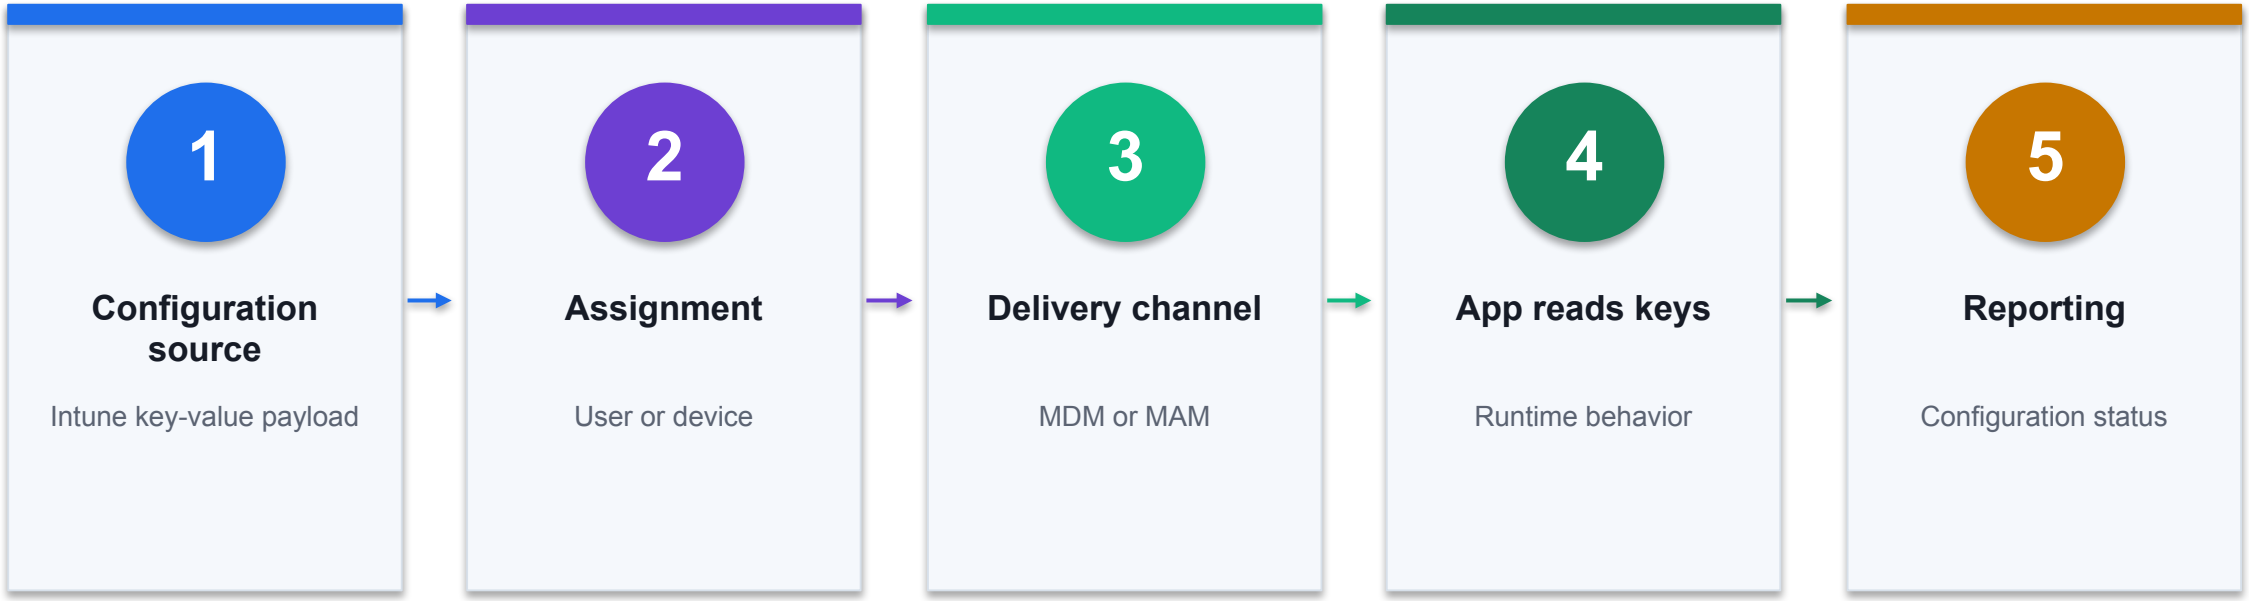

CONTROL POINT

Inspect the evidence at every transition; the first missing state is the most useful troubleshooting boundary. Lab 8 carries the full procedure.

© 2026 Tertiary Infotech Academy Pte Ltd

Deliver app configuration to managed and unmanaged apps — exact contract

1 Managed device

Configuration through MDM

FIELD / STATE

2 Managed app

Configuration through APP channel

FIELD / STATE

3 Data type

String · boolean · integer

FIELD / STATE

4 Vendor schema

Exact supported keys

FIELD / STATE

DECISION RULE

Configuration is a contract: names, values, scope and resulting state must all agree.

© 2026 Tertiary Infotech Academy Pte Ltd

Managed device — control contract



STATE **Managed device**

Configuration through MDM

RISK **Key ignored**

Wrong name or type

PROOF **Policy payload**


Exact keys

CONTROL READING

The Managed device state is valid only when Configuration source produces Policy payload; Key ignored requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Managed app — control contract

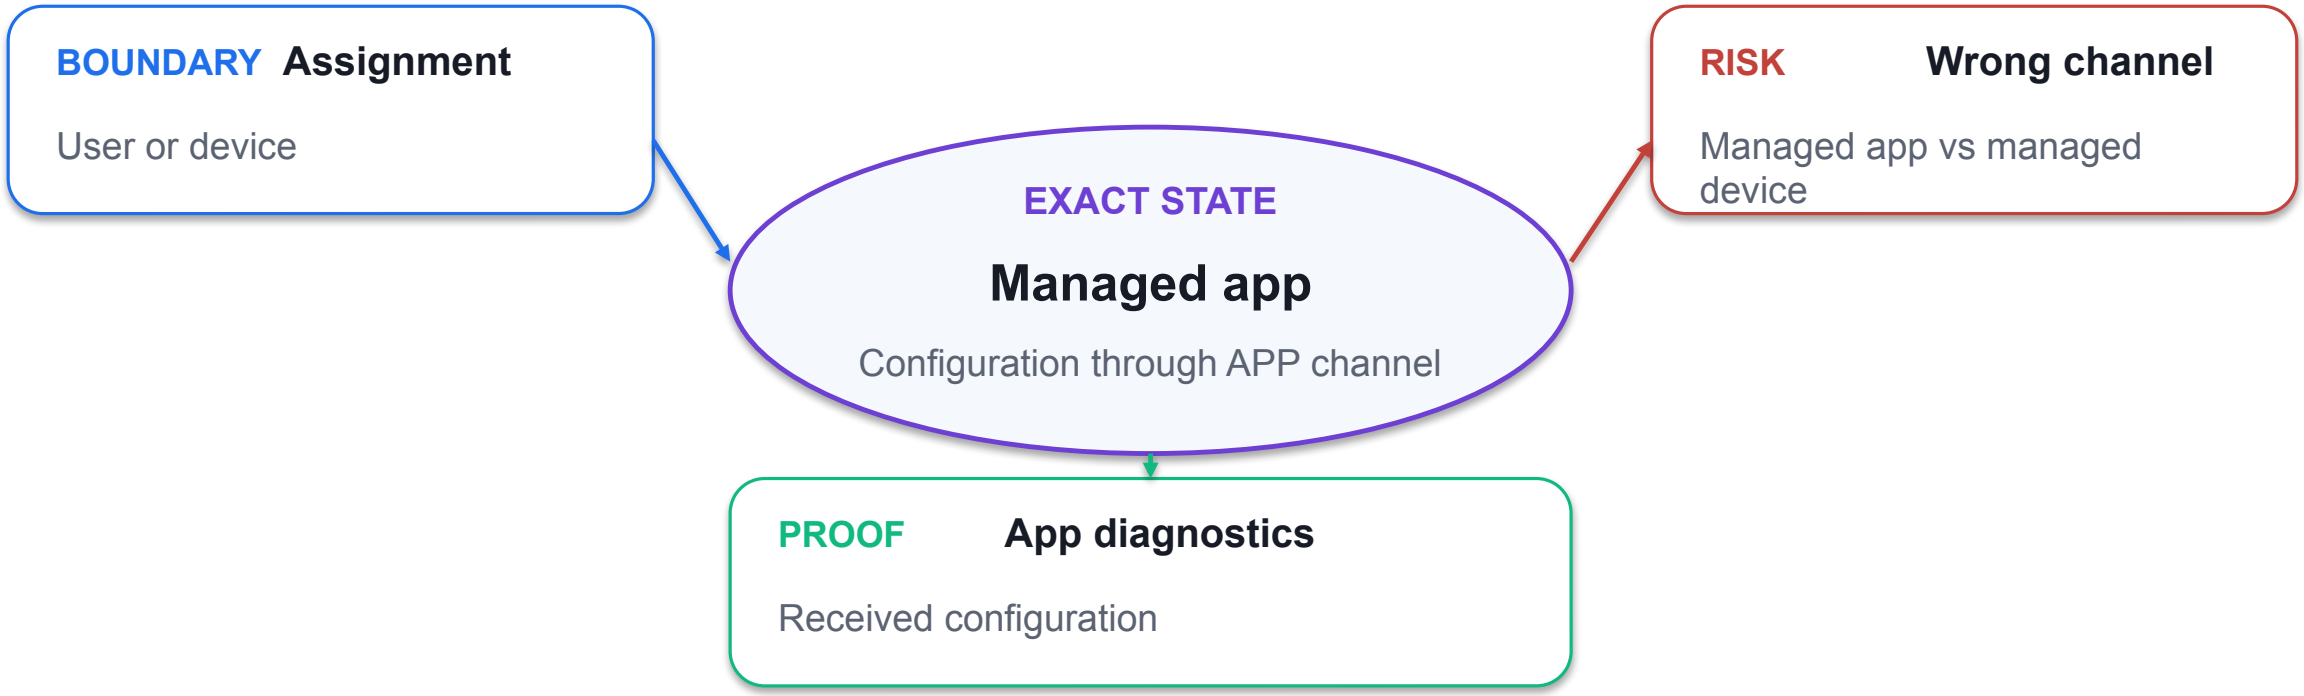

CONTROL READING

The Managed app state is valid only when Assignment produces App diagnostics; Wrong channel requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Data type — control contract

1

BOUNDARY Delivery channel

MDM or MAM

2

EXACT STATE Data type

String · boolean · integer

3

CONTROL RISK Conflicting values

Consolidate policies

4

PROOF Device report

Success

CONTROL READING

The Data type state is valid only when Delivery channel produces Device report; Conflicting values requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Vendor schema — control contract

1	BOUNDARY	App reads keys	Runtime behavior
2	EXACT STATE	Vendor schema	Exact supported keys
3	CONTROL RISK	No report	Verify app supports reporting
4	PROOF	Behavior test	Expected tenant/account state

CONTROL READING

The Vendor schema state is valid only when App reads keys produces Behavior test; No report requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Deliver app configuration to managed and unmanaged apps — failure and recovery

1 Key ignored

Wrong name or type

DIAGNOSE → RECOVER

2 Wrong channel

Managed app vs managed device

DIAGNOSE → RECOVER

3 Conflicting values

Consolidate policies

DIAGNOSE → RECOVER

4 No report

Verify app supports reporting

DIAGNOSE → RECOVER

DECISION RULE

Treat the symptom as a pointer to a failed stage; collect evidence before changing policy.

© 2026 Tertiary Infotech Academy Pte Ltd

Key ignored — diagnostic trace

1	SIGNAL	**Key ignored**
2	BOUNDARY	Assignment
3	SUSPECT STATE	Managed device
4	RECOVERY	Wrong name or type
5	ACCEPTANCE	**Policy payload**

EVIDENCE THRESHOLD

Accept the recovery only when Policy payload shows Exact keys; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Wrong channel — diagnostic trace




RECOVERY ACTION	Managed app vs managed device
ACCEPTANCE PROOF	Received configuration

EVIDENCE THRESHOLD

Accept the recovery only when App diagnostics shows Received configuration; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Conflicting values — diagnostic trace

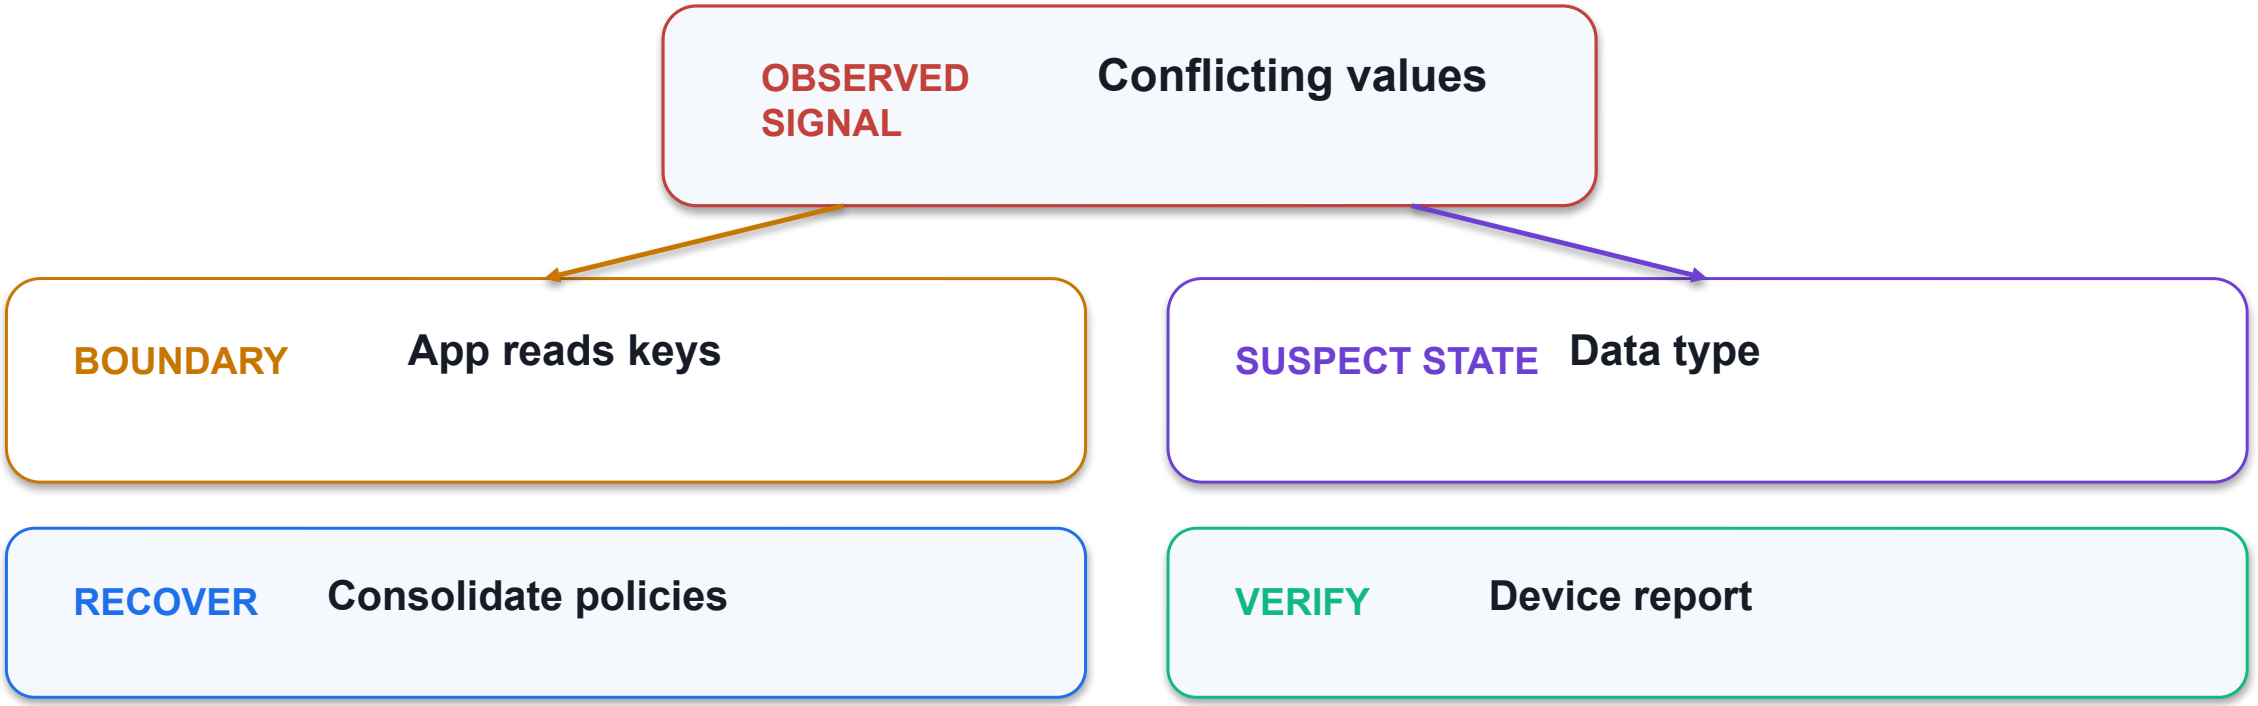


EVIDENCE THRESHOLD

Accept the recovery only when Device report shows Success; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

No report — diagnostic trace

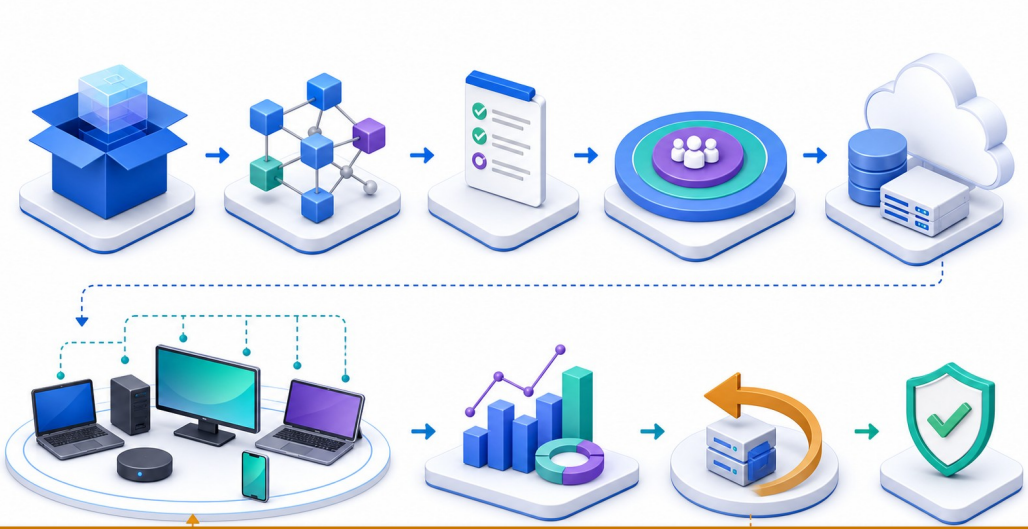

BOUNDARY · Reporting | SUSPECT · Vendor schema

SIGNAL No report

RECOVERY Verify app supports reporting

PROOF Behavior test

EVIDENCE THRESHOLD

Accept the recovery only when Behavior test shows Expected tenant/account state; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Deliver app configuration to managed and unmanaged apps — verification evidence

✓ **Policy payload**	Exact keys
✓ **App diagnostics**	Received configuration
✓ **Device report**	Success
✓ **Behavior test**	Expected tenant/account state

LAB 8

Evidence standard

Capture the configured state, the observed result, the timestamp or correlation ID, and the interpretation.


PASS = REPRODUCIBLE

PRACTICE BRIDGE

Full click paths, commands, expected outputs and troubleshooting are in the Learner Guide and the individual lab folder.

© 2026 Tertiary Infotech Academy Pte Ltd

Troubleshoot application deployment from logs — mechanism

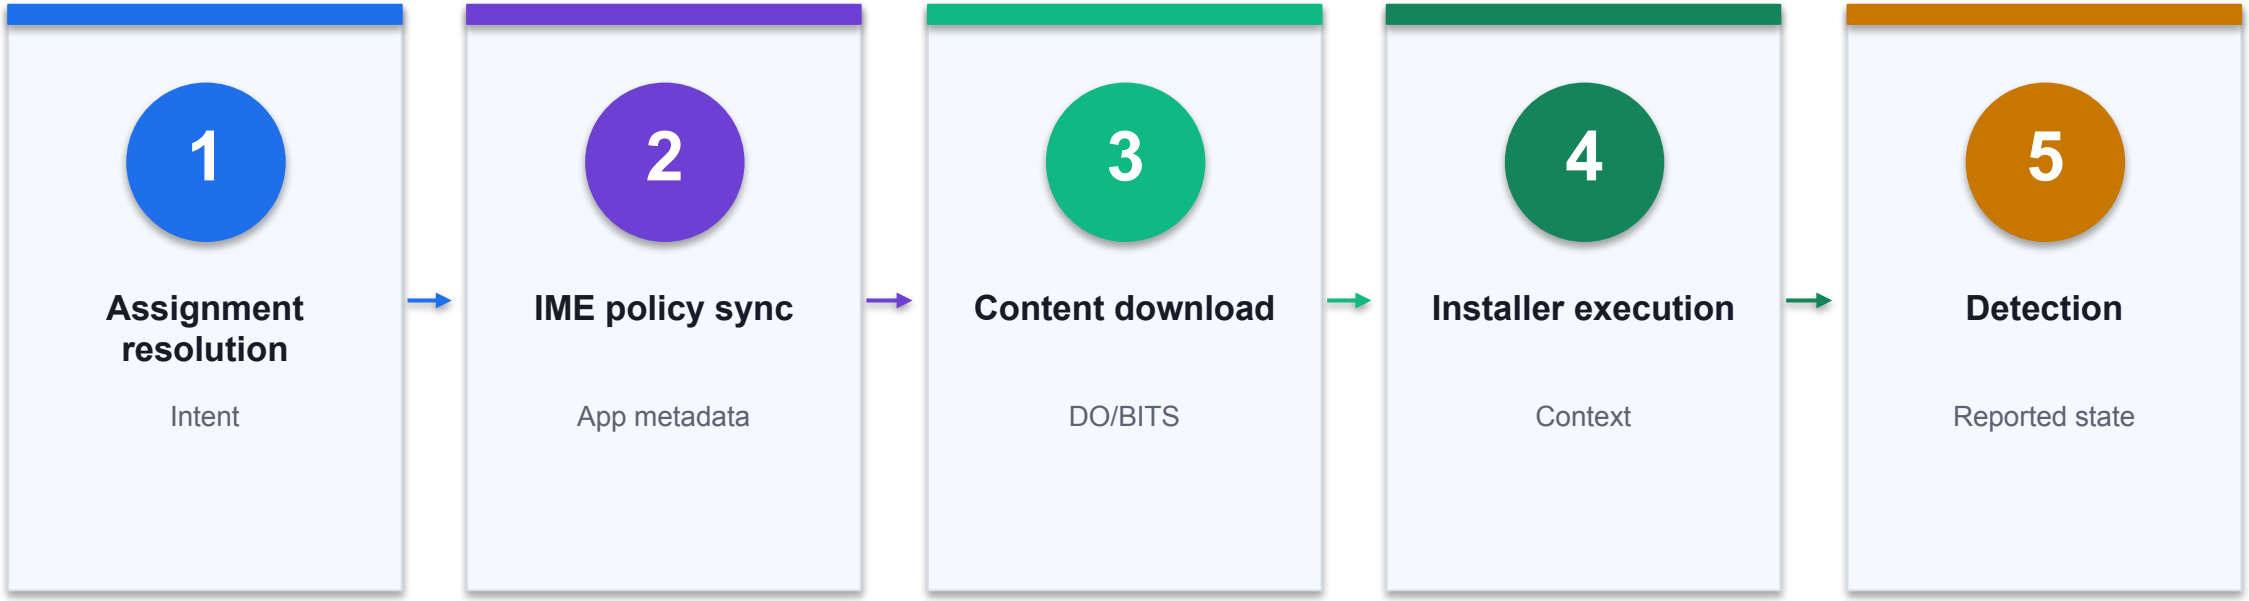

CONTROL POINT

Inspect the evidence at every transition; the first missing state is the most useful troubleshooting boundary. Lab 8 carries the full procedure.

© 2026 Tertiary Infotech Academy Pte Ltd

Troubleshoot application deployment from logs — exact contract

1 IME log

IntuneManagementExtension.log

FIELD / STATE

2 Agent Executor

PowerShell execution

FIELD / STATE

3 Content cache

Staging files

FIELD / STATE

4 Portal report

Device install details

FIELD / STATE

DECISION RULE

Configuration is a contract: names, values, scope and resulting state must all agree.

© 2026 Tertiary Infotech Academy Pte Ltd

IME log — control contract



STATE **IME log**

IntuneManagementExtension.log

RISK **Download timeout**

Network/proxy/DO

PROOF **Timestamp chain**


First failing phase

CONTROL READING

The IME log state is valid only when Assignment resolution produces Timestamp chain; Download timeout requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Agent Executor — control contract

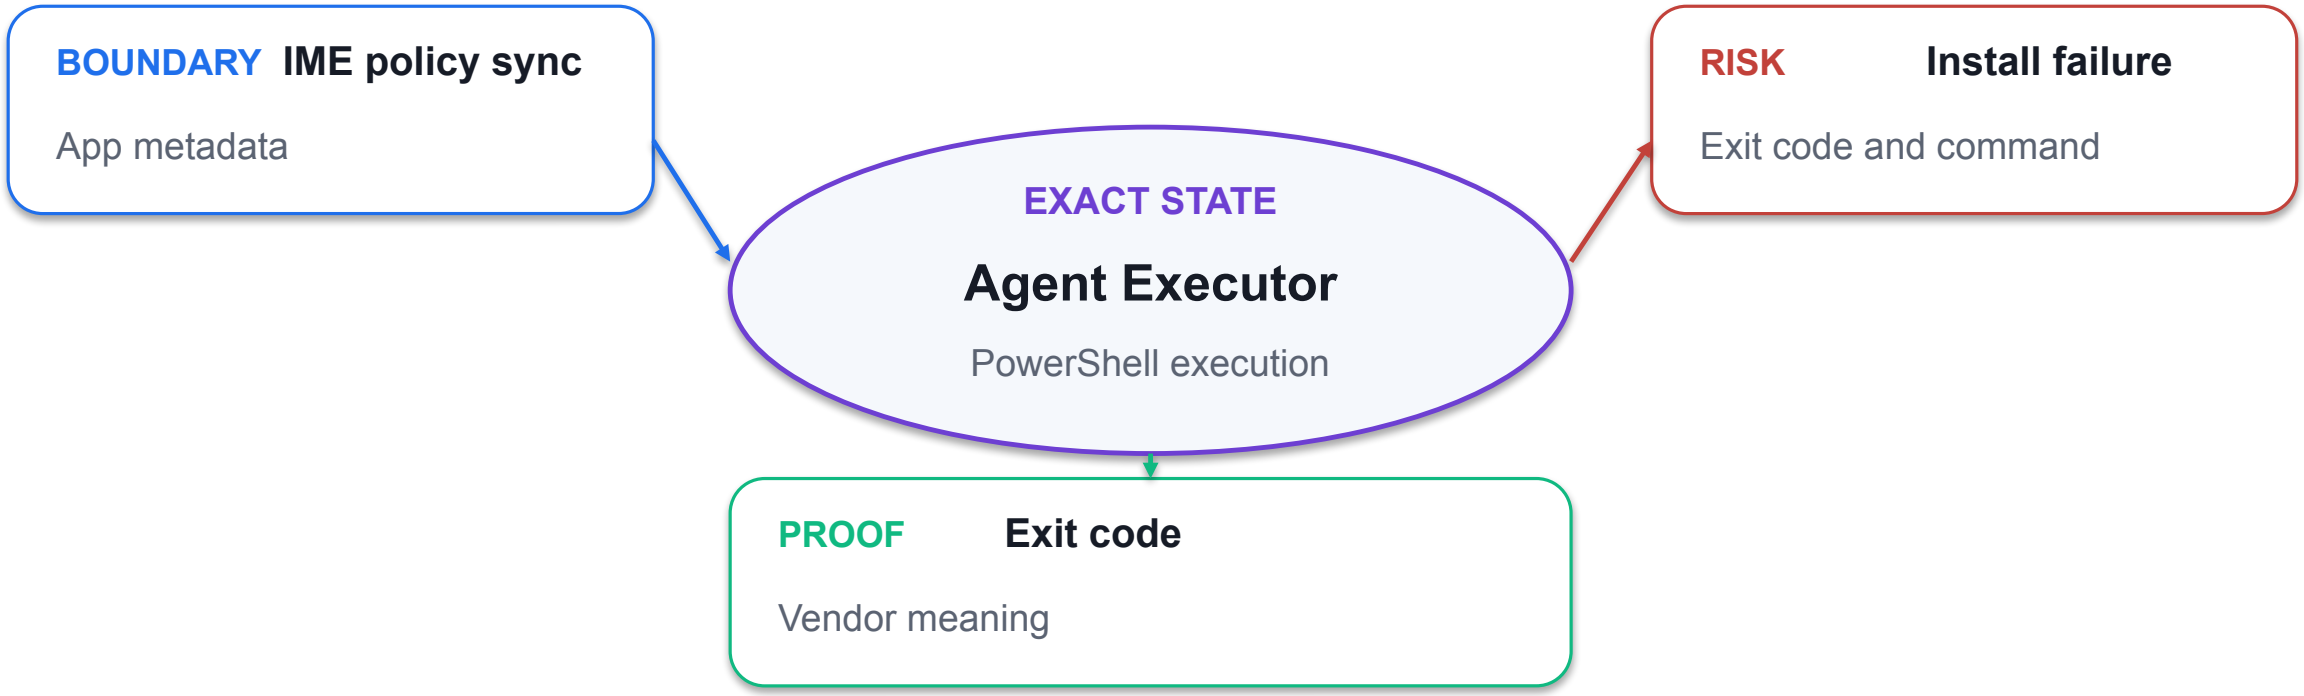

CONTROL READING

The Agent Executor state is valid only when IME policy sync produces Exit code; Install failure requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Content cache — control contract

1

BOUNDARY Content download

DO/BITS

2

EXACT STATE Content cache

Staging files

3

CONTROL RISK Detection false negative

Fix rule

4

PROOF Detection trace

Rule output

CONTROL READING

The Content cache state is valid only when Content download produces Detection trace; Detection false negative requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Portal report — control contract

1	BOUNDARY	Installer execution	Context
2	EXACT STATE	Portal report	Device install details
3	CONTROL RISK	Requirement not met	Inspect applicability
4	PROOF	Retest	Successful device status

CONTROL READING

The Portal report state is valid only when Installer execution produces Retest; Requirement not met requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Troubleshoot application deployment from logs — failure and recovery

1 Download timeout

Network/proxy/DO

DIAGNOSE → RECOVER

2 Install failure

Exit code and command

DIAGNOSE → RECOVER

3 Detection false negative

Fix rule

DIAGNOSE → RECOVER

4 Requirement not met

Inspect applicability

DIAGNOSE → RECOVER

DECISION RULE

Treat the symptom as a pointer to a failed stage; collect evidence before changing policy.

© 2026 Tertiary Infotech Academy Pte Ltd

Download timeout — diagnostic trace

1	SIGNAL	**Download timeout**
2	BOUNDARY	IME policy sync
3	SUSPECT STATE	IME log
4	RECOVERY	Network/proxy/DO
5	ACCEPTANCE	**Timestamp chain**

EVIDENCE THRESHOLD

Accept the recovery only when Timestamp chain shows First failing phase; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Install failure — diagnostic trace




RECOVERY ACTION	Exit code and command
ACCEPTANCE PROOF	Vendor meaning

EVIDENCE THRESHOLD

Accept the recovery only when Exit code shows Vendor meaning; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Detection false negative — diagnostic trace

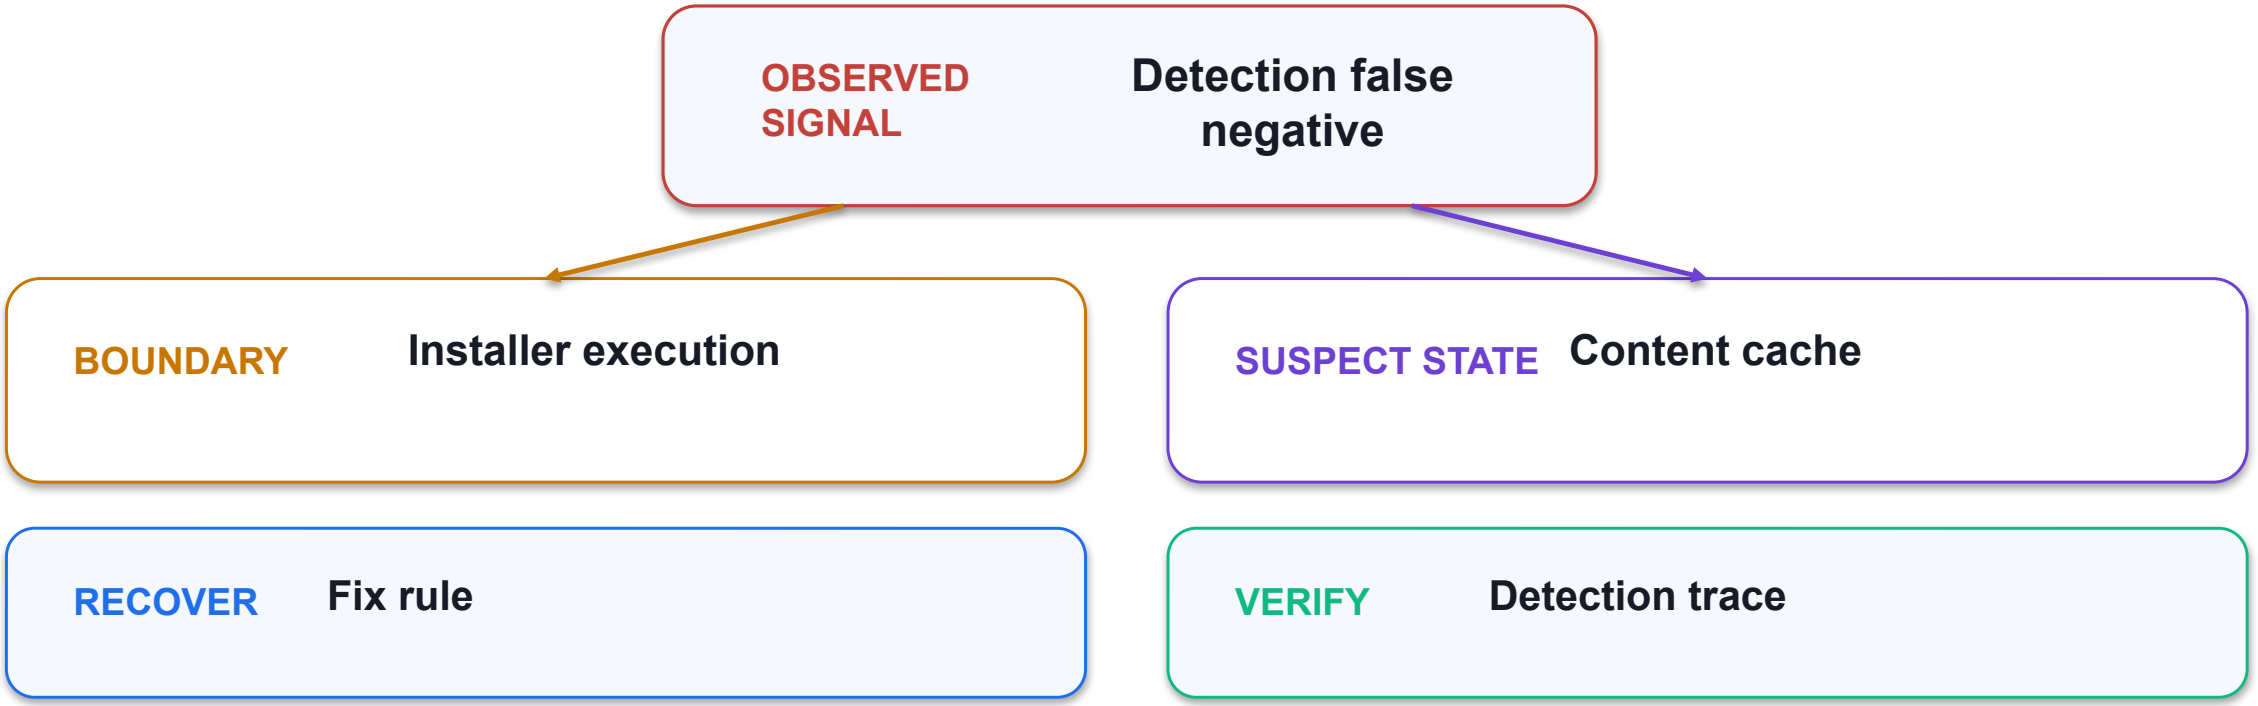


EVIDENCE THRESHOLD

Accept the recovery only when Detection trace shows Rule output; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Requirement not met — diagnostic trace

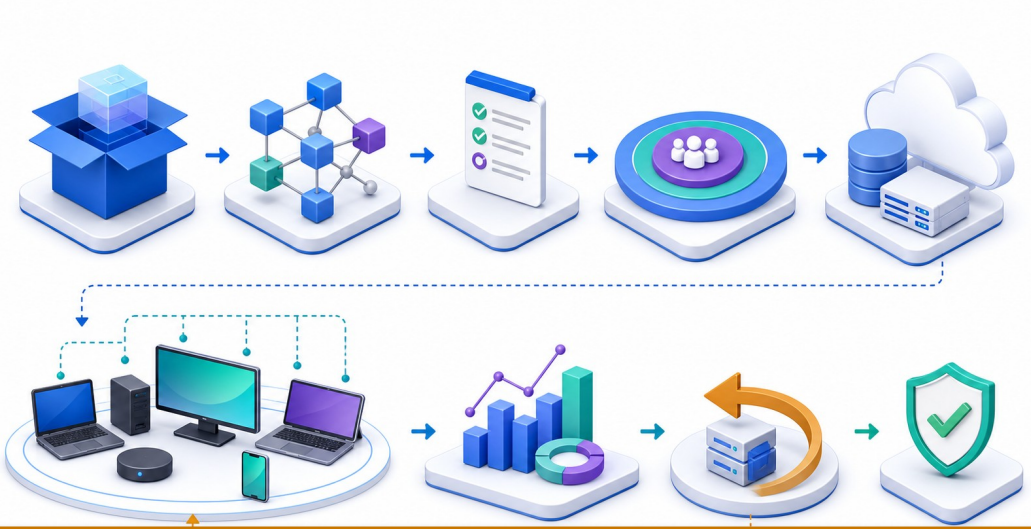

BOUNDARY · Detection | SUSPECT · Portal report

SIGNAL Requirement not met

RECOVERY Inspect applicability

PROOF Retest

EVIDENCE THRESHOLD

Accept the recovery only when Retest shows Successful device status; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Troubleshoot application deployment from logs — verification evidence

Timestamp chain	First failing phase
Exit code	Vendor meaning
Detection trace	Rule output
Retest	Successful device status

LAB 8

Evidence standard

Capture the configured state, the observed result, the timestamp or correlation ID, and the interpretation.


PASS = REPRODUCIBLE

PRACTICE BRIDGE

Full click paths, commands, expected outputs and troubleshooting are in the Learner Guide and the individual lab folder.

© 2026 Tertiary Infotech Academy Pte Ltd

Manage app lifecycle and inventory — mechanism

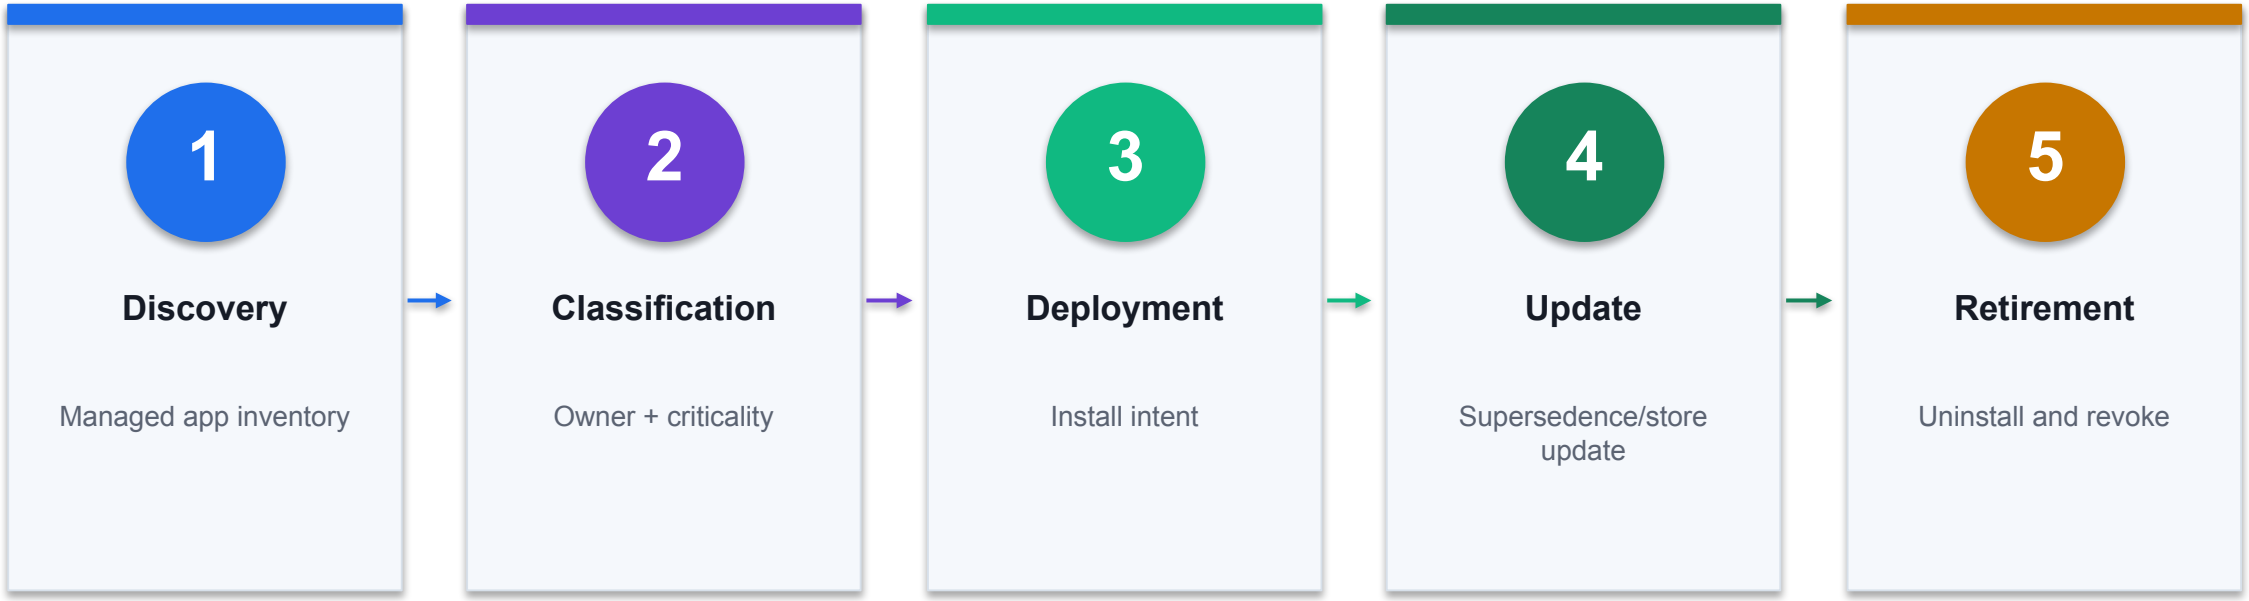

CONTROL POINT

Inspect the evidence at every transition; the first missing state is the most useful troubleshooting boundary. Lab 8 carries the full procedure.

© 2026 Tertiary Infotech Academy Pte Ltd

Manage app lifecycle and inventory — exact contract

1 Owner

Named service owner

FIELD / STATE

2 Detection

Version-aware

FIELD / STATE

3 Update SLA

Risk-based deadline

FIELD / STATE

4 Retirement

Data and access cleanup

FIELD / STATE

DECISION RULE

Configuration is a contract: names, values, scope and resulting state must all agree.

© 2026 Tertiary Infotech Academy Pte Ltd

Owner — control contract



STATE **Owner**

Named service owner

RISK **Shadow IT**

Compare discovered vs approved

PROOF **Discovered apps**


Version footprint

CONTROL READING

The Owner state is valid only when Discovery produces Discovered apps; Shadow IT requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Detection — control contract

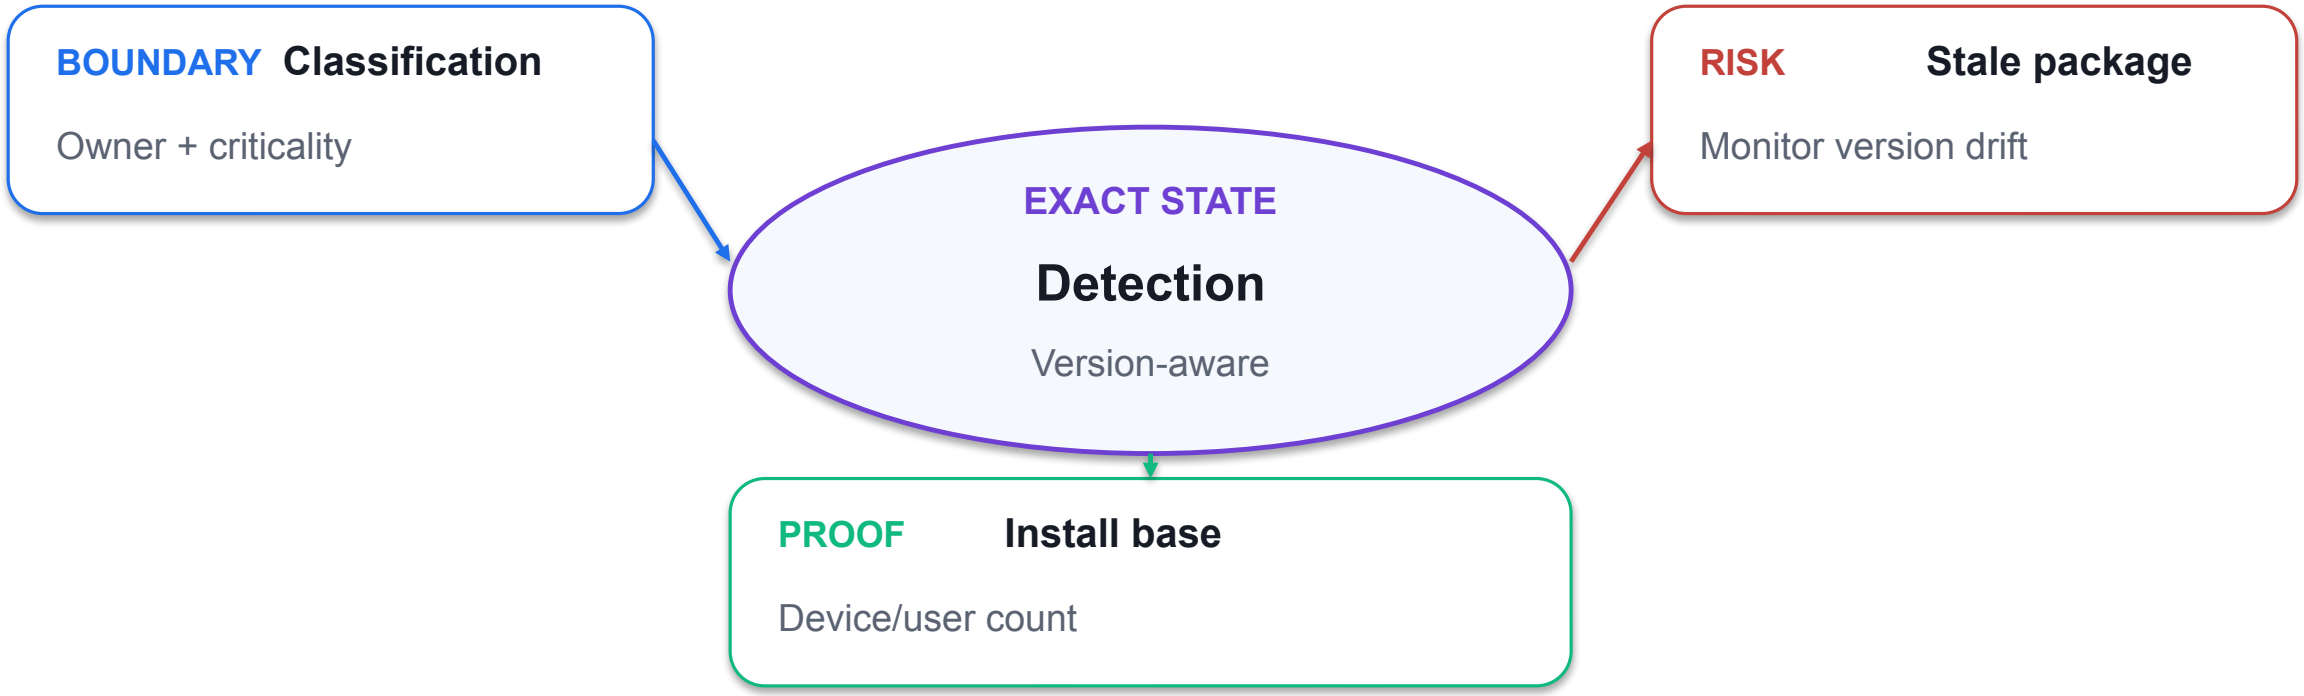

CONTROL READING

The Detection state is valid only when Classification produces Install base; Stale package requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Update SLA — control contract

1 **BOUNDARY** **Deployment**

Install intent

2 **EXACT STATE** **Update SLA**

Risk-based deadline

3 **CONTROL RISK** **Uninstall fails**

Validate command/context

4 **PROOF** **Update compliance**

Current version %

CONTROL READING

The Update SLA state is valid only when Deployment produces Update compliance; Uninstall fails requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Retirement — control contract

1	BOUNDARY	Update	Supersedence/store update
2	EXACT STATE	Retirement	Data and access cleanup
3	CONTROL RISK	Orphan assignment	Review group lifecycle
4	PROOF	Retirement proof	No active assignment

CONTROL READING

The Retirement state is valid only when Update produces Retirement proof; Orphan assignment requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Manage app lifecycle and inventory — failure and recovery

1 Shadow IT

Compare discovered vs approved

DIAGNOSE → RECOVER

2 Stale package

Monitor version drift

DIAGNOSE → RECOVER

3 Uninstall fails

Validate command/context

DIAGNOSE → RECOVER

4 Orphan assignment

Review group lifecycle

DIAGNOSE → RECOVER

DECISION RULE

Treat the symptom as a pointer to a failed stage; collect evidence before changing policy.

© 2026 Tertiary Infotech Academy Pte Ltd

Shadow IT — diagnostic trace


1	SIGNAL	**Shadow IT**
2	BOUNDARY	Classification
3	SUSPECT STATE	Owner
4	RECOVERY	Compare discovered vs approved
5	ACCEPTANCE	**Discovered apps**

EVIDENCE THRESHOLD

Accept the recovery only when Discovered apps shows Version footprint; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Stale package — diagnostic trace

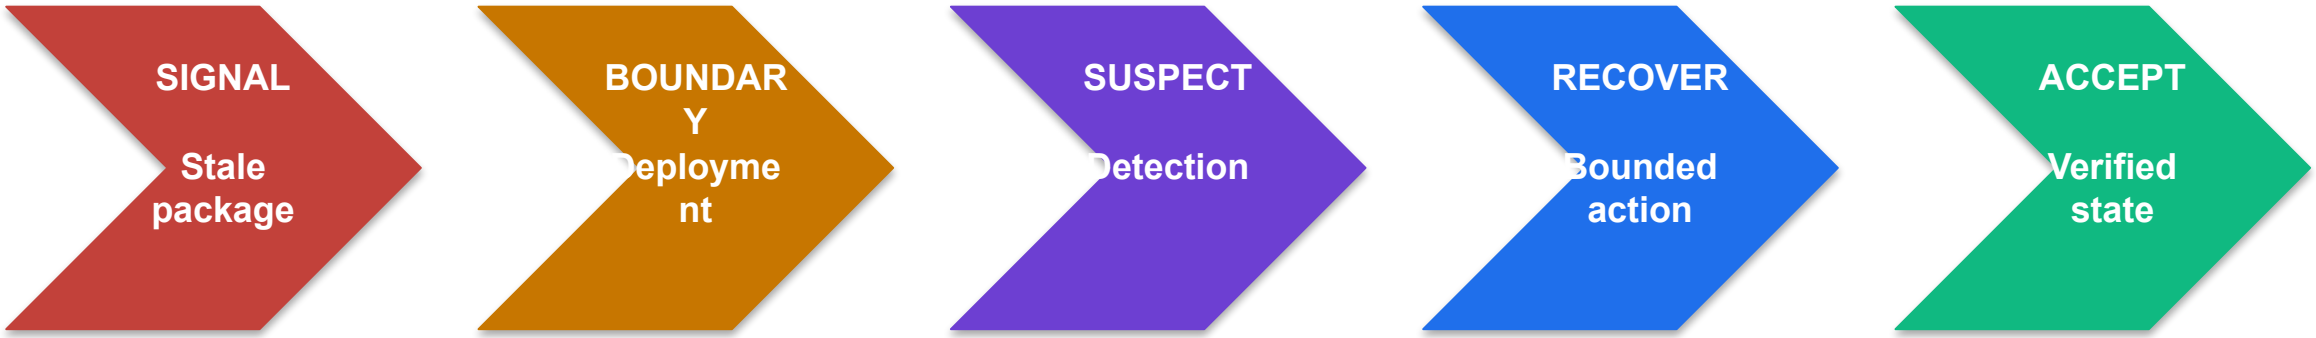

RECOVERY ACTION Monitor version drift


ACCEPTANCE PROOF Device/user count

EVIDENCE THRESHOLD

Accept the recovery only when Install base shows Device/user count; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Uninstall fails — diagnostic trace

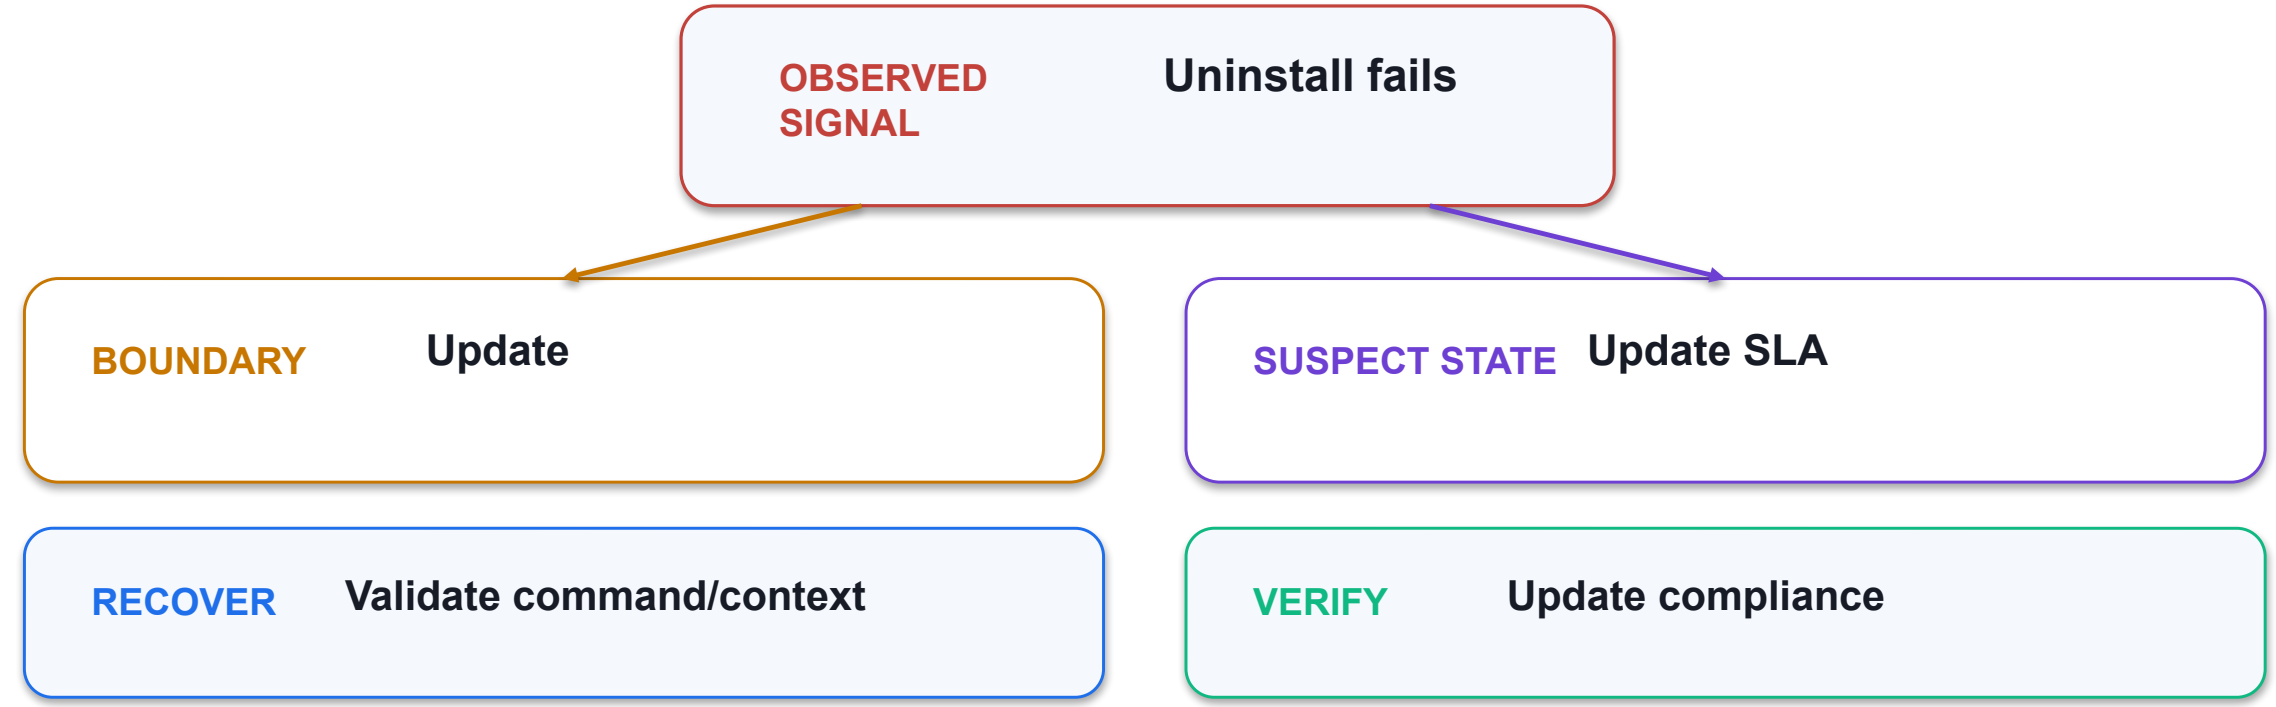


EVIDENCE THRESHOLD

Accept the recovery only when Update compliance shows Current version %; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Orphan assignment — diagnostic trace

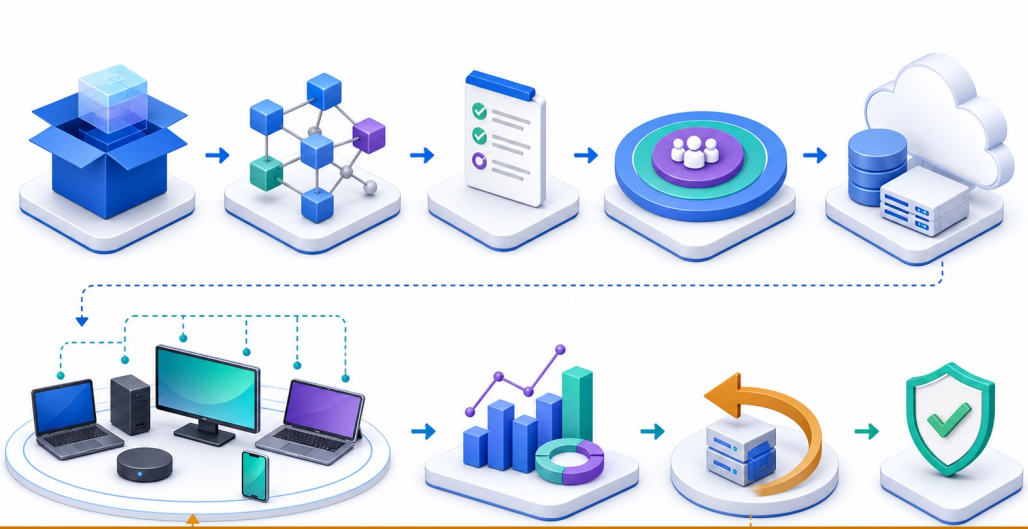

BOUNDARY · Retirement | SUSPECT · Retirement

SIGNAL Orphan assignment

RECOVERY Review group lifecycle

PROOF Retirement proof

EVIDENCE THRESHOLD

Accept the recovery only when Retirement proof shows No active assignment; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Manage app lifecycle and inventory — verification evidence

Discovered apps	Version footprint
Install base	Device/user count
Update compliance	Current version %
Retirement proof	No active assignment

LAB 8

Evidence standard

Capture the configured state, the observed result, the timestamp or correlation ID, and the interpretation.

PASS = REPRODUCIBLE

PRACTICE BRIDGE

Full click paths, commands, expected outputs and troubleshooting are in the Learner Guide and the individual lab folder.

© 2026 Tertiary Infotech Academy Pte Ltd

HANDS-ON · 120 MIN

Lab 8: Win32 apps, Microsoft 365 Apps, MAM and app configuration

SCENARIO

Contoso must implement the control, prove the observed state, diagnose one seeded failure, and retain an auditable evidence pack.



YOU'LL PRODUCE

Deployable app contract, detection evidence, MAM/CA test matrix and troubleshooting trace

© 2026 Tertiary Infotech Academy Pte Ltd

LO2 · LO3 · K2 · K3 · A2 · A5

Lab 8 — acceptance and evidence

Configured state

Policy/profile/assignment values are visible and scoped to the intended cohort.

EVIDENCE REQUIRED

Observed result

The device, app or identity shows the expected service and client-side outcome.

EVIDENCE REQUIRED

Failure diagnosis

The seeded issue is tied to an error, log, report or missing state—not a guess.

EVIDENCE REQUIRED

Recovery proof

A post-change retest demonstrates the corrected state with timestamp/correlation evidence.

EVIDENCE REQUIRED

SUBMISSION

Save the evidence under labs/lab-08-apps-mam-configuration/evidence/. Detailed steps are in the Learner Guide.

© 2026 Tertiary Infotech Academy Pte Ltd

RETRIEVE · DIAGNOSE · EXPLAIN

Day 4 technical recap

1 Checkpoint 1

- Package and deploy Win32 applications
- Sequence apps with dependencies and supersedence

2 Checkpoint 2

- Deploy Microsoft 365 Apps
- Integrate Apple and Managed Google Play stores

3 Checkpoint 3

- Protect corporate data with MAM
- Combine app protection with Conditional Access

4 Checkpoint 4

- Deliver app configuration to managed and unmanaged apps
- Troubleshoot application deployment from logs

REMEMBER

For each checkpoint, name the architecture boundary, exact contract, failure evidence and acceptance state.

© 2026 Tertiary Infotech Academy Pte Ltd


DAY 5 · 8 HOURS

Automation, analytics and incident response

Graph; PowerShell; analytics; remediation; health; unauthorized-access investigation · 10–15% · LO3 · LO4 · K3 · K5 · A5 · A7 · A8

DOMAIN 5 · NATIVE CHART

Optimize endpoint operations — indicative operational signal

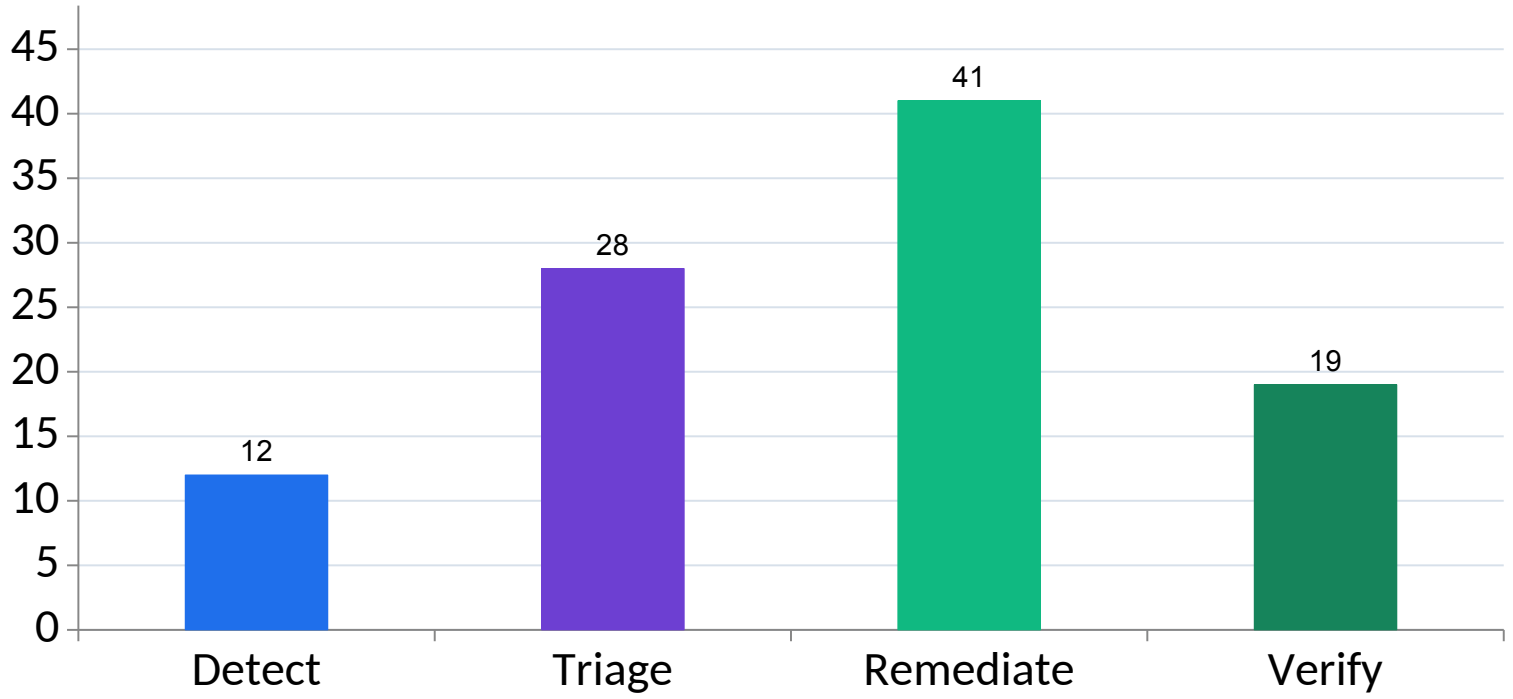

10–15%

CURRENT EXAM WEIGHT

LO3 · LO4

K3 · K5 · A5 · A7 · A8

Indicative teaching data

WHAT THE DATA SHOWS

Operational time accumulates in triage and remediation; automation must preserve verification.

© 2026 Tertiary Infotech Academy Pte Ltd

MECHANISM VISUAL · ANNOTATED

Automation is an evidence-preserving control loop



Collect

Read tenant and device signals.

Decide

Apply bounded policy logic.

Remediate

Change only the required state.


Verify

Re-read state and publish outcome evidence.

Concept illustration generated for this course; Graph/PowerShell contracts are taught on adjacent editable slides.

© 2026 Tertiary Infotech Academy Pte Ltd

Automate Intune with Microsoft Graph — mechanism

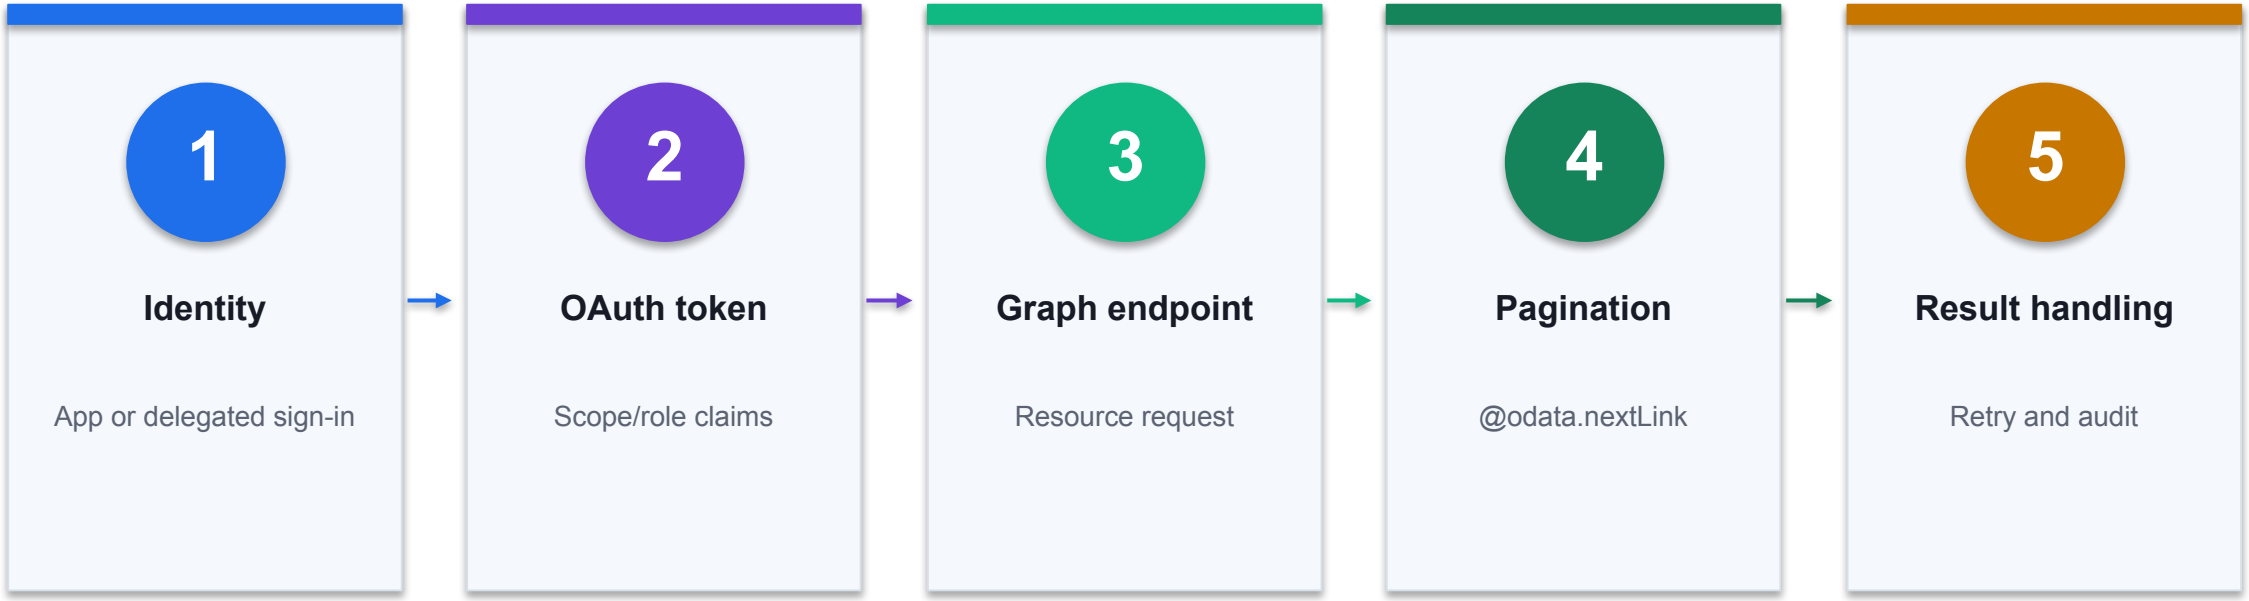

CONTROL POINT

Inspect the evidence at every transition; the first missing state is the most useful troubleshooting boundary. Lab 9 carries the full procedure.

© 2026 Tertiary Infotech Academy Pte Ltd

Automate Intune with Microsoft Graph — exact contract

1 Base URI

https://
graph.microsoft.com/v1.0

FIELD / STATE

2 Permission

DeviceManagementManag
edDevices.Read.All

FIELD / STATE

3 Pagination

Follow every nextLink

FIELD / STATE

4 Throttling

Honor Retry-After


FIELD / STATE

DECISION RULE

Configuration is a contract: names, values, scope and resulting state must all agree.

© 2026 Tertiary Infotech Academy Pte Ltd

Base URI — control contract

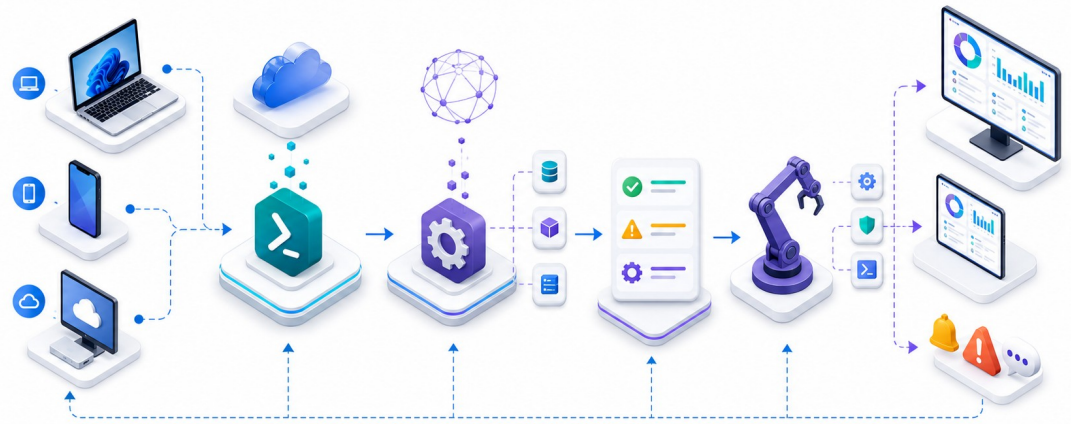

BOUNDARY · Identity

STATE **Base URI**

https://graph.microsoft.com/v1.0

RISK **401**

Token missing/expired

PROOF **Token claims**


aud + roles/scp

CONTROL READING

The Base URI state is valid only when Identity produces Token claims; 401 requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Permission — control contract

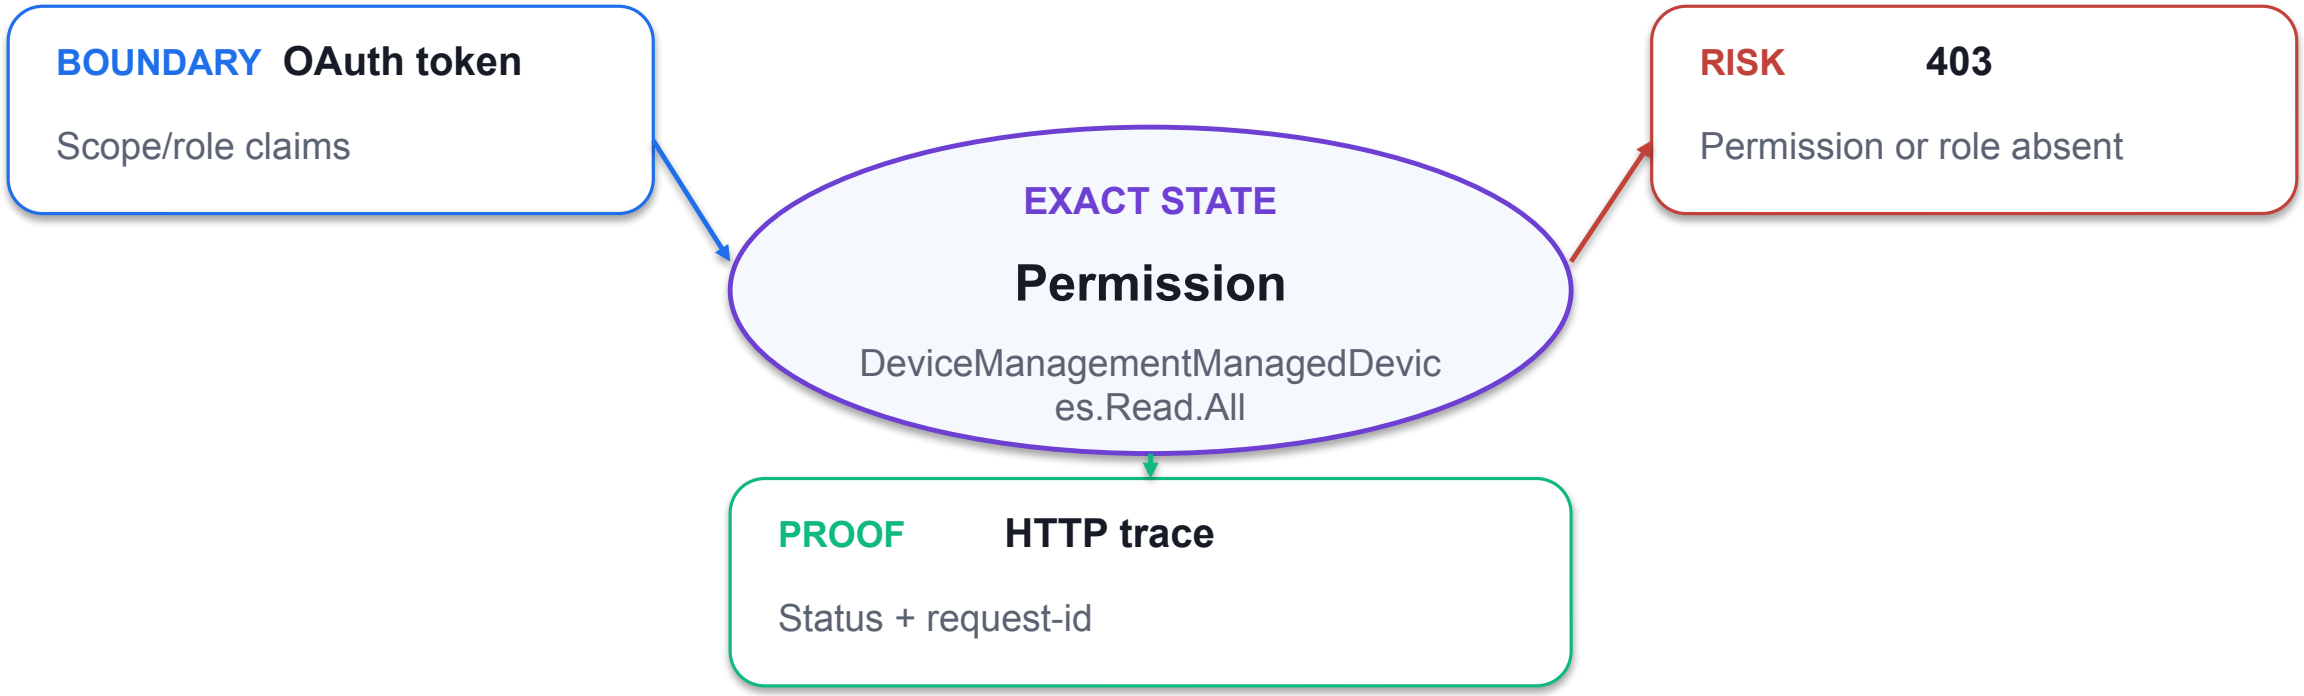

CONTROL READING

The Permission state is valid only when OAuth token produces HTTP trace; 403 requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Pagination — control contract

1

BOUNDARY Graph endpoint

Resource request

2

EXACT STATE Pagination

Follow every nextLink

3

CONTROL RISK 429

Back off and retry

4

PROOF Count check

All pages retrieved

CONTROL READING

The Pagination state is valid only when Graph endpoint produces Count check; 429 requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Throttling — control contract

1	BOUNDARY	Pagination	@odata.nextLink
2	EXACT STATE	Throttling	Honor Retry-After
3	CONTROL RISK	Partial export	Pagination ignored
4	PROOF	Audit log	Automation identity

CONTROL READING

The Throttling state is valid only when Pagination produces Audit log; Partial export requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Automate Intune with Microsoft Graph — failure and recovery

1 — 401

Token missing/expired

DIAGNOSE → RECOVER

2 — 403

Permission or role absent

DIAGNOSE → RECOVER

3 — 429

Back off and retry

DIAGNOSE → RECOVER

4 — Partial export

Pagination ignored

DIAGNOSE → RECOVER

DECISION RULE

Treat the symptom as a pointer to a failed stage; collect evidence before changing policy.

© 2026 Tertiary Infotech Academy Pte Ltd

401 — diagnostic trace

1	SIGNAL	**401**
2	BOUNDARY	OAuth token
3	SUSPECT STATE	Base URI
4	RECOVERY	Token missing/expired
5	ACCEPTANCE	**Token claims**

EVIDENCE THRESHOLD

Accept the recovery only when Token claims shows aud + roles/scp; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

403 — diagnostic trace



RECOVERY ACTION	Permission or role absent
ACCEPTANCE PROOF	Status + request-id

EVIDENCE THRESHOLD

Accept the recovery only when HTTP trace shows Status + request-id; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

429 — diagnostic trace

OBSERVED SIGNAL 429

BOUNDARY Pagination

SUSPECT STATE Pagination

RECOVER Back off and retry


VERIFY Count check

EVIDENCE THRESHOLD

Accept the recovery only when Count check shows All pages retrieved; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Partial export — diagnostic trace

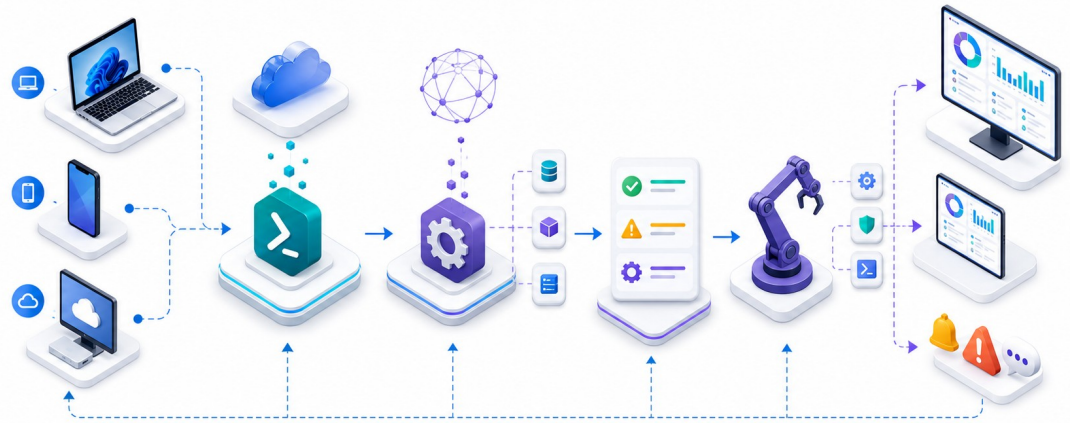

BOUNDARY · Result handling | SUSPECT · Throttling

SIGNAL Partial export

RECOVERY Pagination ignored

PROOF Audit log

EVIDENCE THRESHOLD

Accept the recovery only when Audit log shows Automation identity; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Automate Intune with Microsoft Graph — verification evidence

✓	**Token claims**	aud + roles/scp
✓	**HTTP trace**	Status + request-id
✓	**Count check**	All pages retrieved
✓	**Audit log**	Automation identity

LAB 9

Evidence standard

Capture the configured state, the observed result, the timestamp or correlation ID, and the interpretation.


PASS = REPRODUCIBLE

PRACTICE BRIDGE

Full click paths, commands, expected outputs and troubleshooting are in the Learner Guide and the individual lab folder.

© 2026 Tertiary Infotech Academy Pte Ltd

Use PowerShell for repeatable endpoint operations — mechanism

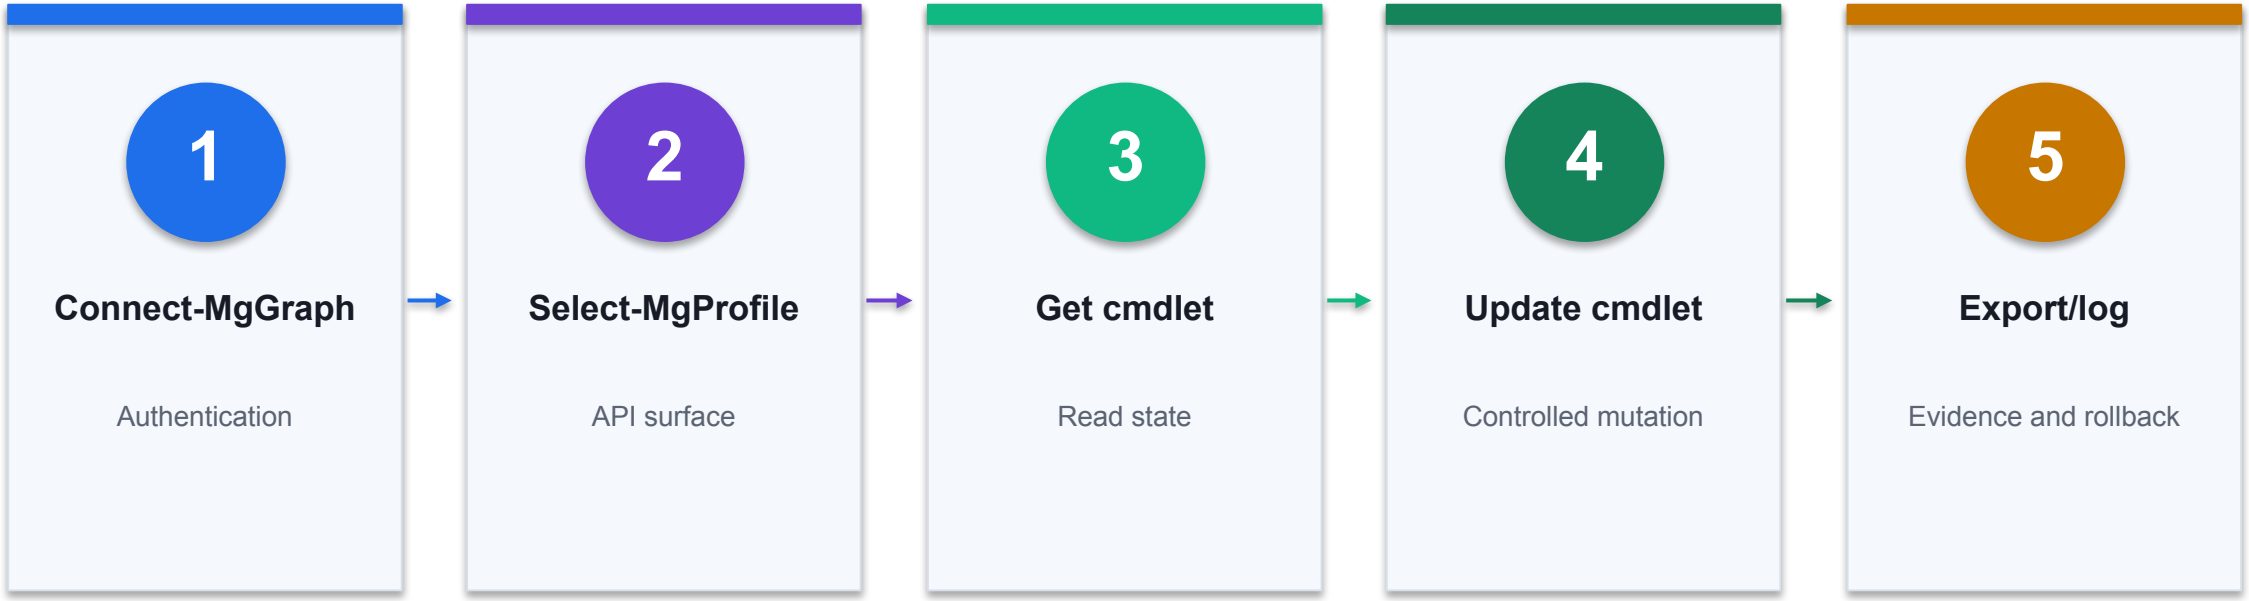

CONTROL POINT

Inspect the evidence at every transition; the first missing state is the most useful troubleshooting boundary. Lab 9 carries the full procedure.

© 2026 Tertiary Infotech Academy Pte Ltd

Use PowerShell for repeatable endpoint operations — exact contract

1 Context

Get-MgContext

FIELD / STATE

2 Least privilege

Explicit scopes

FIELD / STATE

3 WhatIf pattern

Preview intended targets

FIELD / STATE

4 Idempotence

Compare before update

FIELD / STATE

DECISION RULE

Configuration is a contract: names, values, scope and resulting state must all agree.

© 2026 Tertiary Infotech Academy Pte Ltd

Context — control contract



BOUNDARY · Connect-MgGraph

STATE **Context**

Get-MgContext

RISK **Wrong tenant**

Check TenantId

PROOF **Transcript**


Command and time

CONTROL READING

The Context state is valid only when Connect-MgGraph produces Transcript; Wrong tenant requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Least privilege — control contract

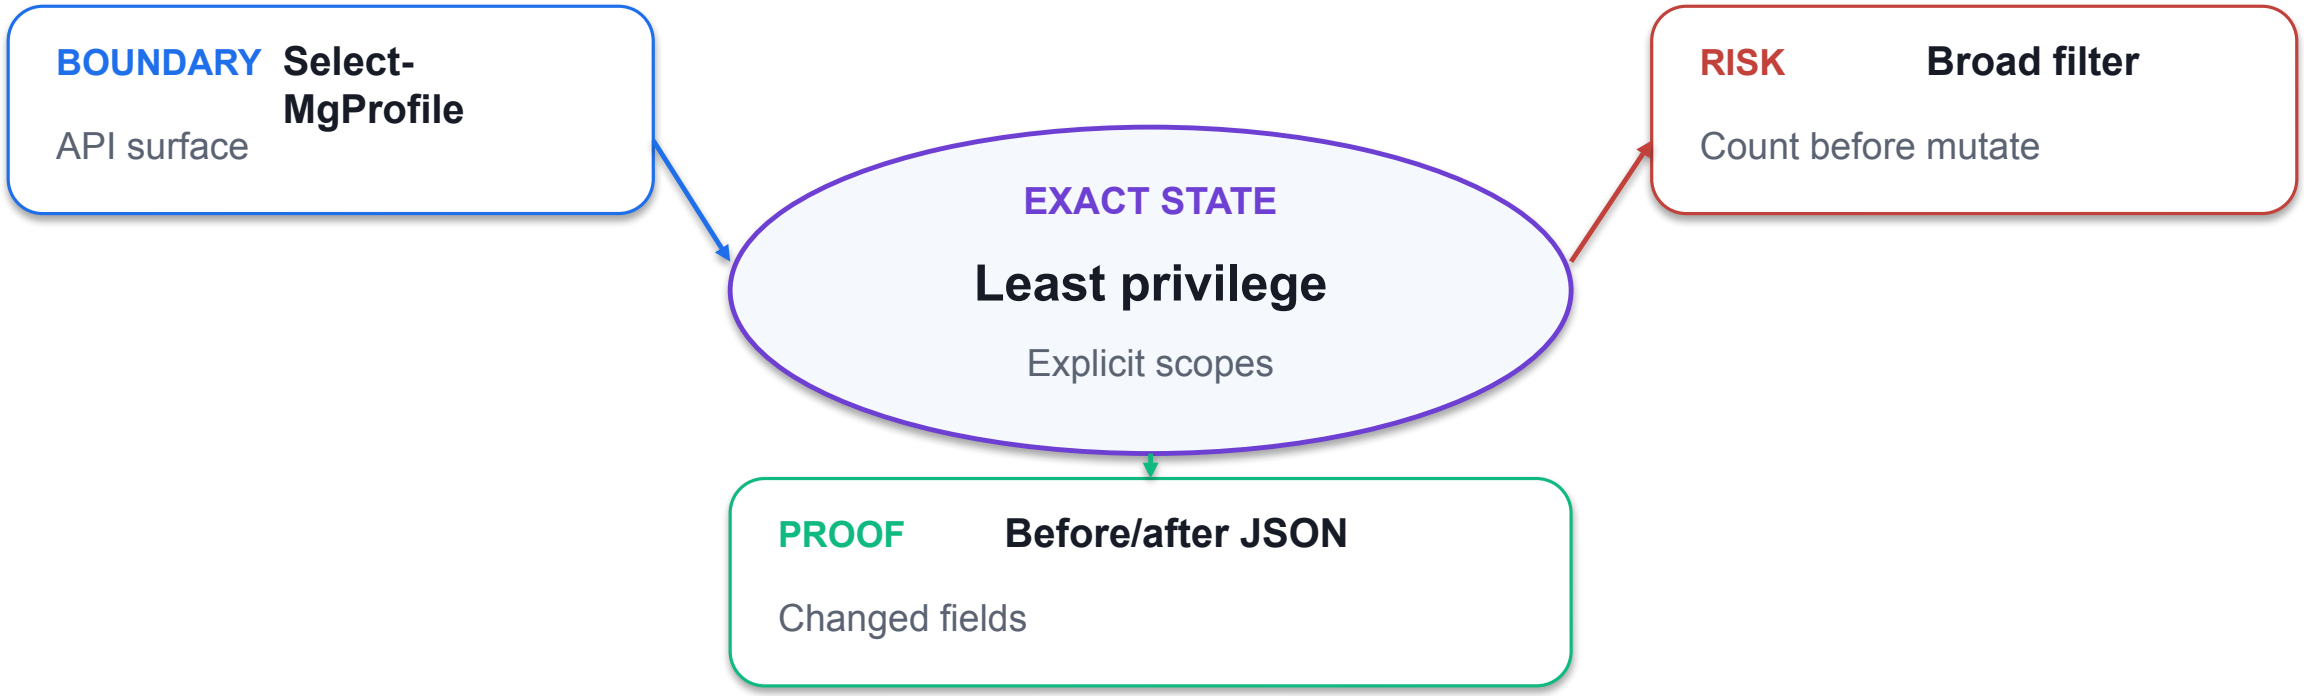

CONTROL READING

The Least privilege state is valid only when Select-MgProfile produces Before/after JSON; Broad filter requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Whatlf pattern — control contract

1

BOUNDARY **Get cmdlet**

Read state

2

EXACT STATE **Whatlf pattern**

Preview intended targets

3

CONTROL RISK **Module drift**

Pin/test version

4

PROOF **Target count**

Expected devices

CONTROL READING

The Whatlf pattern state is valid only when Get cmdlet produces Target count; Module drift requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Idempotence — control contract

1	BOUNDARY	Update cmdlet	Controlled mutation
2	EXACT STATE	Idempotence	Compare before update
3	CONTROL RISK	Transient failure	Retry safe operations
4	PROOF	Exit status	Automation result

CONTROL READING

The Idempotence state is valid only when Update cmdlet produces Exit status; Transient failure requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Use PowerShell for repeatable endpoint operations — failure and recovery

1 Wrong tenant

Check TenantId

DIAGNOSE → RECOVER

2 Broad filter

Count before mutate

DIAGNOSE → RECOVER

3 Module drift

Pin/test version

DIAGNOSE → RECOVER

4 Transient failure

Retry safe operations

DIAGNOSE → RECOVER

DECISION RULE

Treat the symptom as a pointer to a failed stage; collect evidence before changing policy.

© 2026 Tertiary Infotech Academy Pte Ltd

Wrong tenant — diagnostic trace


1	SIGNAL	**Wrong tenant**
2	BOUNDARY	Select-MgProfile
3	SUSPECT STATE	Context
4	RECOVERY	Check TenantId
5	ACCEPTANCE	**Transcript**

EVIDENCE THRESHOLD

Accept the recovery only when Transcript shows Command and time; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Broad filter — diagnostic trace

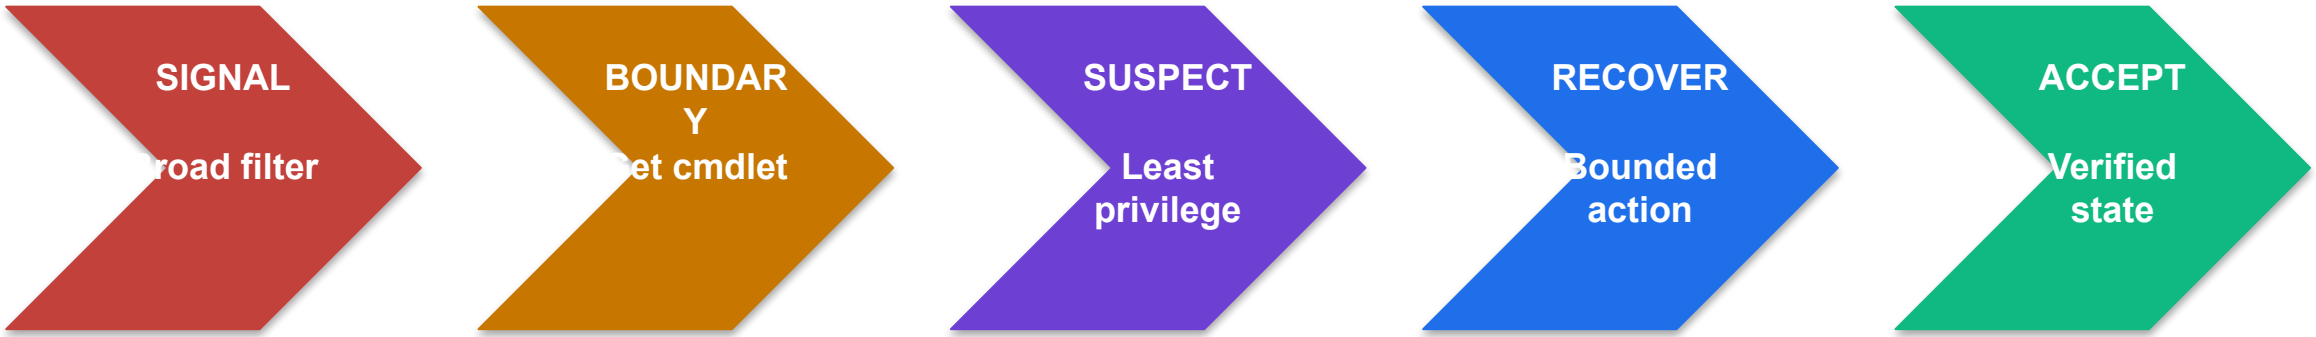


RECOVERY ACTION	Count before mutate
ACCEPTANCE PROOF	Changed fields

EVIDENCE THRESHOLD

Accept the recovery only when Before/after JSON shows Changed fields; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Module drift — diagnostic trace

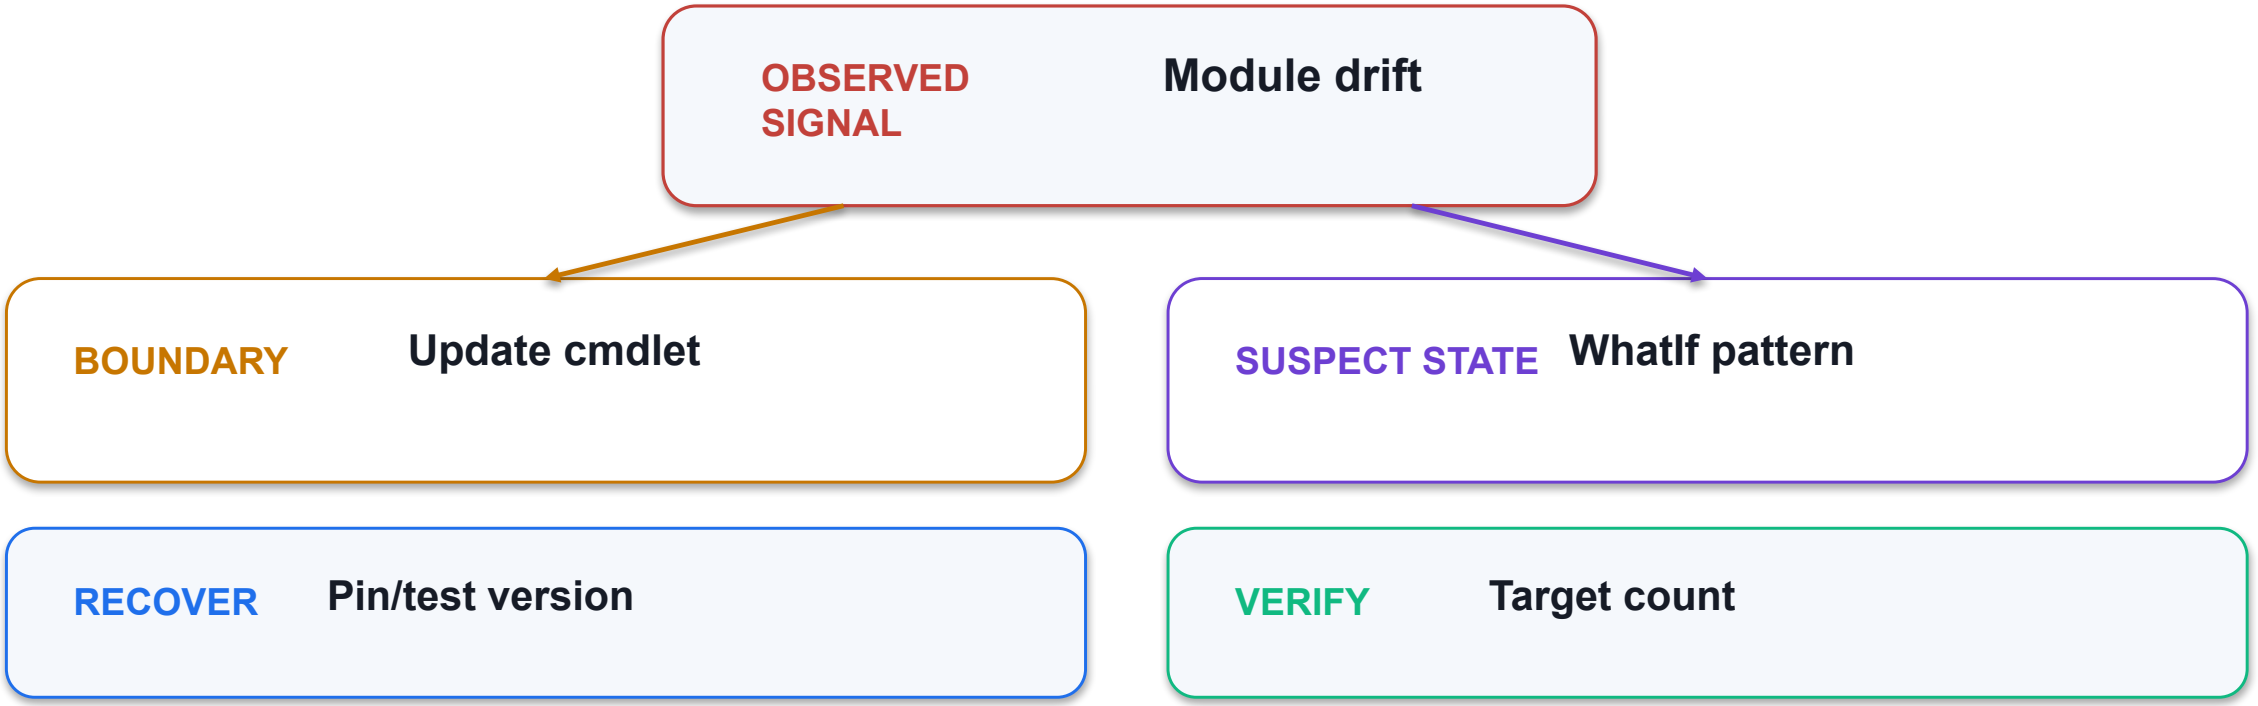


EVIDENCE THRESHOLD

Accept the recovery only when Target count shows Expected devices; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Transient failure — diagnostic trace

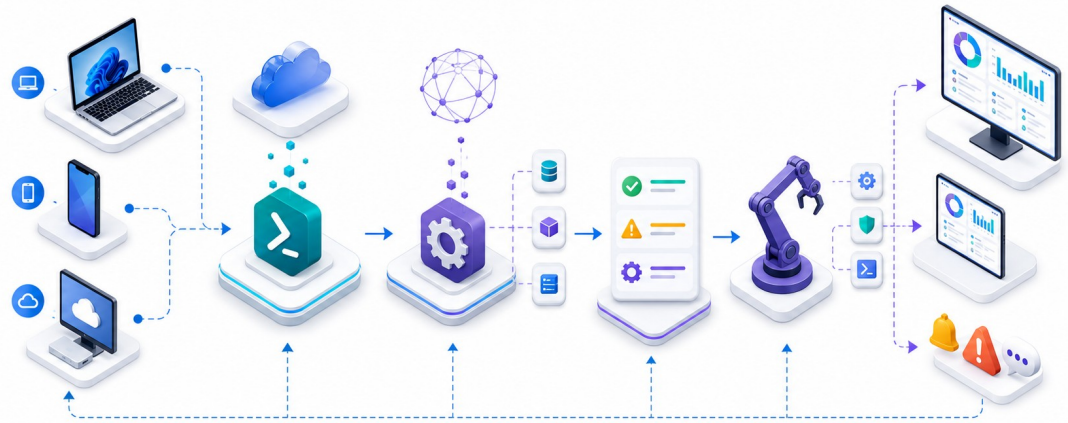

BOUNDARY · Export/log | SUSPECT · Idempotence

SIGNAL Transient failure

RECOVERY Retry safe operations

PROOF Exit status

EVIDENCE THRESHOLD

Accept the recovery only when Exit status shows Automation result; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Use PowerShell for repeatable endpoint operations — verification evidence

✓ **Transcript**	Command and time
✓ **Before/after JSON**	Changed fields
✓ **Target count**	Expected devices
✓ **Exit status**	Automation result

LAB 9

Evidence standard

Capture the configured state, the observed result, the timestamp or correlation ID, and the interpretation.


PASS = REPRODUCIBLE

PRACTICE BRIDGE

Full click paths, commands, expected outputs and troubleshooting are in the Learner Guide and the individual lab folder.

© 2026 Tertiary Infotech Academy Pte Ltd

Extend compliance with custom scripts — mechanism

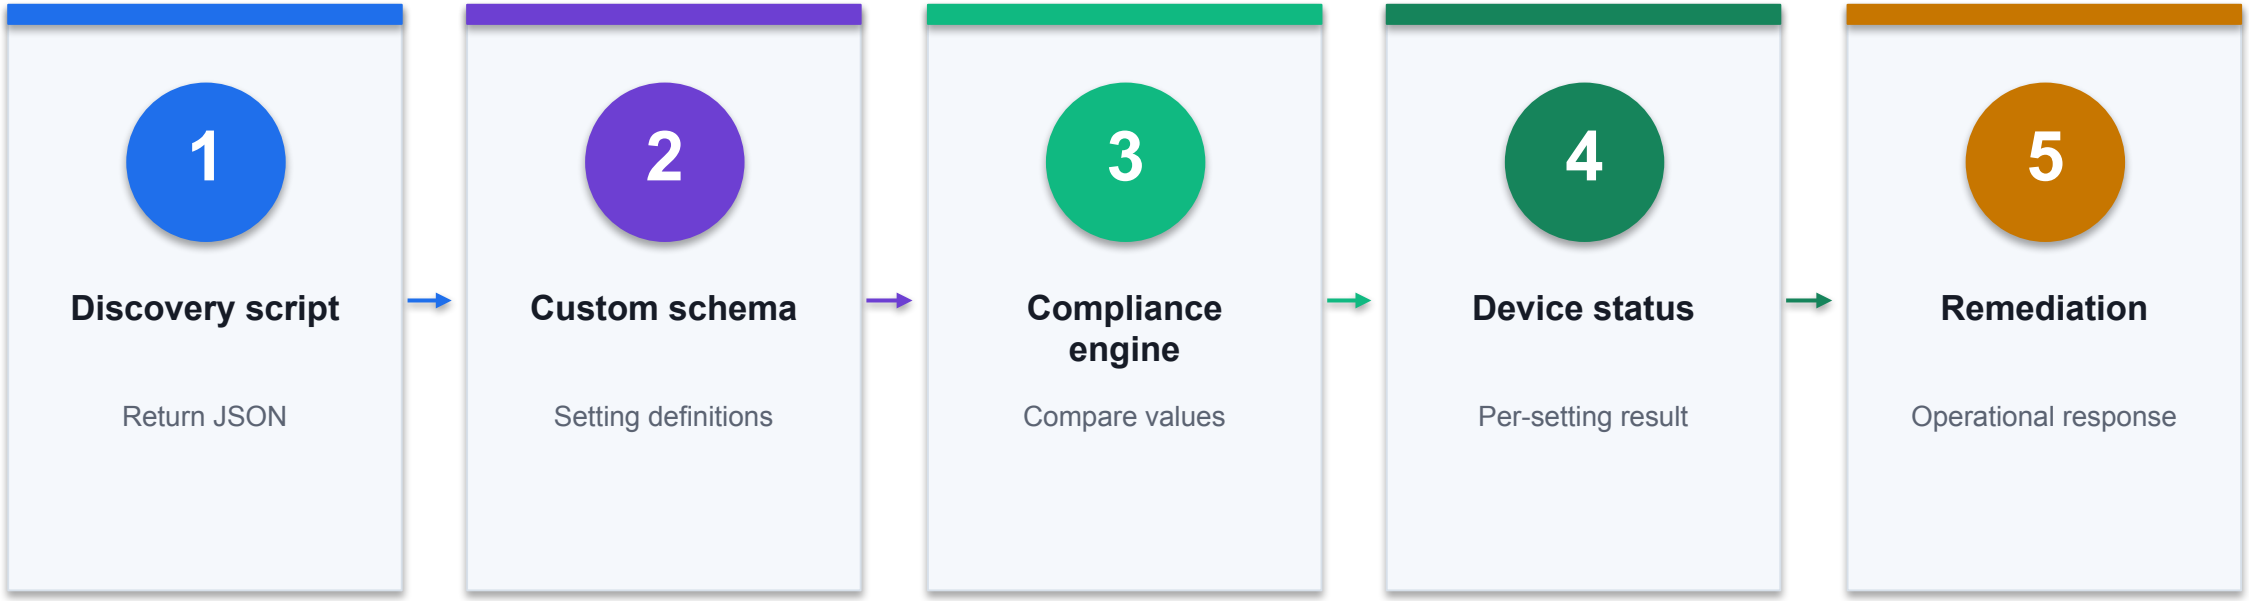

CONTROL POINT

Inspect the evidence at every transition; the first missing state is the most useful troubleshooting boundary. Lab 9 carries the full procedure.

© 2026 Tertiary Infotech Academy Pte Ltd

Extend compliance with custom scripts — exact contract

1 Exit code

0 for successful discovery

FIELD / STATE

2 Output

Single compressed JSON object

FIELD / STATE

3 Data types

Match schema

FIELD / STATE

4 Schedule

Periodic reevaluation

FIELD / STATE

DECISION RULE

Configuration is a contract: names, values, scope and resulting state must all agree.

© 2026 Tertiary Infotech Academy Pte Ltd

Exit code — control contract



BOUNDARY · Discovery script

STATE **Exit code**

0 for successful discovery

RISK **Invalid JSON**

Validate serialization

PROOF **Local script output**


Valid JSON

CONTROL READING

The Exit code state is valid only when Discovery script produces Local script output; Invalid JSON requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Output — control contract

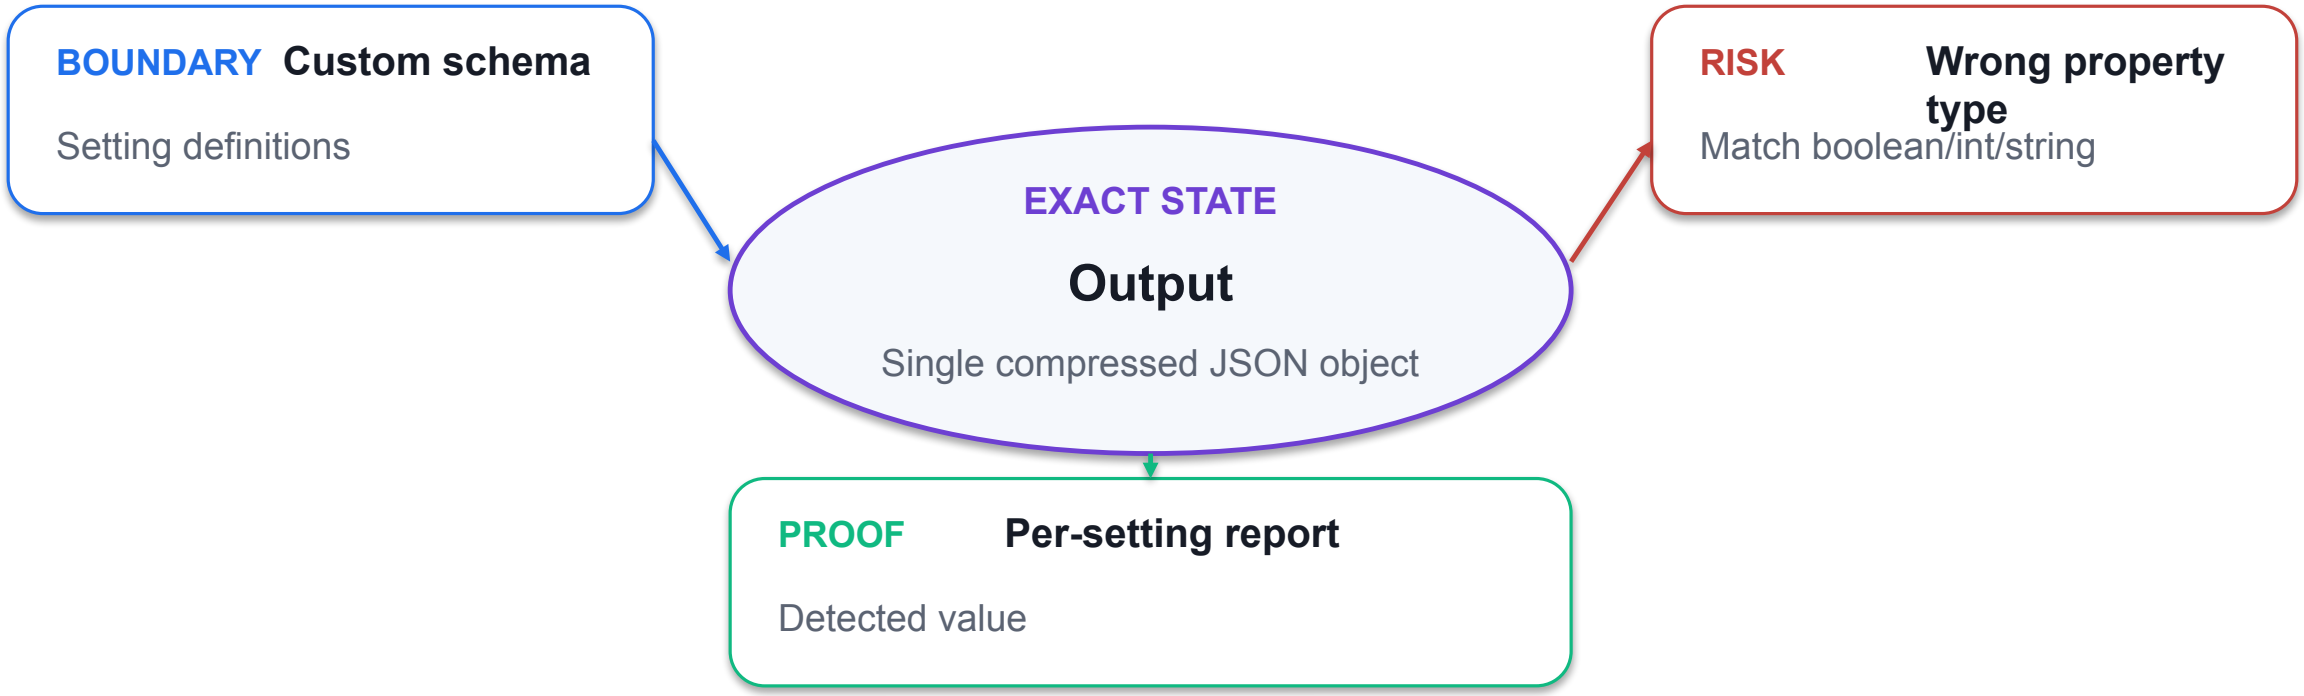

CONTROL READING

The Output state is valid only when Custom schema produces Per-setting report; Wrong property type requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Data types — control contract

1

BOUNDARY Compliance engine

Compare values

2

EXACT STATE Data types

Match schema

3

CONTROL RISK Script timeout

Keep discovery bounded

4

PROOF Compliance state

Expected result

CONTROL READING

The Data types state is valid only when Compliance engine produces Compliance state; Script timeout requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Schedule — control contract

1	BOUNDARY	Device status	Per-setting result
2	EXACT STATE	Schedule	Periodic reevaluation
3	CONTROL RISK	Sensitive data	Do not emit secrets
4	PROOF	Remediation ticket	Closed with proof

CONTROL READING

The Schedule state is valid only when Device status produces Remediation ticket; Sensitive data requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Extend compliance with custom scripts — failure and recovery

1 Invalid JSON

Validate serialization

DIAGNOSE → RECOVER

2 Wrong property type

Match boolean/int/string

DIAGNOSE → RECOVER

3 Script timeout

Keep discovery bounded

DIAGNOSE → RECOVER

4 Sensitive data

Do not emit secrets

DIAGNOSE → RECOVER

DECISION RULE

Treat the symptom as a pointer to a failed stage; collect evidence before changing policy.

© 2026 Tertiary Infotech Academy Pte Ltd

Invalid JSON — diagnostic trace


1	SIGNAL	**Invalid JSON**
2	BOUNDARY	Custom schema
3	SUSPECT STATE	Exit code
4	RECOVERY	Validate serialization
5	ACCEPTANCE	**Local script output**

EVIDENCE THRESHOLD

Accept the recovery only when Local script output shows Valid JSON; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Wrong property type — diagnostic trace

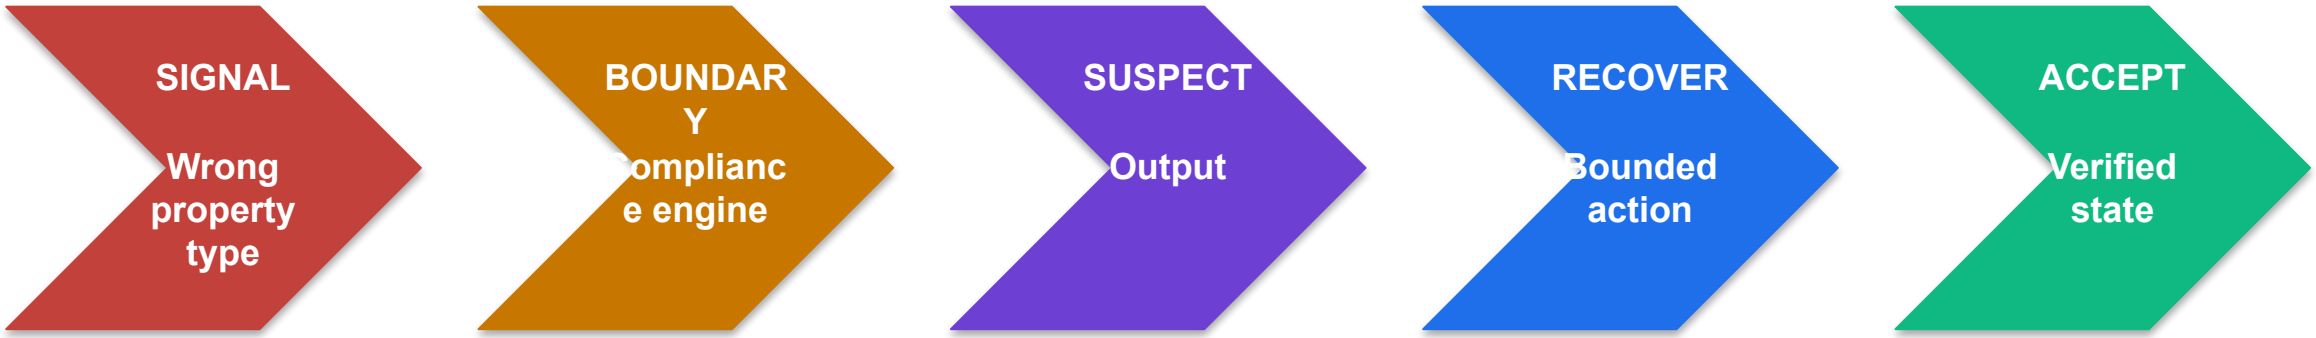


RECOVERY ACTION	Match boolean/int/string
ACCEPTANCE PROOF	Detected value

EVIDENCE THRESHOLD

Accept the recovery only when Per-setting report shows Detected value; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Script timeout — diagnostic trace

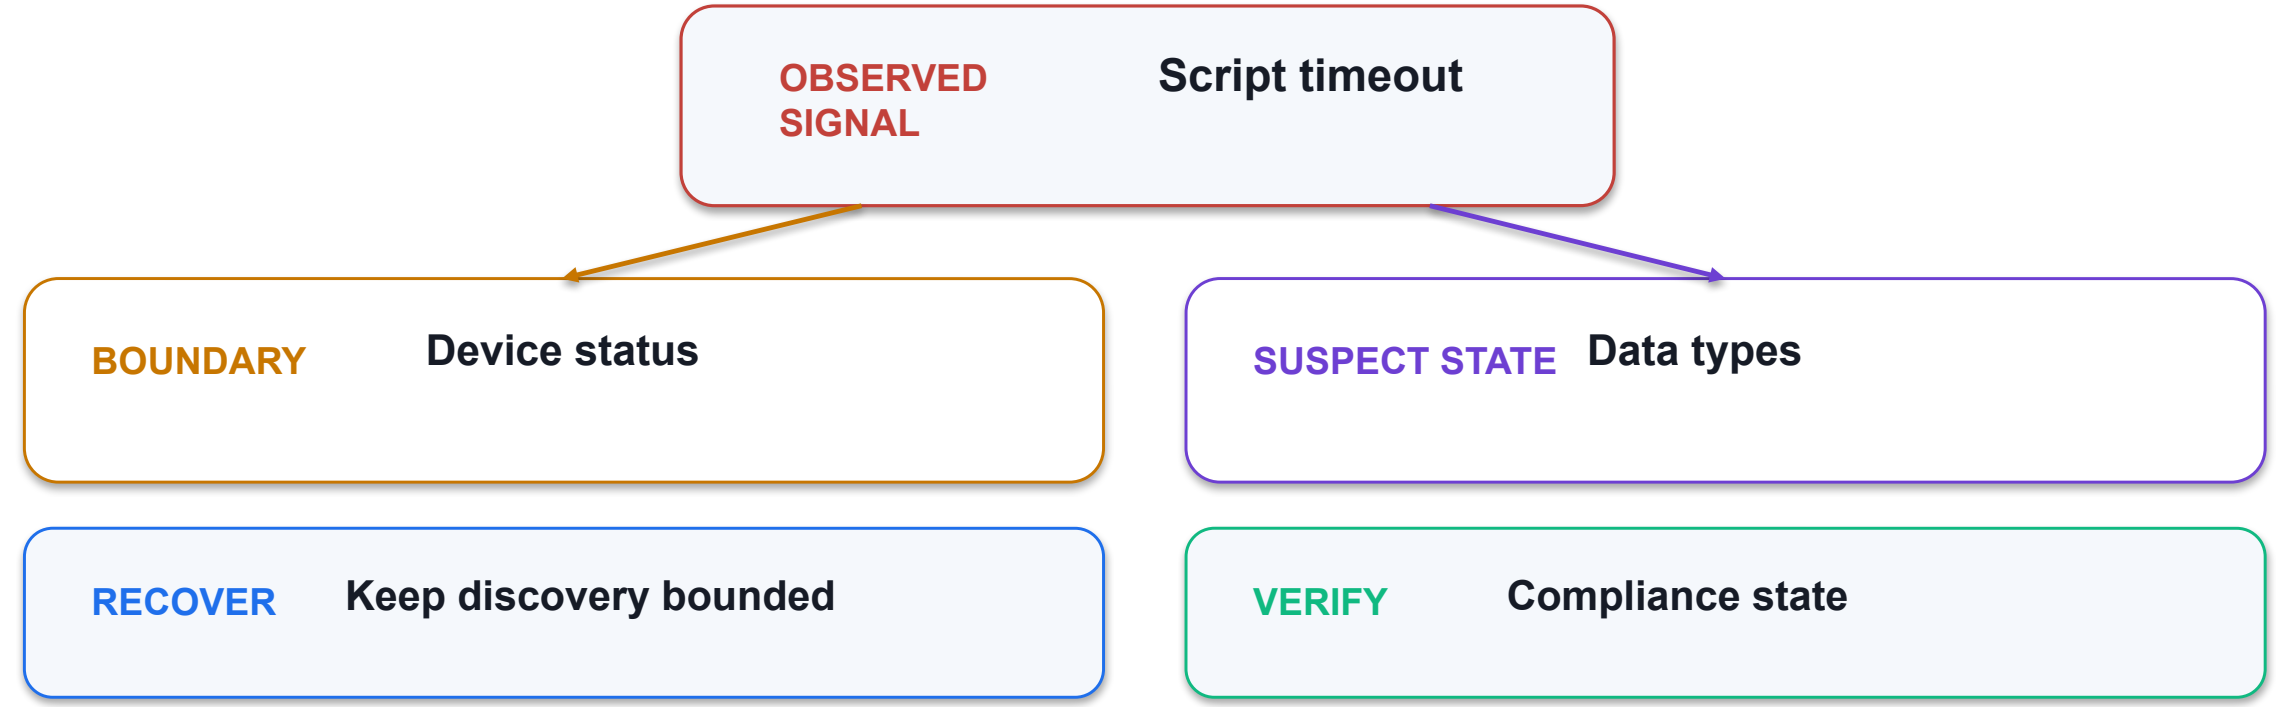

EVIDENCE THRESHOLD

Accept the recovery only when Compliance state shows Expected result; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Sensitive data — diagnostic trace



BOUNDARY · Remediation | SUSPECT · Schedule

SIGNAL	Sensitive data
RECOVERY	Do not emit secrets
PROOF	Remediation ticket

EVIDENCE THRESHOLD

Accept the recovery only when Remediation ticket shows Closed with proof; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Extend compliance with custom scripts — verification evidence

✓ **Local script output**	Valid JSON
✓ **Per-setting report**	Detected value
✓ **Compliance state**	Expected result
✓ **Remediation ticket**	Closed with proof

LAB 9

Evidence standard

Capture the configured state, the observed result, the timestamp or correlation ID, and the interpretation.


PASS = REPRODUCIBLE

PRACTICE BRIDGE

Full click paths, commands, expected outputs and troubleshooting are in the Learner Guide and the individual lab folder.

© 2026 Tertiary Infotech Academy Pte Ltd

Operate Security Copilot agents responsibly — mechanism

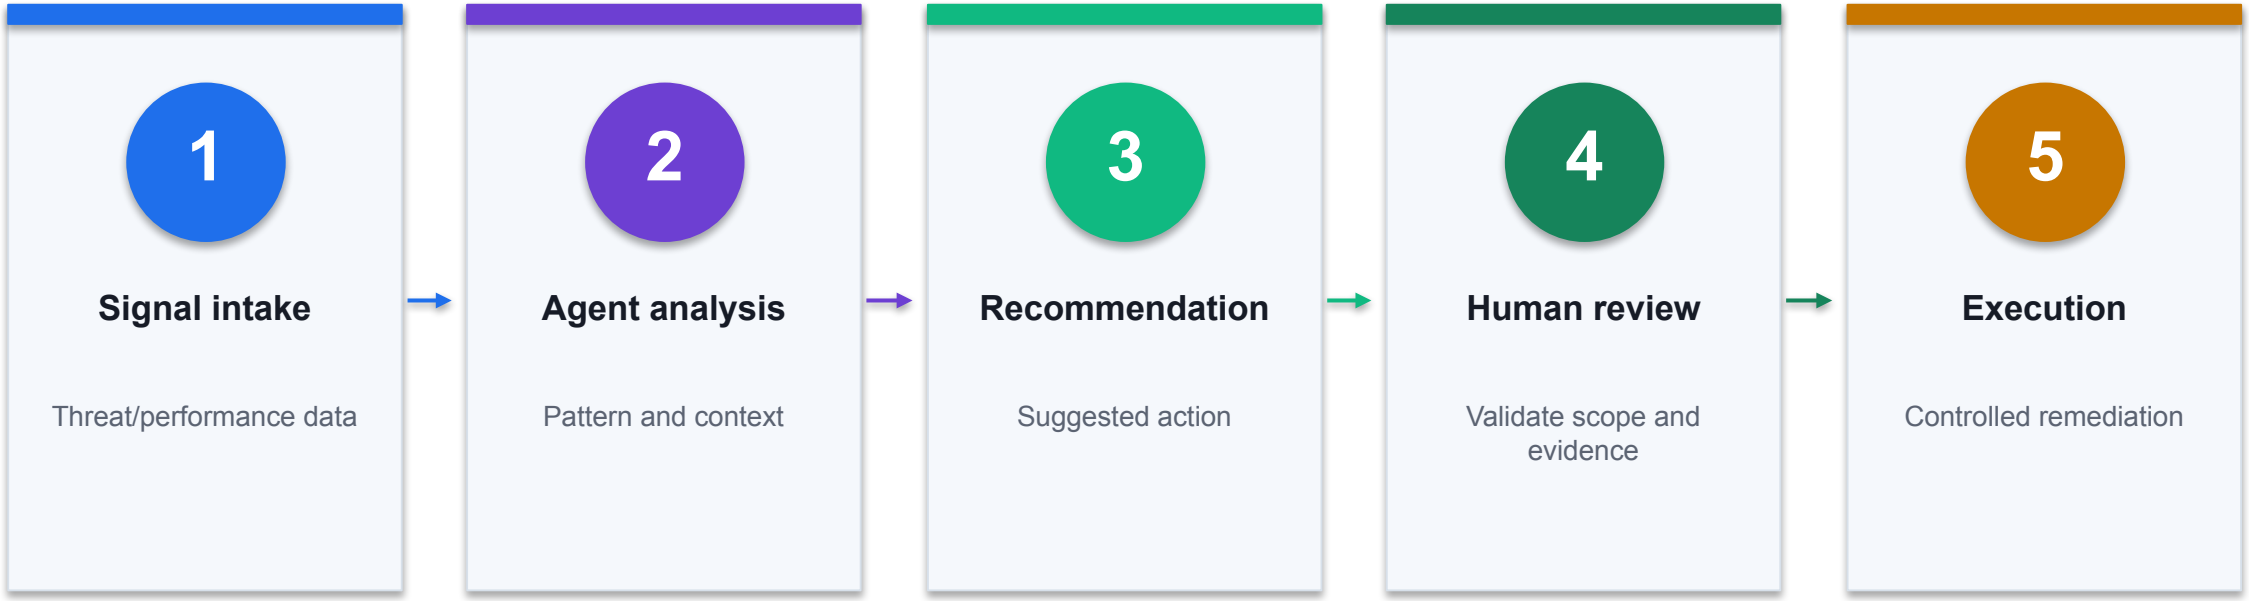

CONTROL POINT

Inspect the evidence at every transition; the first missing state is the most useful troubleshooting boundary. Lab 10 carries the full procedure.

© 2026 Tertiary Infotech Academy Pte Ltd

Operate Security Copilot agents responsibly — exact contract

1 Grounding

Tenant telemetry

FIELD / STATE

2 Recommendation

Not automatic authority

FIELD / STATE

3 Review

Check affected devices and blast radius

FIELD / STATE

4 Audit

Record decision and outcome

FIELD / STATE

DECISION RULE

Configuration is a contract: names, values, scope and resulting state must all agree.

© 2026 Tertiary Infotech Academy Pte Ltd

Grounding — control contract



BOUNDARY · Signal intake

STATE **Grounding**

Tenant telemetry

RISK **Hallucinated cause**

Verify against raw evidence

PROOF **Source evidence**


Linked telemetry

CONTROL READING

The Grounding state is valid only when Signal intake produces Source evidence; Hallucinated cause requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Recommendation — control contract

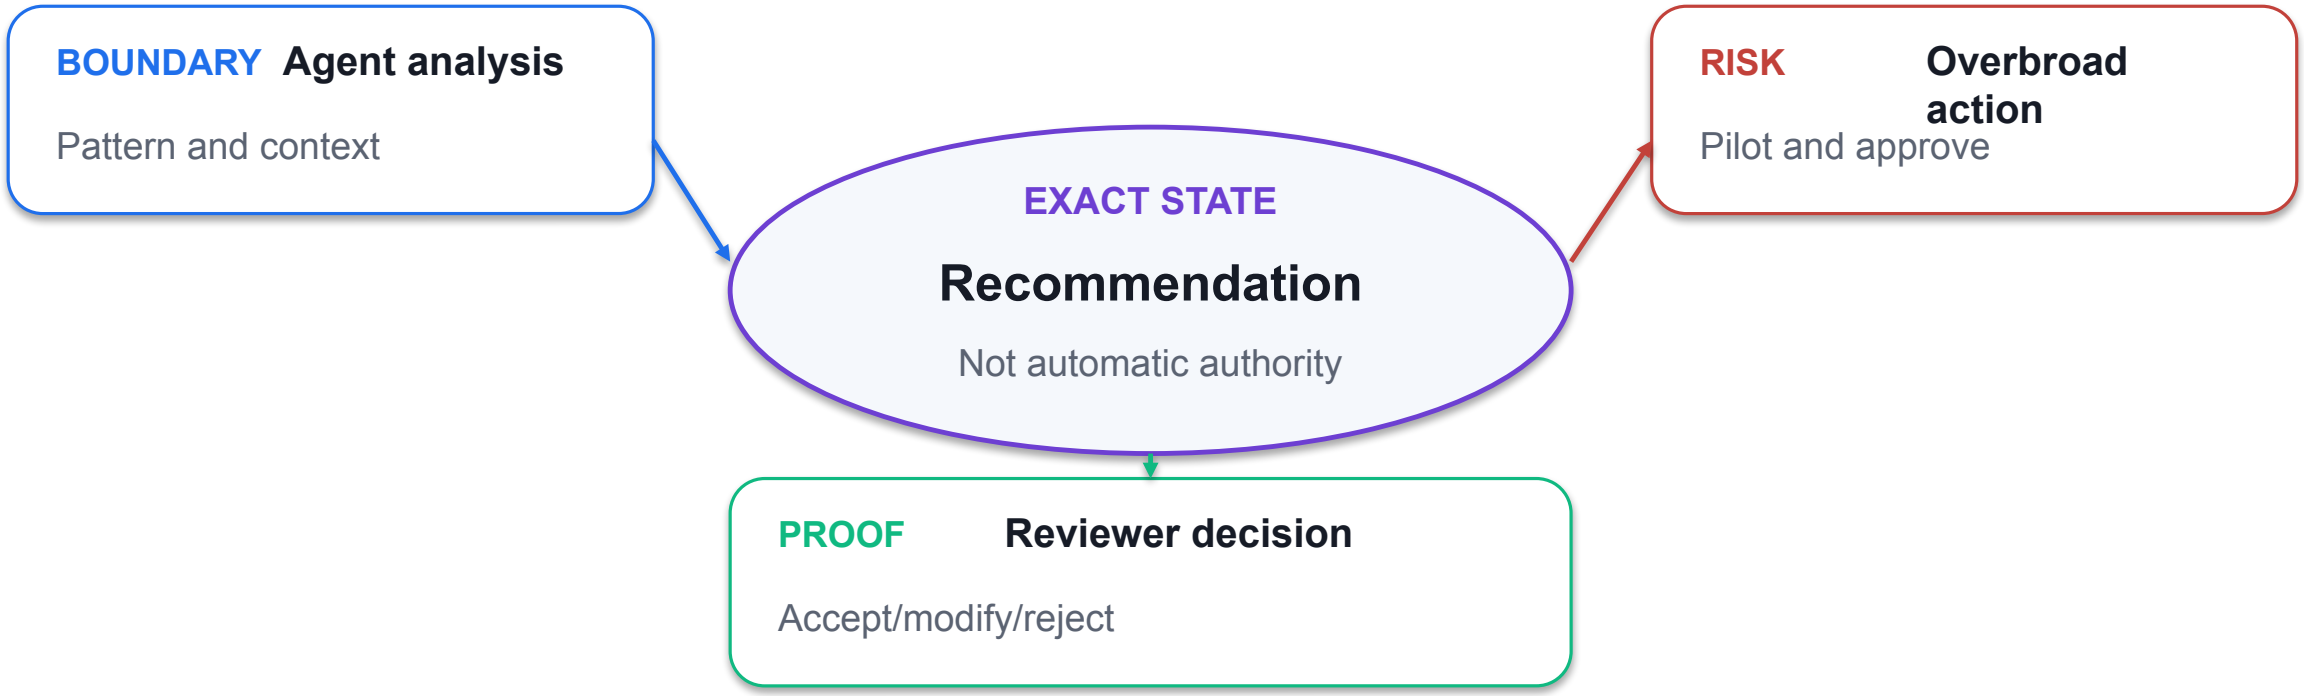

CONTROL READING

The Recommendation state is valid only when Agent analysis produces Reviewer decision; Overbroad action requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Review — control contract

1

BOUNDARY **Recommendation**

Suggested action

2

EXACT STATE **Review**

Check affected devices and blast radius

3

CONTROL RISK **Sensitive prompt**

Apply data governance

4

PROOF **Change record**

Approved scope

CONTROL READING

The Review state is valid only when Recommendation produces Change record; Sensitive prompt requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Audit — control contract

1	BOUNDARY	Human review	Validate scope and evidence
2	EXACT STATE	Audit	Record decision and outcome
3	CONTROL RISK	Agent unavailable	Maintain manual runbook
4	PROOF	Outcome metric	Issue resolved without regression

CONTROL READING

The Audit state is valid only when Human review produces Outcome metric; Agent unavailable requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Operate Security Copilot agents responsibly — failure and recovery

1 Hallucinated cause

Verify against raw evidence

DIAGNOSE → RECOVER

2 Overbroad action

Pilot and approve

DIAGNOSE → RECOVER

3 Sensitive prompt

Apply data governance

DIAGNOSE → RECOVER

4 Agent unavailable

Maintain manual runbook

DIAGNOSE → RECOVER

DECISION RULE

Treat the symptom as a pointer to a failed stage; collect evidence before changing policy.

© 2026 Tertiary Infotech Academy Pte Ltd

Hallucinated cause — diagnostic trace


1	SIGNAL	**Hallucinated cause**
2	BOUNDARY	Agent analysis
3	SUSPECT STATE	Grounding
4	RECOVERY	Verify against raw evidence
5	ACCEPTANCE	**Source evidence**

EVIDENCE THRESHOLD

Accept the recovery only when Source evidence shows Linked telemetry; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Overbroad action — diagnostic trace

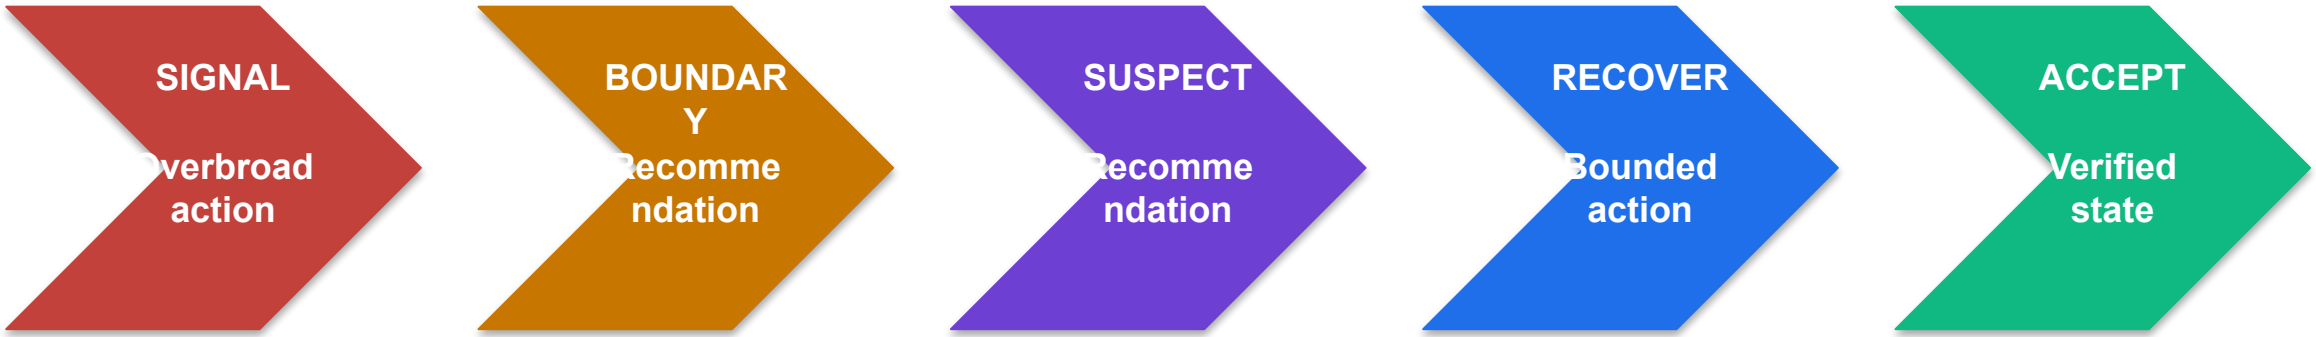

RECOVERY ACTION	Pilot and approve
ACCEPTANCE PROOF	Accept/modify/reject

EVIDENCE THRESHOLD

Accept the recovery only when Reviewer decision shows Accept/modify/reject; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Sensitive prompt — diagnostic trace



EVIDENCE THRESHOLD

Accept the recovery only when Change record shows Approved scope; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Agent unavailable — diagnostic trace



BOUNDARY · Execution | SUSPECT · Audit

SIGNAL Agent unavailable

RECOVERY Maintain manual runbook

PROOF Outcome metric

EVIDENCE THRESHOLD

Accept the recovery only when Outcome metric shows Issue resolved without regression; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Operate Security Copilot agents responsibly — verification evidence

Source evidence	Linked telemetry
Reviewer decision	Accept/modify/reject
Change record	Approved scope
Outcome metric	Issue resolved without regression

LAB 10

Evidence standard

Capture the configured state, the observed result, the timestamp or correlation ID, and the interpretation.

PASS = REPRODUCIBLE

PRACTICE BRIDGE

Full click paths, commands, expected outputs and troubleshooting are in the Learner Guide and the individual lab folder.


© 2026 Tertiary Infotech Academy Pte Ltd

DAY 5

Tea break

Return at the time announced by the trainer.

Build operational reports and dashboards — mechanism

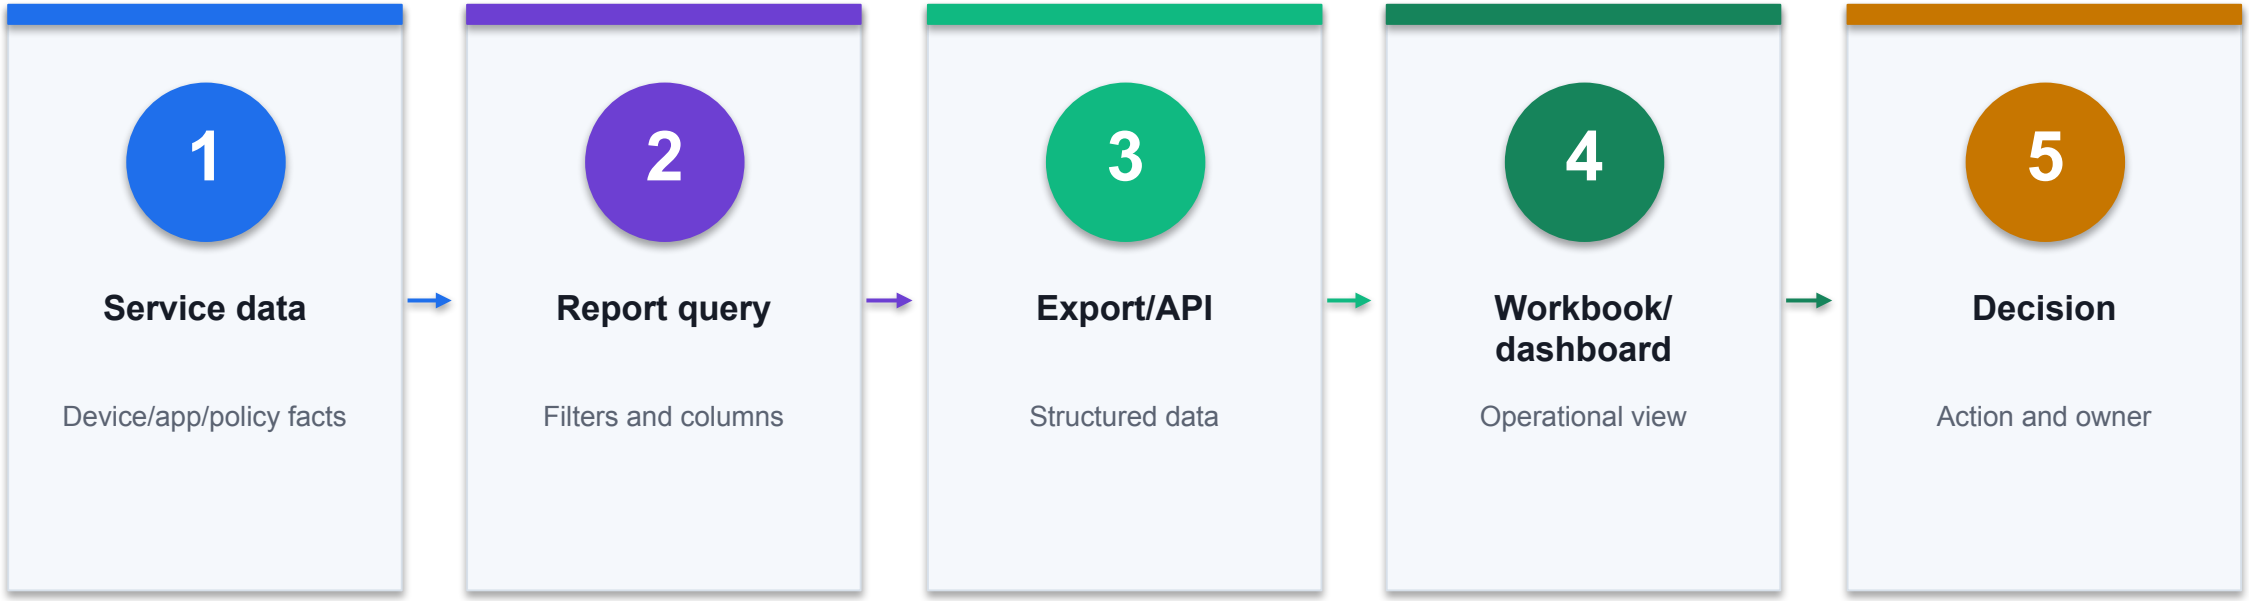

CONTROL POINT

Inspect the evidence at every transition; the first missing state is the most useful troubleshooting boundary. Lab 9 carries the full procedure.

© 2026 Tertiary Infotech Academy Pte Ltd

Build operational reports and dashboards — exact contract

1 Freshness

Record report timestamp

FIELD / STATE

2 Filter

Define cohort explicitly

FIELD / STATE

3 Export

CSV or Graph

FIELD / STATE

4 KPI

Numerator, denominator, threshold

FIELD / STATE

DECISION RULE

Configuration is a contract: names, values, scope and resulting state must all agree.

© 2026 Tertiary Infotech Academy Pte Ltd

Freshness — control contract



BOUNDARY · Service data

STATE **Freshness**

Record report timestamp

RISK **Misleading denominator**

Exclude not-applicable correctly

PROOF **Query definition**


Reproducible filter

CONTROL READING

The Freshness state is valid only when Service data produces Query definition; Misleading denominator requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Filter — control contract

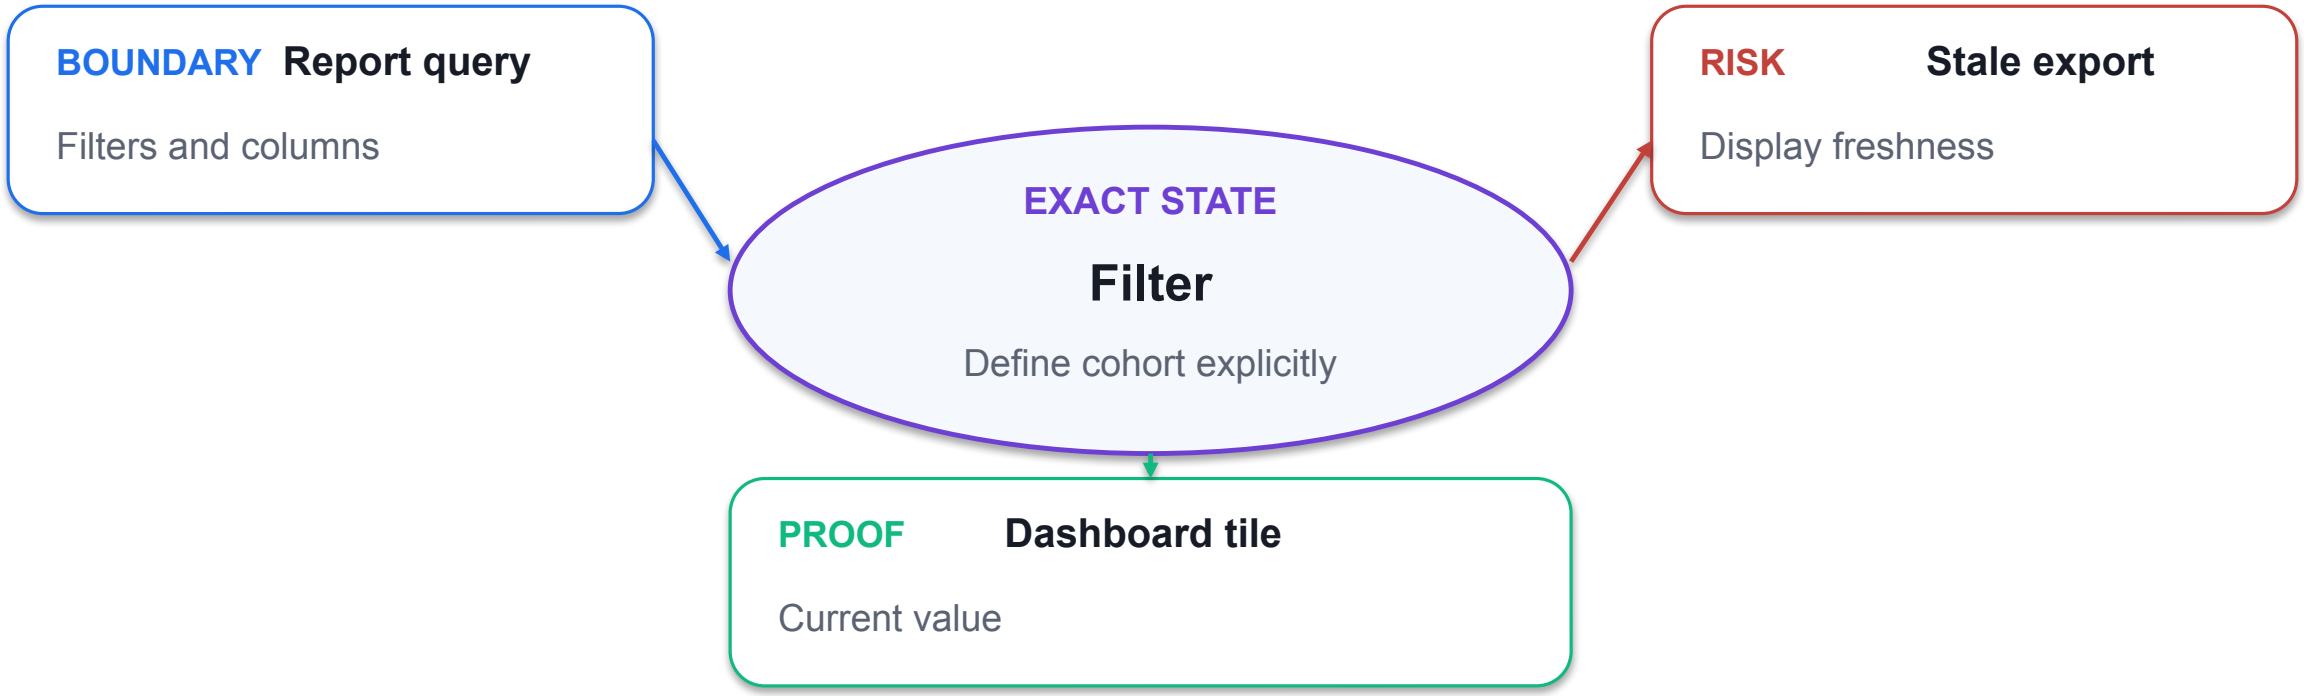

CONTROL READING

The Filter state is valid only when Report query produces Dashboard tile; Stale export requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Export — control contract

1

BOUNDARY Export/API

Structured data

2

EXACT STATE Export

CSV or Graph

3

CONTROL RISK Duplicate devices

Use stable device ID

4

PROOF Drill-through

Affected devices

CONTROL READING

The Export state is valid only when Export/API produces Drill-through; Duplicate devices requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

KPI — control contract

1	BOUNDARY	Workbook/dashboard	Operational view
2	EXACT STATE	KPI	Numerator, denominator, threshold
3	CONTROL RISK	Vanity metric	Tie KPI to action
4	PROOF	Action log	Owner and deadline

CONTROL READING

The KPI state is valid only when Workbook/dashboard produces Action log; Vanity metric requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Build operational reports and dashboards — failure and recovery

1 Misleading denominator

Exclude not-applicable correctly

DIAGNOSE → RECOVER

2 Stale export

Display freshness

DIAGNOSE → RECOVER

3 Duplicate devices

Use stable device ID

DIAGNOSE → RECOVER

4 Vanity metric

Tie KPI to action

DIAGNOSE → RECOVER

DECISION RULE

Treat the symptom as a pointer to a failed stage; collect evidence before changing policy.

© 2026 Tertiary Infotech Academy Pte Ltd

Misleading denominator — diagnostic trace


1	SIGNAL	**Misleading denominator**
2	BOUNDARY	Report query
3	SUSPECT STATE	Freshness
4	RECOVERY	Exclude not-applicable correctly
5	ACCEPTANCE	**Query definition**

EVIDENCE THRESHOLD

Accept the recovery only when Query definition shows Reproducible filter; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Stale export — diagnostic trace

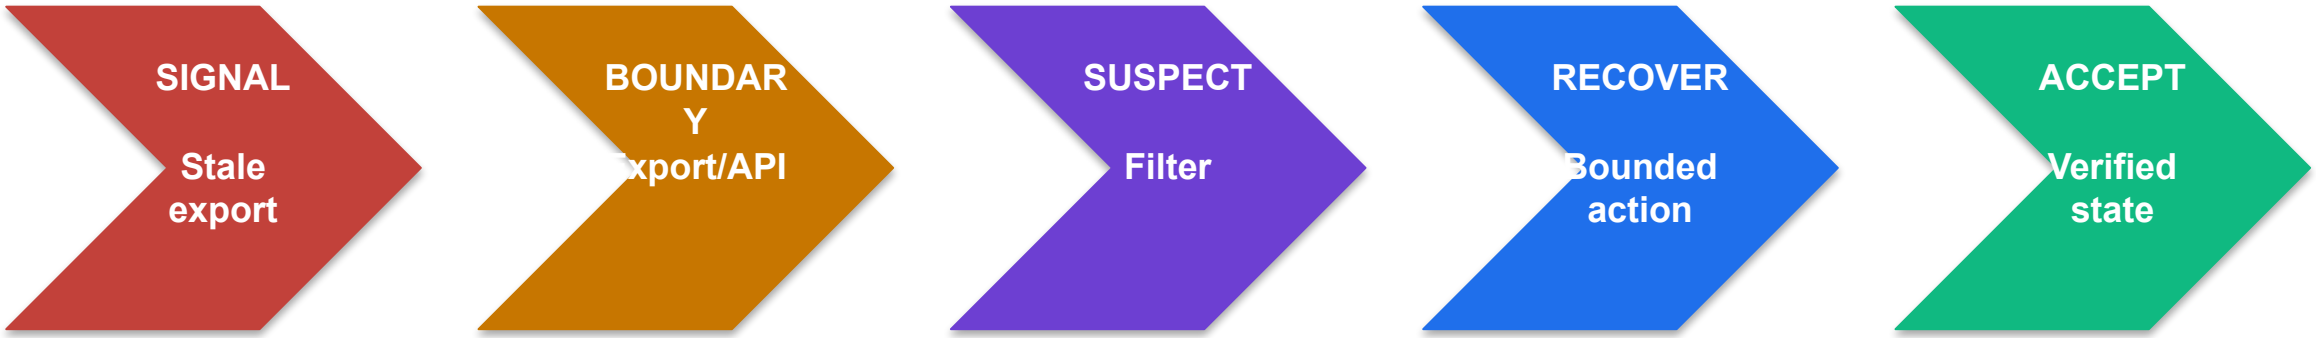


RECOVERY ACTION	Display freshness
ACCEPTANCE PROOF	Current value

EVIDENCE THRESHOLD

Accept the recovery only when Dashboard tile shows Current value; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Duplicate devices — diagnostic trace

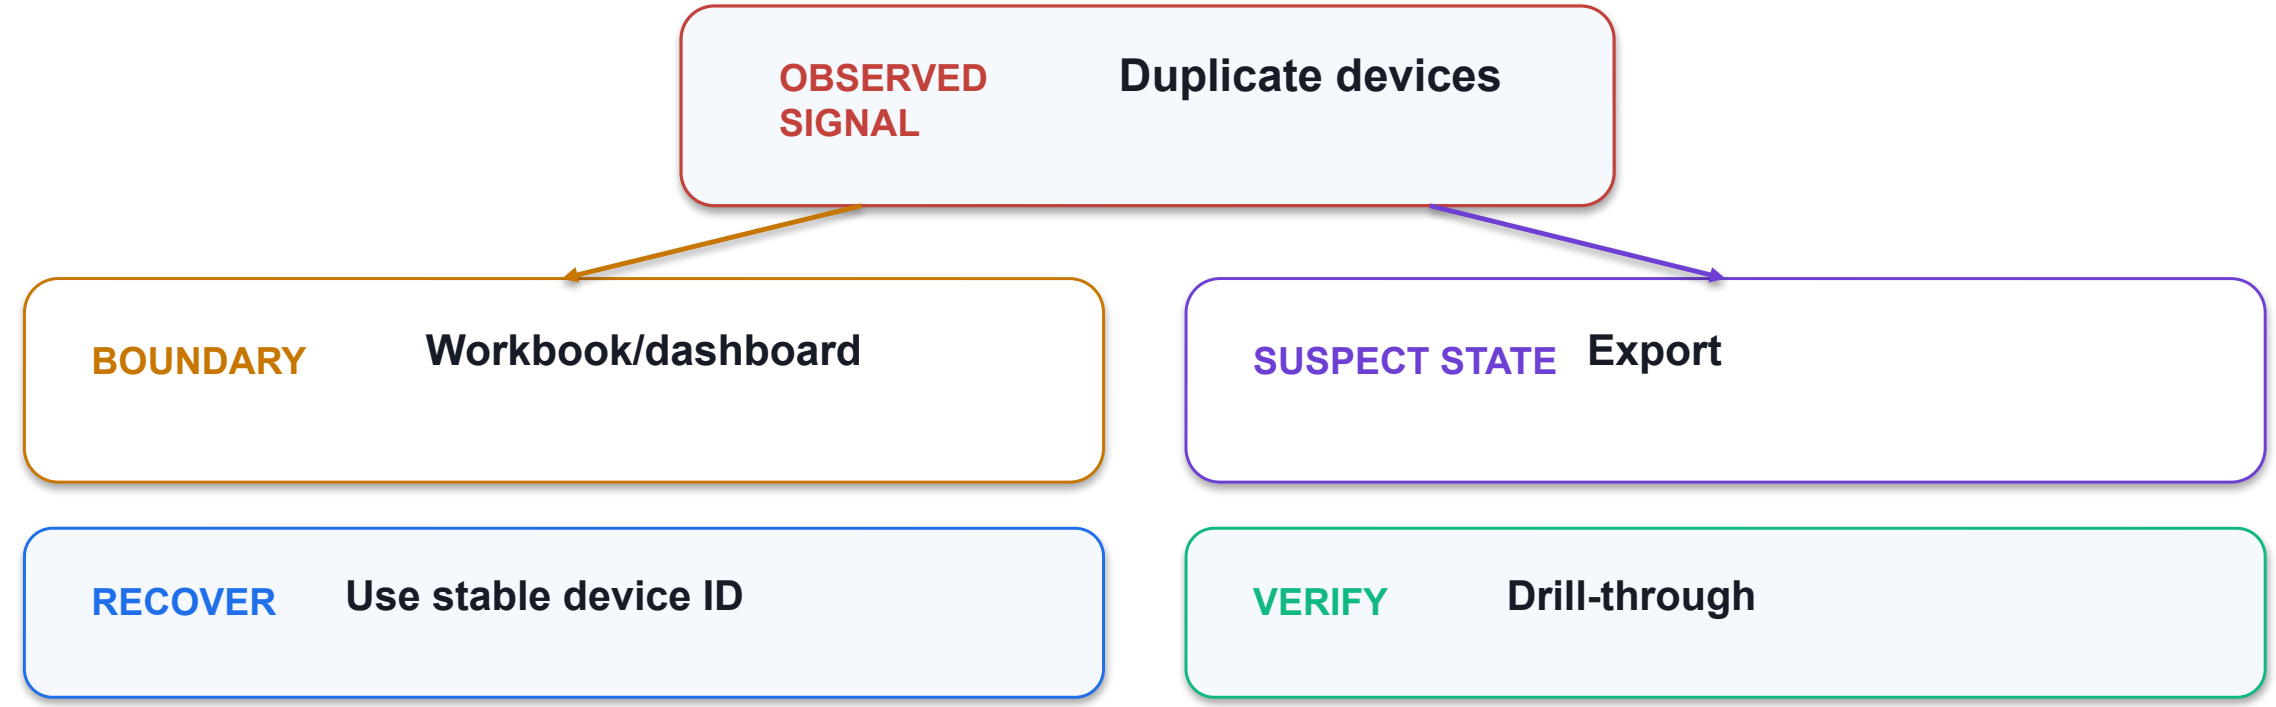

EVIDENCE THRESHOLD

Accept the recovery only when Drill-through shows Affected devices; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Vanity metric — diagnostic trace



BOUNDARY · Decision | SUSPECT · KPI

SIGNAL Vanity metric

RECOVERY Tie KPI to action

PROOF Action log

EVIDENCE THRESHOLD

Accept the recovery only when Action log shows Owner and deadline; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Build operational reports and dashboards — verification evidence

Query definition	Reproducible filter
Dashboard tile	Current value
Drill-through	Affected devices
Action log	Owner and deadline

LAB 9

Evidence standard

Capture the configured state, the observed result, the timestamp or correlation ID, and the interpretation.


PASS = REPRODUCIBLE

PRACTICE BRIDGE

Full click paths, commands, expected outputs and troubleshooting are in the Learner Guide and the individual lab folder.

© 2026 Tertiary Infotech Academy Pte Ltd

Interpret Endpoint Analytics and reliability — mechanism

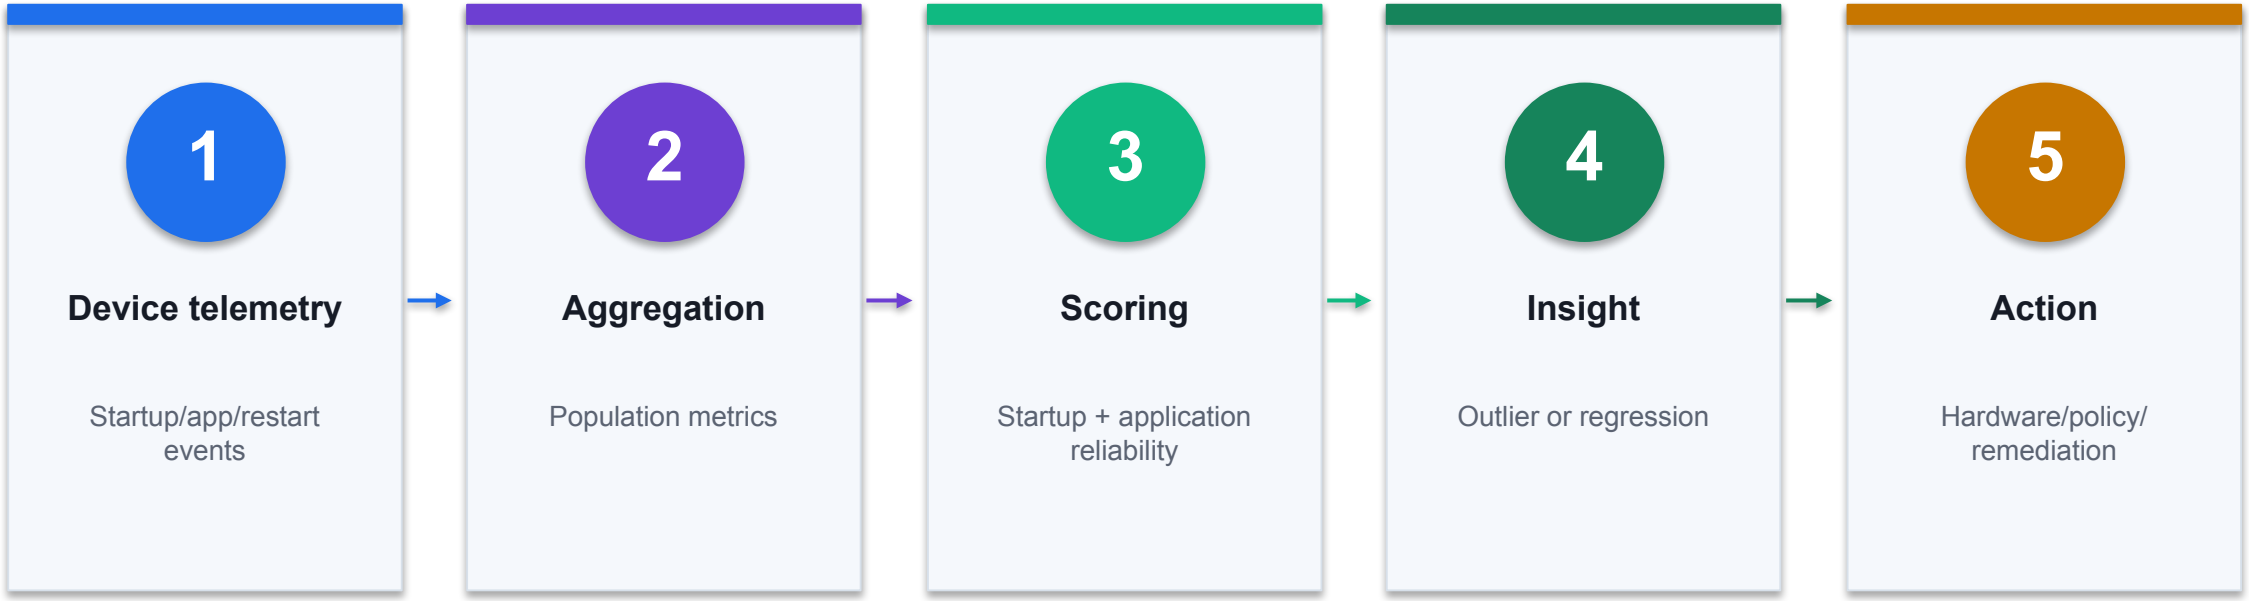

CONTROL POINT

Inspect the evidence at every transition; the first missing state is the most useful troubleshooting boundary. Lab 9 carries the full procedure.

© 2026 Tertiary Infotech Academy Pte Ltd

Interpret Endpoint Analytics and reliability — exact contract

1 Startup score

Boot + sign-in experience

FIELD / STATE

2 App reliability

Crashes and hangs

FIELD / STATE

3 Restart frequency

Operational stability

FIELD / STATE

4 Baseline

Compare cohort and time


FIELD / STATE

DECISION RULE

Configuration is a contract: names, values, scope and resulting state must all agree.

© 2026 Tertiary Infotech Academy Pte Ltd

Startup score — control contract

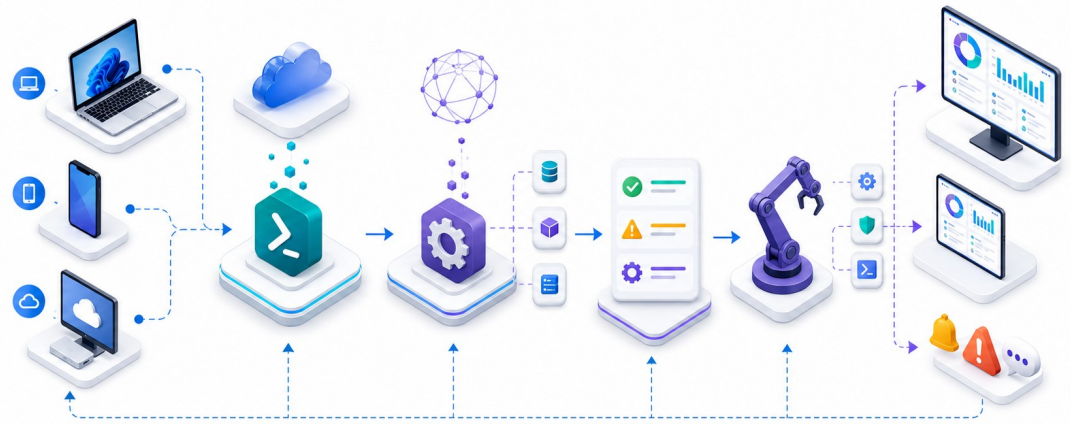

BOUNDARY · Device telemetry

STATE **Startup score**

Boot + sign-in experience

RISK **Low sample**

Avoid overinterpreting

PROOF **Score trend**


Before/after

CONTROL READING

The Startup score state is valid only when Device telemetry produces Score trend; Low sample requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

App reliability — control contract

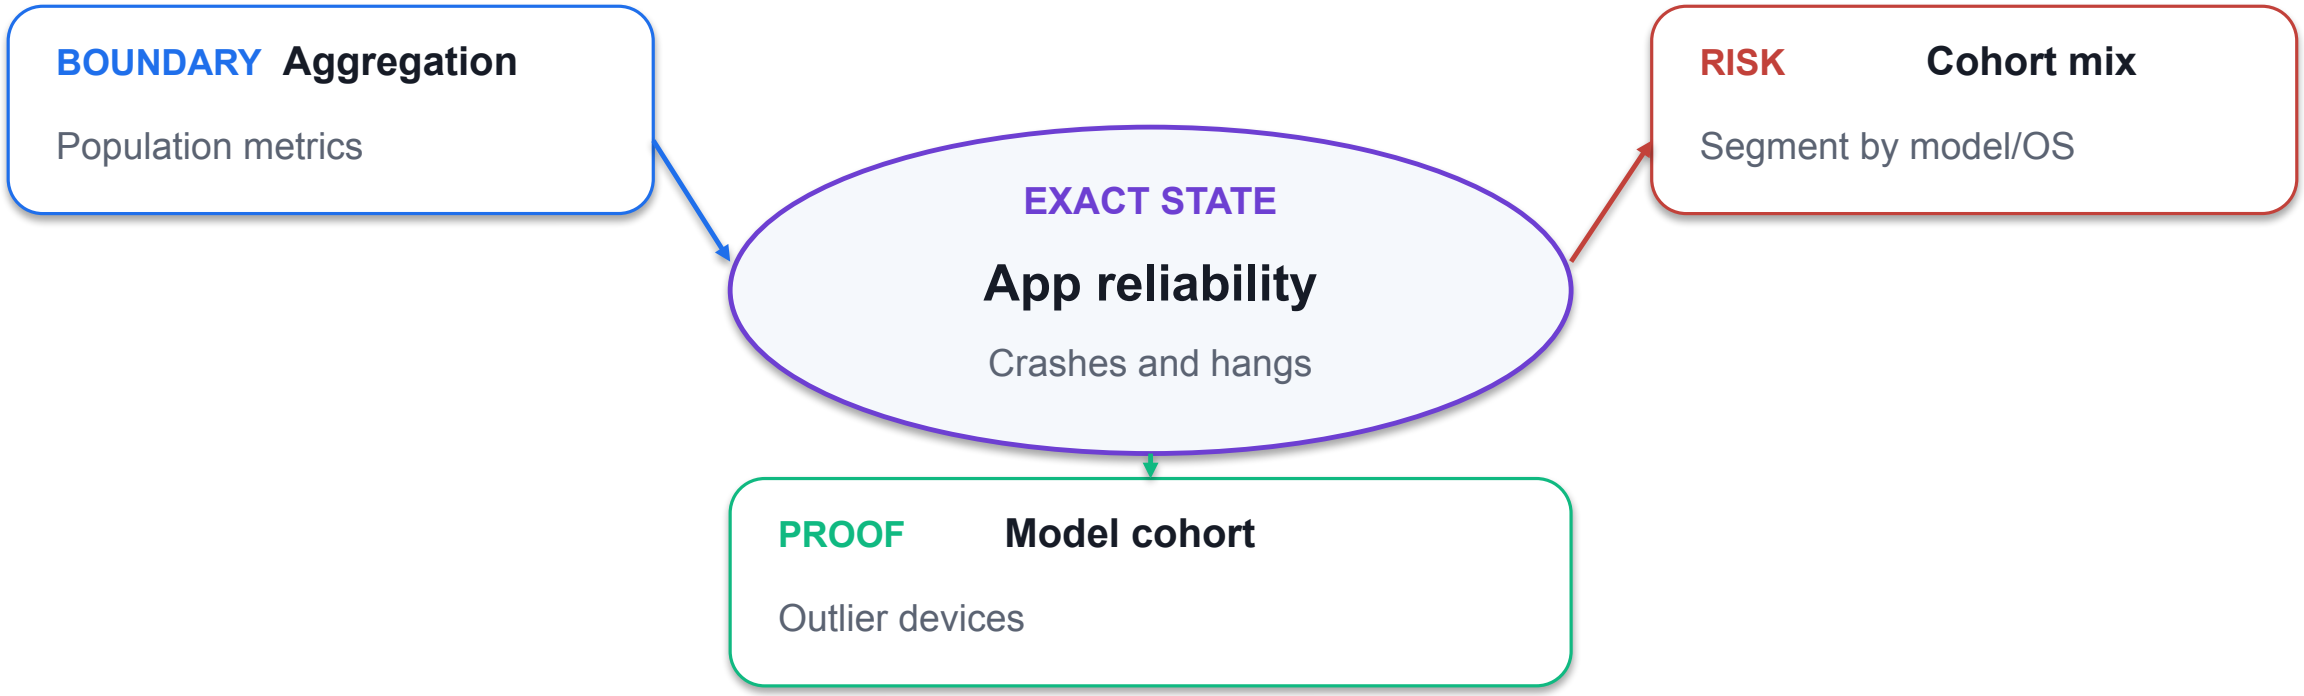

CONTROL READING

The App reliability state is valid only when Aggregation produces Model cohort; Cohort mix requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Restart frequency — control contract

1

BOUNDARY **Scoring**

Startup + application reliability

2

EXACT STATE **Restart frequency**

Operational stability

3

CONTROL RISK **Score improved but tickets rise**

Use multiple signals

4

PROOF **App report**

Top regressions

CONTROL READING

The Restart frequency state is valid only when Scoring produces App report; Score improved but tickets rise requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Baseline — control contract

1	BOUNDARY	Insight	Outlier or regression
2	EXACT STATE	Baseline	Compare cohort and time
3	CONTROL RISK	Telemetry gap	Check prerequisites
4	PROOF	Validation	Reduced incident rate

CONTROL READING

The Baseline state is valid only when Insight produces Validation; Telemetry gap requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Interpret Endpoint Analytics and reliability — failure and recovery

1 Low sample

Avoid overinterpreting

DIAGNOSE → RECOVER

2 Cohort mix

Segment by model/OS

DIAGNOSE → RECOVER

3 Score improved but tickets rise

Use multiple signals

DIAGNOSE → RECOVER

4 Telemetry gap

Check prerequisites

DIAGNOSE → RECOVER

DECISION RULE

Treat the symptom as a pointer to a failed stage; collect evidence before changing policy.

© 2026 Tertiary Infotech Academy Pte Ltd

Low sample — diagnostic trace

1	SIGNAL	**Low sample**
2	BOUNDARY	Aggregation
3	SUSPECT STATE	Startup score
4	RECOVERY	Avoid overinterpreting
5	ACCEPTANCE	**Score trend**

EVIDENCE THRESHOLD

Accept the recovery only when Score trend shows Before/after; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Cohort mix — diagnostic trace




RECOVERY ACTION	Segment by model/OS
ACCEPTANCE PROOF	Outlier devices

EVIDENCE THRESHOLD

Accept the recovery only when Model cohort shows Outlier devices; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Score improved but tickets rise — diagnostic trace

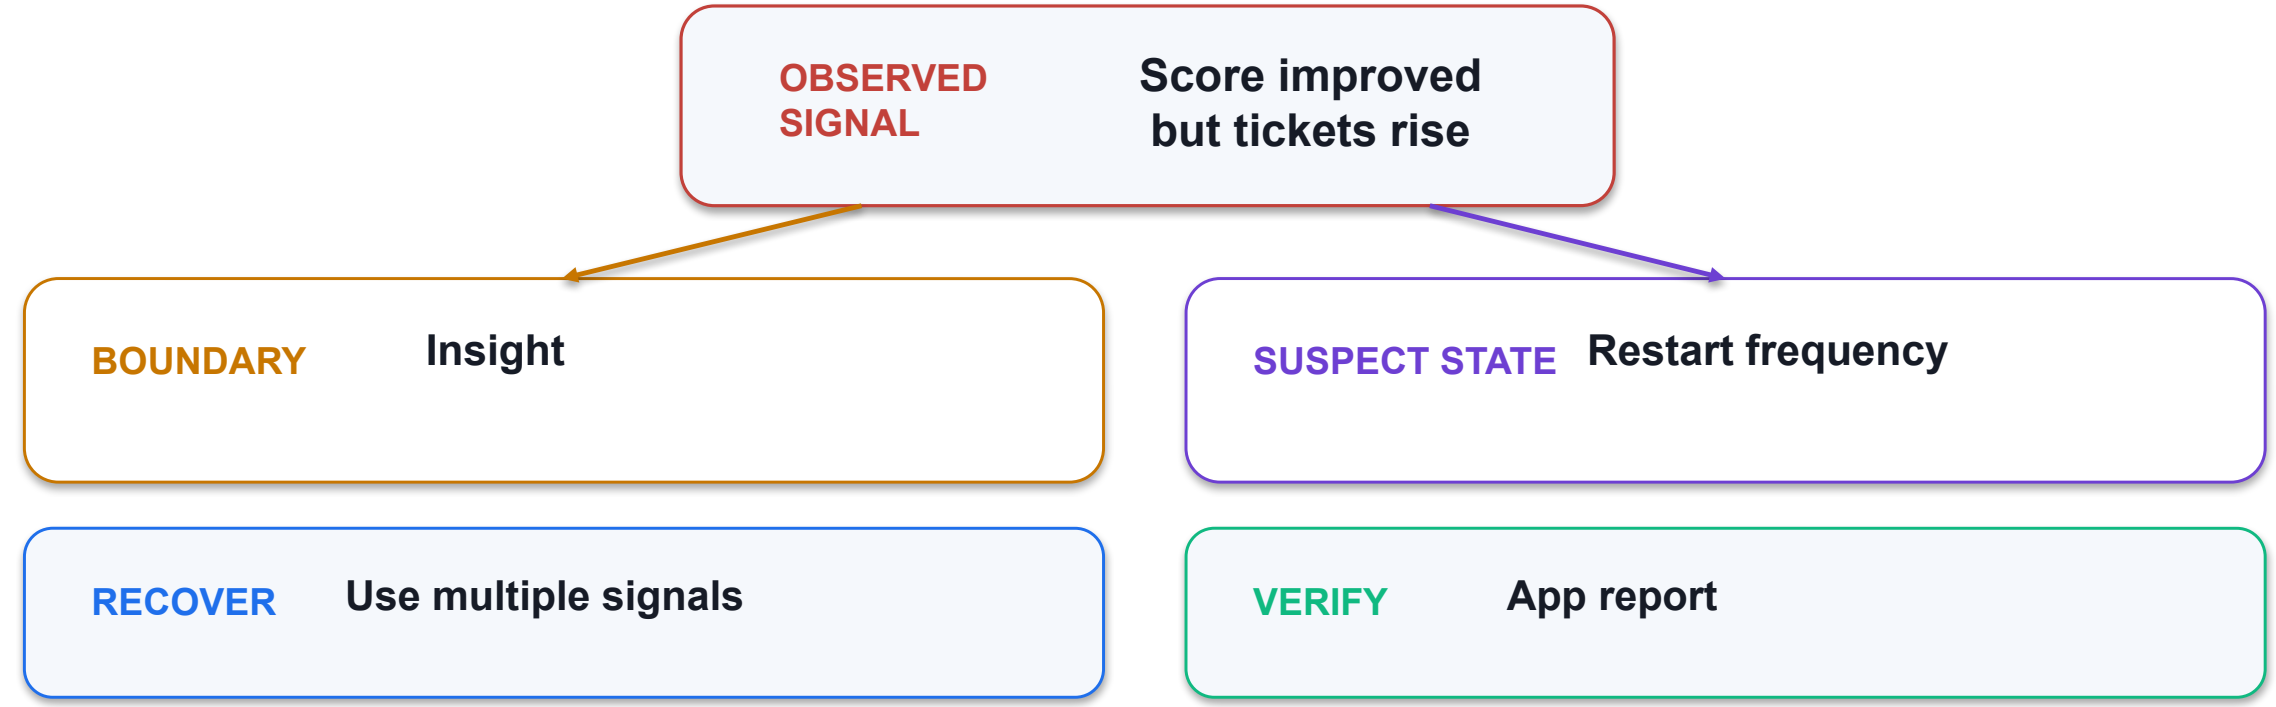

EVIDENCE THRESHOLD

Accept the recovery only when App report shows Top regressions; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Telemetry gap — diagnostic trace



BOUNDARY · Action | SUSPECT · Baseline

SIGNAL Telemetry gap

RECOVERY Check prerequisites

PROOF Validation

EVIDENCE THRESHOLD

Accept the recovery only when Validation shows Reduced incident rate; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Interpret Endpoint Analytics and reliability — verification evidence

✓ **Score trend**	Before/after
✓ **Model cohort**	Outlier devices
✓ **App report**	Top regressions
✓ **Validation**	Reduced incident rate

LAB 9

Evidence standard

Capture the configured state, the observed result, the timestamp or correlation ID, and the interpretation.

PASS = REPRODUCIBLE

PRACTICE BRIDGE

Full click paths, commands, expected outputs and troubleshooting are in the Learner Guide and the individual lab folder.


© 2026 Tertiary Infotech Academy Pte Ltd

DAY 5

Lunch break

Return at the time announced by the trainer.

Deploy proactive remediations safely — mechanism

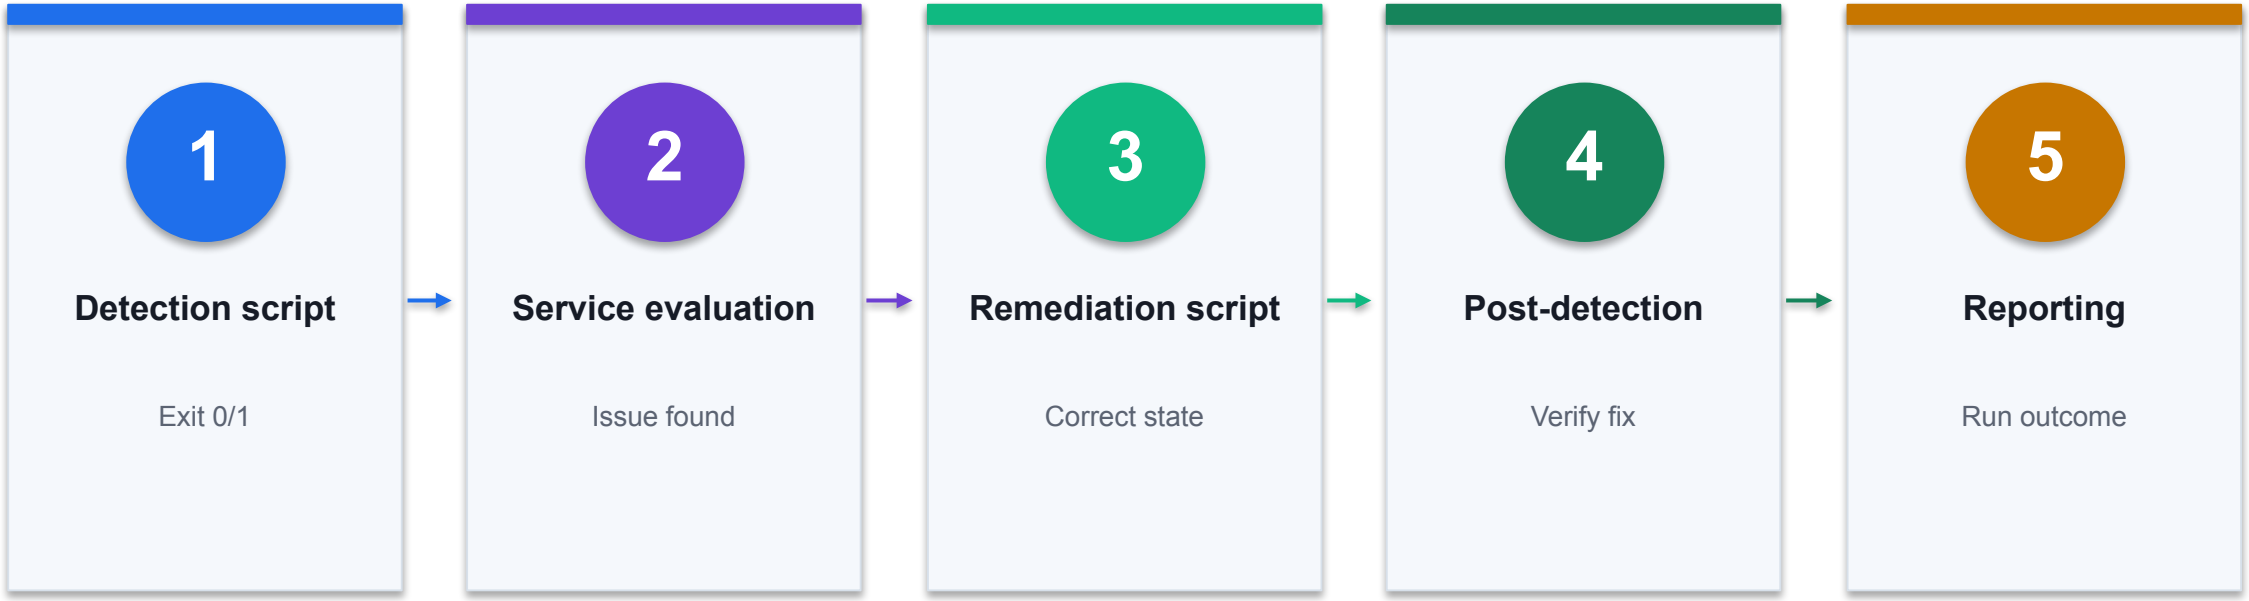

CONTROL POINT

Inspect the evidence at every transition; the first missing state is the most useful troubleshooting boundary. Lab 9 carries the full procedure.

© 2026 Tertiary Infotech Academy Pte Ltd

Deploy proactive remediations safely — exact contract

1 Detection

No change, evidence only

FIELD / STATE

2 Remediation

Idempotent and bounded

FIELD / STATE

3 Execution

System or user context

FIELD / STATE

4 Schedule

Operational need

FIELD / STATE

DECISION RULE

Configuration is a contract: names, values, scope and resulting state must all agree.

© 2026 Tertiary Infotech Academy Pte Ltd

Detection — control contract



BOUNDARY · Detection script

STATE **Detection**

No change, evidence only

RISK **Detection always fails**

Fix exit logic

PROOF **Pre-state**


Issue reproduced

CONTROL READING

The Detection state is valid only when Detection script produces Pre-state; Detection always fails requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Remediation — control contract

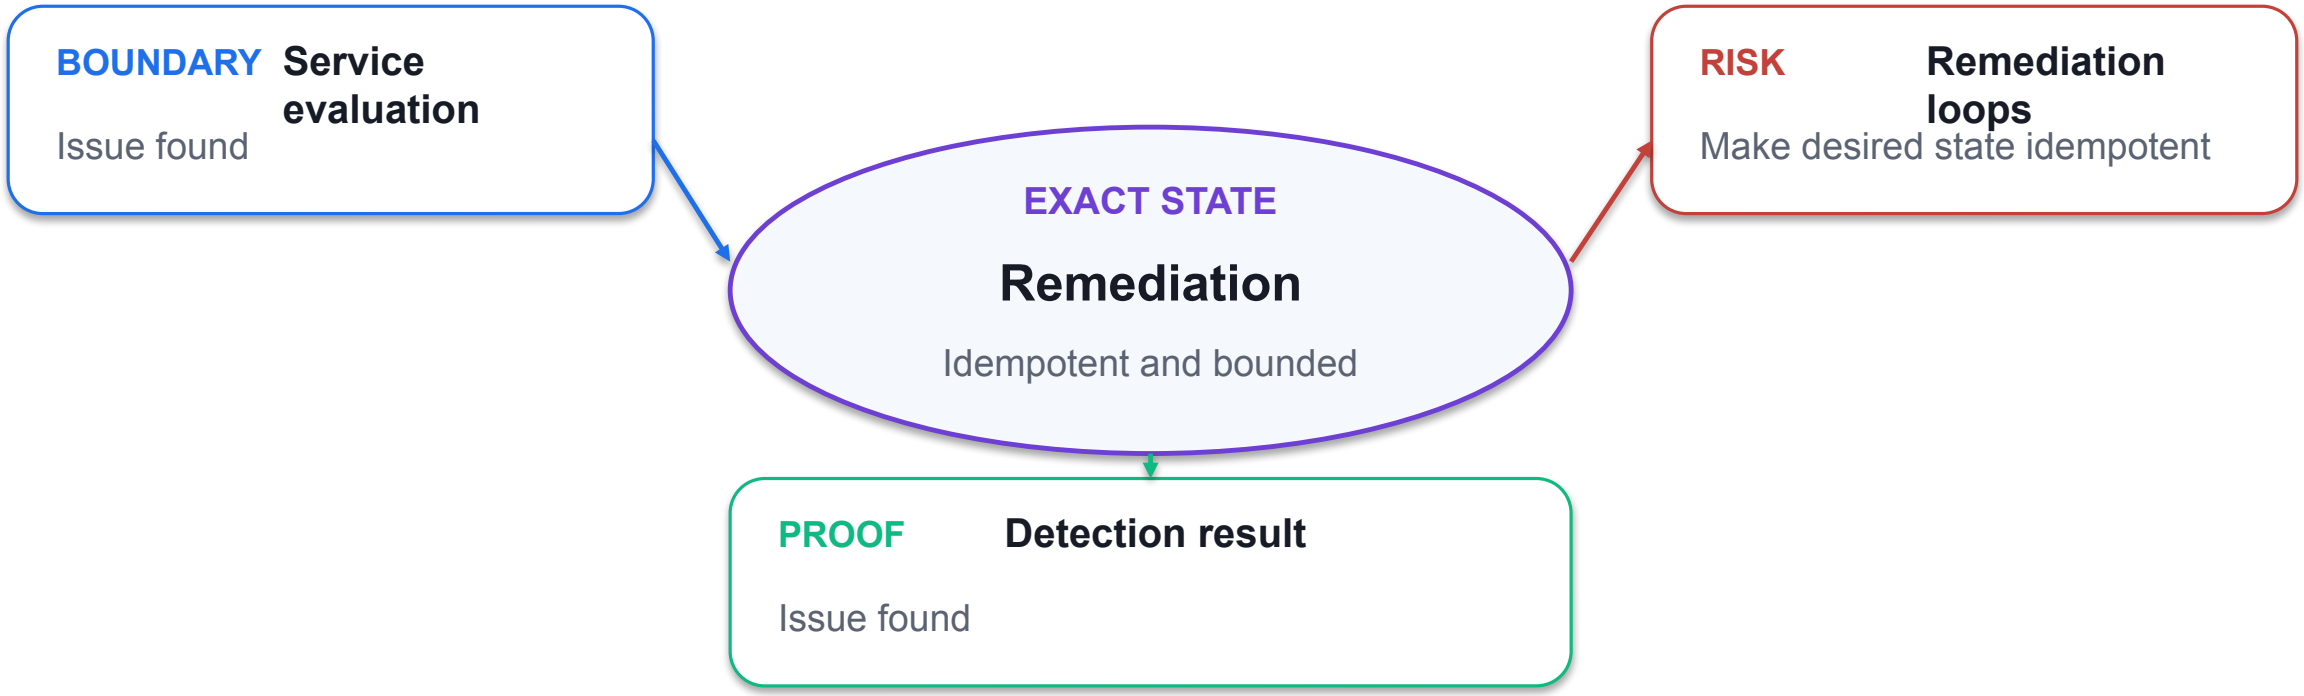

CONTROL READING

The Remediation state is valid only when Service evaluation produces Detection result; Remediation loops requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Execution — control contract

1

BOUNDARY **Remediation script**

Correct state

2

EXACT STATE **Execution**

System or user context

3

CONTROL RISK **32/64-bit mismatch**

Choose host setting

4

PROOF **Remediation log**

Change made

CONTROL READING

The Execution state is valid only when Remediation script produces Remediation log; 32/64-bit mismatch requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Schedule — control contract

1	BOUNDARY	Post-detection	Verify fix
2	EXACT STATE	Schedule	Operational need
3	CONTROL RISK	Large blast radius	Pilot and stage
4	PROOF	Post-state	Issue absent

CONTROL READING

The Schedule state is valid only when Post-detection produces Post-state; Large blast radius requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Deploy proactive remediations safely — failure and recovery

1 Detection always fails

Fix exit logic

DIAGNOSE → RECOVER

2 Remediation loops

Make desired state idempotent

DIAGNOSE → RECOVER

3 32/64-bit mismatch

Choose host setting

DIAGNOSE → RECOVER

4 Large blast radius

Pilot and stage

DIAGNOSE → RECOVER

DECISION RULE

Treat the symptom as a pointer to a failed stage; collect evidence before changing policy.

© 2026 Tertiary Infotech Academy Pte Ltd

Detection always fails — diagnostic trace


1	SIGNAL	**Detection always fails**
2	BOUNDARY	Service evaluation
3	SUSPECT STATE	Detection
4	RECOVERY	Fix exit logic
5	ACCEPTANCE	**Pre-state**

EVIDENCE THRESHOLD

Accept the recovery only when Pre-state shows Issue reproduced; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Remediation loops — diagnostic trace

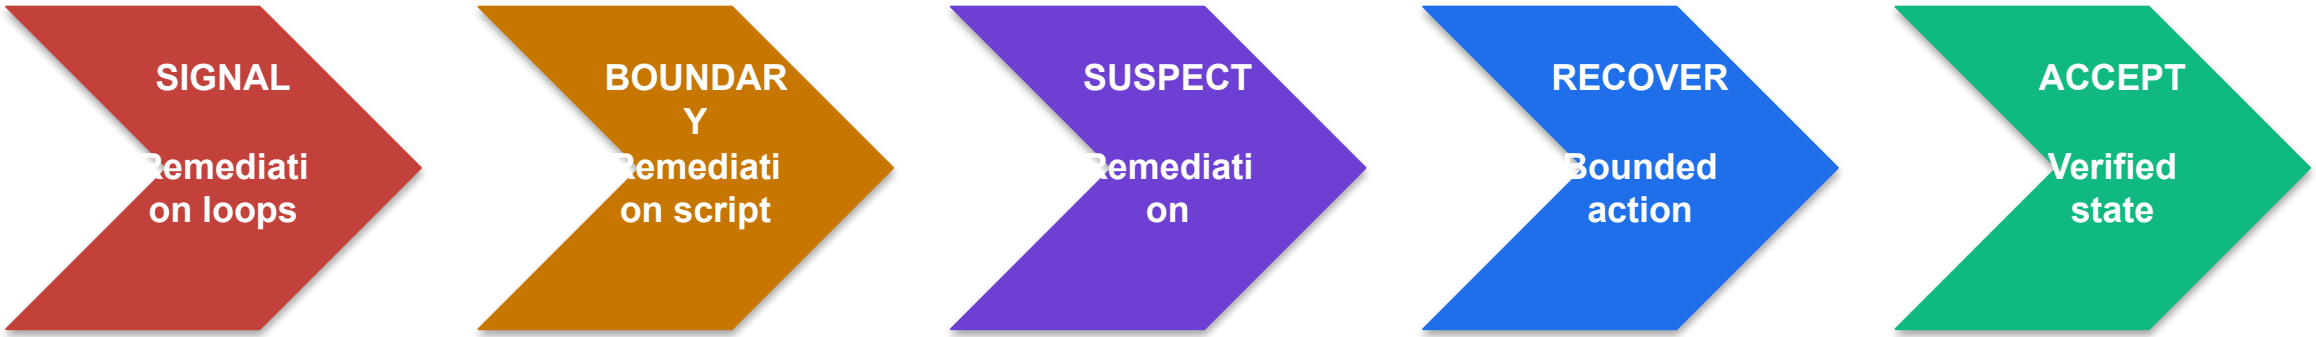


RECOVERY ACTION	Make desired state idempotent
ACCEPTANCE PROOF	Issue found

EVIDENCE THRESHOLD

Accept the recovery only when Detection result shows Issue found; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

32/64-bit mismatch — diagnostic trace

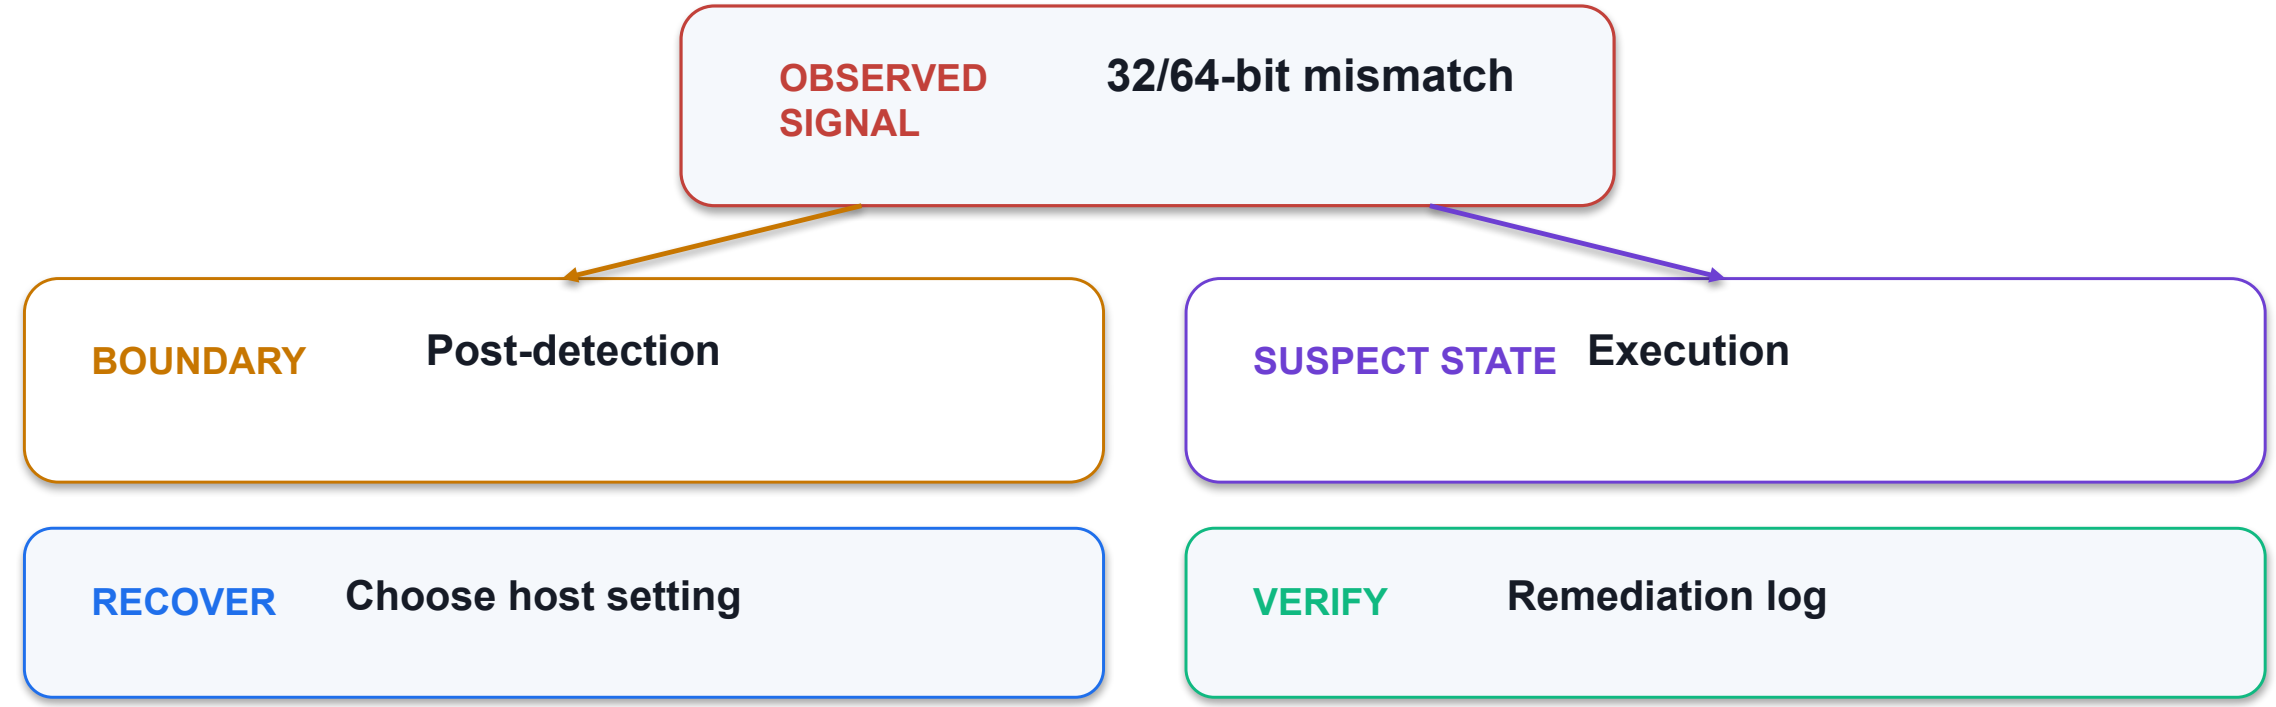

EVIDENCE THRESHOLD

Accept the recovery only when Remediation log shows Change made; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Large blast radius — diagnostic trace



BOUNDARY · Reporting | SUSPECT · Schedule

SIGNAL Large blast radius

RECOVERY Pilot and stage

PROOF Post-state

EVIDENCE THRESHOLD

Accept the recovery only when Post-state shows Issue absent; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Deploy proactive remediations safely — verification evidence

✓ **Pre-state**	Issue reproduced
✓ **Detection result**	Issue found
✓ **Remediation log**	Change made
✓ **Post-state**	Issue absent

LAB 9

Evidence standard

Capture the configured state, the observed result, the timestamp or correlation ID, and the interpretation.


PASS = REPRODUCIBLE

PRACTICE BRIDGE

Full click paths, commands, expected outputs and troubleshooting are in the Learner Guide and the individual lab folder.

© 2026 Tertiary Infotech Academy Pte Ltd

Monitor tenant health, alerts and change — mechanism

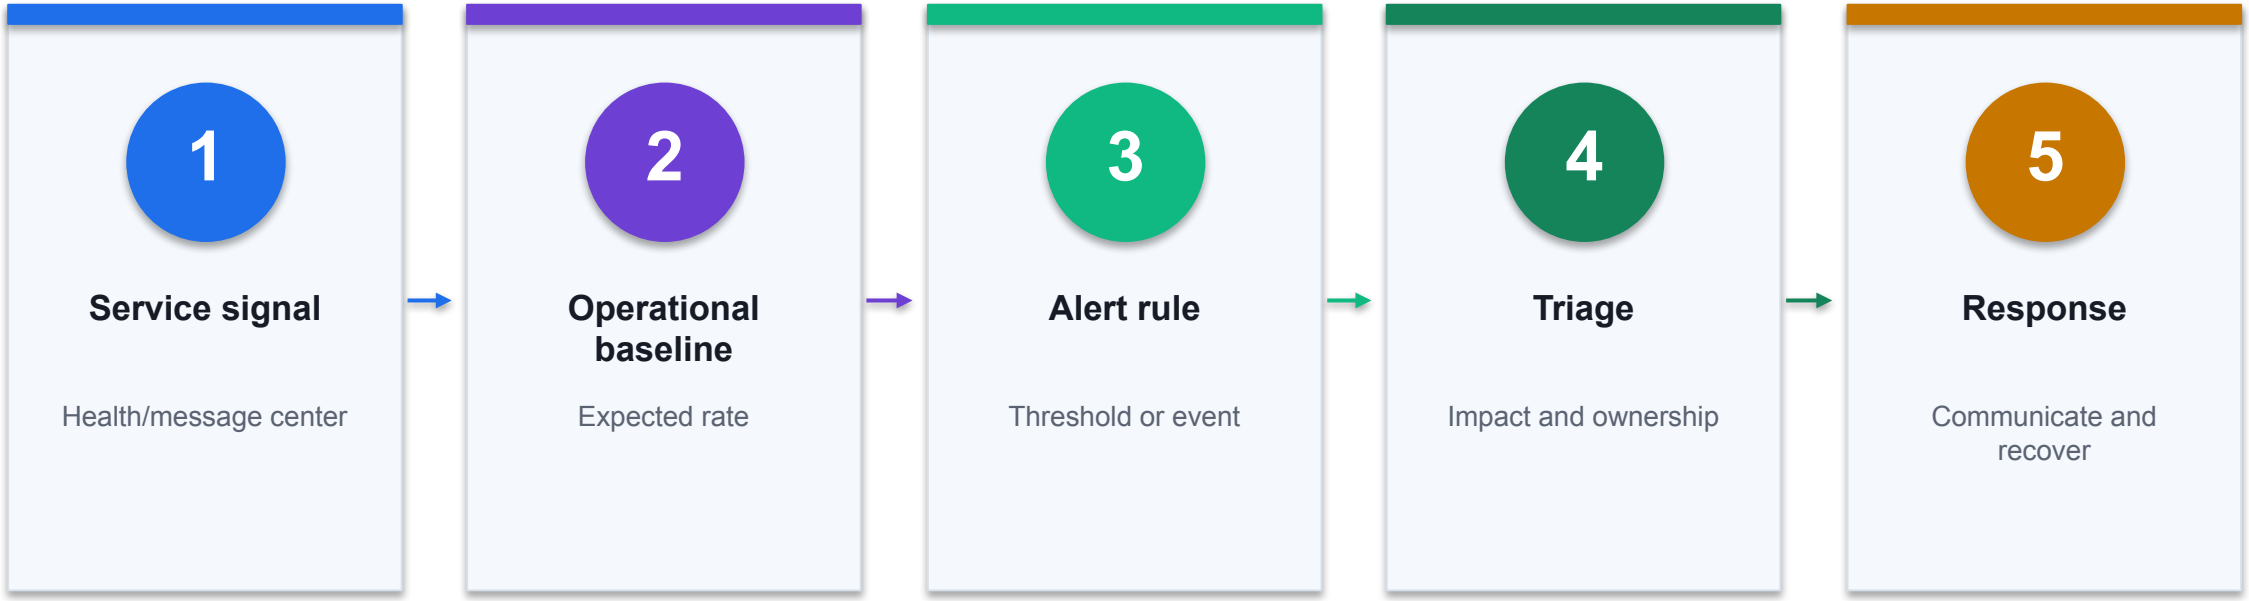

CONTROL POINT

Inspect the evidence at every transition; the first missing state is the most useful troubleshooting boundary. Lab 10 carries the full procedure.

© 2026 Tertiary Infotech Academy Pte Ltd

Monitor tenant health, alerts and change — exact contract

1 Enrollment alert

Failure-rate threshold

FIELD / STATE

2 Compliance drift

Noncompliant percentage

FIELD / STATE

3 Config conflict

New conflict count

FIELD / STATE

4 Service advisory

Affected workload and region

FIELD / STATE

DECISION RULE

Configuration is a contract: names, values, scope and resulting state must all agree.

© 2026 Tertiary Infotech Academy Pte Ltd

Enrollment alert — control contract



BOUNDARY · Service signal

STATE **Enrollment alert**

Failure-rate threshold

RISK **Alert fatigue**

Tune severity and routing

PROOF **Alert payload**


Cohort + timestamp

CONTROL READING

The Enrollment alert state is valid only when Service signal produces Alert payload; Alert fatigue requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Compliance drift — control contract

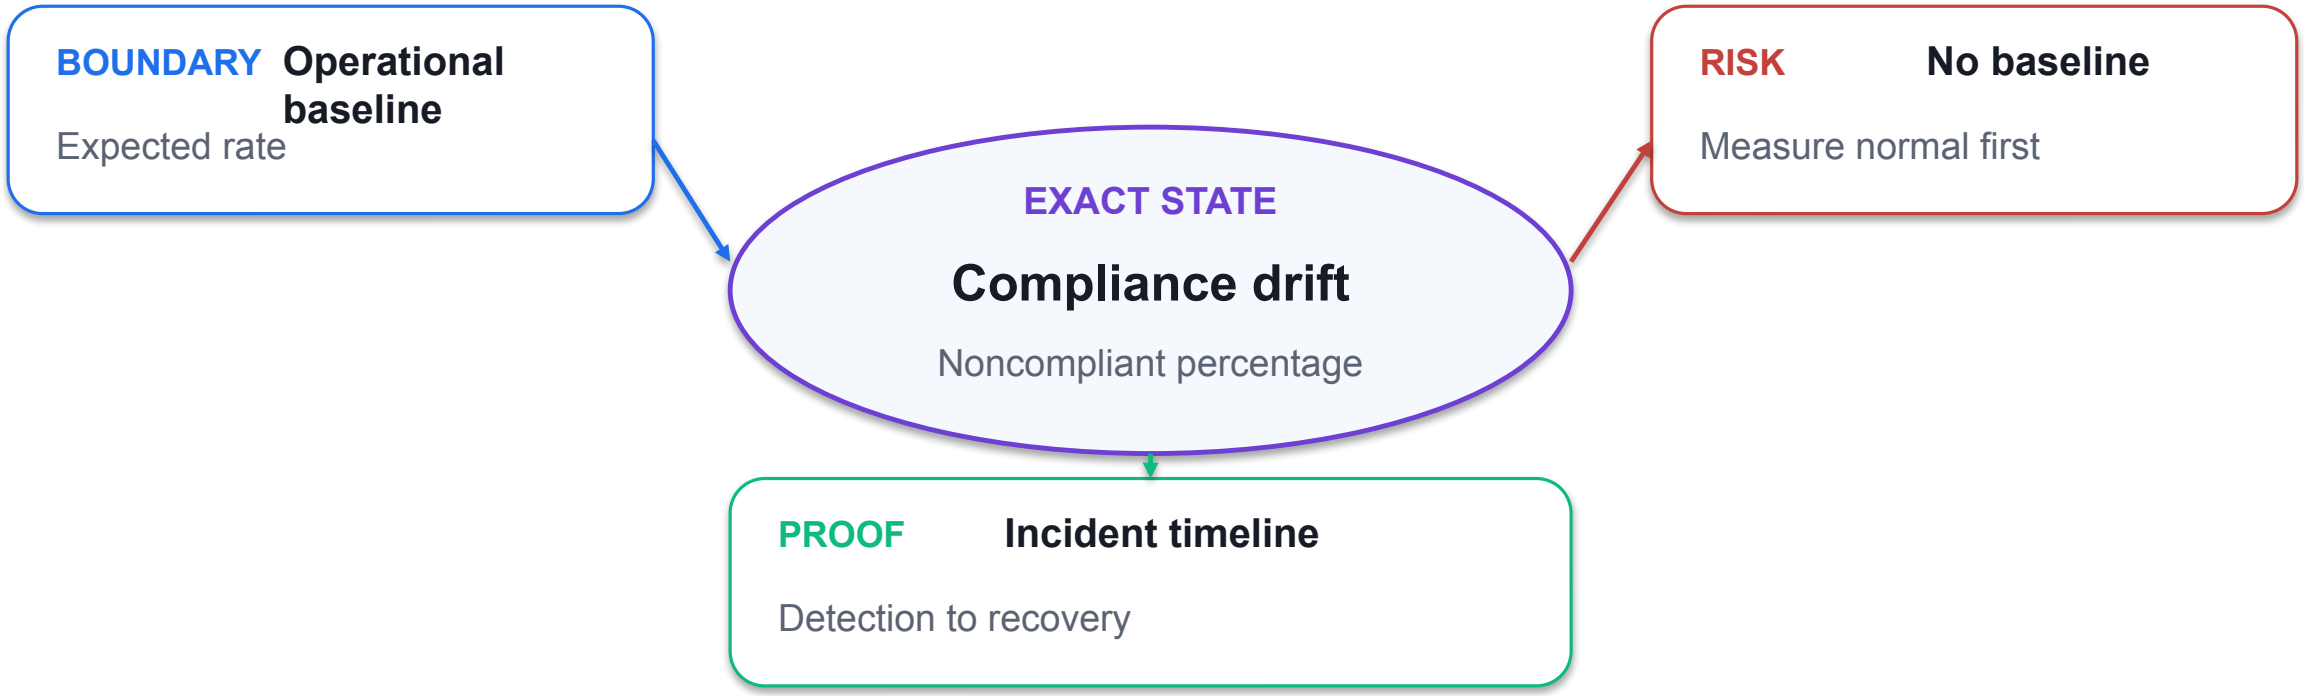

CONTROL READING

The Compliance drift state is valid only when Operational baseline produces Incident timeline; No baseline requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Config conflict — control contract

1

BOUNDARY **Alert rule**

Threshold or event

2

EXACT STATE **Config conflict**

New conflict count

3

CONTROL RISK **Duplicate incident**

Correlate service advisory

4

PROOF **Change correlation**

Policy/deployment event

CONTROL READING

The Config conflict state is valid only when Alert rule produces Change correlation; Duplicate incident requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Service advisory — control contract

1	BOUNDARY	Triage	Impact and ownership
2	EXACT STATE	Service advisory	Affected workload and region
3	CONTROL RISK	Unowned action	Use escalation matrix
4	PROOF	Postmortem	Control improvement

CONTROL READING

The Service advisory state is valid only when Triage produces Postmortem; Unowned action requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Monitor tenant health, alerts and change — failure and recovery

1 Alert fatigue

Tune severity and routing

DIAGNOSE → RECOVER

2 No baseline

Measure normal first

DIAGNOSE → RECOVER

3 Duplicate incident

Correlate service advisory

DIAGNOSE → RECOVER

4 Unowned action

Use escalation matrix

DIAGNOSE → RECOVER

DECISION RULE

Treat the symptom as a pointer to a failed stage; collect evidence before changing policy.

© 2026 Tertiary Infotech Academy Pte Ltd

Alert fatigue — diagnostic trace

1	SIGNAL	**Alert fatigue**
2	BOUNDARY	Operational baseline
3	SUSPECT STATE	Enrollment alert
4	RECOVERY	Tune severity and routing
5	ACCEPTANCE	**Alert payload**

EVIDENCE THRESHOLD

Accept the recovery only when Alert payload shows Cohort + timestamp; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

No baseline — diagnostic trace




RECOVERY ACTION	Measure normal first
ACCEPTANCE PROOF	Detection to recovery

EVIDENCE THRESHOLD

Accept the recovery only when Incident timeline shows Detection to recovery; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Duplicate incident — diagnostic trace

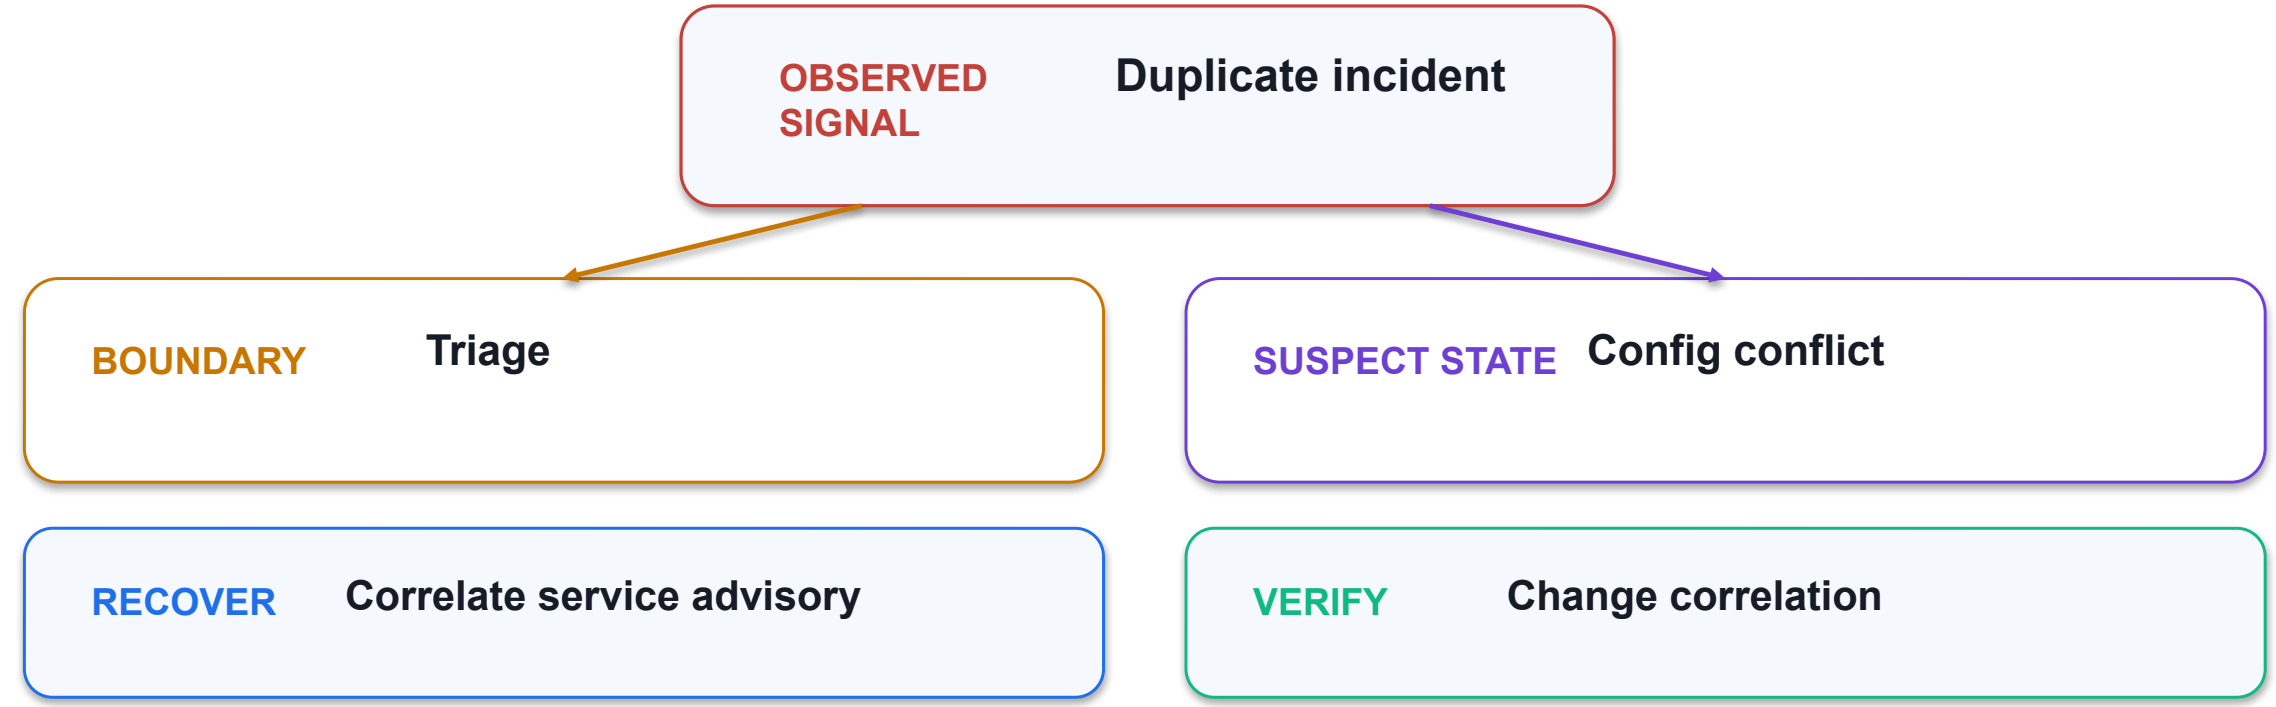

EVIDENCE THRESHOLD

Accept the recovery only when Change correlation shows Policy/deployment event; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Unowned action — diagnostic trace



BOUNDARY · Response | SUSPECT · Service advisory

SIGNAL Unowned action

RECOVERY Use escalation matrix

PROOF Postmortem

EVIDENCE THRESHOLD

Accept the recovery only when Postmortem shows Control improvement; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Monitor tenant health, alerts and change — verification evidence

Alert payload	Cohort + timestamp
Incident timeline	Detection to recovery
Change correlation	Policy/deployment event
Postmortem	Control improvement

LAB 10

Evidence standard

Capture the configured state, the observed result, the timestamp or correlation ID, and the interpretation.


PASS = REPRODUCIBLE

PRACTICE BRIDGE

Full click paths, commands, expected outputs and troubleshooting are in the Learner Guide and the individual lab folder.

© 2026 Tertiary Infotech Academy Pte Ltd

Investigate unauthorized endpoint access — mechanism

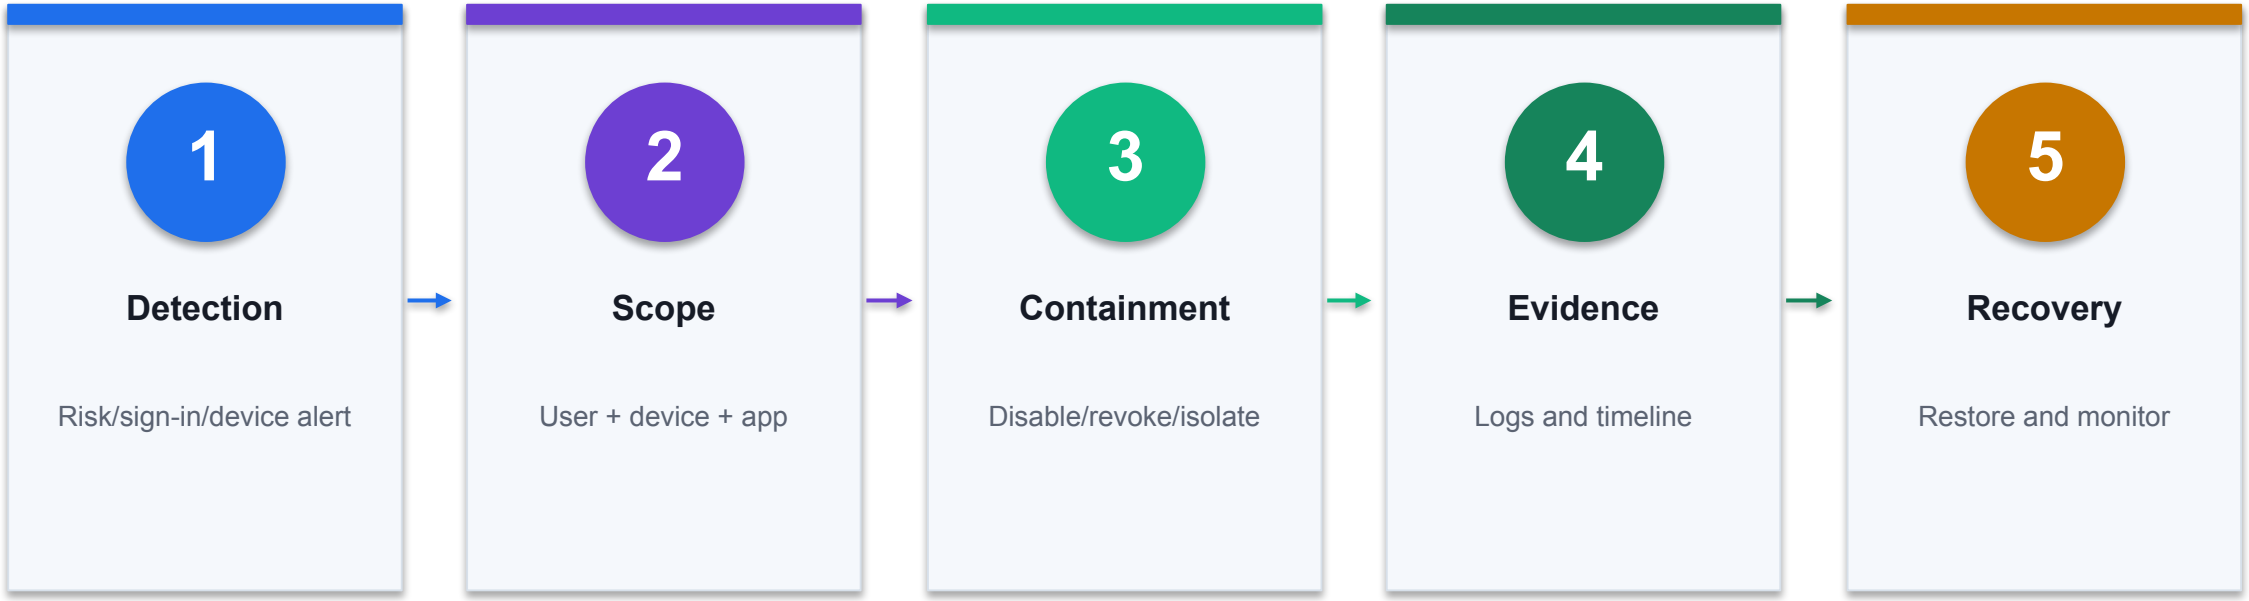

CONTROL POINT

Inspect the evidence at every transition; the first missing state is the most useful troubleshooting boundary. Lab 10 carries the full procedure.

© 2026 Tertiary Infotech Academy Pte Ltd

Investigate unauthorized endpoint access — exact contract

1 Identity action

Revoke sessions

FIELD / STATE

2 Device action

Isolate or retire

FIELD / STATE

3 Evidence handling

Preserve timestamps and IDs

FIELD / STATE

4 Access review

Remove excess privilege

FIELD / STATE

DECISION RULE

Configuration is a contract: names, values, scope and resulting state must all agree.

© 2026 Tertiary Infotech Academy Pte Ltd

Identity action — control contract



BOUNDARY · Detection

STATE **Identity action**

Revoke sessions

RISK **Premature wipe**

Preserve evidence first

PROOF **Incident timeline**


Ordered events

CONTROL READING

The Identity action state is valid only when Detection produces Incident timeline; Premature wipe requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Device action — control contract

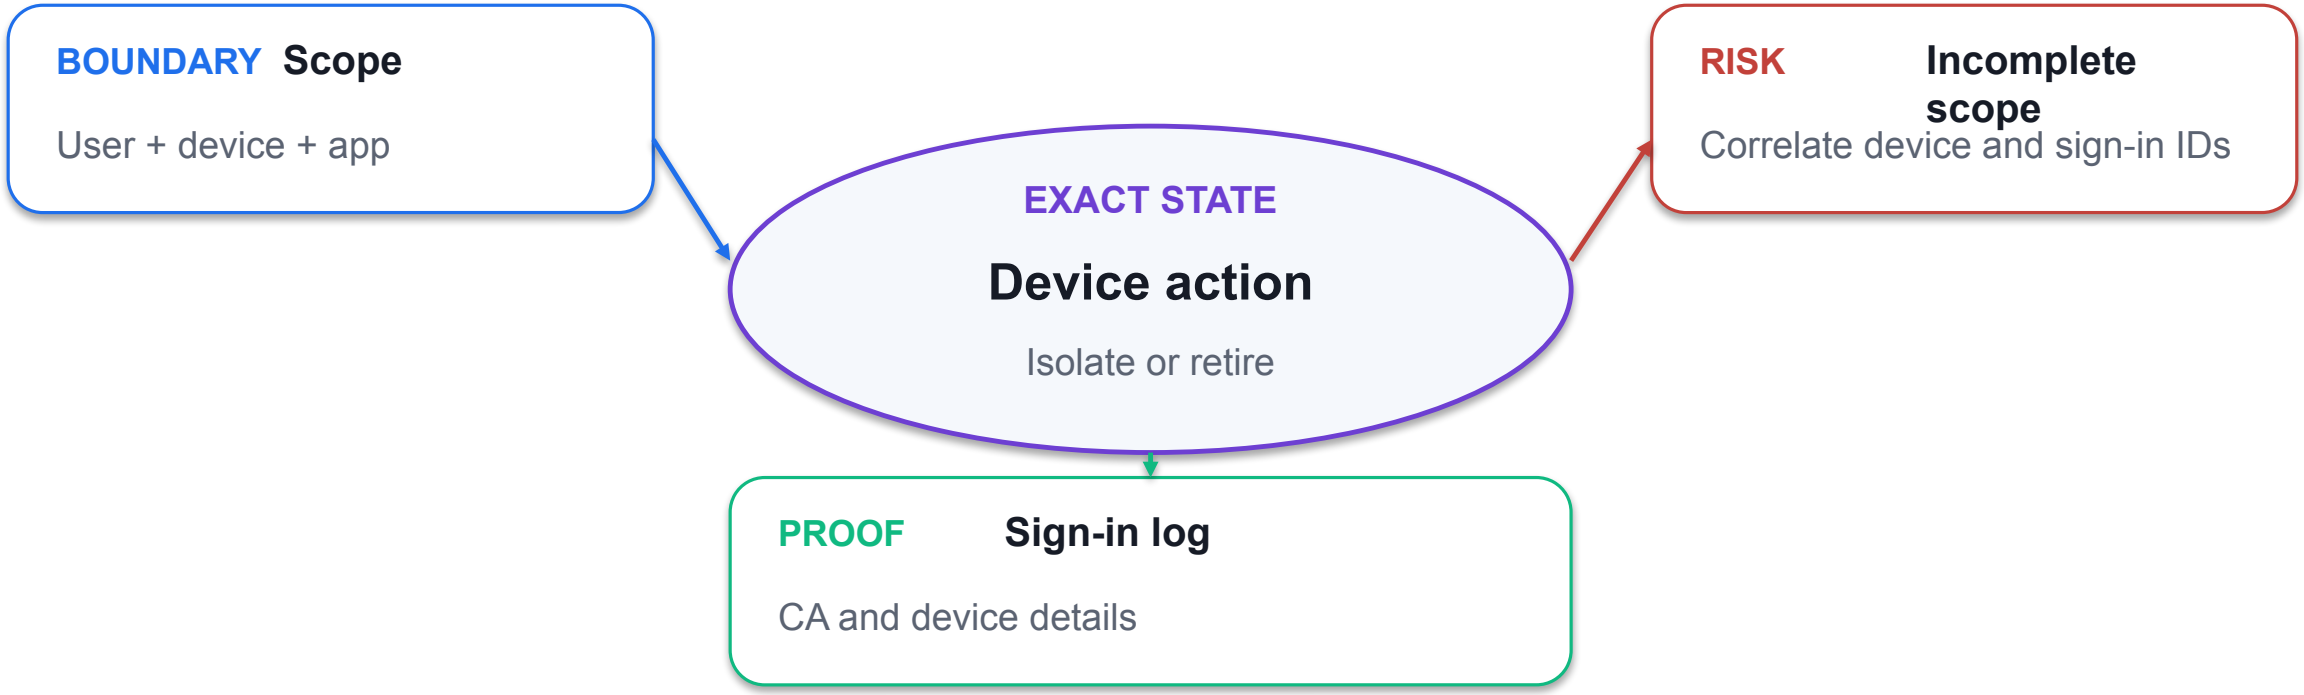

CONTROL READING

The Device action state is valid only when Scope produces Sign-in log; Incomplete scope requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Evidence handling — control contract

1

BOUNDARY **Containment**

Disable/revoke/isolate

2

EXACT STATE **Evidence handling**

Preserve timestamps and IDs

3

CONTROL RISK **Credential persists**

Reset and revoke tokens

4

PROOF **Device timeline**

Alert/process activity

CONTROL READING

The Evidence handling state is valid only when Containment produces Device timeline; Credential persists requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Access review — control contract

1	BOUNDARY	Evidence	Logs and timeline
2	EXACT STATE	Access review	Remove excess privilege
3	CONTROL RISK	Access restored early	Require clean compliance
4	PROOF	Closure proof	Risk cleared and access reviewed

CONTROL READING

The Access review state is valid only when Evidence produces Closure proof; Access restored early requires the bounded recovery shown above.

© 2026 Tertiary Infotech Academy Pte Ltd

Investigate unauthorized endpoint access — failure and recovery

1 Premature wipe

Preserve evidence first

DIAGNOSE → RECOVER

2 Incomplete scope

Correlate device and sign-in IDs

DIAGNOSE → RECOVER

3 Credential persists

Reset and revoke tokens

DIAGNOSE → RECOVER

4 Access restored early

Require clean compliance

DIAGNOSE → RECOVER

DECISION RULE

Treat the symptom as a pointer to a failed stage; collect evidence before changing policy.

© 2026 Tertiary Infotech Academy Pte Ltd

Premature wipe — diagnostic trace

1	SIGNAL	**Premature wipe**
2	BOUNDARY	Scope
3	SUSPECT STATE	Identity action
4	RECOVERY	Preserve evidence first
5	ACCEPTANCE	**Incident timeline**

EVIDENCE THRESHOLD

Accept the recovery only when Incident timeline shows Ordered events; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Incomplete scope — diagnostic trace




RECOVERY ACTION	Correlate device and sign-in IDs
ACCEPTANCE PROOF	CA and device details

EVIDENCE THRESHOLD

Accept the recovery only when Sign-in log shows CA and device details; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Credential persists — diagnostic trace

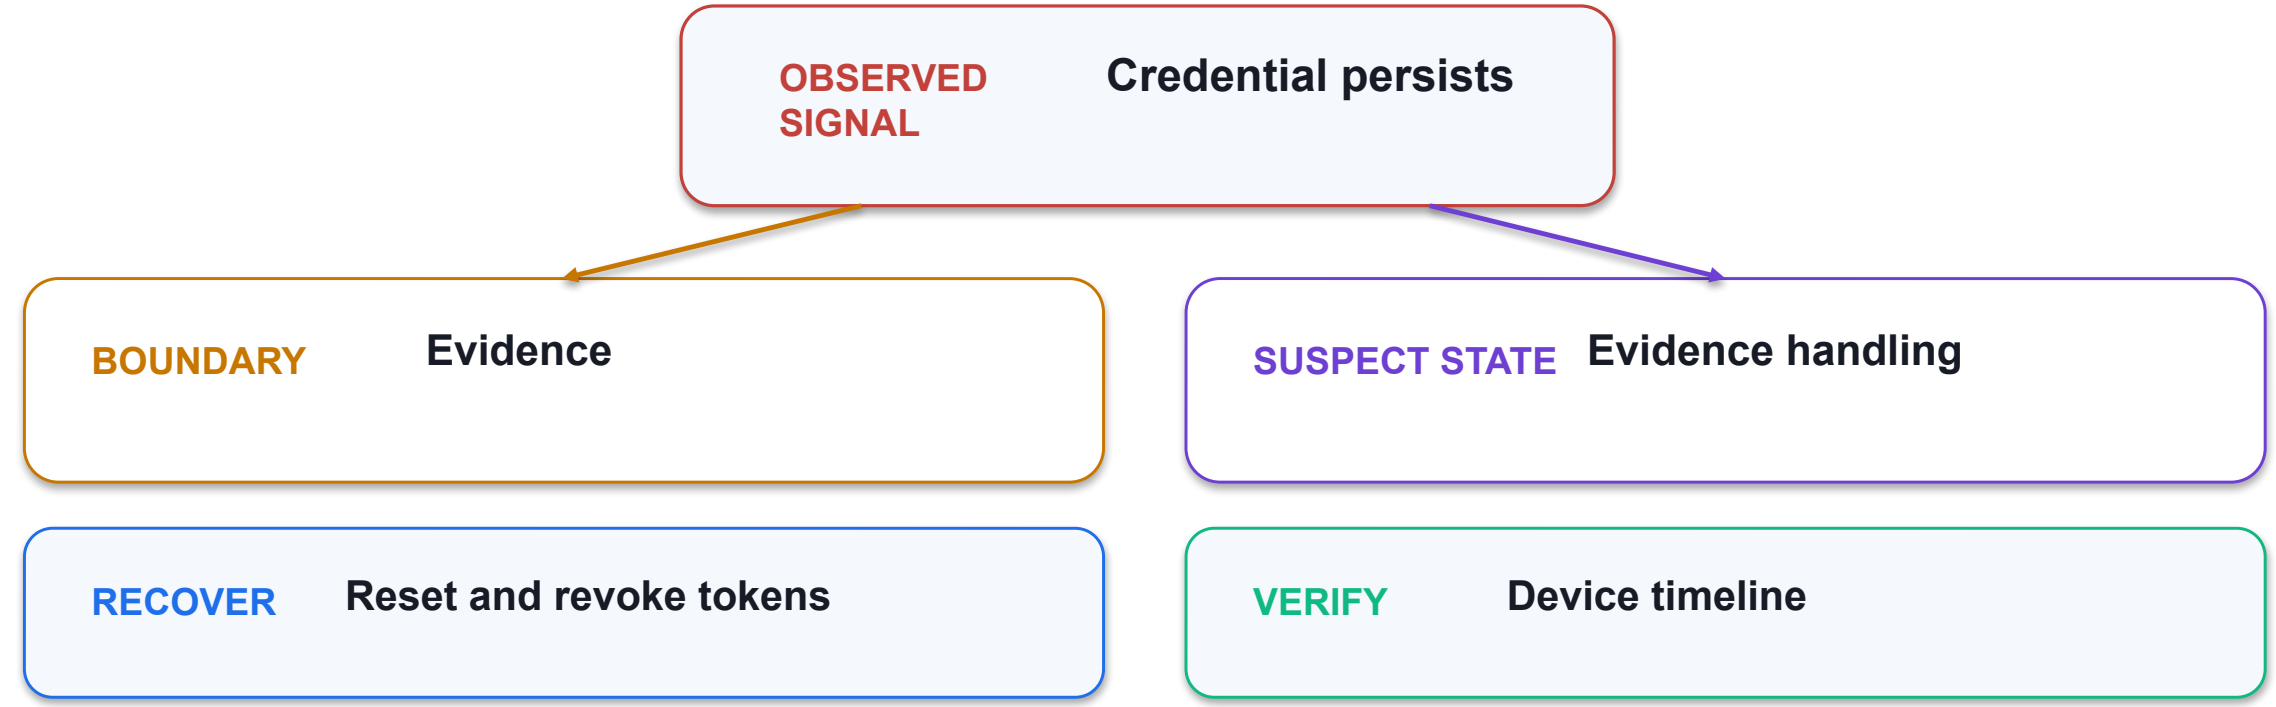


EVIDENCE THRESHOLD

Accept the recovery only when Device timeline shows Alert/process activity; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Access restored early — diagnostic trace

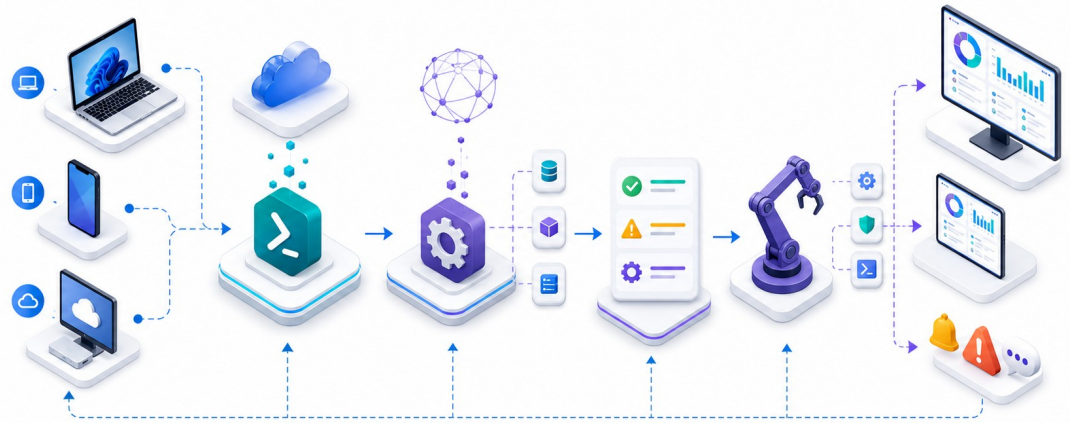

BOUNDARY · Recovery | SUSPECT · Access review

SIGNAL Access restored early

RECOVERY Require clean compliance

PROOF Closure proof

EVIDENCE THRESHOLD

Accept the recovery only when Closure proof shows Risk cleared and access reviewed; otherwise remain at the first unresolved boundary.

© 2026 Tertiary Infotech Academy Pte Ltd

Investigate unauthorized endpoint access — verification evidence

✓ **Incident timeline**	Ordered events
✓ **Sign-in log**	CA and device details
✓ **Device timeline**	Alert/process activity
✓ **Closure proof**	Risk cleared and access reviewed

LAB 10

Evidence standard

Capture the configured state, the observed result, the timestamp or correlation ID, and the interpretation.

PASS = REPRODUCIBLE

PRACTICE BRIDGE

Full click paths, commands, expected outputs and troubleshooting are in the Learner Guide and the individual lab folder.

© 2026 Tertiary Infotech Academy Pte Ltd

HANDS-ON · 115 MIN

Lab 9: Graph, PowerShell, remote actions and Endpoint Analytics

SCENARIO

Contoso must implement the control, prove the observed state, diagnose one seeded failure, and retain an auditable evidence pack.



YOU'LL PRODUCE

Least-privilege automation transcript, paginated export, remote-action evidence and KPI readout

© 2026 Tertiary Infotech Academy Pte Ltd

LO3 · LO4 · K3 · K5 · A5 · A7

Lab 9 — acceptance and evidence

Configured state

Policy/profile/assignment values are visible and scoped to the intended cohort.

EVIDENCE REQUIRED

Observed result

The device, app or identity shows the expected service and client-side outcome.

EVIDENCE REQUIRED

Failure diagnosis

The seeded issue is tied to an error, log, report or missing state—not a guess.

EVIDENCE REQUIRED

Recovery proof

A post-change retest demonstrates the corrected state with timestamp/correlation evidence.

EVIDENCE REQUIRED

SUBMISSION

Save the evidence under labs/lab-09-graph-powershell-analytics/evidence/. Detailed steps are in the Learner Guide.

© 2026 Tertiary Infotech Academy Pte Ltd

HANDS-ON · 110 MIN

Lab 10: Capstone: investigate access, remediate endpoints and brief operations

SCENARIO

Contoso must implement the control, prove the observed state, diagnose one seeded failure, and retain an auditable evidence pack.



YOU'LL PRODUCE

Incident timeline, containment record, remediation proof, access review and executive operations brief

© 2026 Tertiary Infotech Academy Pte Ltd

LO4 · K5 · A7 · A8

Lab 10 — acceptance and evidence

Configured state

Policy/profile/assignment values are visible and scoped to the intended cohort.

EVIDENCE REQUIRED

Observed result

The device, app or identity shows the expected service and client-side outcome.

EVIDENCE REQUIRED

Failure diagnosis

The seeded issue is tied to an error, log, report or missing state—not a guess.

EVIDENCE REQUIRED

Recovery proof

A post-change retest demonstrates the corrected state with timestamp/correlation evidence.

EVIDENCE REQUIRED

SUBMISSION

Save the evidence under labs/lab-10-capstone-incident-operations/evidence/. Detailed steps are in the Learner Guide.

© 2026 Tertiary Infotech Academy Pte Ltd

RETRIEVE · DIAGNOSE · EXPLAIN

Day 5 technical recap

1 Checkpoint 1

- Automate Intune with Microsoft Graph
- Use PowerShell for repeatable endpoint operations

2 Checkpoint 2

- Extend compliance with custom scripts
- Operate Security Copilot agents responsibly

3 Checkpoint 3

- Build operational reports and dashboards
- Interpret Endpoint Analytics and reliability

4 Checkpoint 4

- Deploy proactive remediations safely
- Monitor tenant health, alerts and change

REMEMBER

For each checkpoint, name the architecture boundary, exact contract, failure evidence and acceptance state.

© 2026 Tertiary Infotech Academy Pte Ltd

Assessment: demonstrate current endpoint judgment

1 WA

Explain the mechanism and decision rule using K1 –K5.

2 PP

Perform six connected tasks and preserve evidence for A1–A8.

3 Competency


Meet every criterion; partial evidence does not demonstrate the full ability.

4 Submission

Upload the completed learner-facing papers to the LMS.

© 2026 Tertiary Infotech Academy Pte Ltd

Assessment flow: final sign-off

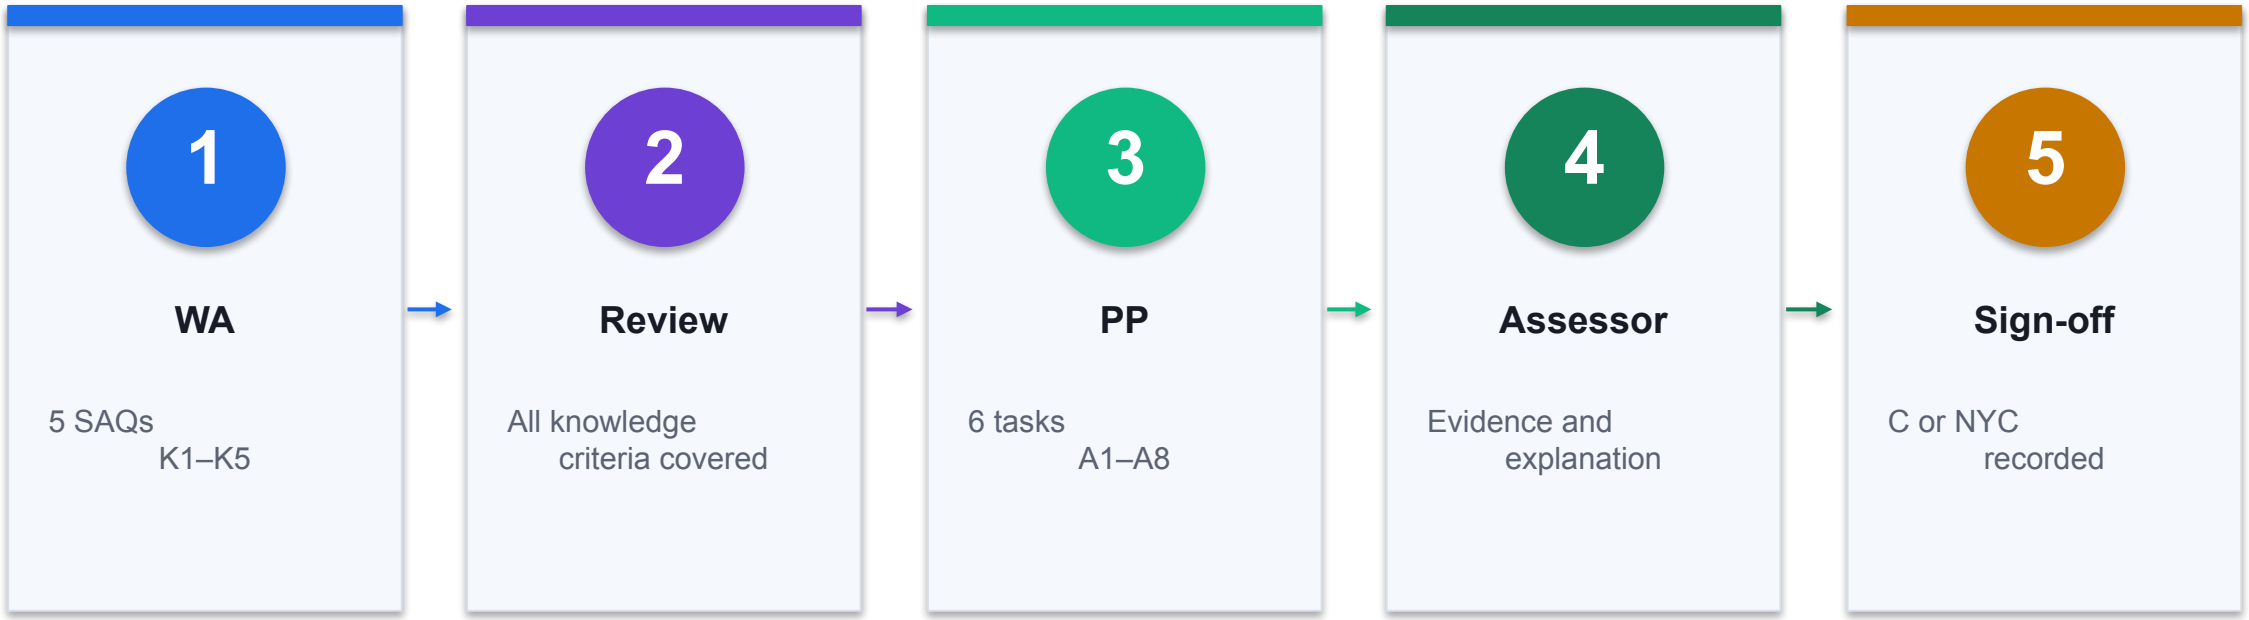

SUBMISSION RULE

Question papers go to the LMS. Answer keys remain trainer-only and are never linked from the learner record.

© 2026 Tertiary Infotech Academy Pte Ltd

Digital attendance: final reconciliation

1 Check today

Confirm every required session has a recorded attendance state.

2 Resolve exception

Show the trainer the relevant Singpass/TRAQOM result.

3 Do not delay

Attendance exceptions become harder to resolve after course close.

4 Keep evidence

Retain the confirmation until the training record is finalized.

© 2026 Tertiary Infotech Academy Pte Ltd

THANK YOU

Manage endpoints as an evidence-driven control system.

Identity · Policy · Security · Applications · Operations



https://www.tertiarycourses.com.sg/wsq-microsoft-certified-endpoint-administrator-associate-md-102.html

TGS-2024042603 · Version v3.1