



n8n

WSQ COURSEWARE

Agentic AI for Email Marketing Campaign


n8n · multi-agent editorial control · MailerLite

WSQ Course Code: TGS-2026064473

Tertiary Infotech Academy Pte Ltd · UEN 201200696W

Version v1.1 · 24 August 2026

© 2026 Tertiary Infotech Academy Pte Ltd. All rights reserved.

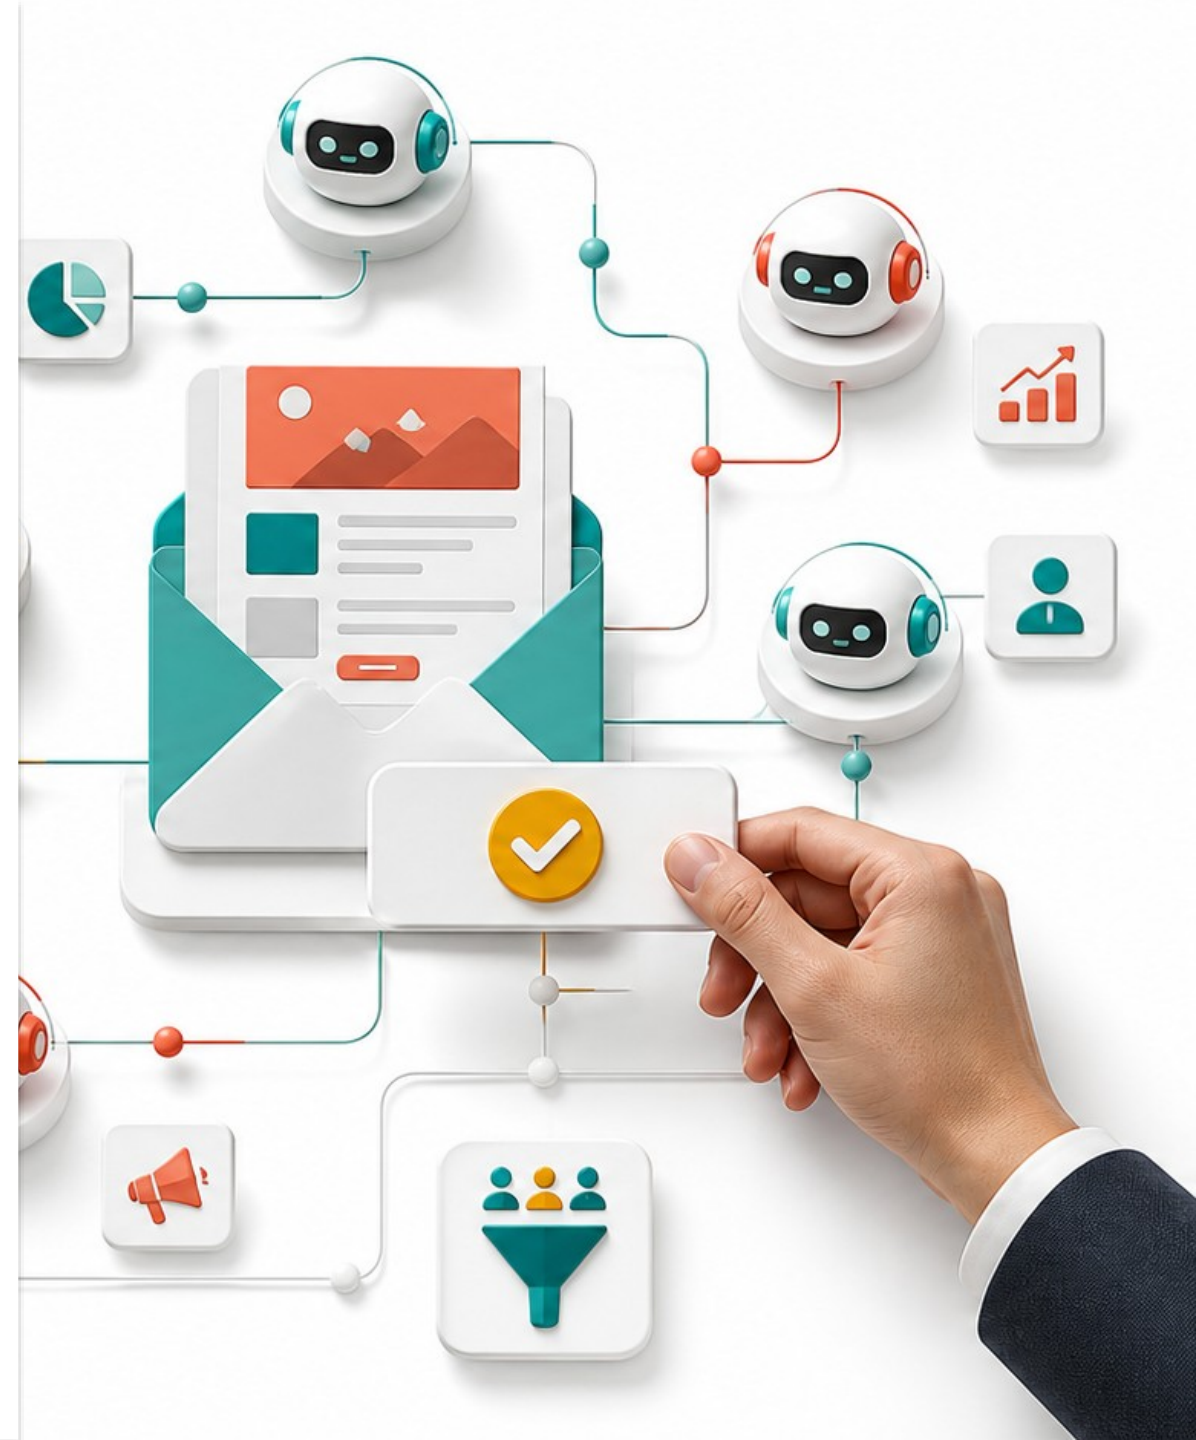

COURSE ADMINISTRATION

Welcome and Learning Contract

How the course runs, what evidence is required and where control boundaries sit

Digital Attendance (Mandatory)

1

AM

Scan the SSG QR code at the start of each training day.

2

PM

Complete the second attendance event after lunch.

3

Assessment

Complete the separate assessment attendance event before the papers.

About the Trainer



Your Trainer

General trainer profile template

NAME

DESIGNATION

QUALIFICATIONS

EXPERTISE

About the Trainer



Dr Alfred Ang

Principal Trainer · Tertiary Infotech Academy

ROLE

Principal trainer and courseware developer

EXPERTISE

Agentic AI, automation, cloud and secure workflow design

DELIVERY

Technical WSQ courses with evidence-led labs

CONTACT

enquiry@tertiaryinfotech.com

Let's Know Each Other

1

Role

Your role and the audience you communicate with

2

Current stack

Email platform, CRM or automation tools you use

3

Goal

One campaign process you want to improve safely

Ground Rules

1

Participate

Ask, challenge and test claims with evidence

2

Protect data

Use sample leads; never expose credentials or customer PII

3

Respect controls

Do not schedule to a live audience without approval

4

Stay on time

Return promptly from breaks

5

Work independently


Assessment evidence must be your own

6

Attendance

At least 75% attendance is required

Download Course Material

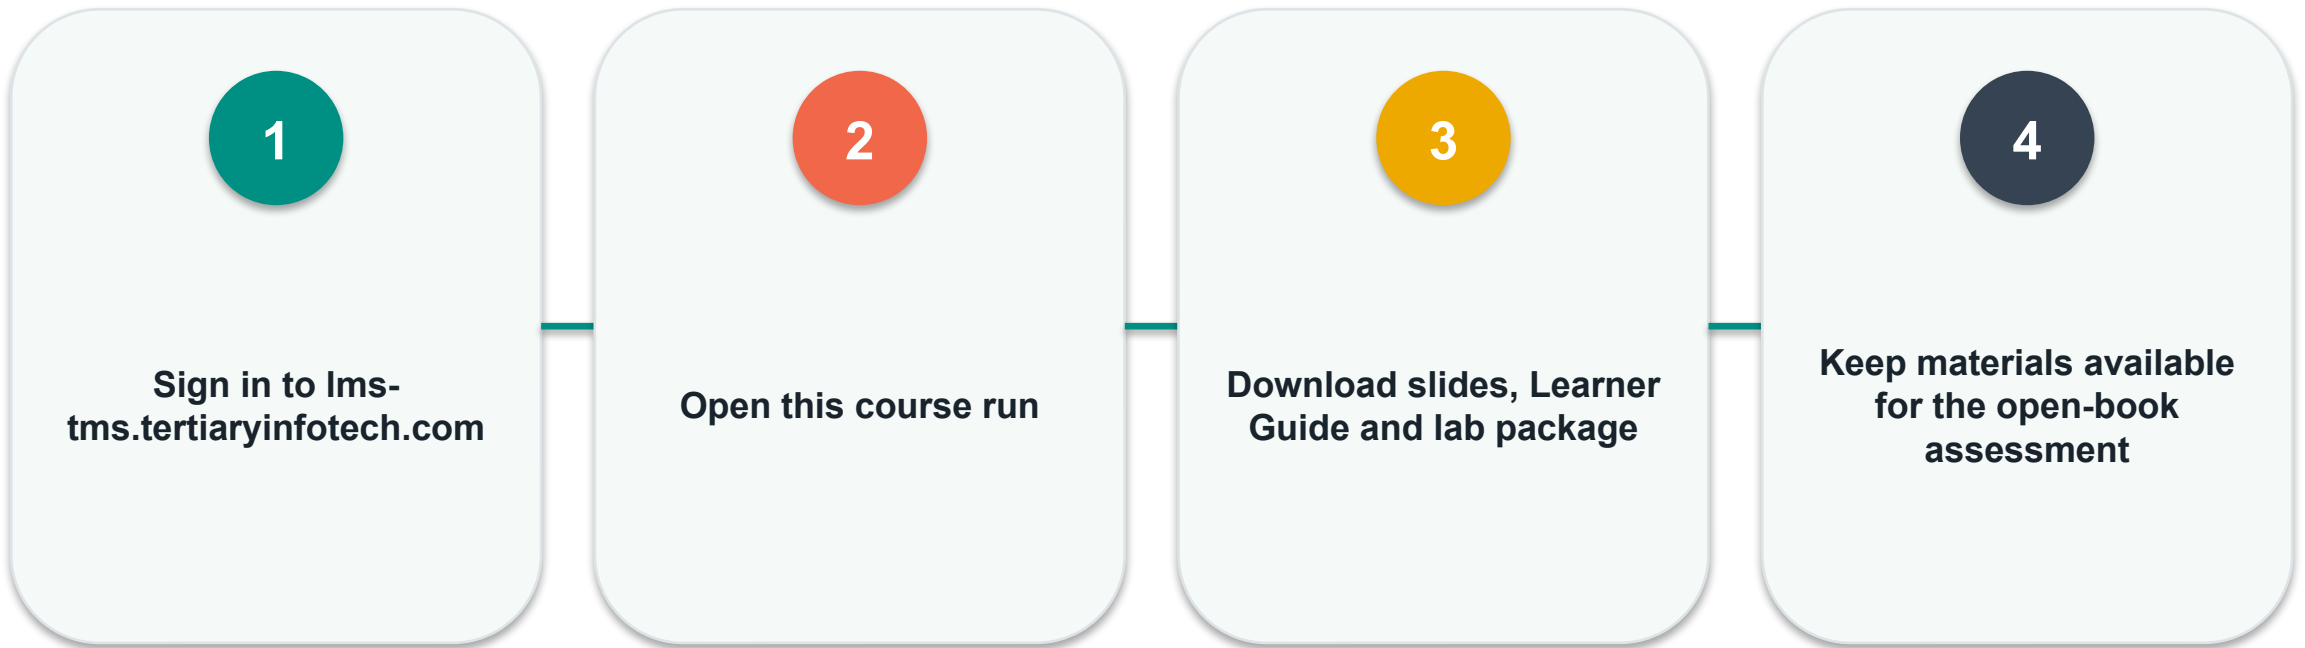

Read left to right. Each boundary has a named payload, state transition and owner.

Two-Day Learning Journey

1

Day 1 AM

System model, consent and campaign brief

2

Day 1 PM

Multi-agent editorial workflow and quality gate

3

Day 2 AM

Human approval, MailerLite draft and schedule

4

Day 2 PM

Analytics dashboard, trend/feedback optimization and assessment

Skills Framework

1

TSC title

E-Commerce Campaign Management

2

TSC code

TOU-SNM-3014-1.1-1

3

Course duration

2 days · 16 training hours

4

Assessment

WA 60 min + PP 60 min · open book

Learning Outcomes

1

LO1

Implement campaigns aligned to strategic objectives

2

LO2

Analyse outcomes using sales data and consumer insights

3

LO3

Analyse market trends and customer reviews

Course Outline

1

Topic 1

Consent, campaign brief, multi-agent drafting, approval and MailerLite scheduling

2

Topic 2

Event facts, KPI model, cohort/funnel dashboard and diagnosis

3

Topic 3

Trend windows, feedback evidence, decision rules and experiments

Knowledge and Ability Coverage

1

K1-K2

Architecture, roles, audience and message contract

2

K3-K4

Consent, subscriber lifecycle, approval and scheduling

3

K5

Metrics, event model and dashboard interpretation

4

K6

Trend, feedback and continuous improvement

5

A1-A3

Build the lead, multi-agent and release workflows

6

A4-A5

Build the dashboard and evidence-led optimization

Briefing for Assessment

1

Materials

Open book: slides, Learner Guide and approved files only

2

Conduct

No discussion, photography or recording

3

Submission

Complete and upload on the LMS as instructed

4

Decision

All prescribed assessment requirements must be competent

Assessment Instruments

WA · 60 minutes

- ✓ Six open-ended K-coded questions
- ✓ Knowledge from the deck and LG
- ✓ Answer every question

PP · 60 minutes

- ✓ Five connected A-coded tasks
- ✓ Evidence from the six labs
- ✓ Build, verify and interpret

Assessment Flow



Read left to right. Each boundary has a named payload, state transition and owner.

Practice Knowledge Portal

1

Portal

Open exams.tertiaryinfotech.com

2

Search

Use the portal search to find a relevant AI or automation practice set

3

Boundary


This WSQ course is assessed by the WA and PP papers, not an external certification exam

TECHNICAL CORE

The Controlled Campaign Loop

Architecture, state, autonomy, evidence and failure controls

The Closed-Loop Campaign System

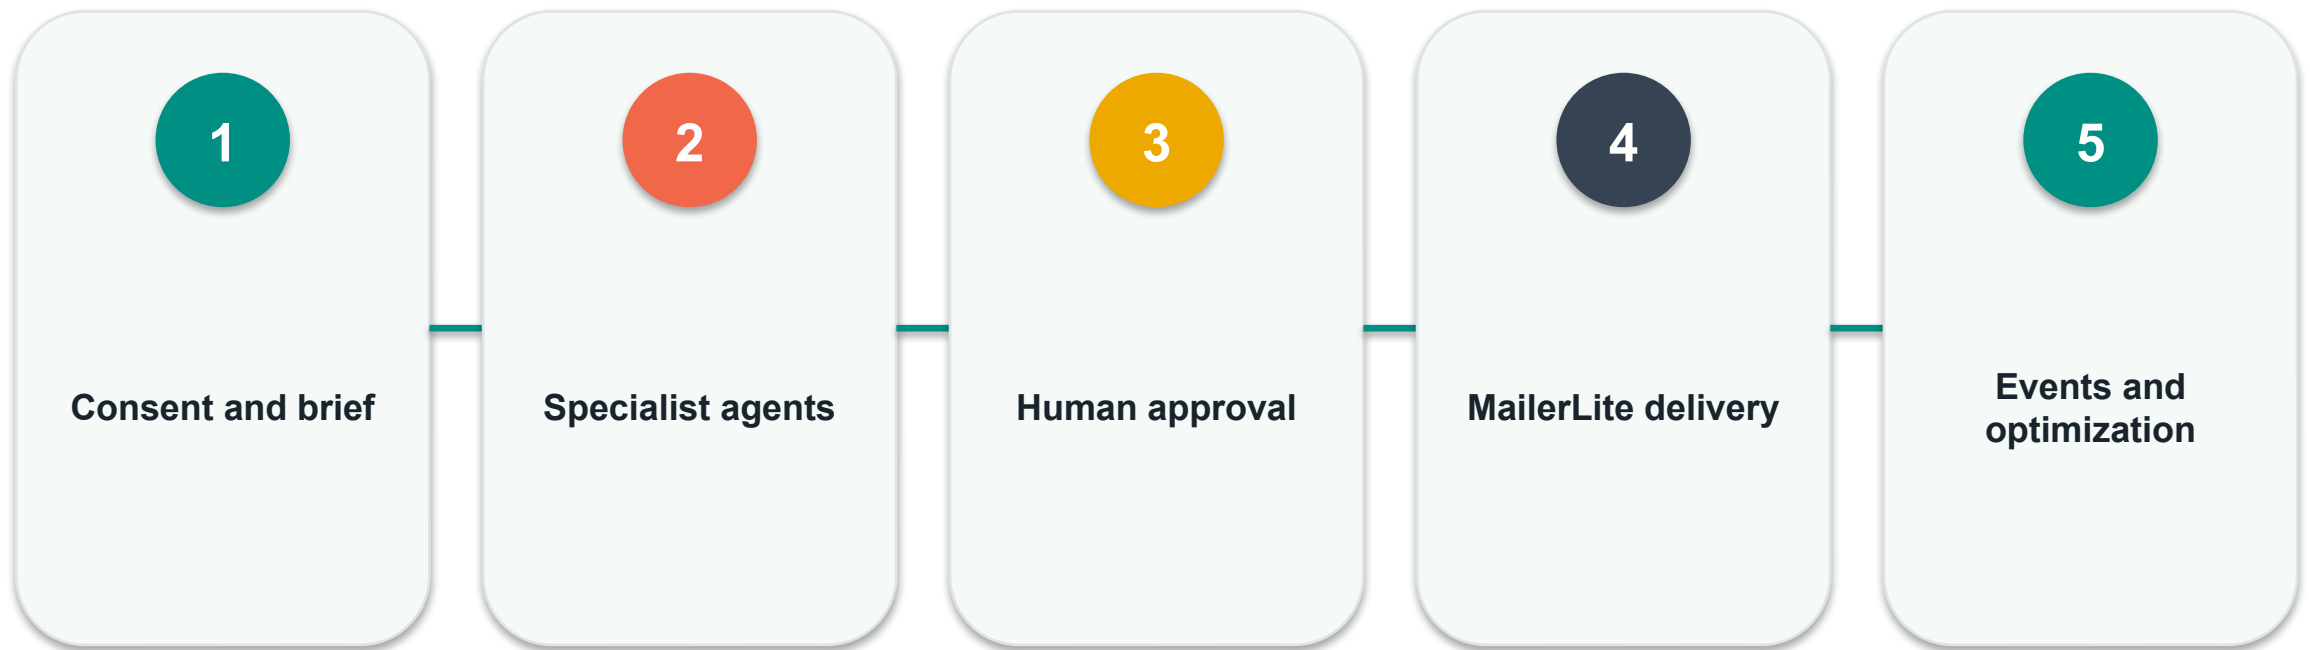

Read left to right. Each boundary has a named payload, state transition and owner.

Automation, AI Workflow and Agentic System

Deterministic automation

- ✓ Fixed path and rules
- ✓ Predictable transforms
- ✓ Best for validation and writes


Agentic layer

- ✓ Chooses among bounded tools
- ✓ Handles ambiguous content work
- ✓ Must not own irreversible sends

Campaign State Is a Contract

campaign_id	stable correlation key	status	draft review approved scheduled sent
version	monotonic content version	approval_hash	binds decision to exact payload
scheduled_at	ISO timestamp plus timezone	evidence_uri	audit and assessment artifact

Autonomy Boundary for Email Marketing

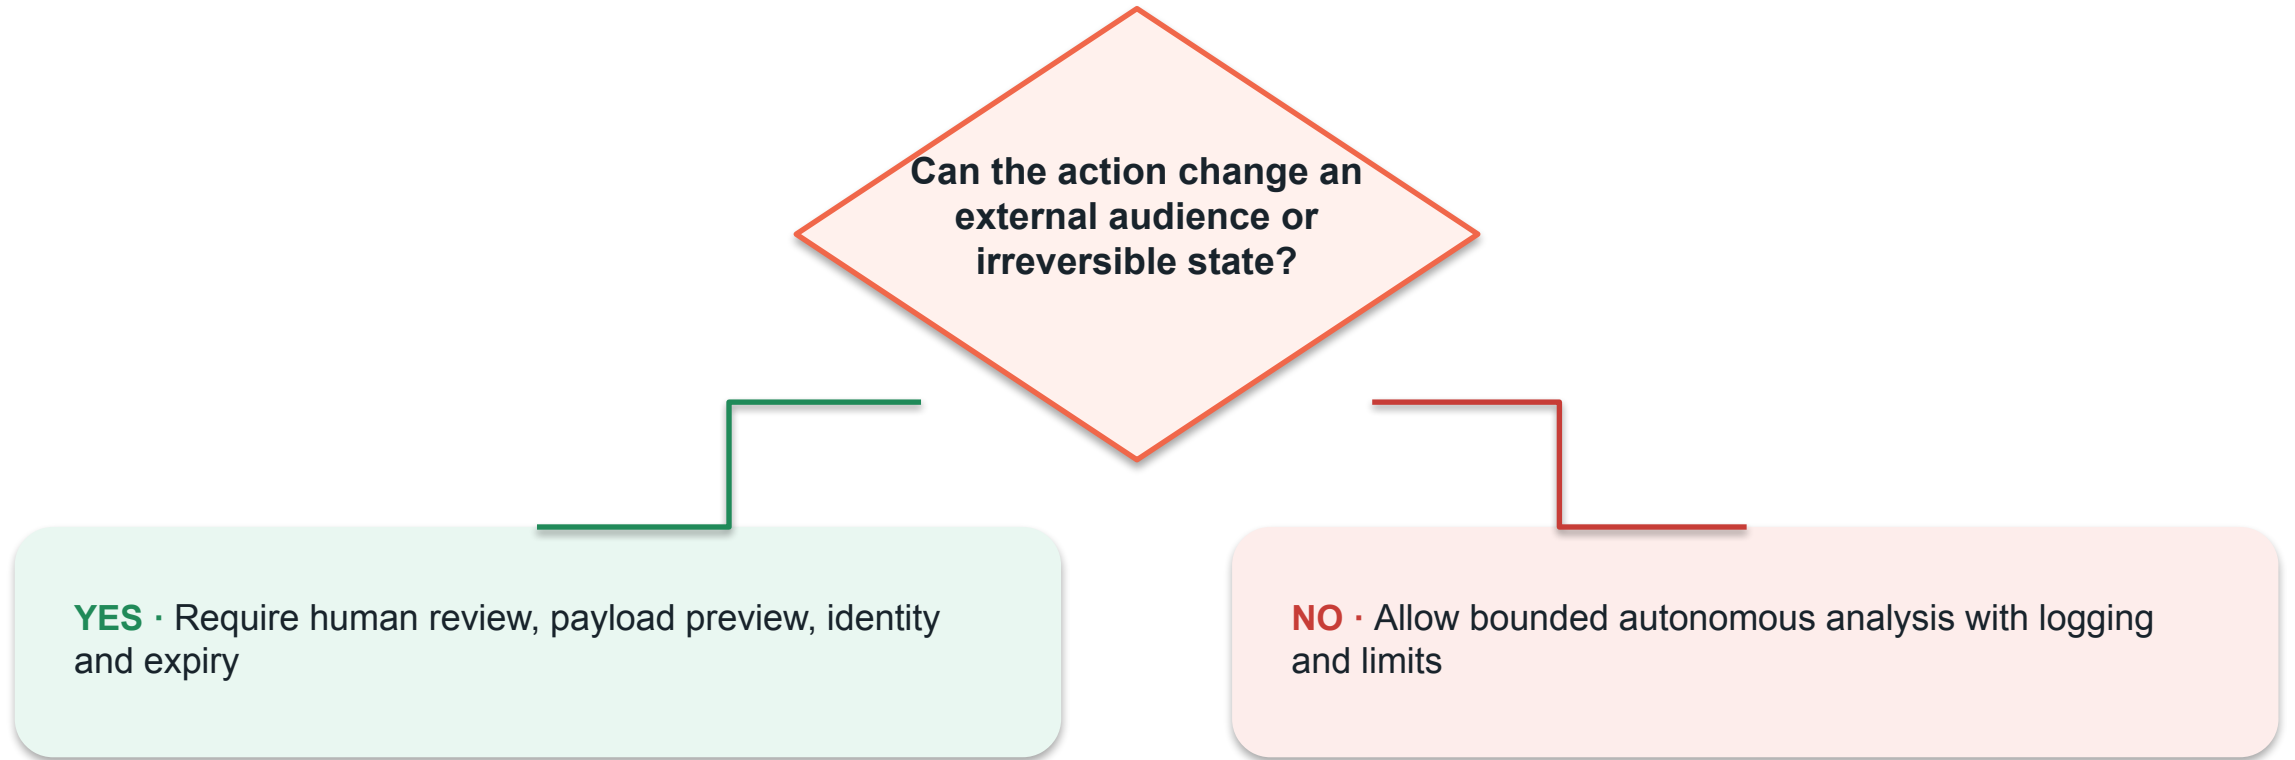

From Objective to Testable Campaign KPI

Target conversions = eligible subscribers x delivery rate x click rate x conversion rate

REALISTIC INPUTS

$8,000 \times 0.98 \times 0.035 \times 0.12 = 32.9$ expected conversions

DECISION

A stronger subject line cannot repair a weak landing-page conversion rate.

Three Data Planes

1

Control plane

brief, policy, approvals, schedule

2

Content plane

research, copy, HTML and variants

3

Evidence plane

events, metrics, logs and decisions

Minimum Audit Record

1

Evidence 1

workflow_execution_id and campaign_id

2

Evidence 2

input brief version and source hashes

3

Evidence 3

agent outputs plus validation results

4

Evidence 4

reviewer decision, time, payload hash

5

Evidence 5

MailerLite response ID and final scheduled time

6

Evidence 6

error path, retry count and recovery action

Failure Taxonomy Before the Build

!	Content	hallucinated claim, tone drift, broken link
!	Audience	wrong group, stale consent, duplicate
!	Delivery	unverified sender, missing unsubscribe, timezone error
!	Measurement	open-rate bias, bot clicks, attribution gap
!	Operations	retry duplicates, leaked credential, unreviewed payload

TOPIC 01

Implementing Agentic AI Email Marketing Campaigns

Consent -> brief -> specialist agents -> approval -> MailerLite schedule

Topic 01 Coverage

1

Mechanism 1

Translate strategy into a machine-readable campaign brief and acceptance contract.

2

Mechanism 2

Separate audience, research, drafting and compliance roles across agent boundaries.

3

Mechanism 3

Gate every external send or schedule action with deterministic human approval.

4

Mechanism 4

Treat consent, unsubscribe state, secrets and audit evidence as first-class data.

Specialists Propose; the Editor Decides



Audience agent
segment and job-to-be-done


Research agent
evidence and claims

Copy agent
subject, preheader and body

Compliance critic
policy and risk

Human editor
approve exact version

Lead Capture Runtime Trace

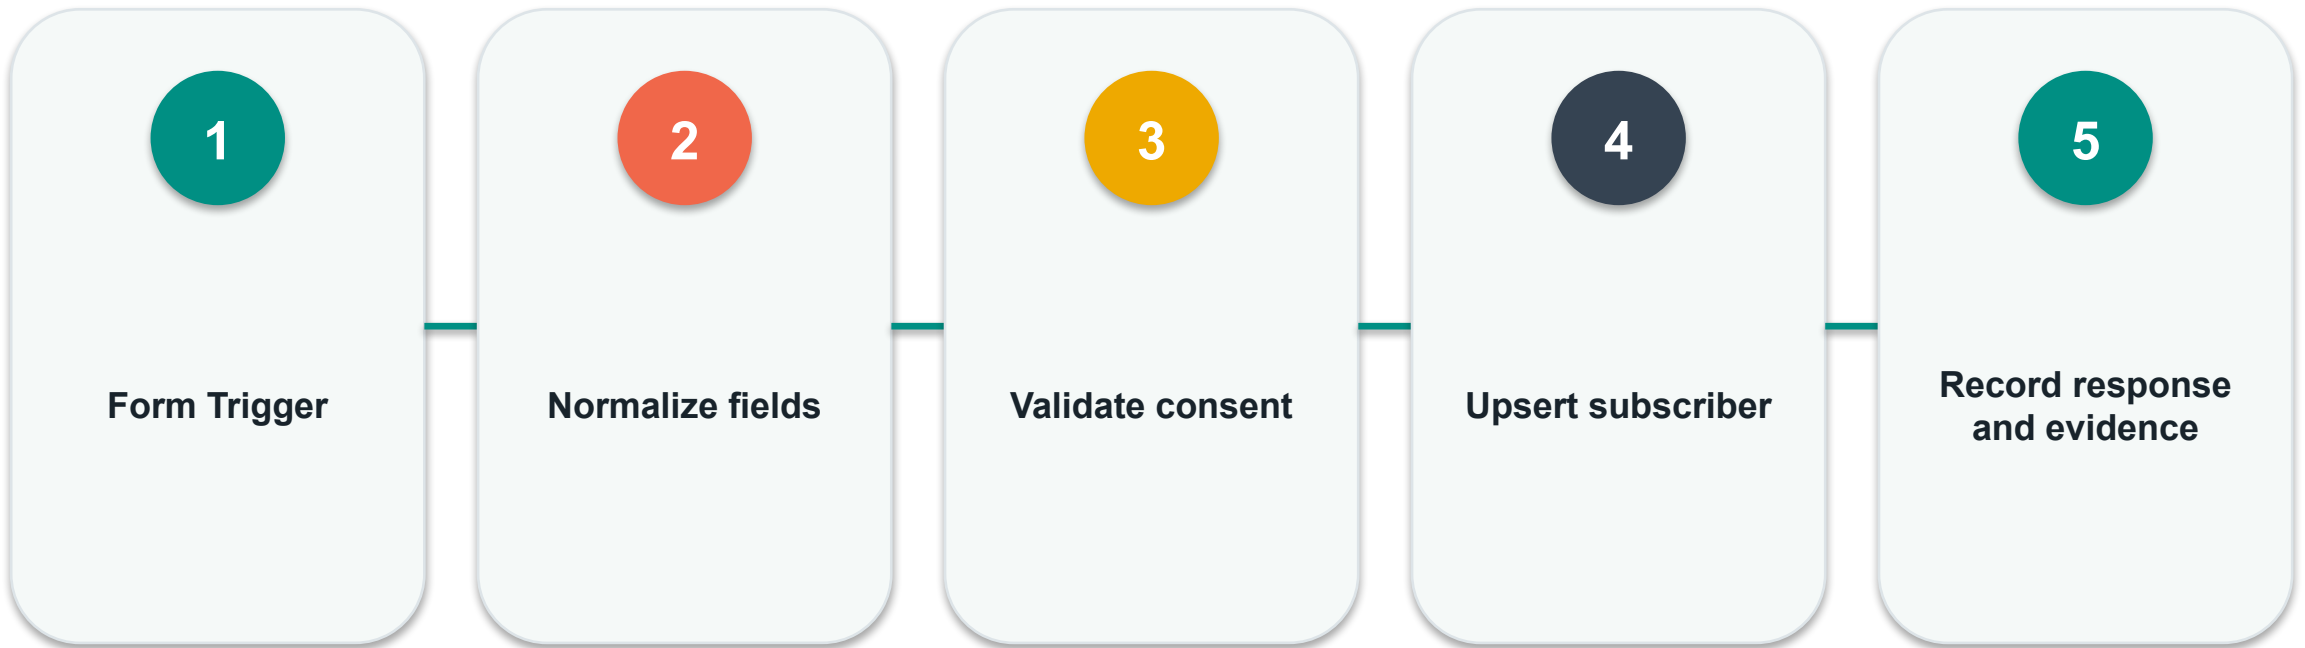

Read left to right. Each boundary has a named payload, state transition and owner.

Consent Record Schema

email	normalized RFC-valid address	consent	explicit boolean; never inferred
consent_text_version	copy shown at submission	opted_in_at	UTC timestamp
optin_ip	where lawful and required	source	form or campaign attribution

MailerLite Subscriber Upsert

HTTP + JSON

POST /api/subscribers

Authorization: Bearer {{\$credentials.apiKey}}

Content-Type: application/json

```
{"email": "{{$json.email}}", "fields": {"name": "{{$json.name}}"}, "groups": ["{{$json.group_id}}"], "opted_in_at": "{{$json.opted_in_at}}"}

```

WHAT TO VERIFY 201 means created; 200 means the existing subscriber was updated non-destructively.

Upsert Is Not Resubscribe


Safe upsert

- ✓ Adds or updates allowed fields
- ✓ Does not remove omitted groups
- ✓ Preserves status by default

High-risk resubscribe

- ✓ Must respect prior unsubscribe
- ✓ Requires an authorised consent route
- ✓ Never set true by an agent guess

Campaign Brief Becomes Agent Context

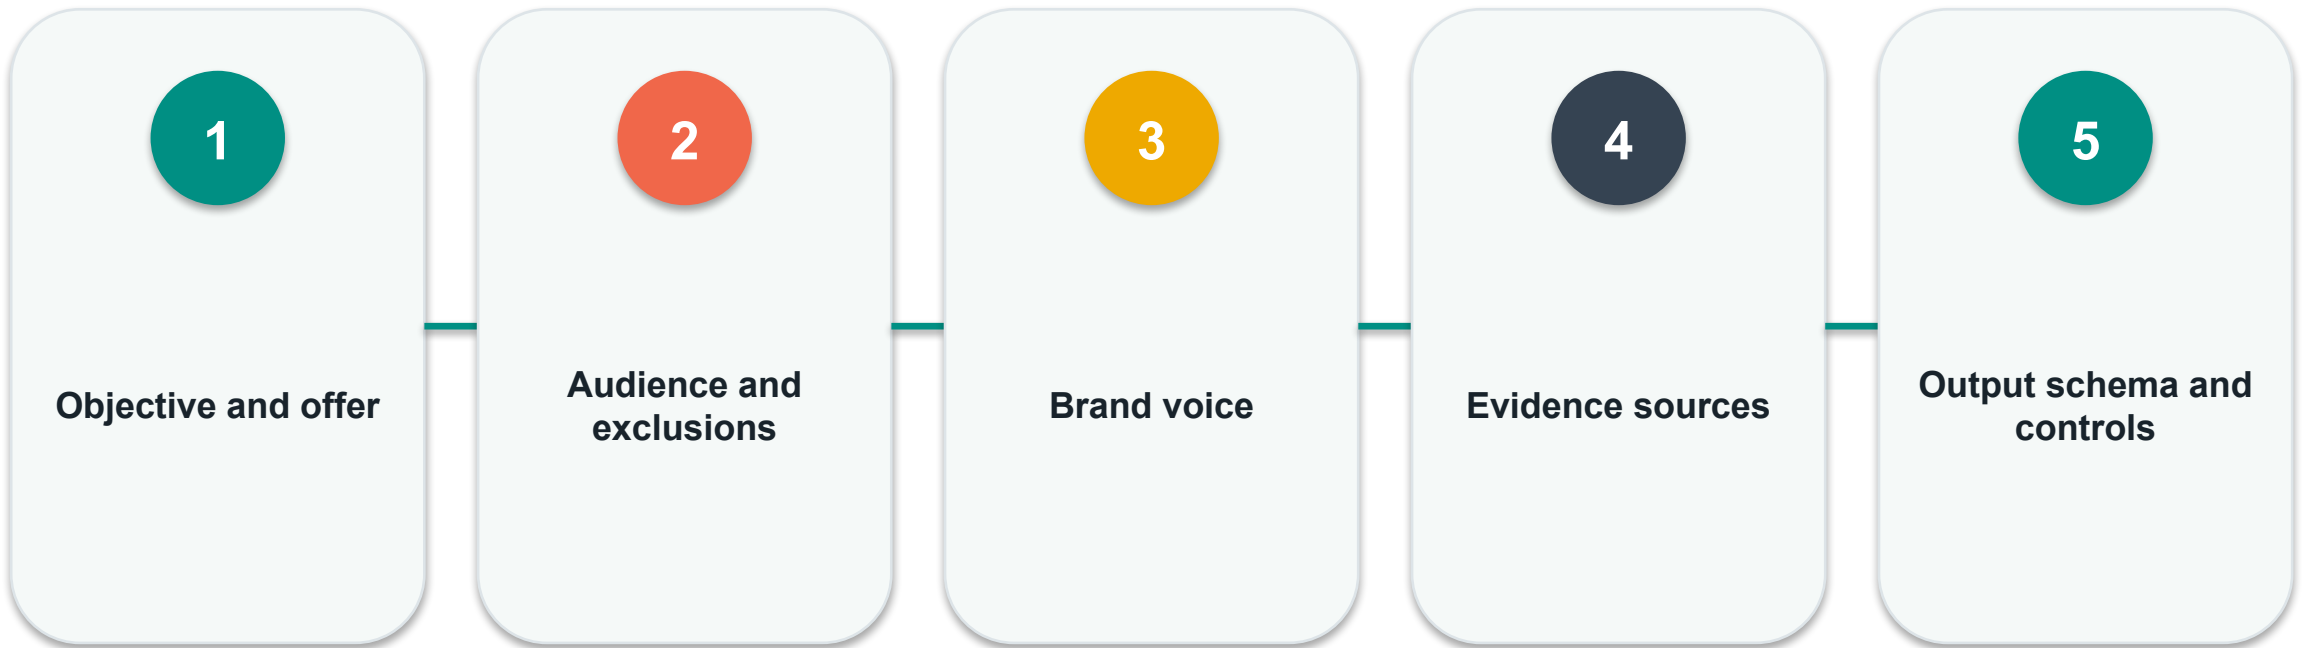


Read left to right. Each boundary has a named payload, state transition and owner.

Newsletter Output Schema

subject	<= 60 characters, no unsupported claim	preheader	complements subject
html	valid semantic email HTML	text	plain-text alternative
cta	one primary action and tracked URL	citations	source IDs for factual claims
risk_flags	empty only after critic pass		

Multi-Agent Editorial Loop

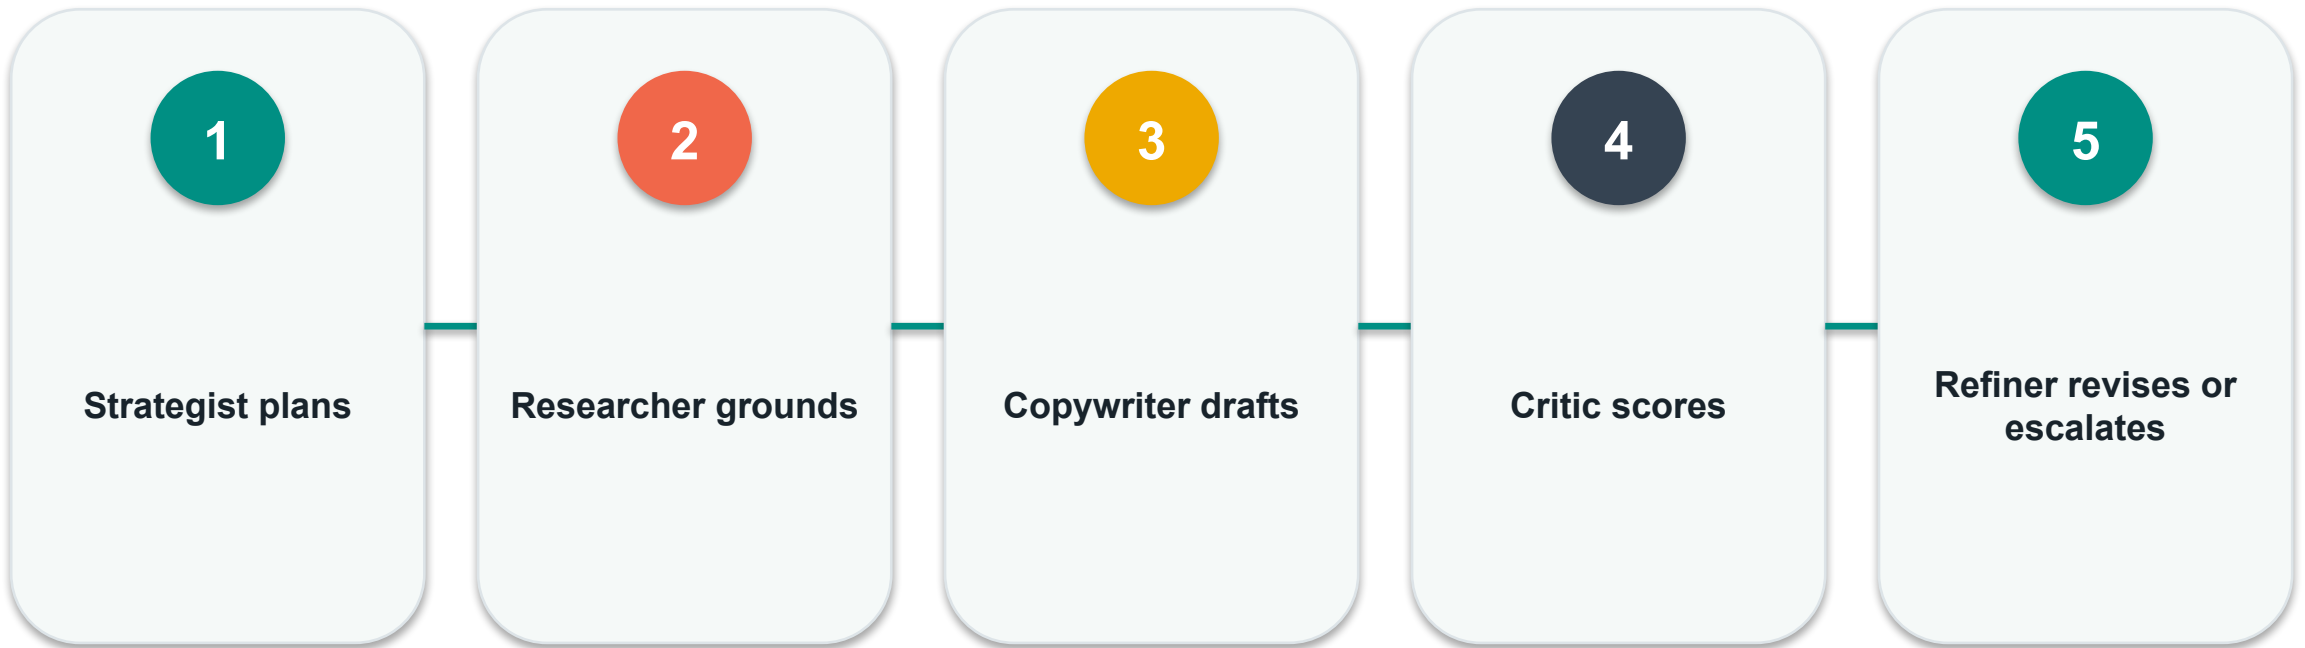

Read left to right. Each boundary has a named payload, state transition and owner.

Parallel Specialists vs Sequential Review

Parallel

- ✓ Faster independent viewpoints
- ✓ Requires merge contract
- ✓ Good for research and audience options

Sequential

- ✓ Each stage sees prior artifact
- ✓ Simpler provenance
- ✓ Good for draft -> critic -> revision

Quality Gate as a Deterministic Score

$$\text{Gate} = \min(\text{brand}, \text{evidence}, \text{compliance}, \text{actionability})$$

REALISTIC INPUTS

Scores 92, 88, 74, 90 -> Gate 74 -> REVISE


DECISION

The weakest mandatory dimension controls release; averages can hide a compliance failure.

Reviewer Decision Payload

decision	approve reject revise	reviewer_id	authenticated reviewer
payload_hash	hash of exact draft and schedule	expires_at	approval time-to-live
feedback	required on reject or revise	version	must match pending draft

Approval Must Bind to the Exact Payload

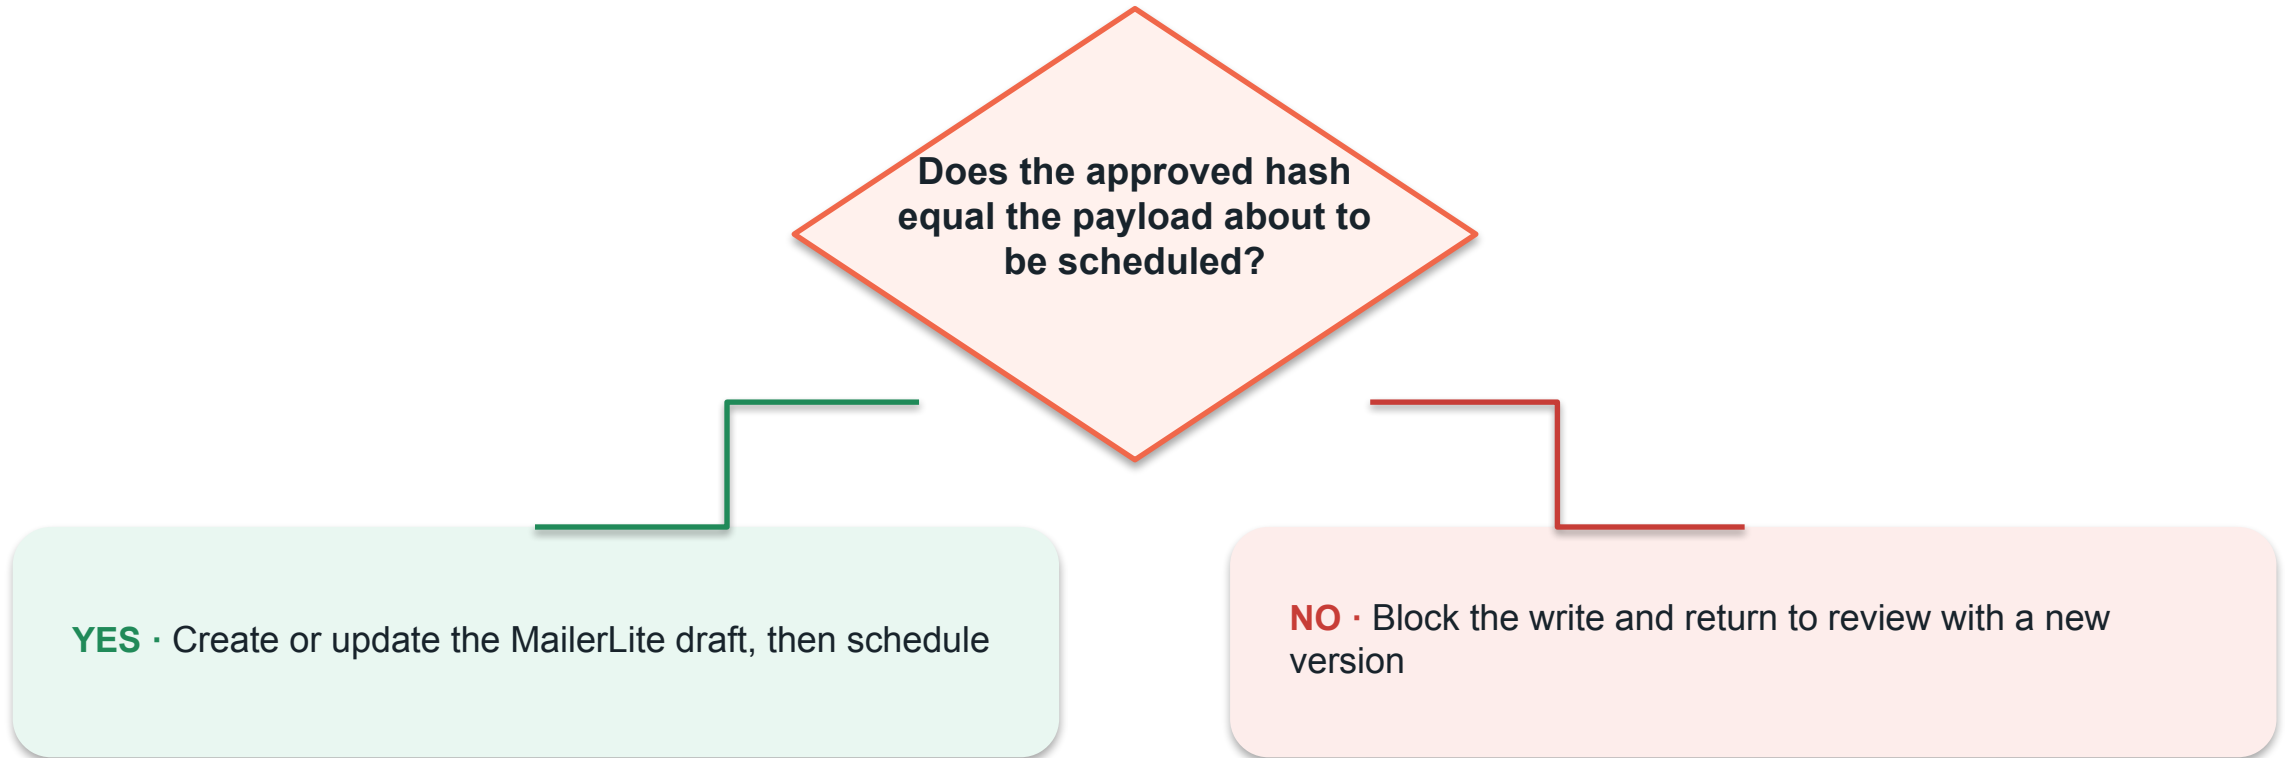

Create a MailerLite Campaign Draft

HTTP + JSON

POST /api/campaigns

```
{"name":"{{$json.campaign_name}}","type":"regular","emails":  
[{"subject":"{{$json.subject}}","from_name":"{{$json.from_name}}","from":"{{$json.verified_sender}}","content":"{{$json.html}}"],"groups":["{{$json.group_id}}"]}
```

WHAT TO VERIFY The sender must already be verified. Advanced-plan rules may apply to HTML content.

Schedule Only After Approval


HTTP + JSON

POST /api/campaigns/{{\${json.campaign_id}}}/schedule

```
{"delivery":"scheduled","schedule":{"date":"2026-09-15","hours":"10","minutes":"00","timezone_id":{{${json.timezone_id}}}}
```

WHAT TO VERIFY Use a future date and preserve timezone explicitly. Store the returned campaign ID.

Idempotent Schedule Pattern

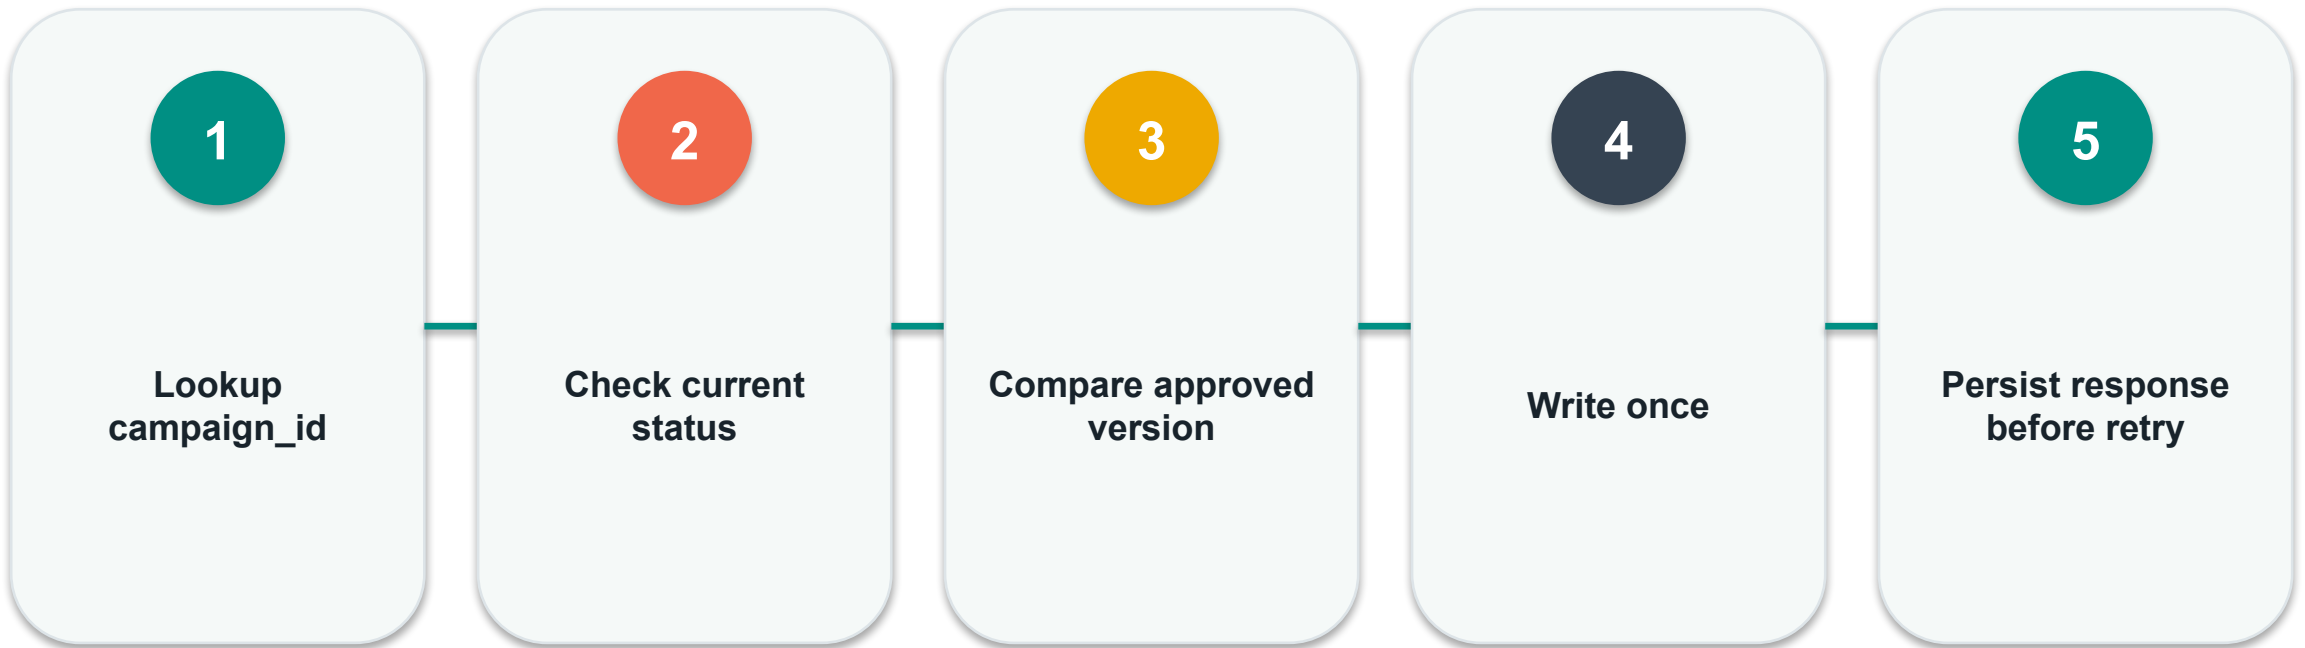

Read left to right. Each boundary has a named payload, state transition and owner.

Campaign-Write Failure Modes



401

credential or scope invalid



422

invalid sender, audience, content or schedule



429

rate limit; back off and retry safely



5xx

retry only with idempotency evidence



ready/sent

do not update as if still draft

LO1 Evidence Bundle

1

Evidence 1

lead-form test submission with explicit consent

2

Evidence 2

MailerLite 200/201 subscriber response

3

Evidence 3

multi-agent draft with critic score and revision

4

Evidence 4

review payload showing decision and hash

5

Evidence 5

MailerLite campaign ID and scheduled time

6

Evidence 6

n8n execution log with no secret values

LAB 1

Consent-First Lead Capture to MailerLite

LO1 | K3 | A1 · 75 minutes

Lab 1 Scenario

1

Business need

Build an n8n form workflow that validates explicit consent, normalises a lead, upserts the subscriber into a MailerLite group and preserves audit evidence.

2

Deliverable


A production-shaped lead form, MailerLite upsert, rejection path and evidence record.

3

Tool boundary

n8n Form Trigger, Code, IF, HTTP Request, MailerLite API

Lab 1 Runtime Mechanism

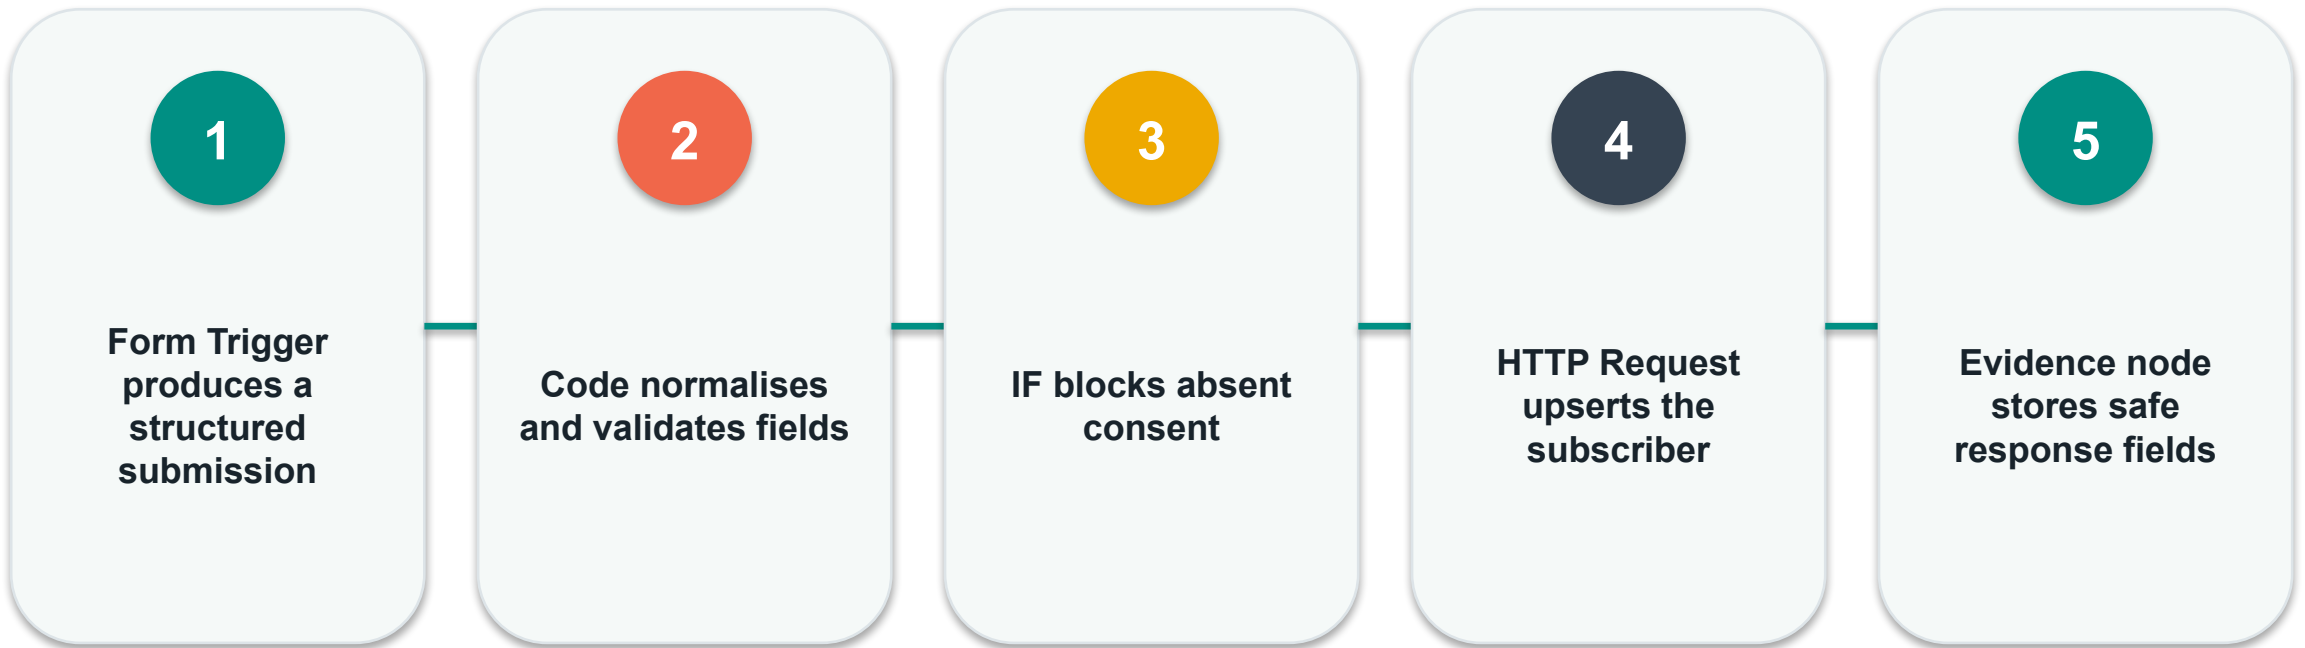

Read left to right. Each boundary has a named payload, state transition and owner.

Lab 1 Concrete Contract

Rule 1

email is trimmed and lowercased

Rule 2

consent must equal true

Rule 3

consent_text_version is recorded

Rule 4

group_id is configuration, not model output

Rule 5

API token remains in an n8n credential

Lab 1 Evidence Package

1 Evidence 1

test submission

2 Evidence 2

normalised payload

3 Evidence 3

MailerLite subscriber ID and status

4 Evidence 4

n8n execution ID

Lab 1 Verification and Failure

Accept

- ✓ valid consent reaches MailerLite
- ✓ missing consent never calls MailerLite
- ✓ subscriber ID/status captured
- ✓ credential value absent from exports

Diagnose

- ✓ invalid email returns a controlled form response
- ✓ unsubscribed status is never silently overridden
- ✓ 200 and 201 are both accepted
- ✓ 429 follows bounded exponential backoff

LAB 2

Campaign Brief and Audience Contract

LO1 | K1-K2 · 60 minutes

Lab 2 Scenario

1

Business need

Turn a marketing objective into a validated campaign brief that every specialist agent consumes consistently.

2

Deliverable


A campaign-brief intake form, JSON schema validator and audience/message contract.

3

Tool boundary

n8n Form Trigger, Edit Fields, Code, Structured Output

Lab 2 Runtime Mechanism

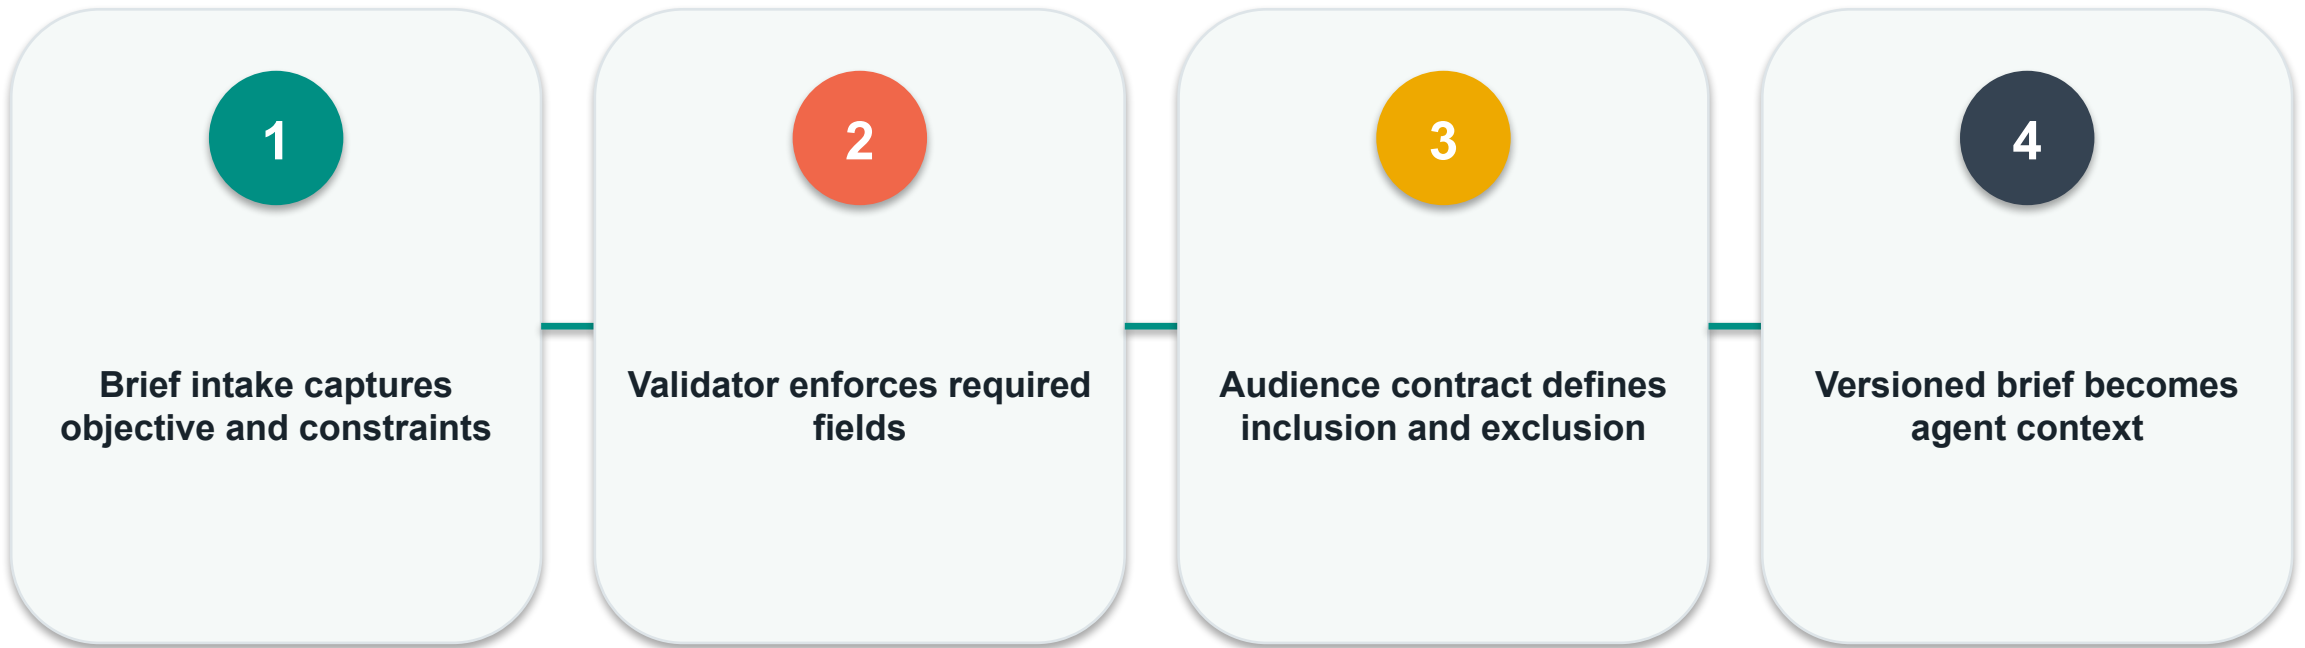

Read left to right. Each boundary has a named payload, state transition and owner.

Lab 2 Concrete Contract

Rule 1	one primary objective	Rule 2	one primary CTA
Rule 3	eligible group and exclusions	Rule 4	brand voice and prohibited claims
Rule 5	evidence source IDs	Rule 6	schedule and timezone

Lab 2 Evidence Package

1 Evidence 1

campaign-brief.json

2 Evidence 2

validator result

3 Evidence 3

audience inclusion/exclusion table

4 Evidence 4

brief version hash

Lab 2 Verification and Failure

Accept

- ✓ all required fields pass
- ✓ exclusions present
- ✓ one CTA only
- ✓ brief version and hash generated

Diagnose

- ✓ ambiguous objectives fail validation
- ✓ missing exclusions stop the pipeline
- ✓ unversioned edits create a new brief version
- ✓ PII is not inserted into prompts

LAB 3

Multi-Agent Newsletter Editorial System

LO1 | K1-K2 | A2 · 120 minutes

Lab 3 Scenario

1

Business need

Coordinate strategist, researcher, copywriter, critic and refiner agents through explicit schemas and a bounded revision loop.

2

Deliverable


An importable multi-agent n8n workflow that produces a grounded newsletter draft with quality scores and provenance.

3

Tool boundary

n8n AI Agent, OpenAI Chat Model, Structured Output Parser, Loop Over Items, Code

Lab 3 Runtime Mechanism

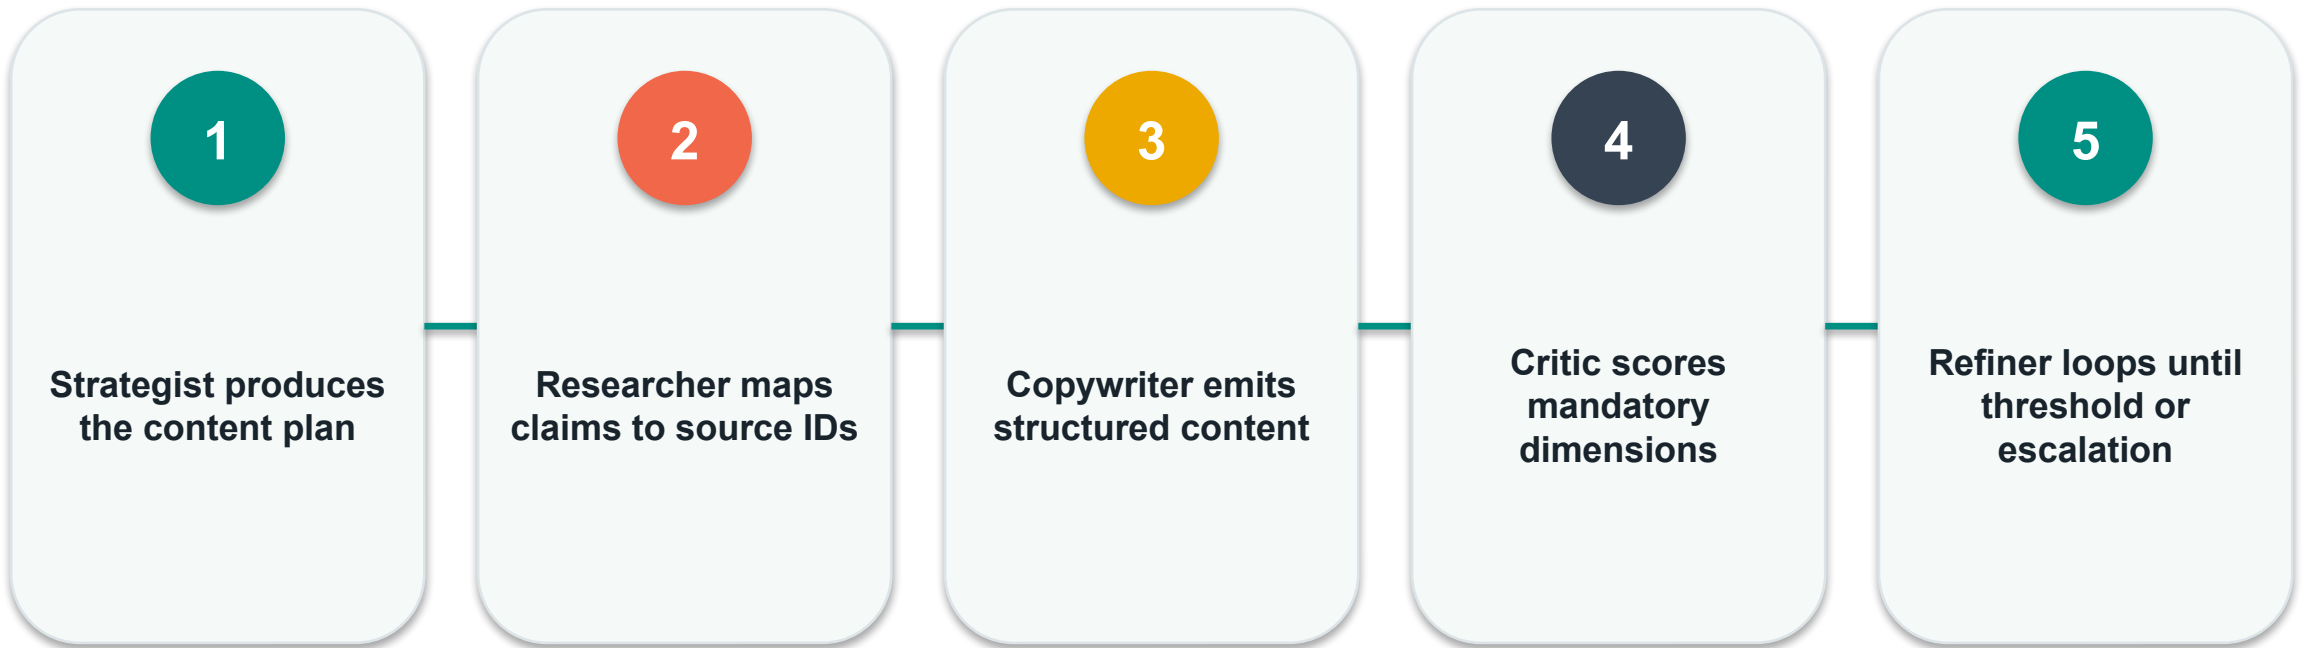

Read left to right. Each boundary has a named payload, state transition and owner.

Lab 3 Concrete Contract

Rule 1

structured JSON output

Rule 2

maximum two revisions

Rule 3

every factual claim carries a source ID

Rule 4

critic minimum score 80 on every dimension

Rule 5

no external send tool attached

Lab 3 Evidence Package

1 Evidence 1

agent outputs

2 Evidence 2

critic scorecard

3 Evidence 3

revision count

4 Evidence 4

final content JSON

5 Evidence 5

execution graph

Lab 3 Verification and Failure

Accept

- ✓ five distinct roles visible
- ✓ source IDs preserved
- ✓ schema valid
- ✓ bounded revision loop
- ✓ no send/schedule action

Diagnose

- ✓ parser errors route to repair
- ✓ missing source IDs force revision
- ✓ loop limit escalates to human
- ✓ agent outputs never overwrite raw brief

LAB 4

Human Approval and MailerLite Scheduling

LO1 | K4 | A3 · 105 minutes

Lab 4 Scenario

1

Business need

Bind a human decision to the exact newsletter payload, create a MailerLite draft and schedule only the approved version.

2

Deliverable


A human-review gate, payload hash check, MailerLite draft creation and schedule transaction with release evidence.

3

Tool boundary

n8n Manual Trigger, Gmail Send and Wait, IF, Code, HTTP Request

Lab 4 Runtime Mechanism

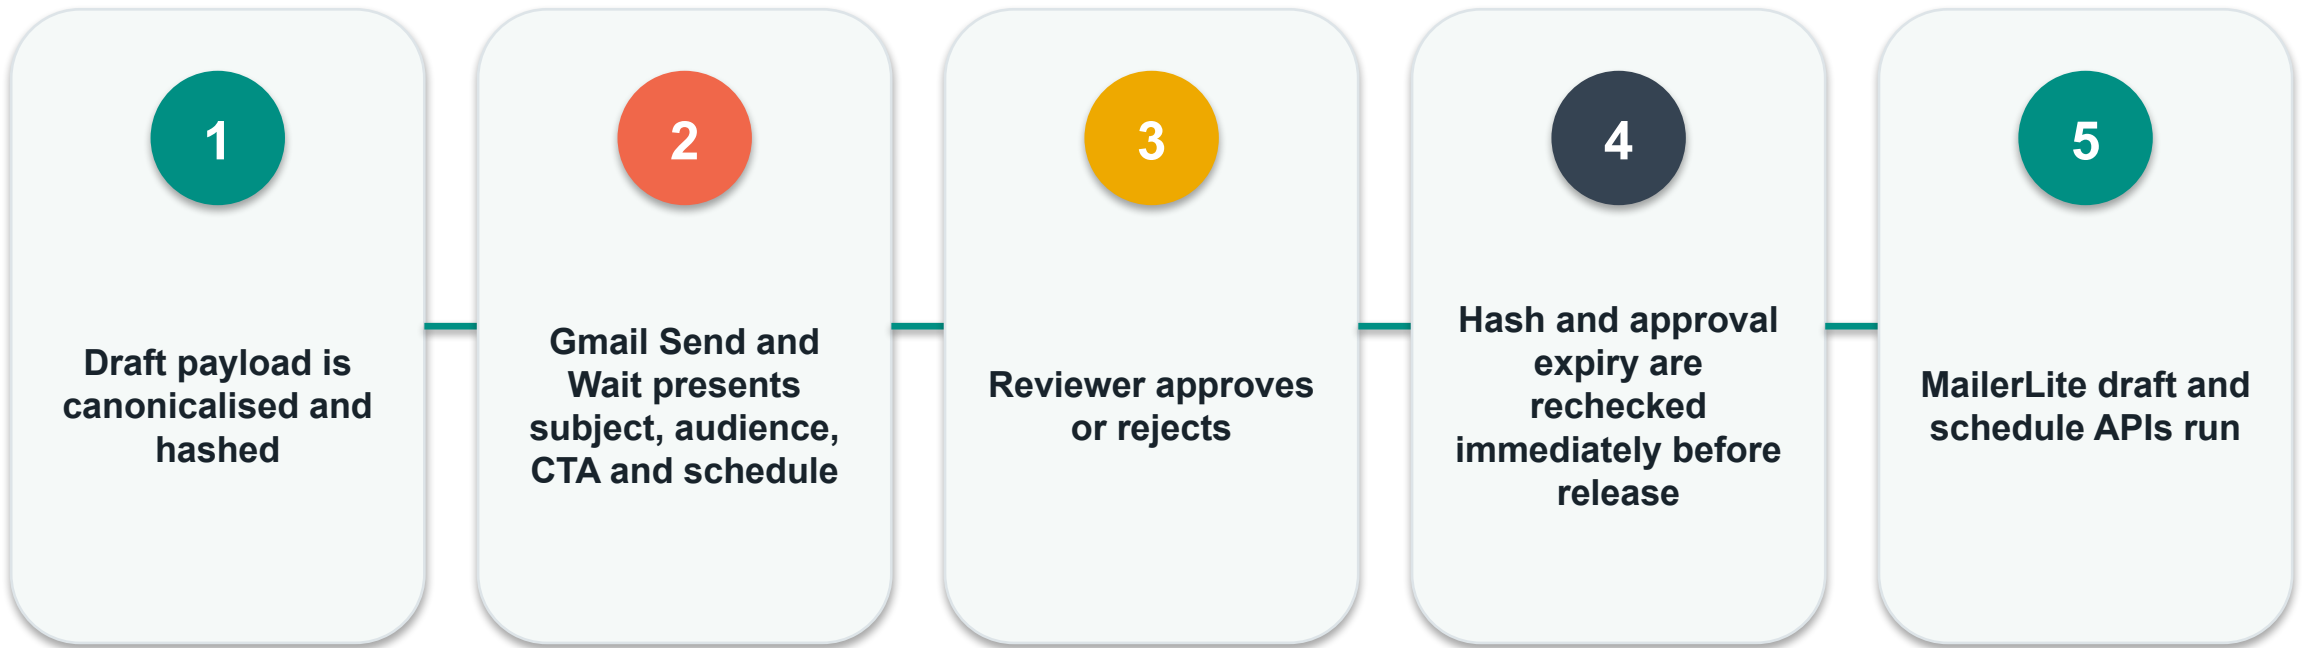

Read left to right. Each boundary has a named payload, state transition and owner.

Lab 4 Concrete Contract

Rule 1	authenticated reviewer	Rule 2	approval expiry
Rule 3	payload hash equality	Rule 4	verified sender
Rule 5	group ID allow-list	Rule 6	future schedule with timezone

Lab 4 Evidence Package

1 Evidence 1

review request

2 Evidence 2

decision payload

3 Evidence 3

hash comparison

4 Evidence 4

MailerLite campaign ID

5 Evidence 5

scheduled timestamp

Lab 4 Verification and Failure

Accept

- ✓ reject path makes no write
- ✓ hash mismatch blocks
- ✓ approved draft created
- ✓ campaign scheduled once
- ✓ evidence contains reviewer and campaign ID

Diagnose

- ✓ hash mismatch blocks write
- ✓ expired approval blocks release
- ✓ rejection records the decision without an external write
- ✓ 422 exposes safe validation detail

TOPIC 02

AI-Driven Campaign Performance and Consumer Insights Analysis

MailerLite events -> normalised facts -> KPI model -> diagnostic dashboard

Topic 02 Coverage

1

Mechanism 1

Model campaign, delivery and subscriber events at the correct grain.

2

Mechanism 2

Distinguish delivery, engagement and business outcomes in a metric tree.

3

Mechanism 3

Use cohort and funnel views to diagnose where performance is lost.

4


Mechanism 4

State limitations of open tracking, attribution and small samples.

Acquisition, Delivery, Measurement, Optimization



Analytics Ingestion Runtime Trace

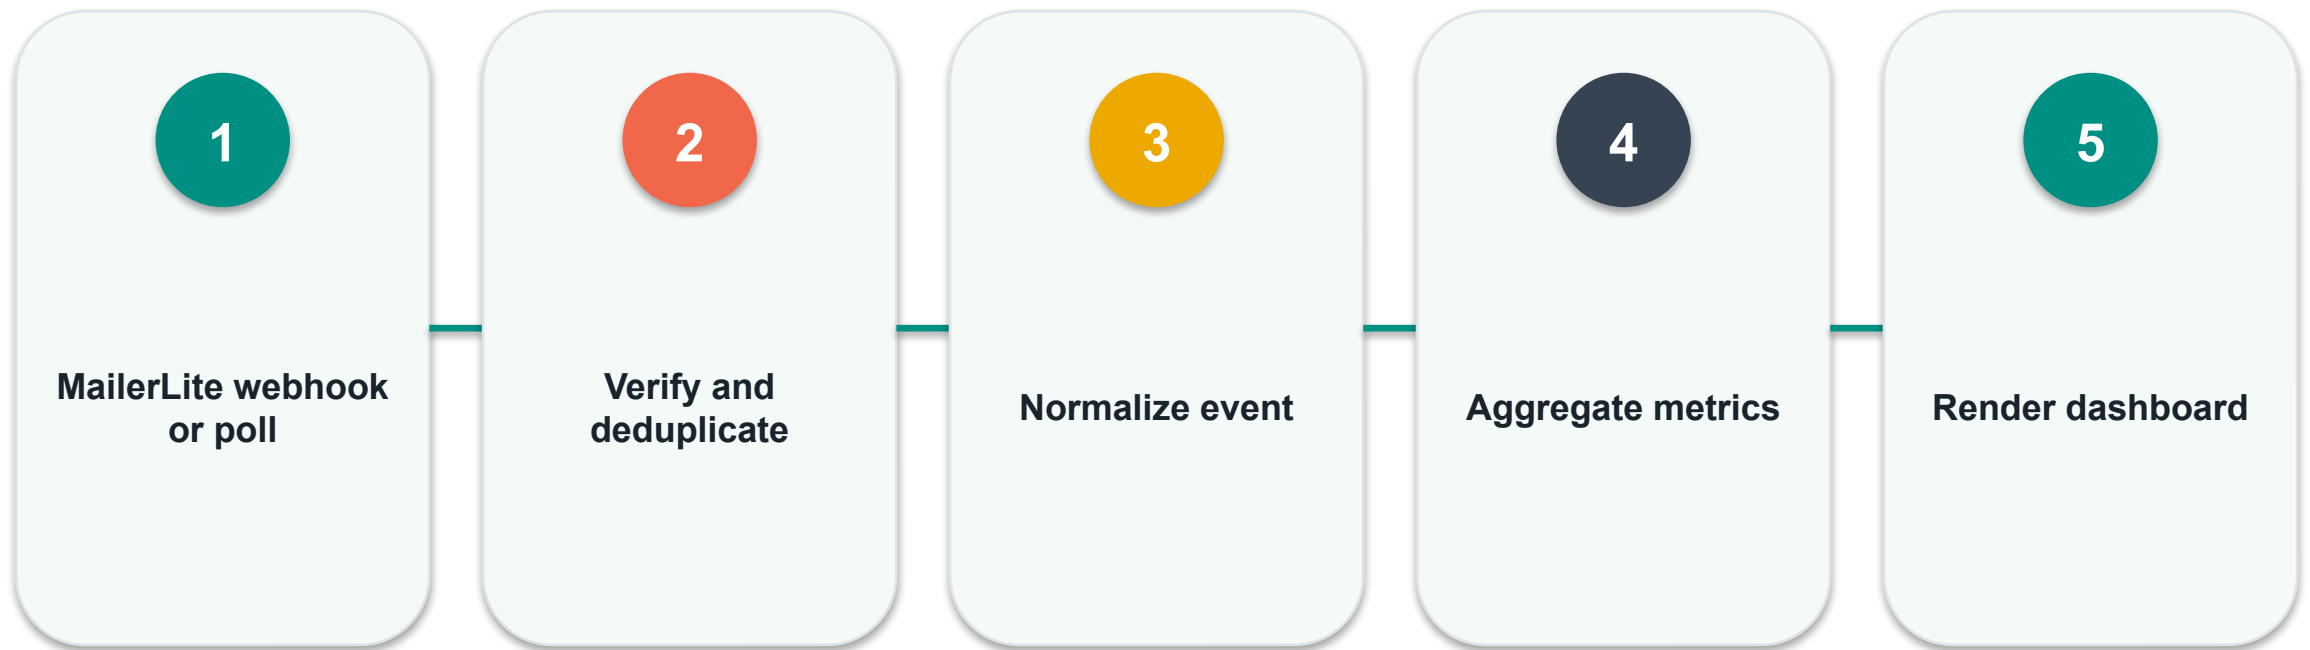

Read left to right. Each boundary has a named payload, state transition and owner.

Campaign Event Fact

event_id	deduplication key	event_type	sent open click unsubscribe bounce
occurred_at	event timestamp UTC	campaign_id	delivery identity
subscriber_id	pseudonymous analysis key	link_id	nullable click target
source_payload_hash	lineage without exposing PII		

Verify MailerLite Webhook Signature

JAVASCRIPT

```
const expected = hmacSha256(rawBody, webhookSecret);  
if (!timingSafeEqual(signature, expected)) throw new Error('invalid signature');  
return { eventId, eventType, occurredAt, campaignId };
```

WHAT TO VERIFY MailerLite signs webhook payloads with HMAC-SHA256. A valid 2xx response should be returned quickly.

Email KPI Definitions

Delivery rate = delivered / sent; CTR = unique clicks / delivered; CTOR = unique clicks / unique opens


REALISTIC INPUTS

9,600 delivered; 2,400 opens; 420 clicks -> CTR 4.38%,
CTOR 17.5%

DECISION

Label the denominator on every chart; similarly named metrics can answer different questions.


Funnel Reveals Where Value Is Lost

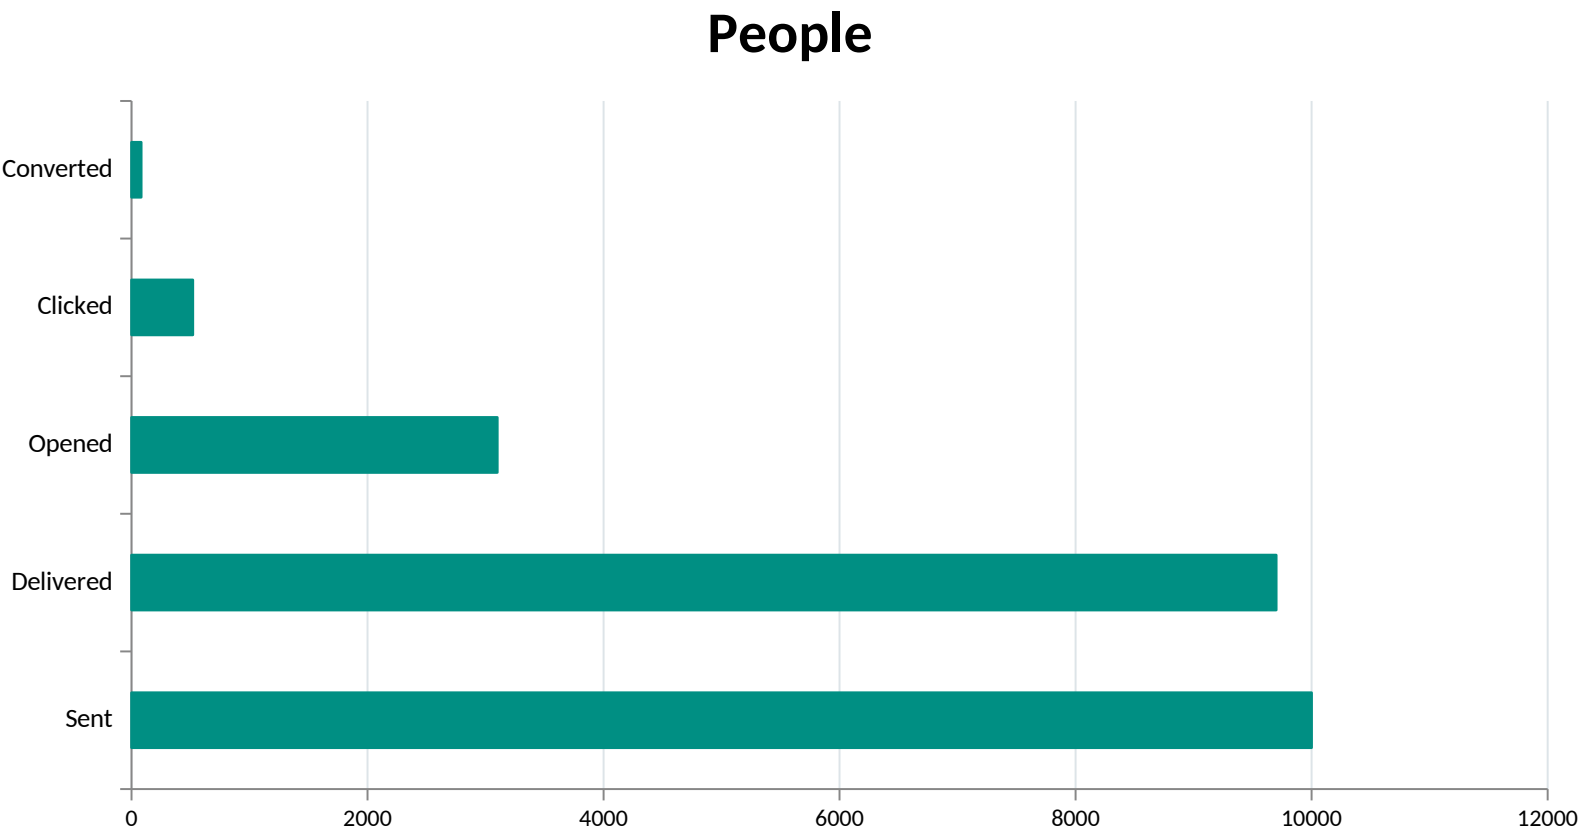

WHAT THE DATA SHOWS

The sharpest proportional drop is click-to-conversion, not delivery.


Target vs Actual Campaign KPIs

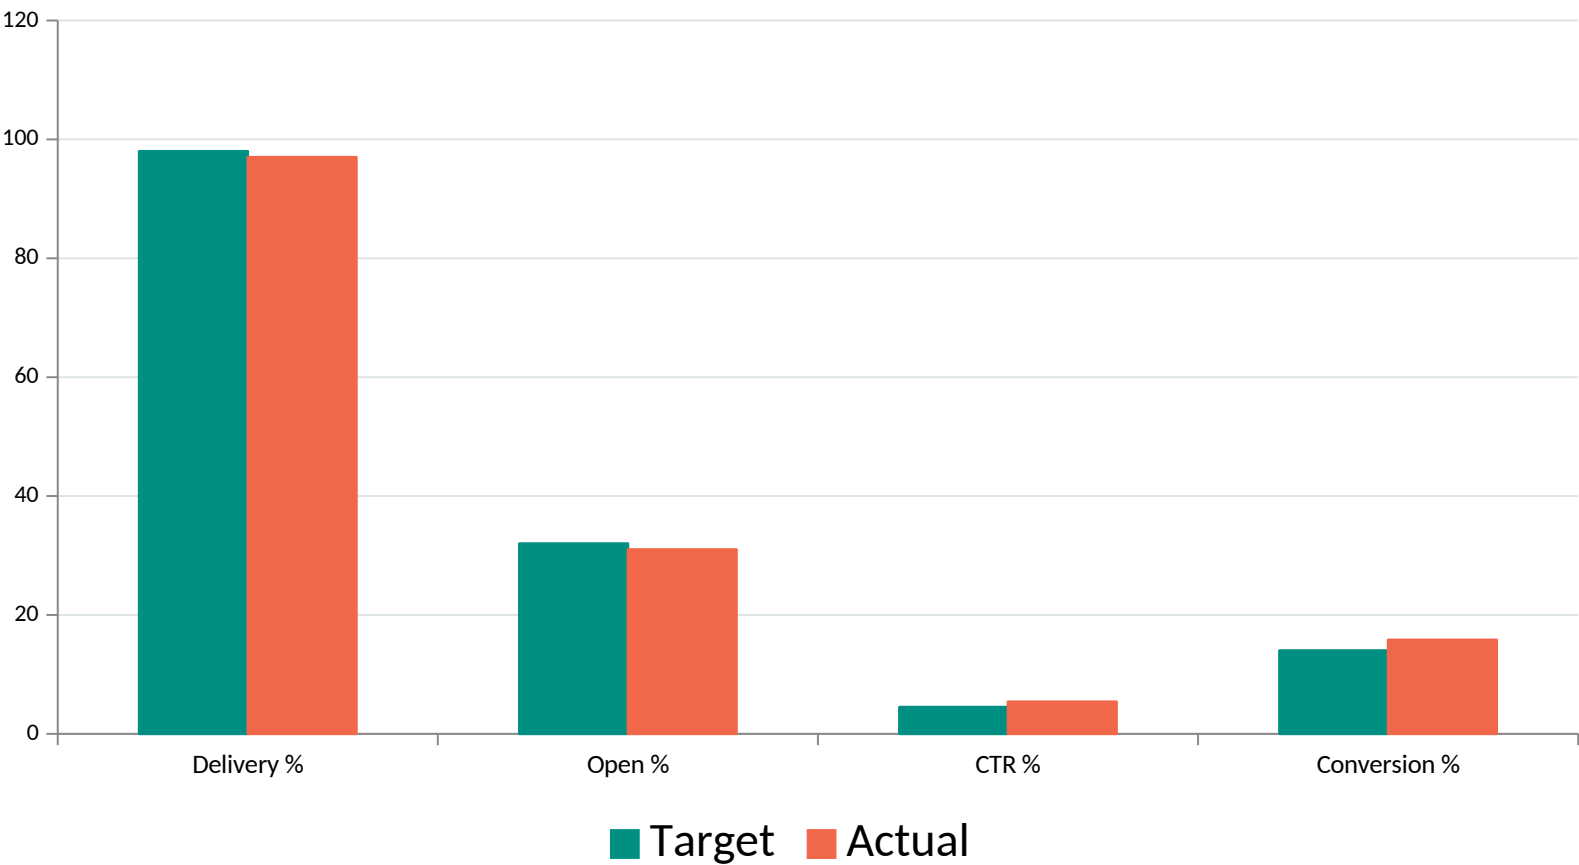

WHAT THE DATA SHOWS

Delivery and opens miss target; downstream engagement exceeds target.

Cohort View Separates Audience Effects

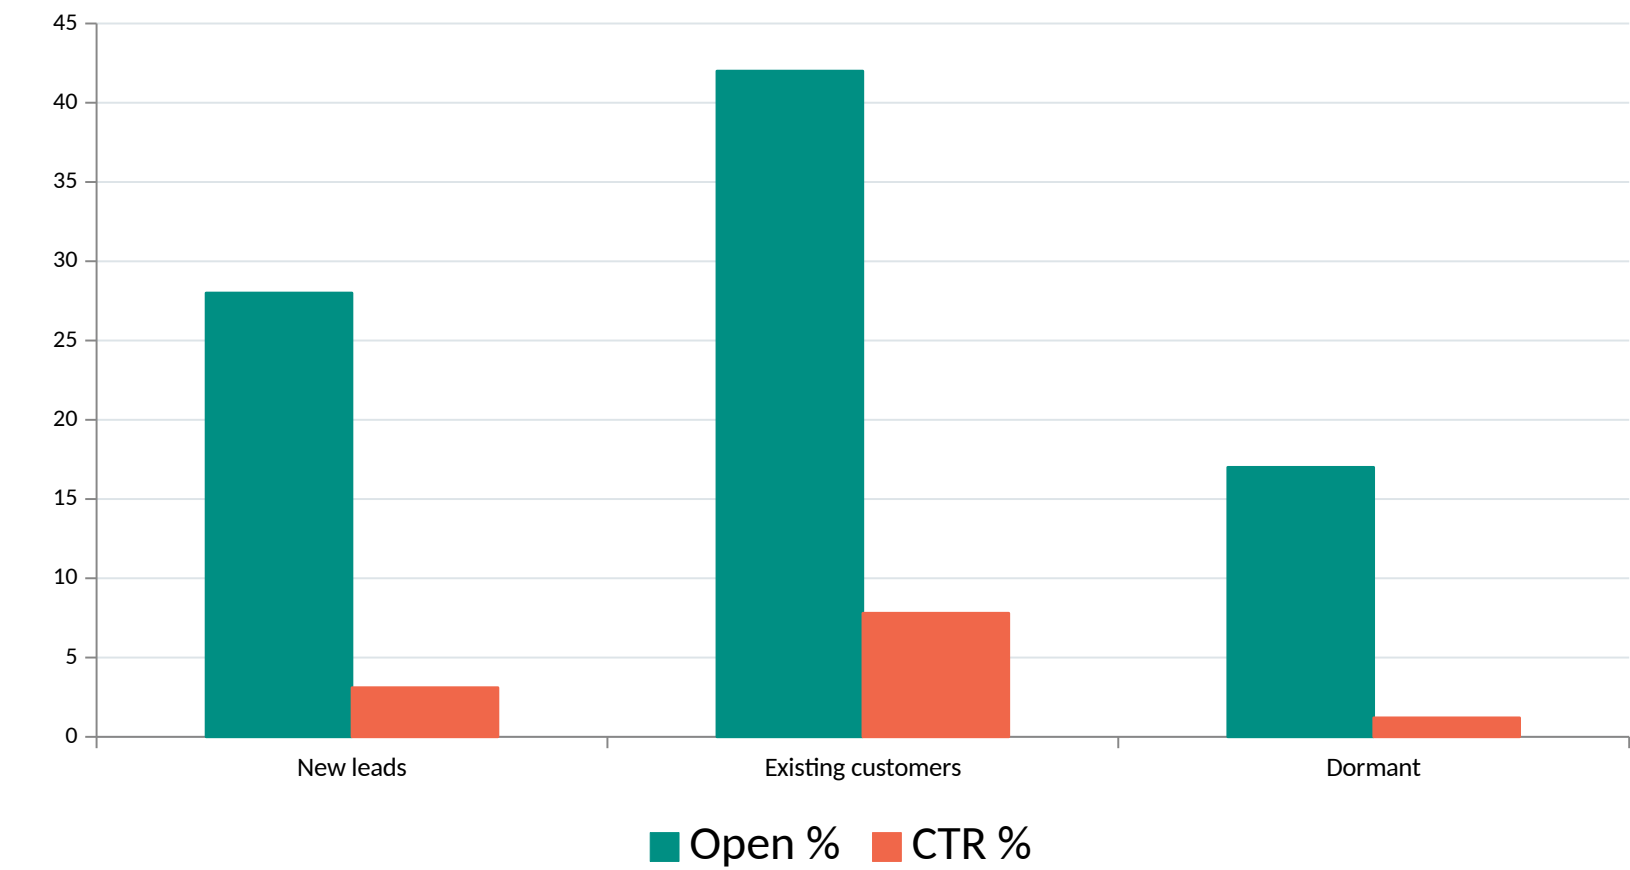

WHAT THE DATA SHOWS

The aggregate hides a weak dormant cohort and a strong customer cohort.

Webhook vs Scheduled Poll


Webhook

- ✓ Near real-time events
- ✓ Requires HMAC verification
- ✓ Handle retries and duplicates

Scheduled poll

- ✓ Simpler recovery and backfill
- ✓ Higher latency and API use
- ✓ Use cursors and watermarks

When Is an Alert Actionable?

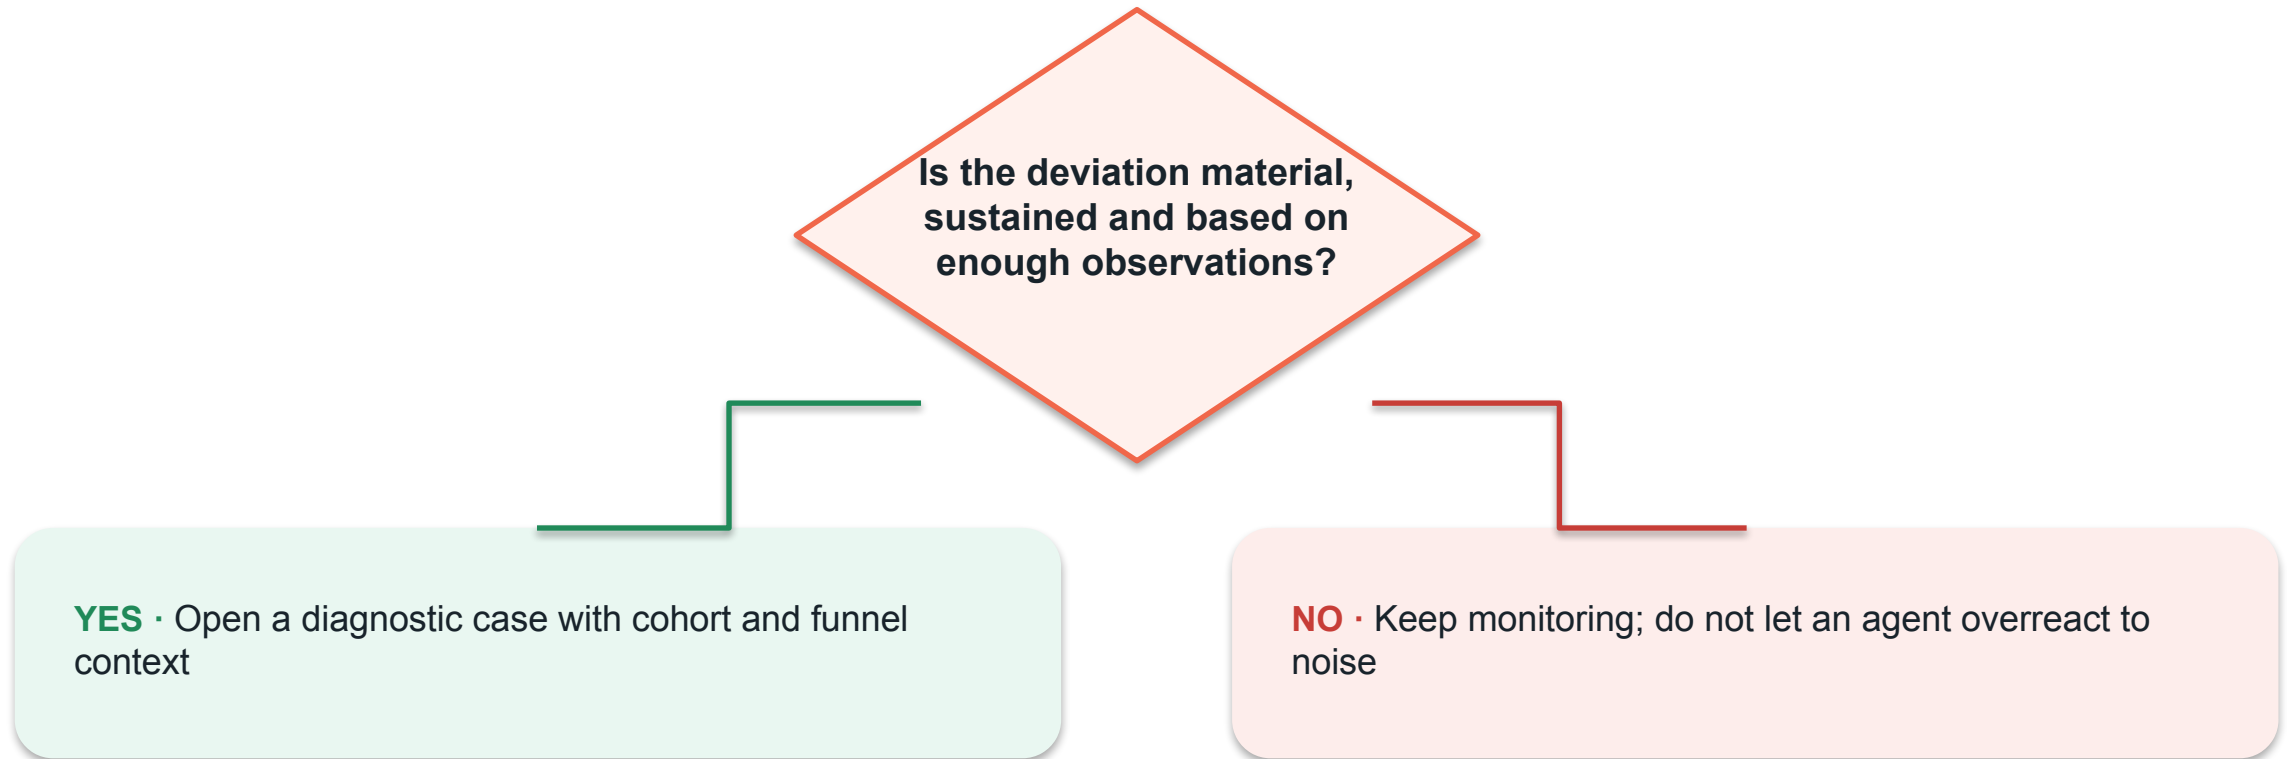

Measurement Limitations



Open tracking

privacy proxies and blocked pixels distort counts



Click activity

security scanners can create bot clicks



Attribution

last-click can ignore assisted conversions



Small cohorts

rates swing with few observations



Survivorship

unsubscribed users disappear from future engagement

LO2 Evidence Bundle

1

Evidence 1

validated event samples and deduplication result

2

Evidence 2

metric dictionary with denominators

3

Evidence 3

dashboard screenshot or HTML export

4

Evidence 4

target-versus-actual interpretation

5

Evidence 5

one diagnosed issue with evidence

6

Evidence 6

one controlled corrective action and expected metric movement

LAB 5

MailerLite Campaign Analytics Dashboard

LO2 | K5 | A4 · 120 minutes

Lab 5 Scenario

1

Business need

Fetch current MailerLite campaign statistics, normalise the report, calculate labelled metrics and publish a self-contained diagnostic dashboard.

2

Deliverable


A live MailerLite campaign-report fetch, validated KPI calculation and HTML dashboard with status, target and funnel views.

3

Tool boundary

n8n Webhook, Set, HTTP Request, Code, Respond to Webhook

Lab 5 Runtime Mechanism

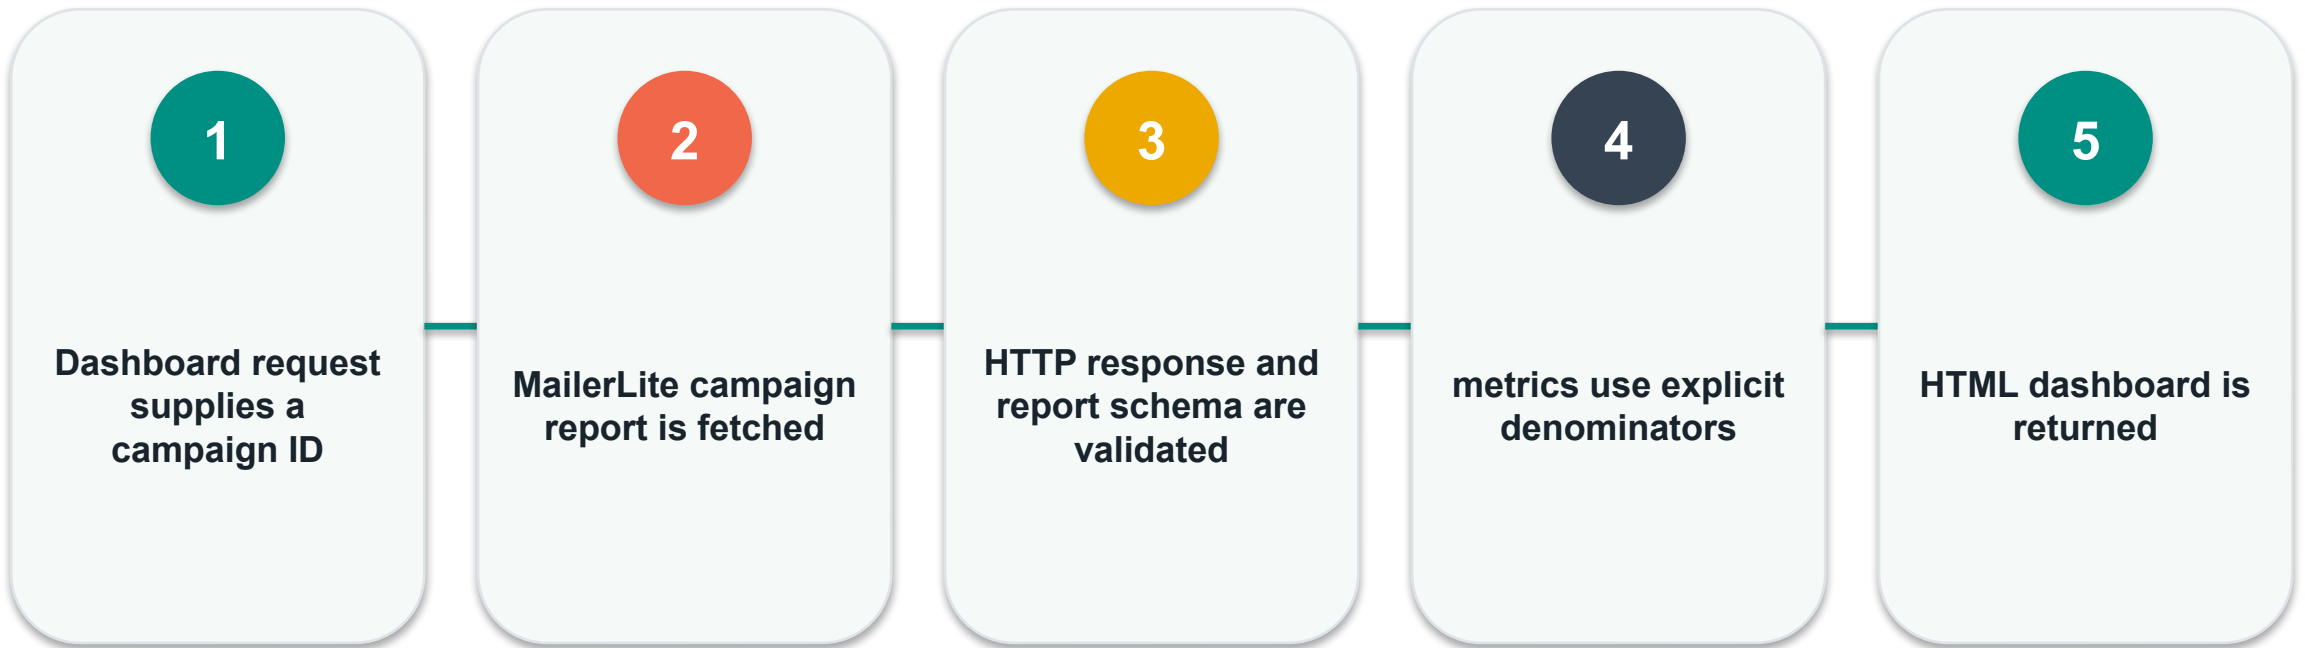

Read left to right. Each boundary has a named payload, state transition and owner.

Lab 5 Concrete Contract

Rule 1	campaign ID allow-listed	Rule 2	HTTP status validated
Rule 3	metric denominators labelled	Rule 4	zero denominators return N/A
Rule 5	PII excluded from dashboard		

Lab 5 Evidence Package

1 Evidence 1

MailerLite report response

2 Evidence 2

validated metric object

3 Evidence 3

metric dictionary

4 Evidence 4

dashboard HTML or screenshot

5 Evidence 5

diagnostic narrative

Lab 5 Verification and Failure

Accept

- ✓ live report fetched
- ✓ response validated
- ✓ metrics recomputable
- ✓ dashboard renders
- ✓ diagnosis cites status/funnel evidence

Diagnose

- ✓ 401 identifies a credential problem
- ✓ 404 identifies an invalid campaign ID
- ✓ missing statistics fail schema validation
- ✓ empty denominator returns null not infinity

TOPIC 03

AI Agent Analysis of Market Trends and Customer Feedback

Signals -> evidence -> themes -> confidence -> controlled optimization

Topic 03 Coverage

1

Mechanism 1

Separate observed signals from agent inference and recommended action.

2

Mechanism 2

Combine quantitative trends with review themes and unsubscribe reasons.

3

Mechanism 3


Use confidence, materiality and reversible-test thresholds before changing a campaign.

4

Mechanism 4

Write approved learnings back into the next campaign brief without contaminating raw data.

Trend and Feedback Analysis Trace

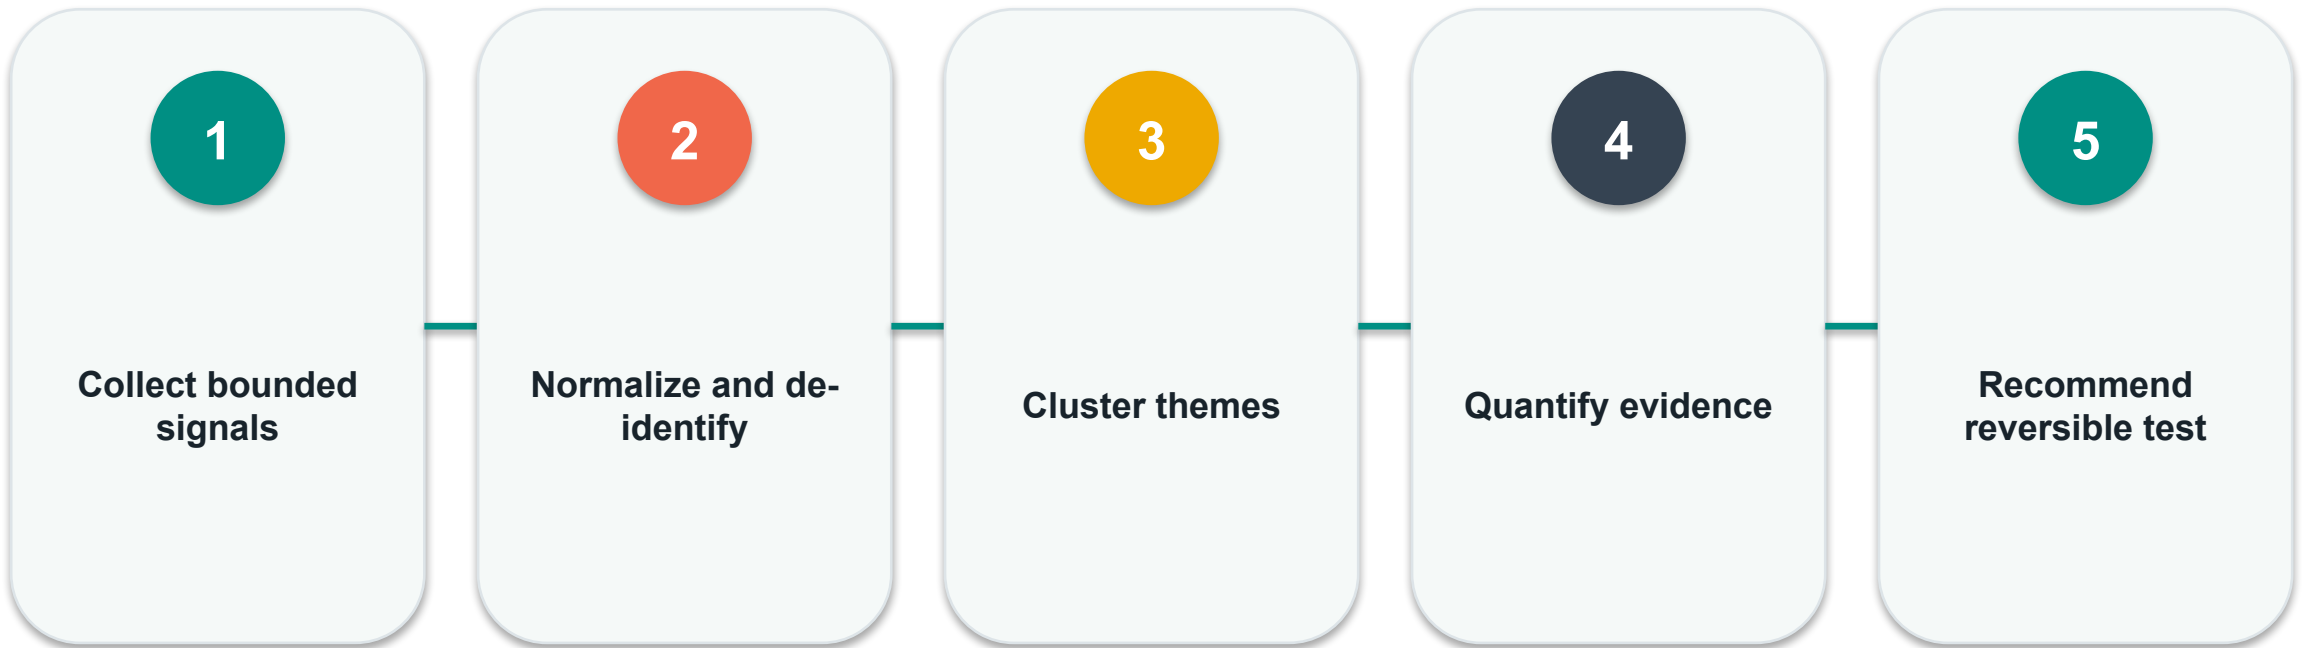

Read left to right. Each boundary has a named payload, state transition and owner.

Evidence Card for Every Finding

finding	plain-language observation	source_ids	traceable records
sample_size	records behind the claim	window	analysis period
confidence	low medium high with reason	counter_evidence	what weakens the claim

Signal, Inference and Recommendation


Observed

- ✓ CTR fell from 5.4% to 3.2%
- ✓ 27 unsubscribe comments mention frequency
- ✓ Dormant cohort had 1.2% CTR

Inferred / proposed

- ✓ Frequency may be contributing
- ✓ Test a lower cadence
- ✓ Do not claim causality yet


Feedback Themes by Campaign

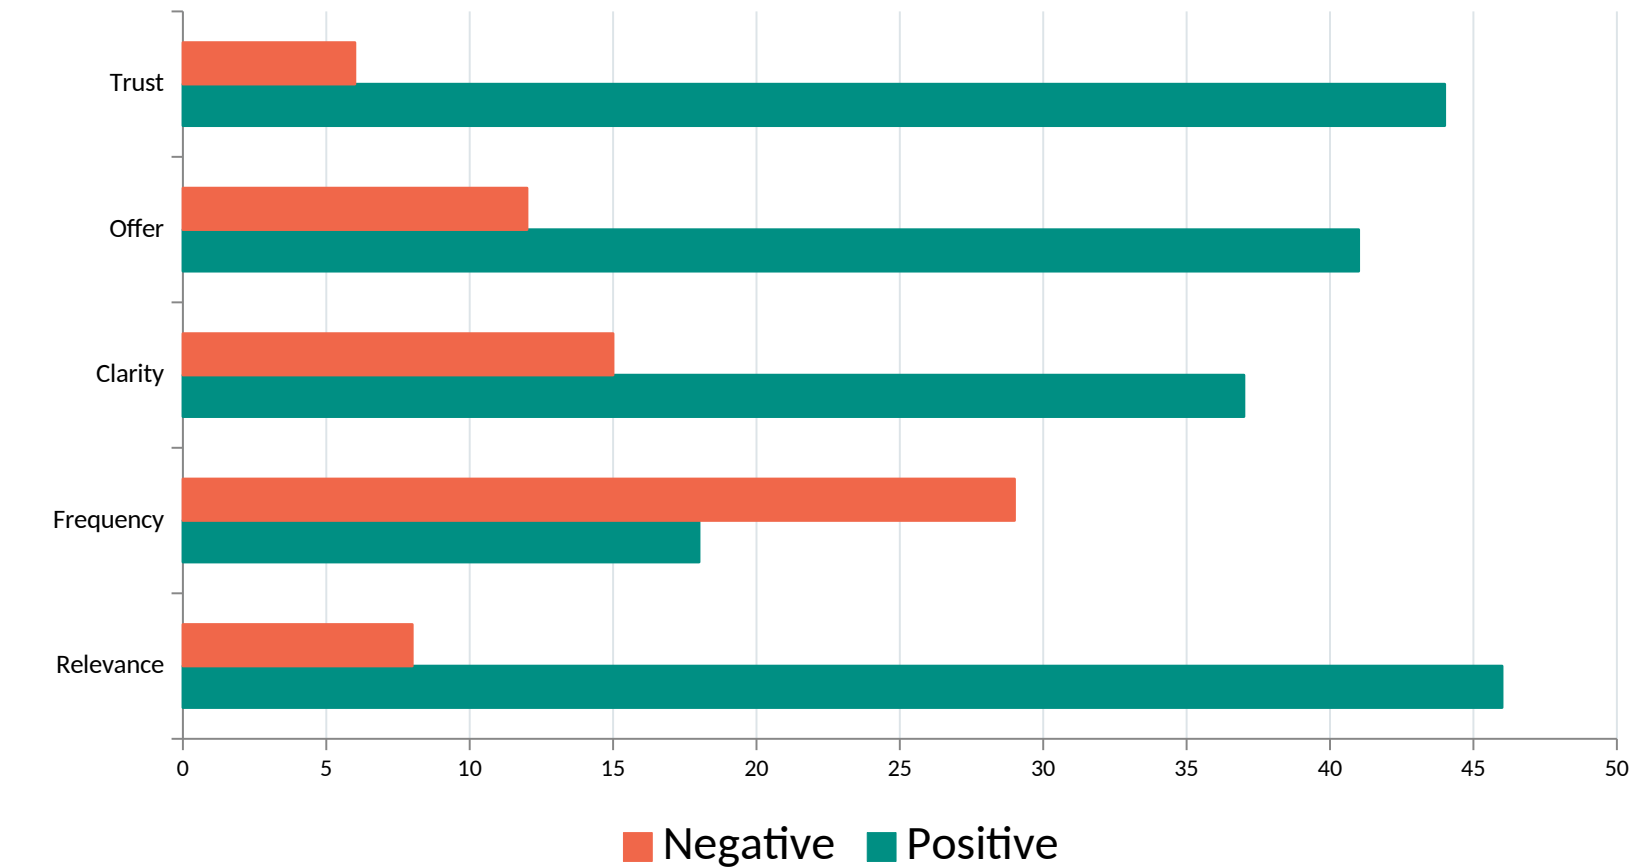

WHAT THE DATA SHOWS

Frequency is the only theme with more negative than positive mentions.

Trend Needs a Window and Baseline

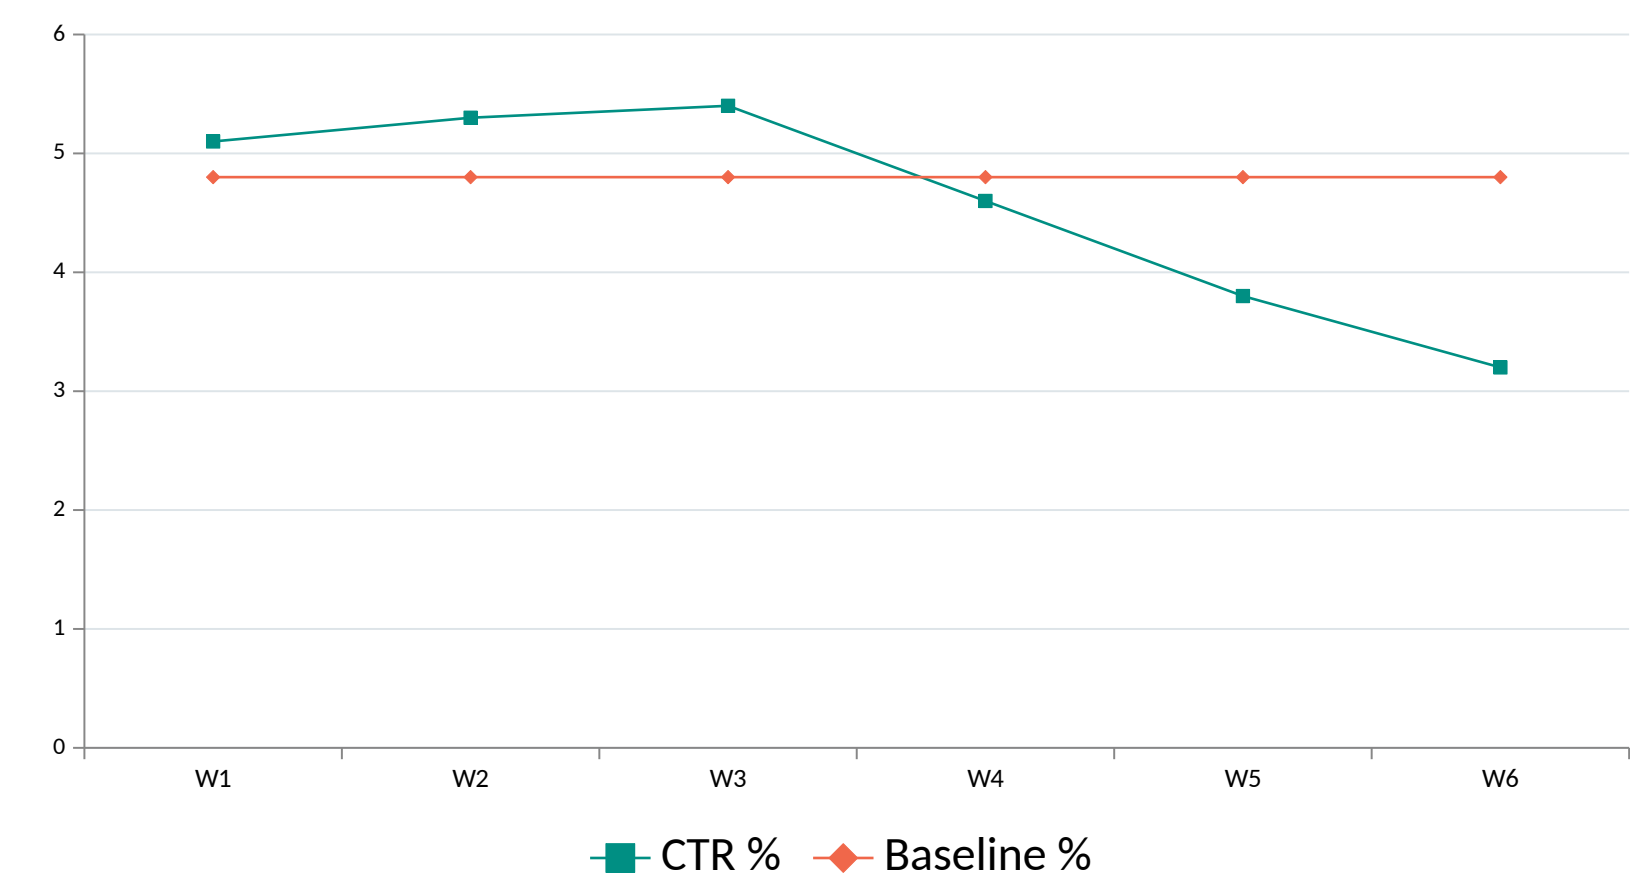

WHAT THE DATA SHOWS

Three consecutive weeks below baseline justify investigation, not an automatic send change.

Priority Score for Improvement Ideas

$$\text{Priority} = \text{impact} \times \text{confidence} \times \text{reversibility} / \text{effort}$$


REALISTIC INPUTS

Cadence test: $4 \times 3 \times 4 / 2 = 24$; redesign: $4 \times 2 \times 2 / 5 = 3.2$

DECISION

The score ranks tests; it does not replace consent, compliance or brand review.

Agent Recommendation Release Gate

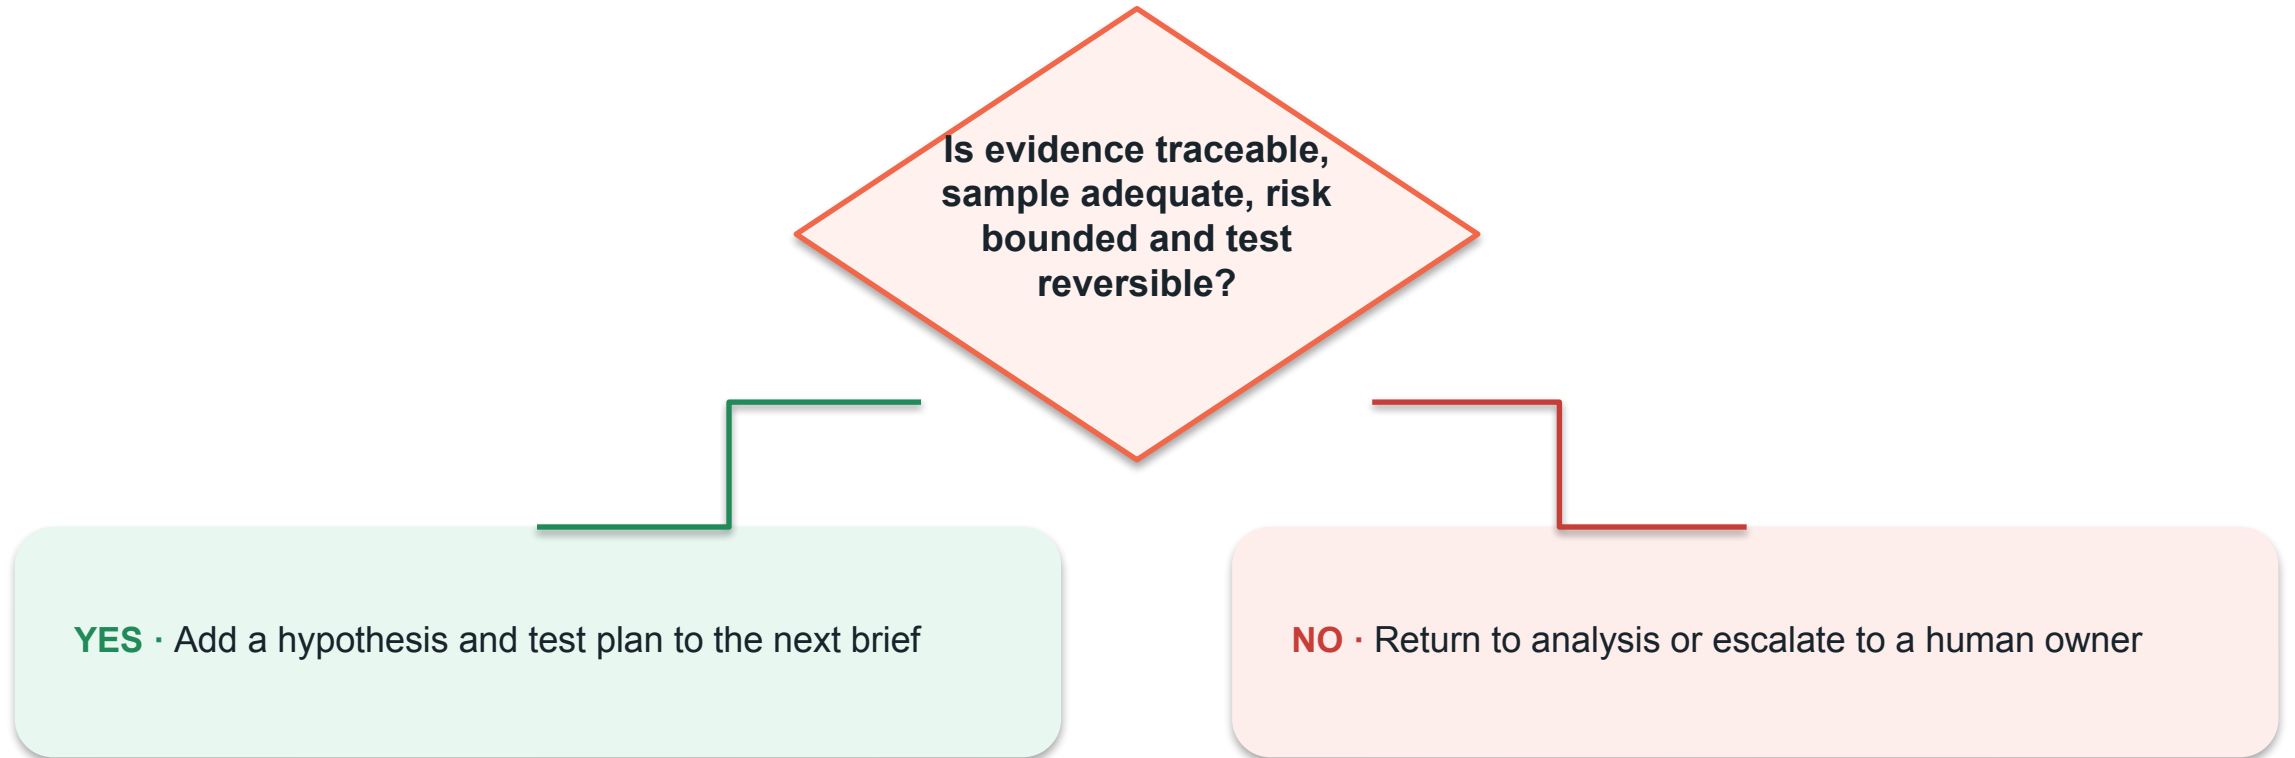

Optimization Experiment Contract

hypothesis	cause and expected direction	primary_metric	one decision metric
guardrail_metrics	unsubscribe, complaint, bounce	segment	eligible population
allocation	control and treatment split	stop_rule	time or sample threshold

Feedback-Analysis Failure Modes



PII leakage

raw reviews copied into prompts or slides



Theme collapse

distinct issues merged into one label



Sentiment shortcut

tone score replaces actual evidence



Recency bias

latest comments dominate



Action inflation

agent proposes change without baseline or owner

LO3 Evidence Bundle

1

Evidence 1

de-identified feedback data set

2

Evidence 2

theme counts linked to source IDs

3

Evidence 3

trend chart with window and baseline

4

Evidence 4

finding with counter-evidence and confidence

5

Evidence 5

ranked recommendation using decision rule

6

Evidence 6

experiment contract with guardrails and human owner

LAB 6

Trend and Customer Feedback Optimization Agent

LO3 | K6 | A5 · 90 minutes

Lab 6 Scenario

1

Business need

Combine campaign trends with de-identified feedback, require evidence cards and produce a reversible experiment recommendation for human approval.

2

Deliverable


A trend/feedback analysis workflow with theme counts, confidence, counter-evidence, priority score and experiment contract.

3

Tool boundary

n8n Code, AI Agent, Structured Output Parser, IF, Chat HITL Tool

Lab 6 Runtime Mechanism

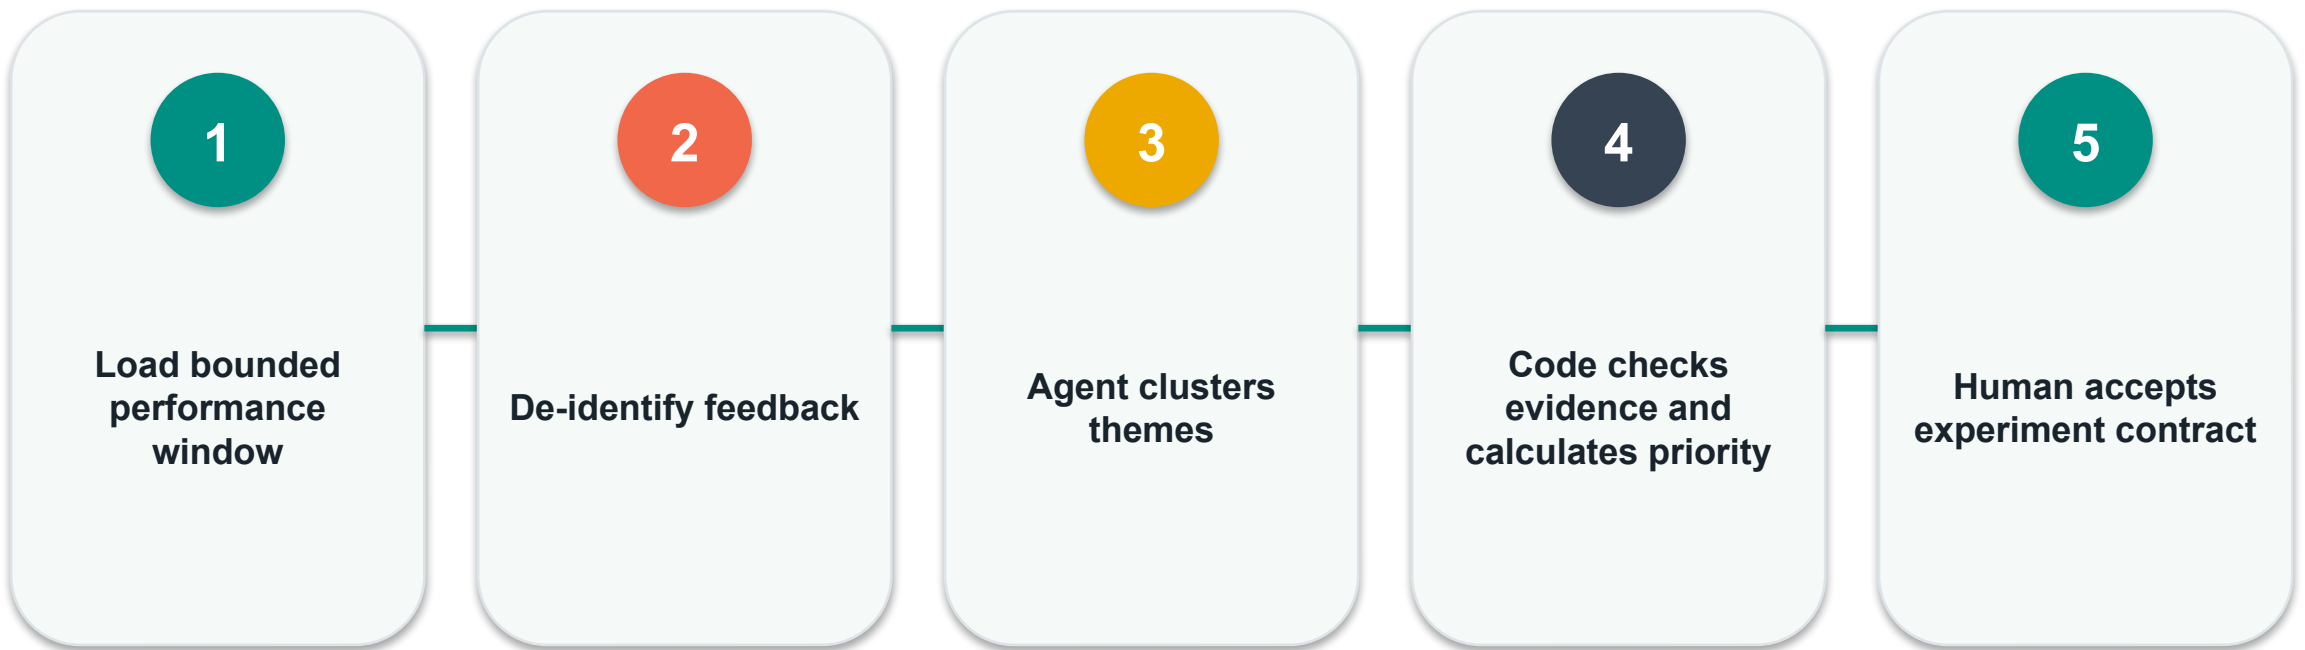

Read left to right. Each boundary has a named payload, state transition and owner.

Lab 6 Concrete Contract

Rule 1

no raw email addresses in prompts

Rule 2

theme counts link to source IDs

Rule 3

confidence includes reason

Rule 4

counter-evidence mandatory

Rule 5

experiment has guardrail metrics

Lab 6 Evidence Package

1 Evidence 1

de-identified feedback

2 Evidence 2

theme table

3 Evidence 3

trend chart

4 Evidence 4

evidence card

5 Evidence 5

approved experiment contract

Lab 6 Verification and Failure

Accept

- ✓ PII removed
- ✓ themes trace to sources
- ✓ trend has baseline/window
- ✓ counter-evidence present
- ✓ experiment has guardrails and approval

Diagnose

- ✓ insufficient sample returns monitor
- ✓ untraceable claim fails schema
- ✓ PII detector blocks prompt
- ✓ irreversible change requires escalation

COURSE CLOSE

From Evidence to Assessment

Review the control loop, complete the assessment and preserve your working artifacts

Revision Map

1

Implement

Labs 1-4: consent, brief, agents, approval and schedule

2

Analyse

Lab 5: event facts, metrics, cohorts and funnel

3

Improve

Lab 6: trends, feedback, evidence cards and experiments

Assessment Reminder


WA · Knowledge

- ✓ K1-K6 from the deck and LG
- ✓ Open-ended responses
- ✓ Use exact contracts and decision rules

PP · Ability

- ✓ A1-A5 from the labs
- ✓ Show observable evidence
- ✓ Explain verification and failure handling

Assessment Flow

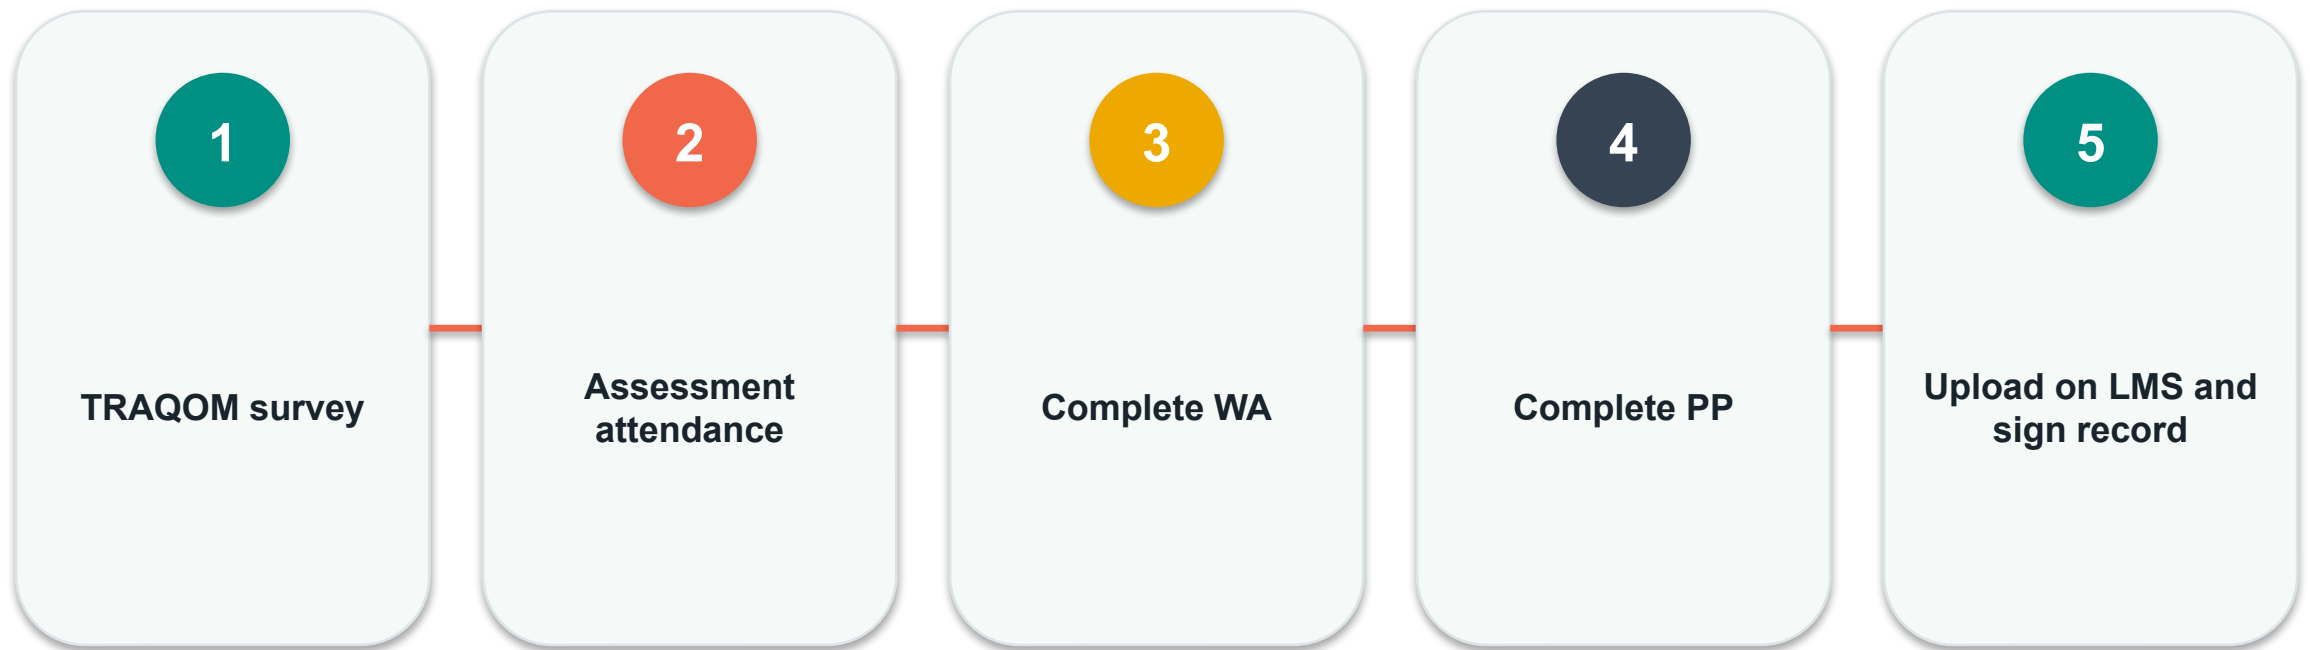

Read left to right. Each boundary has a named payload, state transition and owner.

TRAQOM Survey (Mandatory)

1

Locate

Open the LMS course run

2

Scan

Use the displayed TRAQOM QR code

3

Submit

Complete the survey before final sign-off

Certificate Delivery

1 Name

Confirm the spelling of your name

2 Email

Confirm the address used for delivery

3 Record

Complete the required LMS/TRAQOM details

Digital Attendance (Mandatory)

1 AM

Attendance recorded

2 PM

Attendance recorded

3 Assessment

Complete the final SSG attendance event

Support

1

Email

enquiry@tertiaryinfotech.com

2

Telephone

+65 6100 0613

3

Course page

<https://www.tertiarycourses.com.sg/casl-agentic-ai-for-email-marketing-campaign.html>

Thank You

Build agentic campaigns that are useful, measurable and controlled.

TGS-2026064473