


Mongo DB MCP servers starting

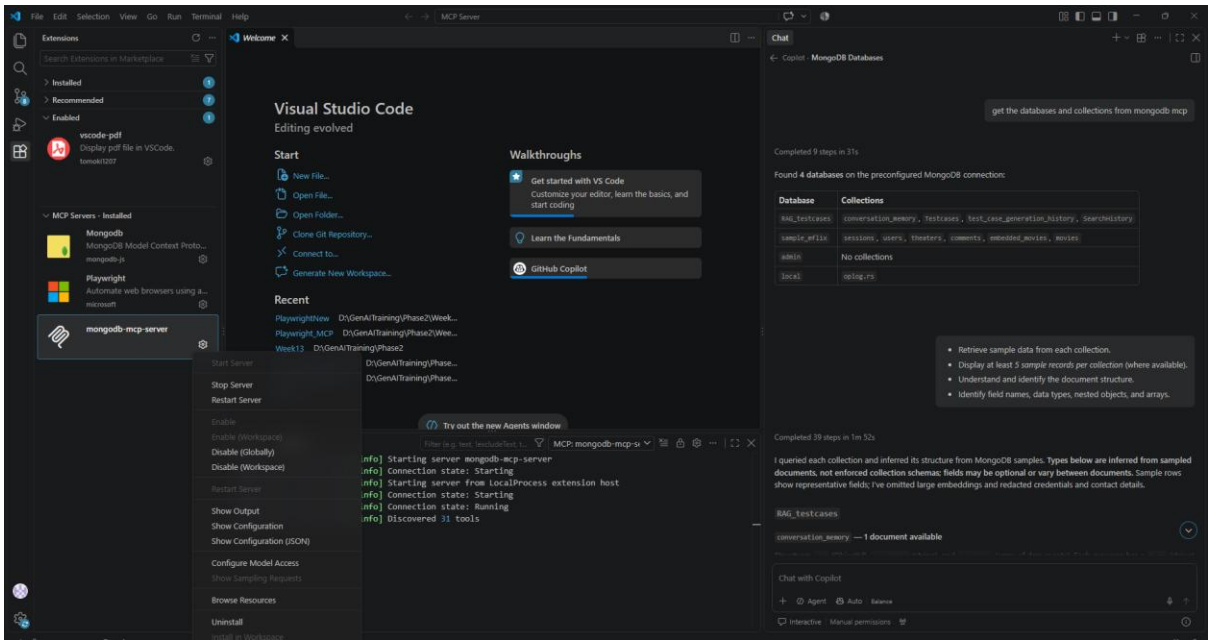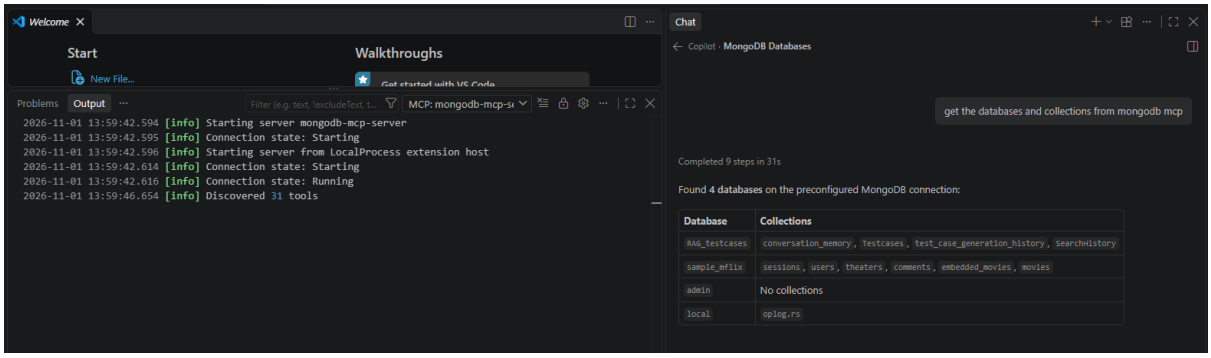

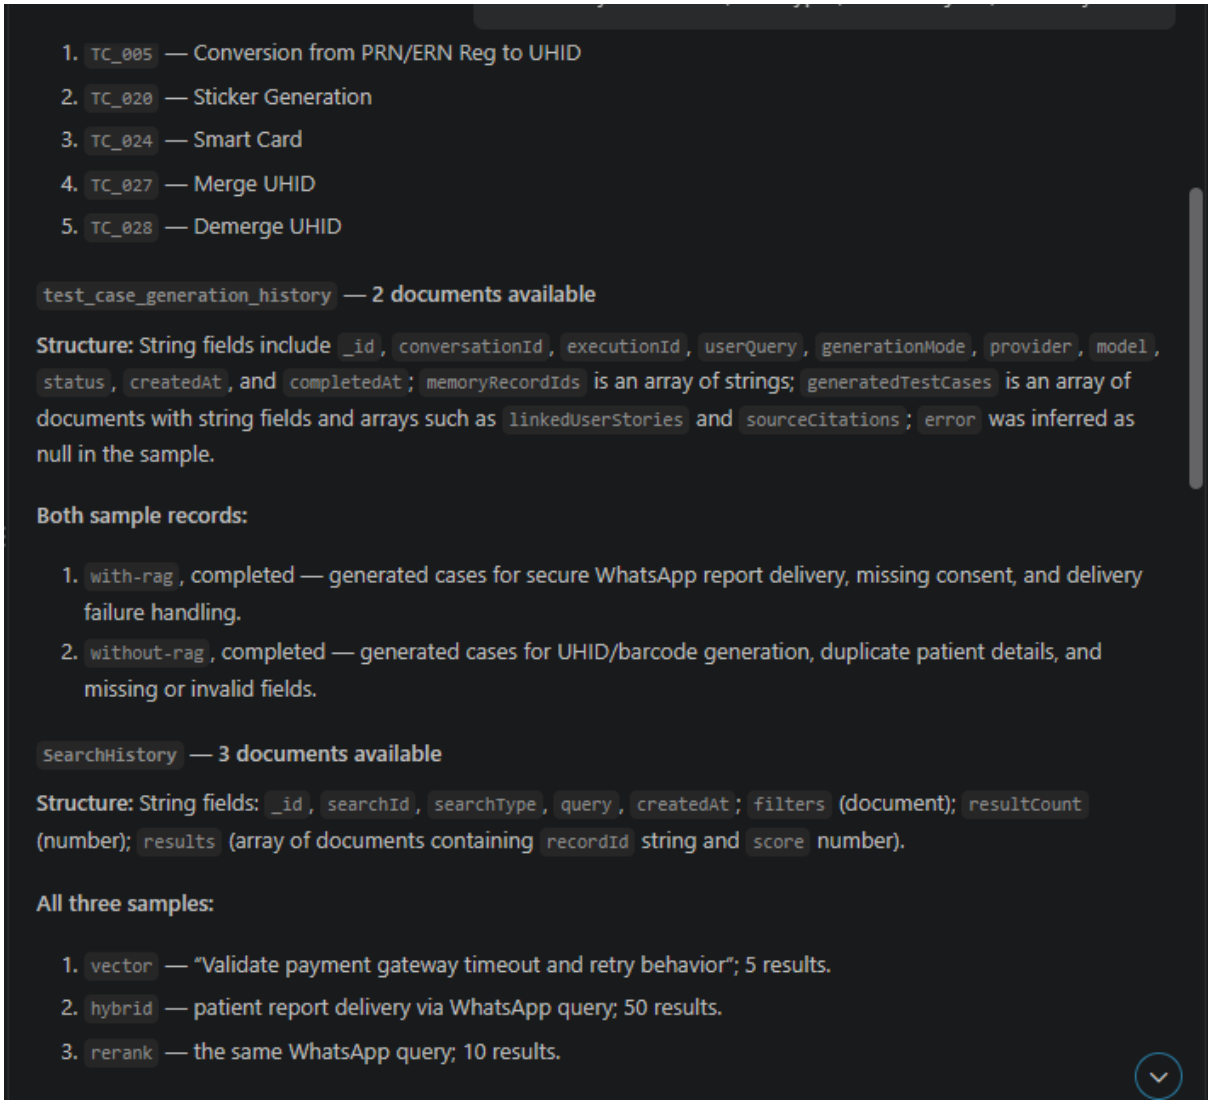


Open File...
Customize your editor, learn the basics, and
Problems
Output
MCP: mongodb-mcp-si
2026-11-01 13:59:42.594 [info] Starting server mongodb-mcp-server
2026-11-01 13:59:42.595 [info] Connection state: Starting
2026-11-01 13:59:42.596 [info] Starting server from LocalProcess extension host
2026-11-01 13:59:42.614 [info] Connection state: Starting
2026-11-01 13:59:42.616 [info] Connection state: Running
2026-11-01 13:59:46.654 [info] Discovered 31 tools
Retrieve sample data from each collection.
Display at least 5 sample records per collection (where available).
Understand and identify the document structure.
Identify field names, data types, nested objects, and arrays.
Completed 39 steps in 1m 52s
I queried each collection and inferred its structure from MongoDB samples. Types below are inferred from sampled documents, not enforced collection schemas; fields may be optional or vary between documents. Sample rows show representative fields; I've omitted large embeddings and redacted credentials and contact details.
RAG_testcases
conversation_memory — 1 document available
Structure: _id (ObjectId), sessionId (string), and messages (array of documents). Each message has a type (string) and nested data document containing content and id (strings), additional_kwargs (document with string IDs), response_metadata (document), and tool_calls / invalid_tool_calls (arrays).
Sample: One document with a session ID and four messages: human, ai, human, ai. Message content is omitted because it contains detailed healthcare-related test scenarios.
Testcases — 6,354 documents
Structure: _id (ObjectId); strings: module, id, preRequisites, title, description, steps, expectedResults, automationManual, priority, createdBy, linkedStories, risk, version, type, sourceFile; numbers: createdDate, lastModifiedDate; embedding (array of numbers); createdAt (Date); embeddingMetadata (document containing model, provider strings and createdAt Date).
Five sample records (id — title):
1. TC_005 — Conversion from PRN/ERN Reg to UHID
2. TC_020 — Sticker Generation
Chat with Copilot
Agent
Auto
Balance
Interactive
Manual permissions


1. TC_005 — Conversion from PRN/ERN Reg to UHID
2. TC_020 — Sticker Generation
3. TC_024 — Smart Card
4. TC_027 — Merge UHID
5. TC_028 — Demerge UHID
test_case_generation_history — 2 documents available
Structure: String fields include _id, conversationId, executionId, userQuery, generationMode, provider, model, status, createdAt, and completedAt; memoryRecordIds is an array of strings; generatedTestCases is an array of documents with string fields and arrays such as linkedUserStories and sourceCitations; error was inferred as null in the sample.
Both sample records:
1. with-rag, completed — generated cases for secure WhatsApp report delivery, missing consent, and delivery failure handling.
2. without-rag, completed — generated cases for UHID/barcode generation, duplicate patient details, and missing or invalid fields.
SearchHistory — 3 documents available
Structure: String fields: _id, searchId, searchType, query, createdAt; filters (document); resultCount (number); results (array of documents containing recordId string and score number).
All three samples:
1. vector — "Validate payment gateway timeout and retry behavior"; 5 results.
2. hybrid — patient report delivery via WhatsApp query; 50 results.
3. rerank — the same WhatsApp query; 10 results.

`sample_mflix`

`sessions` — **1 document available**

Structure: `_id` (ObjectId), `user_id` (string), `jwt` (string).

Sample: One session document. The user identifier and JWT are redacted; the JWT should be treated as a credential.

`users` — **185 documents**

Structure: `_id` (ObjectId); `name`, `email`, and `password` (strings). Sample password values appear to be hashes; I have not reproduced them.

Five sample records (`_id` abbreviated — name):

1. `59b99d…85b6` — Ned Stark
2. `59b99d…85b7` — Robert Baratheon
3. `59b99d…85b8` — Jaime Lannister
4. `59b99d…85b9` — Catelyn Stark
5. `59b99d…85ba` — Cersei Lannister

`theaters` — **1,564 documents**

Structure: `_id` (ObjectId), `theaterId` (number), `location` (document). `location.address` contains `street1`, `city`, `state`, `zipcode` (strings) and optional/null `street2`; `location.geo` contains `type` (string) and `coordinates` (array of numbers).

Five sample records (`theaterId` — city/state):

1. `1000` — Bloomington, MN
2. `1003` — California, MD
3. `1008` — Vacaville, CA
4. `1004` — Birmingham, AL
5. `1002` — Tempe, AZ

`comments` — **41,079 documents**

Structure: `_id`, `movie_id` (ObjectIds); `name`, `email`, `text` (strings); `date` (Date).

Five sample records (author — movie ID — date; email omitted):

1. Mercedes Tyler — `573a1390_4323` — 2002-08-18
2. John Bishop — `573a1390_446f` — 1975-01-21
3. Jaqen H'ghar — `573a1390…516c` — 1981-11-08
4. Taylor Scott — `573a1390_4eaf` — 1970-11-15
5. Yara Greyjoy — `573a1390…587d` — 2012-11-26

`embedded_movies` — **3,483 documents**

Structure: `_id` (ObjectId); strings: `fullplot`, `plot`, `rated`, `title`, `lastupdated`, `type`, `poster`; numbers: `year`, `metacritic`, `num_mflix_comments`, `runtime`; arrays of strings: `genres`, `languages`, `writers`, `countries`, `cast`, `directors`; `imdb` (document with numeric `rating`, `votes`, `id`); `tomatoes` (nested review document); `awards` (document with numeric `wins` / `nominations` and string `text`); `released` (Date); and three Binary embedding fields: `plot_embedding`, `plot_embedding_voyage_3_large`, `plot_embedding_voyage_4_large`.

Five sample records (title — year — genres — IMDb rating):

1. Scarface — 1932 — Action, Crime, Drama — 7.8
2. The Charge of the Light Brigade — 1936 — Action, Adventure, Romance — 7.1
3. Flash Gordon — 1936 — Action, Adventure, Sci-Fi — 7.3
4. The Perils of Pauline — 1914 — Action — 7.6
5. From Hand to Mouth — 1919 — Comedy, Short, Action — 7.0

`movies` — **21,349 documents**

Structure: Same general movie metadata as `embedded_movies`, but the inferred schema has no embedding fields. Fields include `_id` (ObjectId); string fields such as `title`, `plot`, `fullplot`, `rated`, `type`, `poster`, `lastupdated`; numeric fields such as `year`, `runtime`, `metacritic`, `num_mflix_comments`; string arrays including `genres`, `languages`, `writers`, `countries`, `cast`, `directors`; nested `imdb`, `tomatoes`, and `awards` documents; and `released` (Date).

Five sample records (title — year — genres — IMDb rating):

1. The Great Train Robbery — 1903 — Short, Western — 7.4
2. A Corner in Wheat — 1909 — Short, Drama — 6.6
3. Winsor McCay, the Famous Cartoonist of the N.Y. Herald and His Moving Comics — 1911 — Animation, Short, Comedy — 7.3
4. Traffic in Souls — 1913 — Crime, Drama — 6.0
5. Gertie the Dinosaur — 1914 — Animation, Short, Comedy — 7.3

`local`

`oplog.rs` — **0 documents returned**

The collection was listed, but the sample query returned no documents, so I couldn't infer its fields or provide sample records. The `admin` database also had no collections to sample.

Chat with Copilot

Agent | Auto | Balance

Interactive | Manual permissions