22-03-2026

Agenda:

Streamlit

project

Streamlit → Intro → UI components → web application → poc → demo
→ MVP

↑

backend

Streamlit Practice:

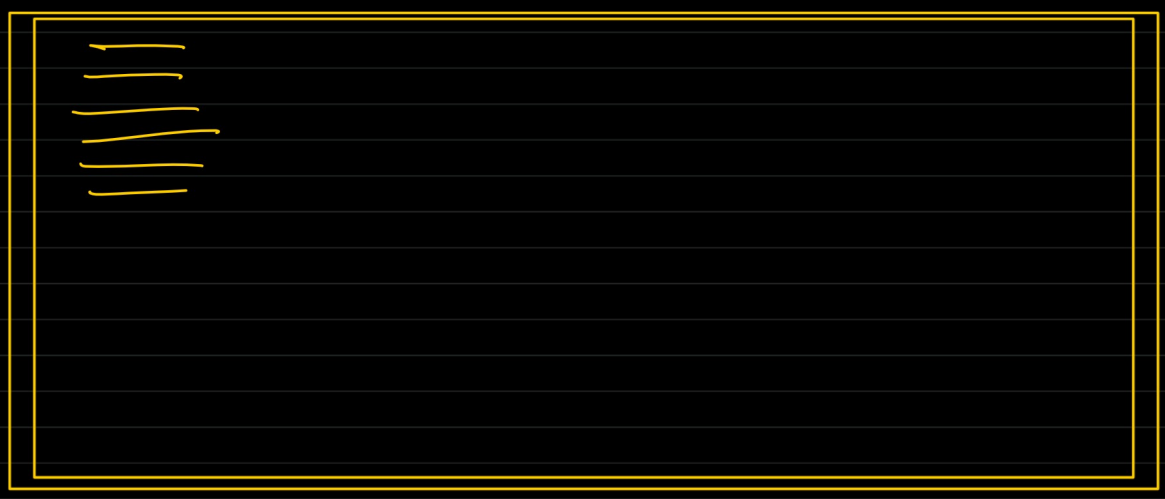

pdf → Text → Big → chapter name

↓

modules → Big

write(' ') →

white

<H1>
<image />
<p>
<H3>

} G-1

↓

invisible

→ 200

→ 200

Sri-button → click

→ state → false

→ click → state → true

Streamlit concept :-

→ runs the application from top to bottom

→ whenever you click / interact with the application anywhere, streamlit reruns the application.

rerun

count = 0 →
button → False
button → True

```
count = 0
if st.button("Click here to add 1 to the count"):
  count+=1
  st.write(f"Hello there!, the current count value is {count}")
```

st.text_input() → rerun → retain state ←
st.button()

→ internally assign id to every widget

st.text_input → 1 → state →
st.text_input → 2 → state → latest value written by user
st.text_input → 3 → its value
st.text_input → 4
st.button → 5 → True/False

Rerun ≠ Refresh

Streamlit Session state

streamlit → rerun → interaction

→ python variable → c=0 } rerun

→ st.write( )

└ no-rerun → widget state → text

→ button

```
count = 0

if st.button("Increment"):
    count += 1

st.write(count)
```

count=0 ← run app.py

button ← rerun → True
count=0
if true :
    count += 1 → count = 1

st.write(1)

button ← rerun → True
count=0
if true :
    count += 1 → count = 1

st.write(1)

save all those imp variable in session state

session state → dict like object → streamlit

st.session_state → rerun → X → restart the application

→ refresh

w/o session state

```
count = 0
```

with session state

```
if 'count' not in st.session_state:
    st.session_state.count = 0
```

```
if st.button("Increment"):
    count += 1
st.write(count)
```

```
if st.button("Increment"):
    st.session_state.count += 1
st.write(st.session_state.count)
```

→ st.session_state.clear()

→ st.rerun()

sending

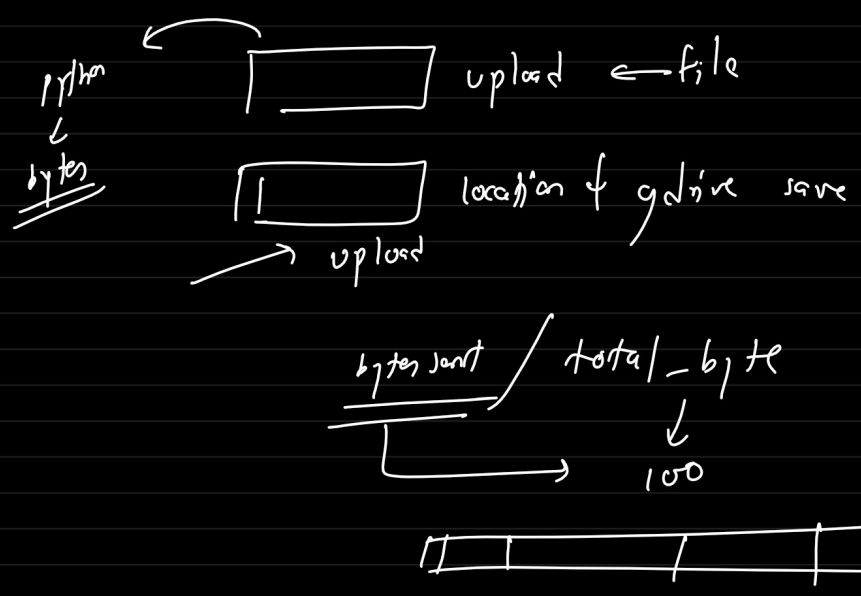

Streamlit Completed

→ cloud

deployment →

Ca →

steps

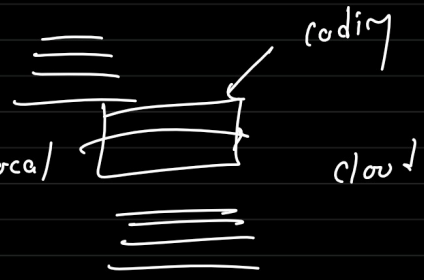

dep

15 steps → gid 5 steps