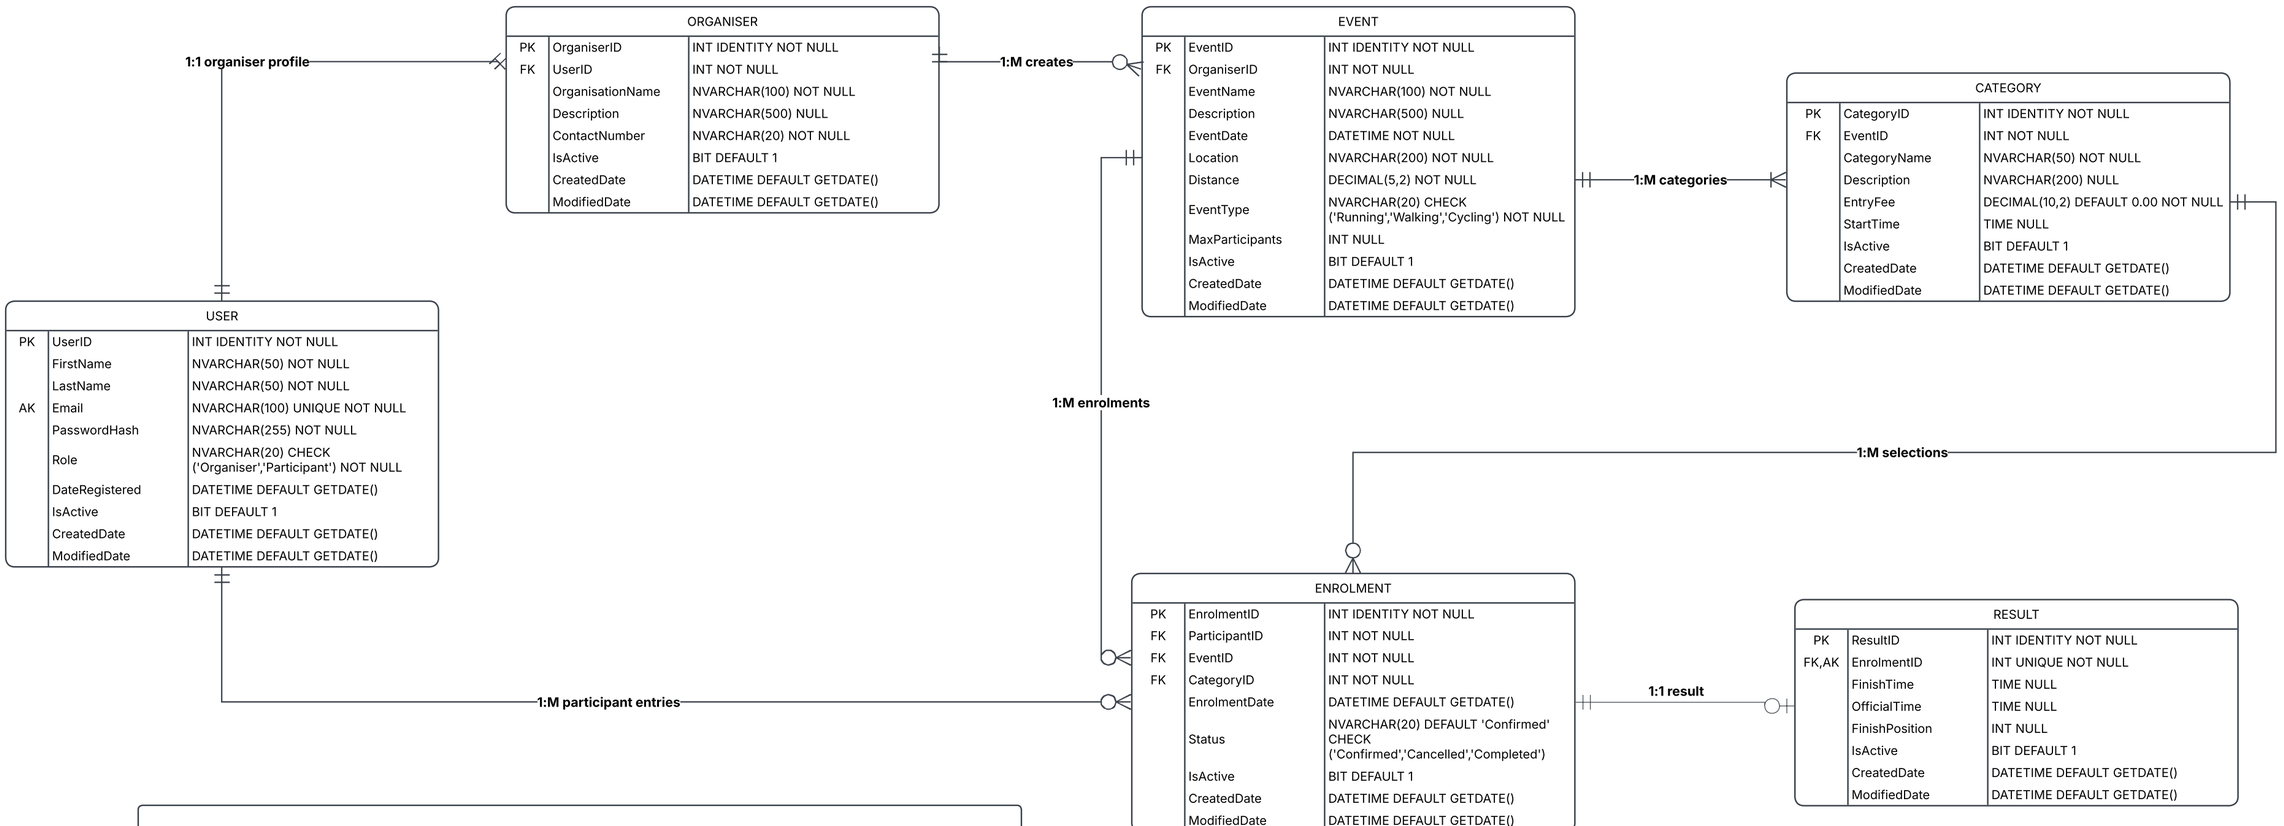

ORGANISER
PK OrganiserID INT IDENTITY NOT NULL
FK UserID INT NOT NULL
OrganisationName NVARCHAR(100) NOT NULL
Description NVARCHAR(500) NULL
ContactNumber NVARCHAR(20) NOT NULL
IsActive BIT DEFAULT 1
CreatedDate DATETIME DEFAULT GETDATE()
ModifiedDate DATETIME DEFAULT GETDATE()
1:1 organiser profile
1:M creates
EVENT
PK EventID INT IDENTITY NOT NULL
FK OrganiserID INT NOT NULL
EventName NVARCHAR(100) NOT NULL
Description NVARCHAR(500) NULL
EventDate DATETIME NOT NULL
Location NVARCHAR(200) NOT NULL
Distance DECIMAL(5,2) NOT NULL
EventType NVARCHAR(20) CHECK ('Running','Walking','Cycling') NOT NULL
MaxParticipants INT NULL
IsActive BIT DEFAULT 1
CreatedDate DATETIME DEFAULT GETDATE()
ModifiedDate DATETIME DEFAULT GETDATE()
1:M categories
CATEGORY
PK CategoryID INT IDENTITY NOT NULL
FK EventID INT NOT NULL
CategoryName NVARCHAR(50) NOT NULL
Description NVARCHAR(200) NULL
EntryFee DECIMAL(10,2) DEFAULT 0.00 NOT NULL
StartTime TIME NULL
IsActive BIT DEFAULT 1
CreatedDate DATETIME DEFAULT GETDATE()
ModifiedDate DATETIME DEFAULT GETDATE()
USER
PK UserID INT IDENTITY NOT NULL
FirstName NVARCHAR(50) NOT NULL
LastName NVARCHAR(50) NOT NULL
AK Email NVARCHAR(100) UNIQUE NOT NULL
PasswordHash NVARCHAR(255) NOT NULL
Role NVARCHAR(20) CHECK ('Organiser','Participant') NOT NULL
DateRegistered DATETIME DEFAULT GETDATE()
IsActive BIT DEFAULT 1
CreatedDate DATETIME DEFAULT GETDATE()
ModifiedDate DATETIME DEFAULT GETDATE()
1:M enrolments
1:M selections
1:M participant entries
ENROLMENT
PK EnrolmentID INT IDENTITY NOT NULL
FK ParticipantID INT NOT NULL
FK EventID INT NOT NULL
FK CategoryID INT NOT NULL
EnrolmentDate DATETIME DEFAULT GETDATE()
Status NVARCHAR(20) DEFAULT 'Confirmed' CHECK ('Confirmed','Cancelled','Completed')
IsActive BIT DEFAULT 1
CreatedDate DATETIME DEFAULT GETDATE()
ModifiedDate DATETIME DEFAULT GETDATE()
1:1 result
RESULT
PK ResultID INT IDENTITY NOT NULL
FK,AK EnrolmentID INT UNIQUE NOT NULL
FinishTime TIME NULL
OfficialTime TIME NULL
FinishPosition INT NULL
IsActive BIT DEFAULT 1
CreatedDate DATETIME DEFAULT GETDATE()
ModifiedDate DATETIME DEFAULT GETDATE()
Crow's Foot: | exactly one; O| zero or one; < many; O< zero or many; |< one or many
PK = Primary Key | FK = Foreign Key | AK/UNIQUE = Alternate or unique key
Unique constraints: User.Email; Enrolment (ParticipantID, EventID); Result.EnrolmentID
Nullable fields are marked NULL; defaults and CHECK constraints appear in the Type column