

Django and Python Code for PaperSearch

Languages/tools used: Apache Solr, Python 3.5, Django, HTML, CSS3, MDBootstrap, Jinja2


PREREQUISITES: Solr indices should exist as described in the [solr_steps.pdf](#) file.

papers, arxiv_metadata, metadata, references are the names of the 4 Solr indices which are assumed to exist.

So now that the Solr configuration is done, and the data has been inserted into Solr, it's time for querying from the webpage (created using Django) and getting the desired results from Solr into Python, and from there into the HTML.

The website for PaperSearch can be reached at <http://132.230.150.9>, which automatically redirects to <http://132.230.150.9/searchengine/>.

The following screenshot shows the landing page.

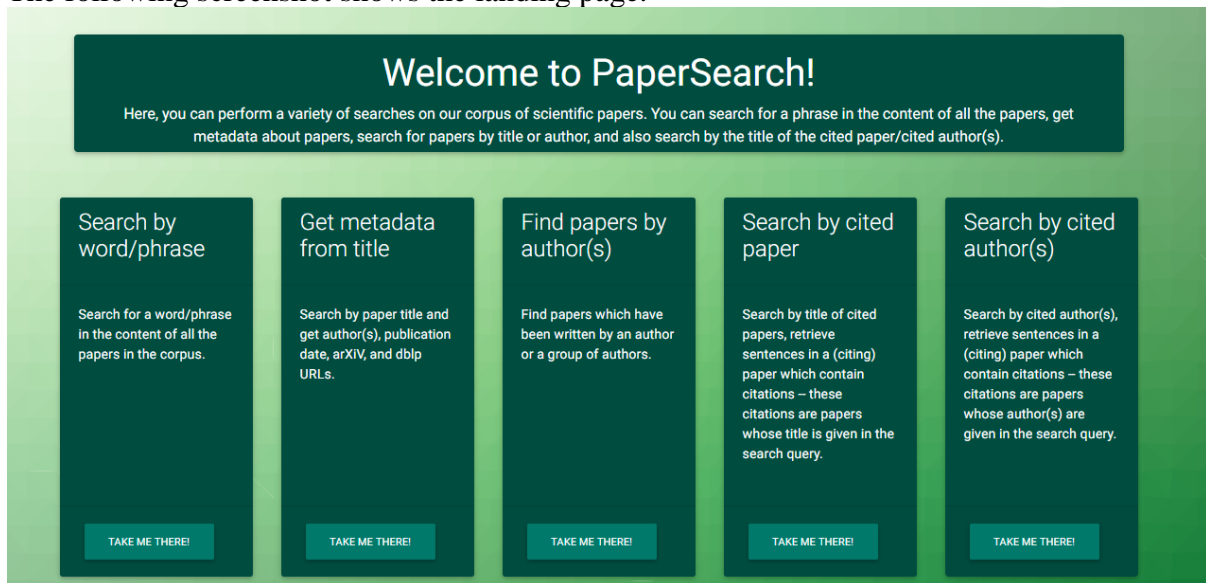

As you can see, there are 5 options in the above main page, the html is in the template **index.html**.

These 5 options are given again below. Clicking on the button below each of them takes you to the corresponding search page.

1. Search for a word/phrase in the content of all the papers in the corpus.
2. Search by paper title and get author(s), publication date, arXiv, and dblp URLs.
3. Find papers which have been written by an author or a group of authors.
4. Search by title of cited papers, retrieve sentences in a (citing) paper which contain citations -- these citations are papers whose title is given in the search query.
5. Search by cited author(s), retrieve sentences in a (citing) paper which contain citations -- these citations are papers whose author(s) are given in the search query.


The Django and the front-end explanation are given below for the first option 'phrase search' and it is similar for the others. So, only the screenshots are given for these options, sans (much) explanation. The back-end logic is explained later on, after the front-end explanation.

DJANGO AND FRONT-END EXPLANATION

1. Phrase Search


The search page is given below, the template is `phrasesearch.html`. The page has a search box for the phrase as well as another option for 'no. of results' (10 by default if no value is given). The function `phrase_search` in `views.py` is called whenever this page is displayed. It does the field validation and calls the `search_sentences` Python function in the `django_paper_search` module. `search_sentences` returns a list of results,

with all the fields including title, authors, arxiv url, dblp url (if it exists), and arxiv identifier.

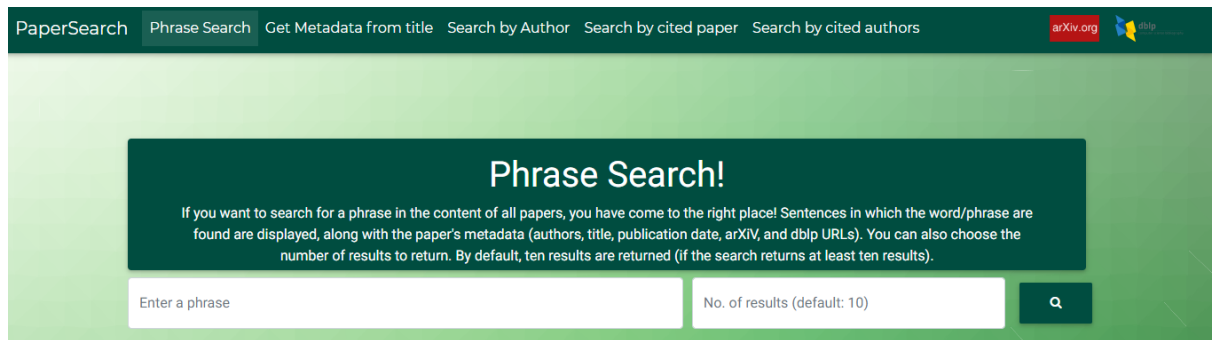

The views function `phrase_search` finally renders the results in the template `phraseresults.html`.

The search results are shown in the following screenshot.

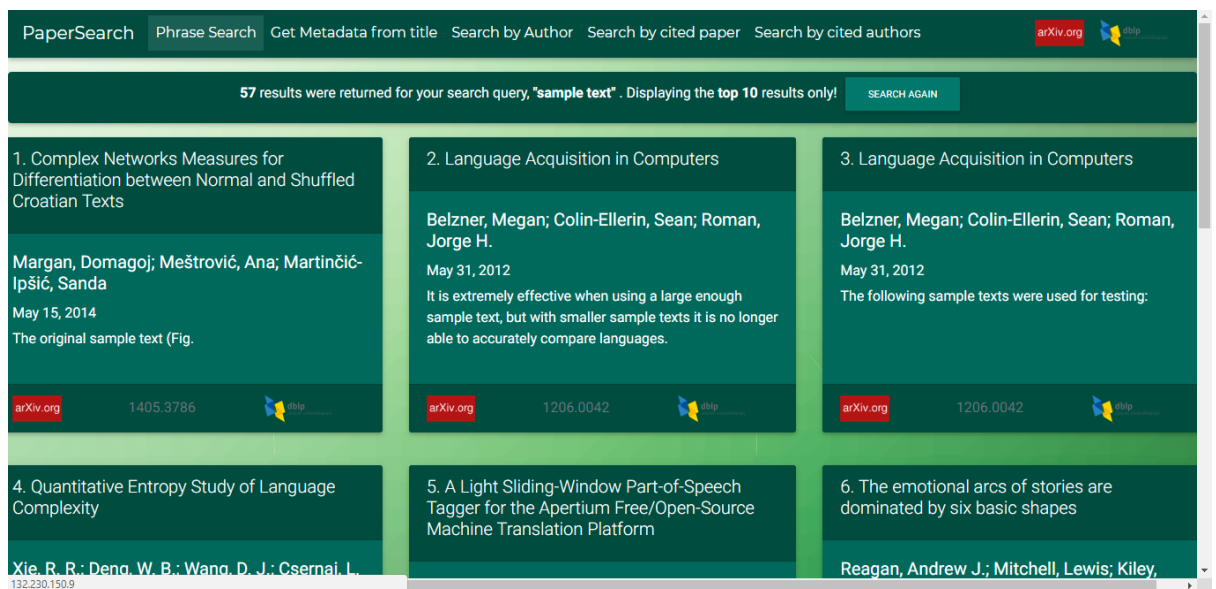

This template receives the results (a Python list) from the view, and iterates through them using Jinja logic, and renders all the fields in separate CSS 'cards' for each result (using MDBBootstrap's version of cards). Each card also has a DBLP and Arxiv url link (logo links). While arxiv links always exist, the dblp url may or may not exist for a result. This is checked in Jinja logic, and if there is no dblp url, the logo link is disabled.

2. Get metadata from title

The Django explanation is similar to that for phrase search, the templates are `titlesearch.html` and `titlesearchresults.html`. The corresponding view function is `metadatatitle_search`.

Search:

PaperSearch
Phrase Search
Get Metadata from title
Search by Author
Search by cited paper
Search by cited authors
arXiv.org
dblp

Get metadata from title!

This page allows you to search for papers by their titles (partial titles allowed). It returns the following metadata about each paper: author(s), title, published date, arXiv, and dblp links. Ten results are returned by default (if the search returns at least 10 results), but you can also choose to return a different number of results.

Results:

<div> PaperSearch Phrase Search Get Metadata from title Search by Author Search by cited paper Search by cited authors arXiv.org dblp </div>		
74 results were returned for your search query, sparse graph . Displaying the top 10 results only! <div>SEARCH AGAIN</div>		
<div>1. Deobfuscating sparse graphs</div> <div>Gajarsky, Jakub; Kral, Daniel</div> <div>September 28, 2017; September 30, 2017 (multiple dates indicate revisions to the paper)</div> <div> arXiv.org 1709.09985 dblp </div>	<div>2. Reconfiguration on sparse graphs</div> <div>Lokshstanov, Daniel; Mouawad, Amer E.; Panolan, Fahad; Ramanujan, M. S.; Saurabh, Saket</div> <div>February 17, 2015</div> <div> arXiv.org 1502.04803 dblp </div>	<div>3. On the number of types in sparse graphs</div> <div>Pilipczuk, Michał; Siebertz, Sebastian; Toruńczyk, Szymon</div> <div>May 25, 2017; November 06, 2017 (multiple dates indicate revisions to the paper)</div> <div> arXiv.org 1705.09336 dblp </div>
<div>4. Separation dimension of sparse graphs</div> <div>Basavaraju, Manu; Chandran, L. Sunil; Mathew, Rogers; Rajendraprasad, Deepak</div> <div>April 17, 2014</div>	<div>5. Fast Recoloring of Sparse Graphs</div> <div>Bousquet, Nicolas; Perarnau, Guillem</div> <div>November 25, 2014</div>	<div>6. On ultralimits of sparse graph classes</div> <div>Pilipczuk, Michał; Toruńczyk, Szymon</div> <div>August 28, 2015</div>

3. Author Search

Search: **Multiple authors need to be separated by semicolons.** the templates are authorsearch.html and authorsearchresults.html. The corresponding view function is author_search.

PaperSearch Phrase Search Get Metadata from title **Search by Author** Search by cited paper Search by cited authors

arXiv.org dblp

Author Search!

This page allows you to find papers by an author or set of authors. It returns the following metadata about each paper: author(s), title, published date, arXiv, and dblp links. Ten results are returned by default (if the search returns at least 10 results), but you can also choose to return a different number of results.

Results:

PaperSearch Phrase Search Get Metadata from title Search by Author Search by cited paper Search by cited authors		
7 results were returned for your search query, Lindauer AND Hutter . Displaying all 7 results! SEARCH AGAIN		
<p>1. Warmstarting of Model-based Algorithm Configuration</p> <p>Lindauer, Marius; Hutter, Frank</p> <p>September 14, 2017; November 28, 2017 (multiple dates indicate revisions to the paper)</p> <p>arXiv.org 1709.04636 dblp</p>	<p>2. Pitfalls and Best Practices in Algorithm Configuration</p> <p>Eggersperger, Katharina; Lindauer, Marius; Hutter, Frank</p> <p>May 17, 2017</p> <p>arXiv.org 1705.06058 dblp</p>	<p>3. Predicting Runtime Distributions using Deep Neural Networks</p> <p>Eggersperger, Katharina; Lindauer, Marius; Hutter, Frank</p> <p>September 22, 2017; October 24, 2017 (multiple dates indicate revisions to the paper)</p> <p>arXiv.org 1709.07615 dblp</p>
<p>4. A case study of algorithm selection for the traveling thief problem</p> <p>Wagner, Markus; Lindauer, Marius; Misir, Mustafa; Nallaperuma, Samadhi; Hutter, Frank</p>	<p>5. Efficient Benchmarking of Algorithm Configuration Procedures via Model-Based Surrogates</p> <p>Eggersperger, Katharina; Lindauer, Marius; Hoos, Holger H.; Hutter, Frank; Leyton-Brown,</p>	<p>6. The Configurable SAT Solver Challenge (CSSC)</p> <p>Hutter, Frank; Lindauer, Marius; Balint, Adrian; Bayless, Sam; Hoos, Holger; Leyton-Brown, Kevin</p>

4. Search by Cited Paper

It searches for the titles of the cited paper (in the references Solr index/files). It gets details of the papers that these papers are cited by, as well as details of the cited paper itself.

The templates are citedpapersearch.html and citedpapersearchresults.html. The corresponding view function is cited_paper_search.

Search:

PaperSearch Phrase Search Get Metadata from title Search by Author **Search by cited paper** Search by cited authors


arXiv.org dblp

Search by Cited Paper!

Here, you can search by cited paper title. The results returned are sentences in a (citing) paper which contain citations – these citations are papers whose title is given in the search query. The results display details of both the citing and the cited paper (the publication date, dblp, and arXiv urls of the original **citing** paper are displayed). Ten results are returned by default (if the search returns at least ten results), but you can also choose the number of results (sentences in citing papers) to return.

Search Results:

The search results include the details of the cited paper AND the citing paper. The same citation may (and probably will) occur multiple times in the search results.

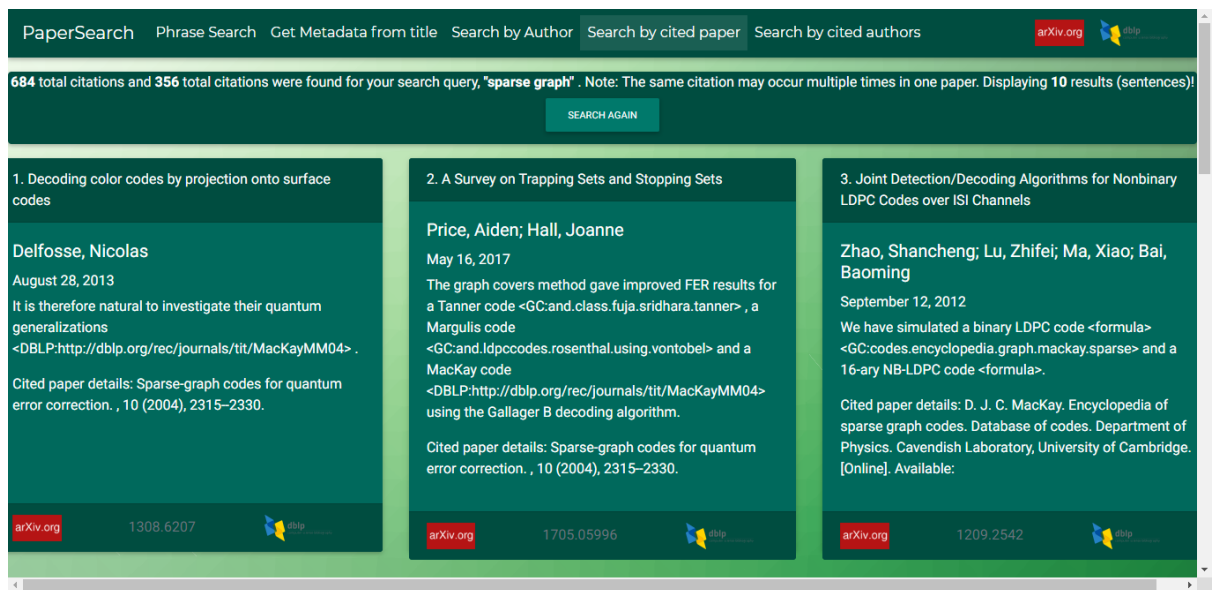

5. Search by cited author:

This also searches the references Solr index (on the same field, called 'details' in the Solr index and the refs files), but by the author name. It gets details of the papers that these papers are cited by, as well as details of the cited paper itself.

The templates are `citedauthorsearch.html` and `citedauthorsearchresults.html`. The corresponding view function is `cited_author_search`.

NOTE: The published date and the authors are normalized in `views.py` before they are displayed in the templates.

BACK END FUNCTIONS CALLED BY THE DJANGO VIEW FUNCTIONS:

Module: `django_paper_search.py`

There are a number of functions which are used (by different options: there's a lot of overlap especially among functions `search_solr`, `parse_json` and `add_query_type`).

Here are the functions:

`search_sentences`, `search_references`, `search_authors`, `search_meta_titles`, `num_rows_input`, `add_query_type`, `search_solr`, `parse_json`, `parse_sentence_json`, `parse_metadata_json`, `parse_refs_json`

The following common functions are explained first: `add_query_type`, `search_solr`, `parse_json`.

search_solr and add_query_type:

`search_solr` is called in different options to query different collections. It takes the fields shown below: `search_filed` is the field in the solr index which is searched (using the 'df' parameter: see Solr querying tutorial for more about this). The `query_type` can be one of three things: 'exact', 'proximity' or 'and'. These correspond to 3 different kinds of queries using Solr's standard query parser.

The `add_query_type` translates the `query_type` from plain English to the format Solr expects and returns it in this format to `search_solr`.

1. *Exact query:* surrounded by quotes. "query"

2. *Proximity query:* surrounded by quotes, and a tilde symbol and a number n, which indicates that there can be n words between the words within the quotes. This is useful to

search for cases where the second word in the phrase occurs before the first phrase. The number *n* is set to the no. of words in the user's search phrase. The `proximity_authors` query type defined in the `add_query_type` function allows a higher proximity than `proximity_title`. This is to allow users to search for last name of the first author and the first name of the 4th author, for example.

3. *And query*: this is used in the case where there is a search for more than 1 author. It creates a list of proximity queries and then does an AND operation on them.

Once the `query_type` is returned to `search_solr`, it builds a solr url using the `requests` library. All the params which we want to pass to Solr -- `q`, `rows`, `df` -- are added to a dictionary of params, which can be passed along with the url in `request's` beautiful `get` method. This sends the GET request to SOLR and gets SOLR's json response in `data`. This response is then sent to `parse_json`.

```
def search_solr(query, num_rows, collection, search_field, query_type):
    """ Creates a URL to call Solr along with the search query, search
    field
    and number of rows as parameters, and sends a GET request to SOLR. It
    then calls the parse_json func to parse the json, and returns results
    from that function."""
    solr_url = 'http://localhost:8983/solr/' + collection + '/select'
    query = add_query_type(query, query_type)
    url_params = {'q': query, 'rows': num_rows, 'df': search_field}
    solr_response = requests.get(solr_url, params=url_params)
    if solr_response.ok:
        data = solr_response.json()
        return parse_json(data, collection)
    else:
        print("Invalid response returned from Solr")
        sys.exit(11)
```

add_query_type:

```
def add_query_type(query, query_type):
    """ Returns the query based on the query type (exact or proximity)
    required for different searches. """
    if query_type == 'exact':
        query = '"' + query + '"'
    elif query_type == 'proximity_authors':
        # Allow for the words in the query to be in a different order. There may also be an
        # 'and' between the words in the file/index. This also allows for search by last
        name
        # of 1 author and full name of third author.
        query = '"' + query + '"' + '~' + str(len(query.split())+8)
    elif query_type == 'proximity_title':
        # Allow for the words in the query to be in a different order. There may also be an
        # 'and' between the words in the file/index. This also allows for search by last
        name
        # of 1 author and full name of third author.
        query = '"' + query + '"' + '~' + str(len(query.split()))

    elif query_type == 'and':
        # query is a list, authors search
        query = ['"' + name + '"' + '~' + str(len(name.split())) for name in
        query]
        query = ' AND '.join(query)
    return query
```


parse_json:

This function is used to parse the JSON returned by the SOLR query. It calls different functions: parse_refs_json, parse_metadata_json, parse_arxiv_metadata_json, parse_sentence_json, based on which Solr index the data is obtained from. Parse_sentence_json is given below, the others are pretty similar.

```
def parse_sentence_json(data):
    """ Function to parse the json response from the papers collection
    in Solr. It returns the results as a list with the sentence, file name
    and title."""
    # docs contains sentence, fileName, id generated by Solr
    docs = data['response']['docs']
    # Create a list object for the results with sentence, fileName and title
    results = [[docs[i].get('sentence')[0], docs[i].get('fileName')]
               for i in range(len(data['response']['docs']))]
    return results
```

Option 1: Search for a phrase in the content of all papers.

search_sentences: it is called by the Django view phrase_search.

Takes user's query as input, finds all sentences with the given phrase, then finds the title, authors and url of the paper from the arxiv_metadata and metadata indices. It also gets the results and normalizes it so that correct error messages are displayed, and fields are displayed in the right format.

To do this, it first calls search_solr on the papers index. This gets the arxiv identifier (filename in Solr) and the sentence for each result. Results is a list because search_solr, in this case, calls parse_sentence_json to parse the JSON and put it in a list.

```
results, query, num_results = search_solr(query, num_rows,
                                           'papers', 'sentence', 'exact')
```

If there are results, for each result, a query against the arxiv_metadata Solr index is made to get the title, authors, published date and the arxiv url.

```
res_arxiv, _, _ = search_solr(arxiv_identifier, 1,
                              'arxiv_metadata', 'arxiv_identifier', 'exact')
```

The parse_arxiv_metadata_json function is shown below (called by search_solr for the arxiv_metadata collection).

```
def parse_arxiv_metadata_json(data):
    """ Function to parse the json response from the metadata or the
    arxiv_metadata collections in Solr. It returns the results as a
    list with the sentence, file name and title."""
    # docs contains authors, title, id generated by Solr, url
    docs = data['response']['docs']
    # NOTE: there are records without authors and urls. This is why the
    # get method is always used to get the value instead of getting the value
    # by applying the [] operator on the key.
    results = [[docs[i].get('title'), docs[i].get('authors'),
               docs[i].get('url'), docs[i].get('arxiv_identifier'),
               docs[i].get('published_date')]
               for i in range(len(data['response']['docs']))]
    return results
```

The 'metadata' index, which has the dblp url, is also queried. This index, of course, is built from the 'meta' files. These files have a lot of missing values.

```
res_dblp, _, _ = search_solr(arxiv_identifier, 1,
```

```
'metadata', 'arxiv_identifier', 'exact')
```

These are joined together, the different field values are normalized, and the results are returned, along with the number of results num_results.

Option 2:

Search by paper title and get author(s), publication date, arXiv, and dblp URLs.

It returns all metadata (title, authors, url) when a partial or complete title is given in the user query.

It makes a search on first the arxiv_metadata index on 'title', and then gets the dblp url for each of these results (based on a join with the arxiv identifier)

```
results, query, num_results = search_solr(query, num_rows,
                                           'arxiv_metadata', 'title',
                                           'exact')
```

```
for result in results:
    arxivid = result[3]
    # This should return only 1 row (exact match on arxiv_identifier
    res_dblp, _, _ = search_solr(arxivid, 1, 'metadata',
    'arxiv_identifier', 'exact')
```

These results are then returned.

Option 3:

Find papers which have been written by an author or a group of authors.

It returns all metadata (title, authors, url) when names of 1 or more authors are given in the user query. This is very similar to option 2. The same fields are returned.

```
results, query, num_results = search_solr(query, num_rows,
                                           'arxiv_metadata', 'authors',
                                           'and')

for result in results:
    arxivid = result[3]
    # This should return only 1 row (exact match on arxiv_identifier
    res_dblp, _, _ = search_solr(arxivid, 1, 'metadata',
    'arxiv_identifier', 'exact')
```

Options 4 and 5:

Search by title of cited papers, retrieve sentences in a (citing) paper which contain citations -- these citations are papers whose title is given in the search query.

Search by cited author(s), retrieve sentences in a (citing) paper which contain citations -
- these citations are papers whose author(s) are given in the search query.

Both these options query the references Solr index on the details field and are defined in the same function search_references. Both are Solr proximity searches, but the amount of proximity is different (see add_query_type).

```
if search_type == 'title':
    # Return all rows to count no. of citations.
    results, query, num_results = search_solr(query, 100000,
```



```

'references', 'details',
'proximity_title')

if search_type == 'authors':
    # Return all rows to count no. of citations.
    results, query, num_results = search_solr(query, 100000,
                                              'references', 'details',
                                              'proximity authors')

```

In the above function calls, the user's query (author/title of cited papers in the refs files) needs to get all a certain number of from the references index. Solr doesn't have the capability of getting 'all' results, the only way is to give a very high number in numrows: much higher than the no. of results possible in the use case. Now these are the total no. of citations found. However, different refs files WILL contain the same citation, so what we are really interested in is the no. of unique citations.

Note that the results are of the form [(annotation, details), (annotation, details),...], where details is a field in the refs file containing authors, title and other publication details. The refs files are not standardized at all, there are many cases where the same annotation has different details associated with it. But while finding the unique citations, the value of the details is not taken into account, I take into account only the value of the annotation. To do this, make an Ordered Dict with the annotation as key and details as the value.

```

unique_citations = OrderedDict((result[0], result[1]) for result in
results)
num_unique_citations = len(unique_citations)
# Conver unique_citations back into a list -- a list of tuples so that we can slice it.
unique_citations = list(unique_citations.items())

```

Now that we have a dict (an OrderedDict), duplicate keys are implicitly removed. Only unique values are retained (of course, we lose some of the duplicate details, but finding unique annotation+details combination doesn't reduce the no. of unique citations enough, it doesn't make sense to do it that way).

Making a list out of the items of the Ordered dict results in [(annotation, details), (annotation, details),...], just like we want for the unique citations.

Now, we get to the most confusing part of the whole program. Remember, we want to return the no. of rows specified by the user (default: 10). But here, we are dealing with different types of data: data from references, and data from papers (+metadata). We get a number of unique citations from the references index (let's say 85), and then reduce it to the number of rows specified by the user (say, 10).

When we reach the following for loop, we are left with 10 citations in unique_citations.

```

for annotation, details in unique_citations:
    reslist = search_sentences(annotation, num_rows)
    if reslist == []:
        # If the annotation was not found, go to next annotation
        continue
    res = reslist[0]
    num_res = reslist[3]

```

But what the user wants is NOT 10 citations from references, it is 10 papers which have these citations. In other words, we are looking for papers (and sentences in the papers) which have the citations specified in the search query.

So, we get the annotation and search for it (EXACT match) in the papers index.

It is possible (and indeed likely) that there are multiple papers (and further, sentences within the same paper) that have each of the 10 annotations in `unique_citations`. We don't want to return all these results (in the `res` variable), we want to return only 10 results (paper + sentence + associated metadata + associated citation data which is searched on). So for instance, 2 of the citations may be contained in 14 sentences in papers, the other 8 citations do not need to be returned at all. We need

```
if res == []:
    # If the annotation was not found, go to next annotation
    continue
```

If no results are returned (it's possible that the annotation from the refs files are not present in any of the papers text files, i.e. in the papers index), just move on to the next annotation, as shown above.

The number of results so far is counted in each iteration, and only the required number of results is returned at the end. The following code shows how that is done.

```
for entry in res:
    # res is a list of lists -> entry is a list: extract values from entry
    intermediate_result = []
    intermediate_result.append(annotation)
    intermediate_result.append(details)
    # Values of 1 result: title, authors etc.
    for value in entry:
        intermediate_result.append(value)
    # Append the ith result to final_results: which contains full lists.
    final_results.append(intermediate_result)
    break
elif result_counter > num_rows:
    # If appending results results in more rows than num_rows,
    # reduce the no. of rows to append.
    old_result_counter = result_counter - num_res
    num_append_rows = num_rows - old_result_counter
    res = res[:num_append_rows]
    # Append all the fields like title, sentence, arxiv url etc. from papers
    #and metadata/arxiv_metadata indexes
    for entry in res:
        # res is a list of lists -> entry is a list: extract values from entry
        intermediate_result = []
        intermediate_result.append(annotation)
        intermediate_result.append(details)
        for value in entry:
            intermediate_result.append(value)
        # Append the ith result to final_results: which contains full lists.
        final_results.append(intermediate_result)
    break
else:
    # Append all the fields like title, sentence, arxiv url etc. from papers
    #and metadata/arxiv_metadata indexes
    for entry in res:
        # res is a list of lists -> entry is a list: extract values from entry
        intermediate_result = []
        intermediate_result.append(annotation)
        intermediate_result.append(details)
        for value in entry:
            intermediate_result.append(value)
        final_results.append(intermediate_result)
```

The final results contain the cited paper details (from refs files/references index), citing paper details (from papers and metadata/arxiv_metadata indices: the call to `search_sentences` takes care of this).