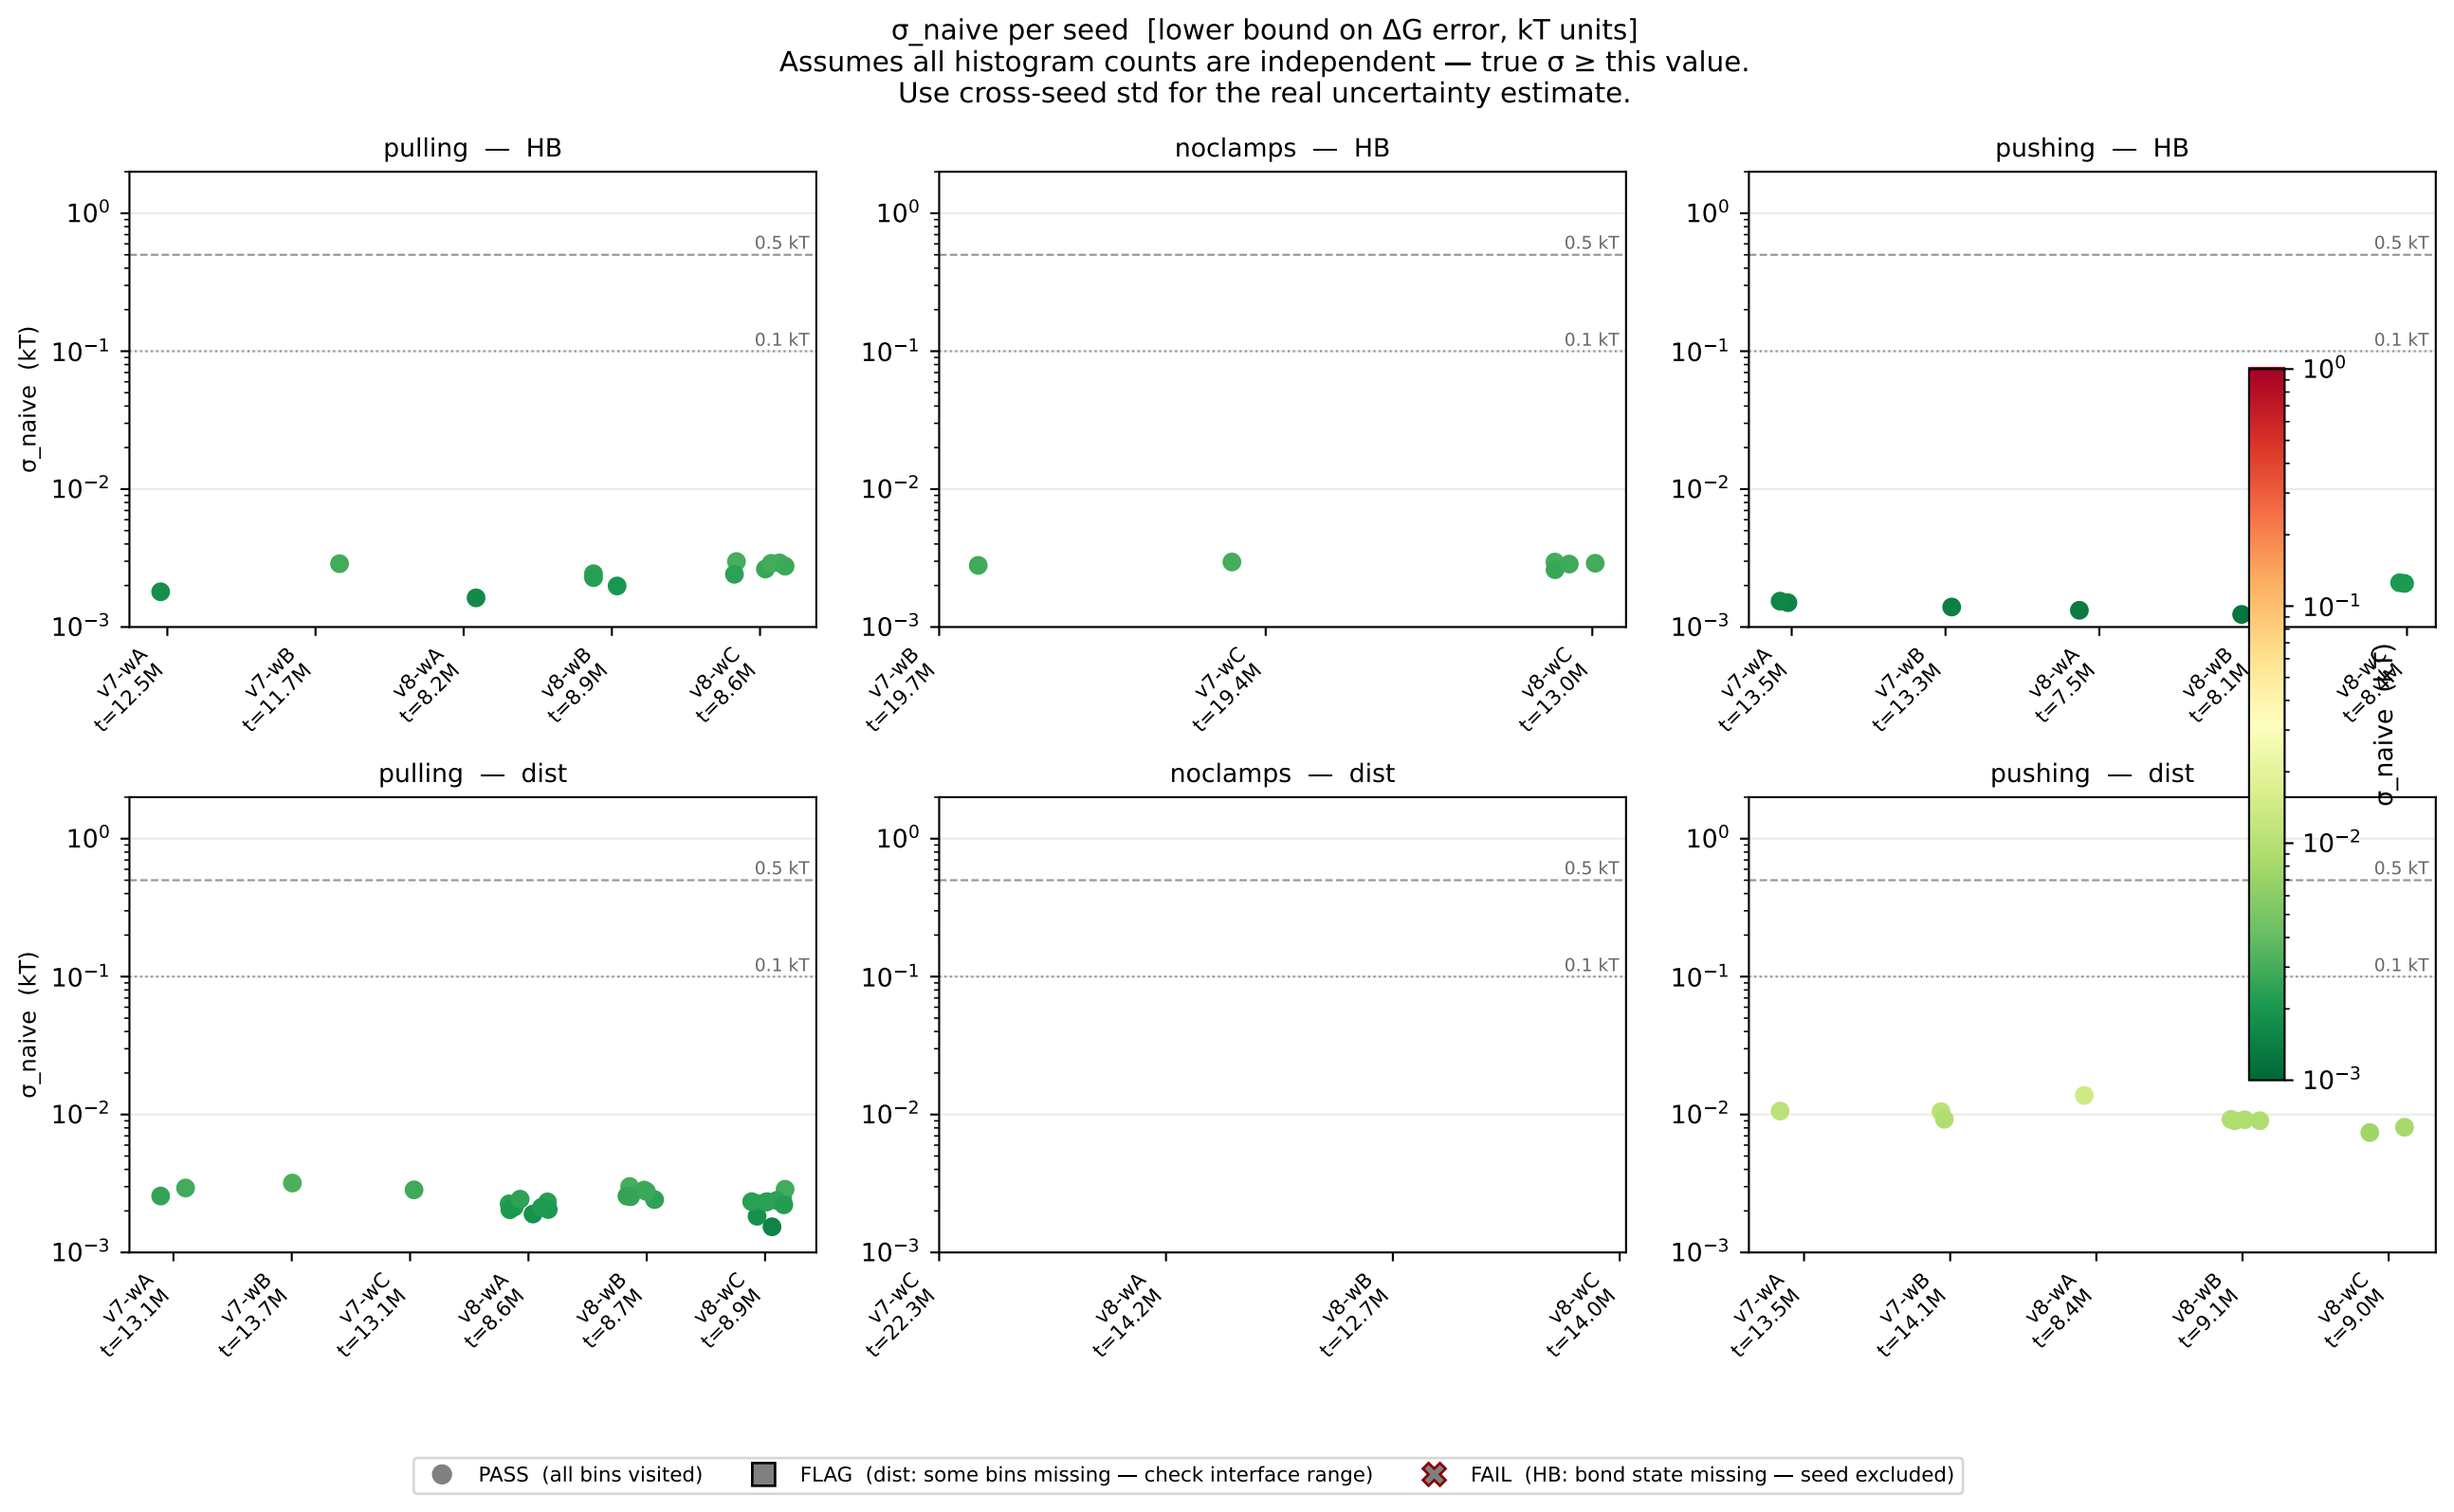
σ_naive per seed [lower bound on ΔG error, kT units]
Assumes all histogram counts are independent — true σ ≥ this value.
Use cross-seed std for the real uncertainty estimate.
pulling — HB
noclamps — HB
pushing — HB
pulling — dist
noclamps — dist
pushing — dist
σ_naive (kT)
0.5 kT
0.1 kT
v7-wA t=12.5M
v7-wB t=11.7M
v8-wA t=8.2M
v8-wB t=8.9M
v8-wC t=8.6M
v7-wB t=19.7M
v7-wC t=19.4M
v8-wC t=13.0M
v7-wA t=13.5M
v7-wB t=13.3M
v8-wA t=7.5M
v8-wB t=8.1M
v8-wC t=8.4M
v7-wA t=13.1M
v7-wB t=13.7M
v7-wC t=13.1M
v8-wA t=8.6M
v8-wB t=8.7M
v8-wC t=8.9M
v7-wC t=22.3M
v8-wA t=14.2M
v8-wB t=12.7M
v8-wC t=14.0M
v7-wA t=13.5M
v7-wB t=14.1M
v8-wA t=8.4M
v8-wB t=9.1M
v8-wC t=9.0M
PASS (all bins visited)
FLAG (dist: some bins missing — check interface range)
FAIL (HB: bond state missing — seed excluded)