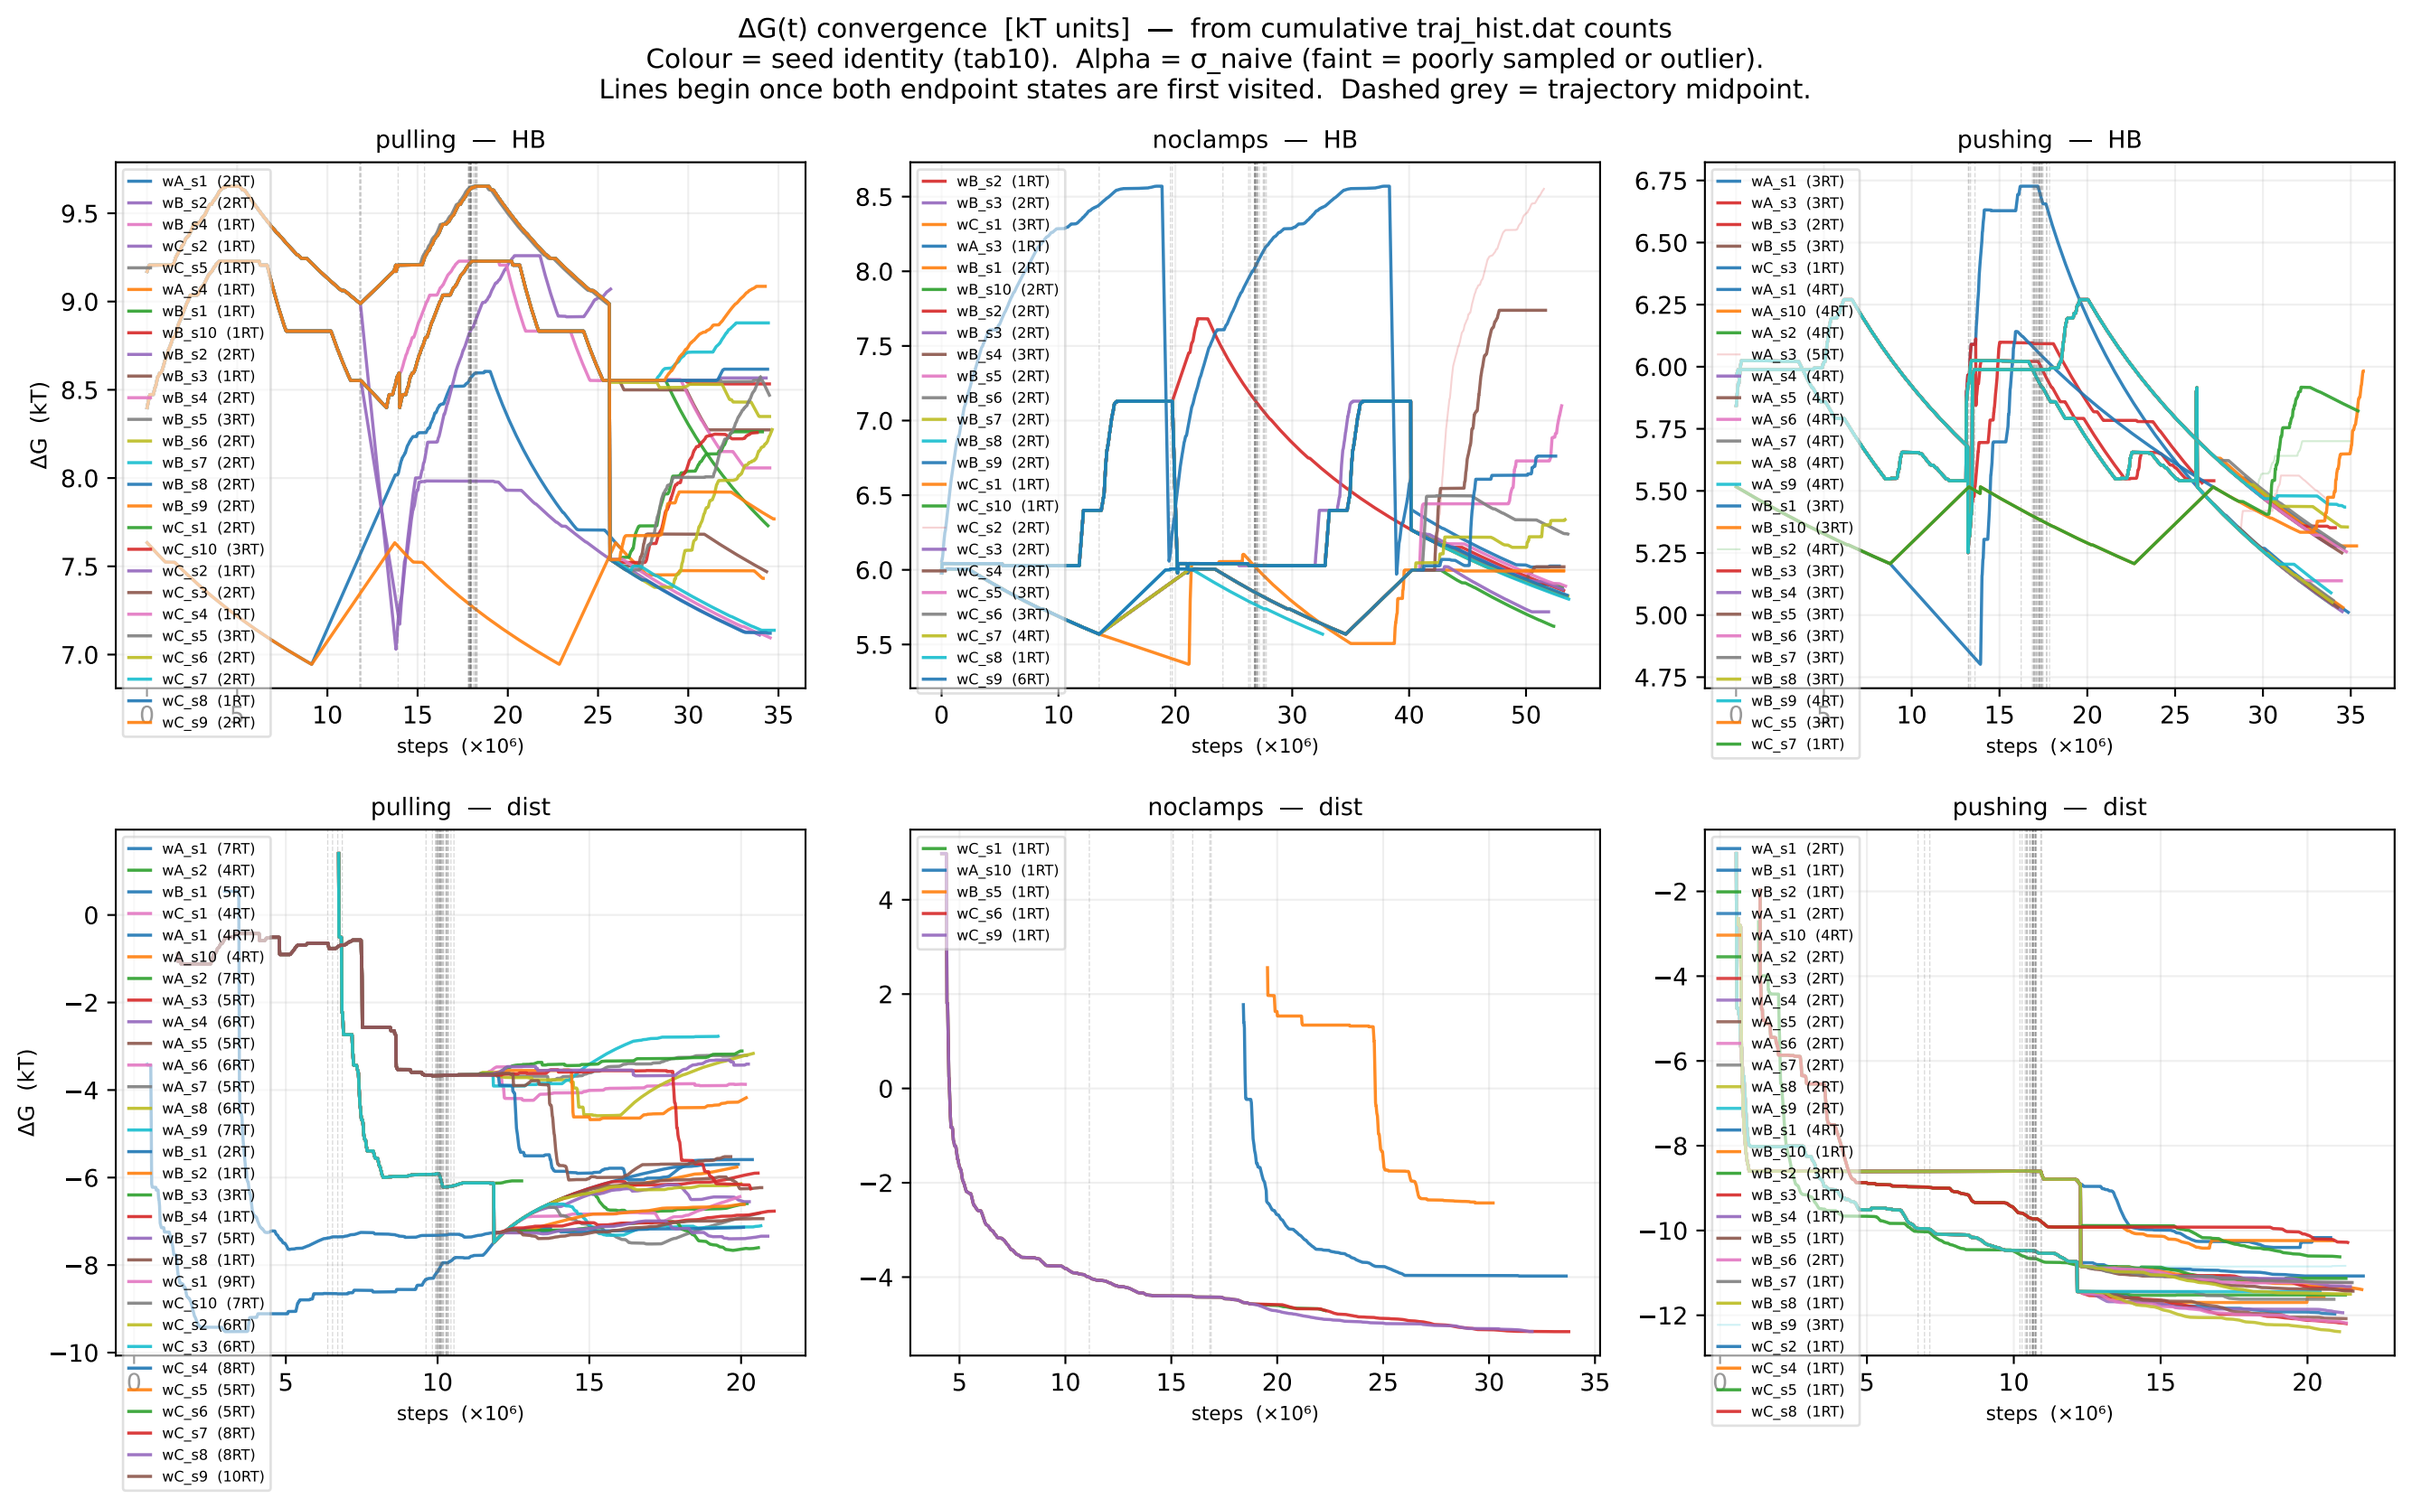

ΔG(t) convergence [kT units] — from cumulative traj_hist.dat counts
Colour = seed identity (tab10). Alpha = σ_naive (faint = poorly sampled or outlier).
Lines begin once both endpoints states are first visited. Dashed grey = trajectory midpoint.
pulling — HB
noclamps — HB
pushing — HB
pulling — dist
noclamps — dist
pushing — dist
ΔG (kT)
steps (×10⁶)
wA_s1 (2RT)
wB_s2 (2RT)
wB_s4 (1RT)
wC_s2 (1RT)
wC_s5 (1RT)
wA_s4 (1RT)
wB_s1 (1RT)
wB_s10 (1RT)
wB_s2 (2RT)
wB_s3 (1RT)
wB_s4 (2RT)
wB_s5 (3RT)
wB_s6 (2RT)
wB_s7 (2RT)
wB_s8 (2RT)
wB_s9 (2RT)
wC_s1 (2RT)
wC_s10 (3RT)
wC_s2 (1RT)
wC_s3 (2RT)
wC_s4 (1RT)
wC_s5 (3RT)
wC_s6 (2RT)
wC_s7 (2RT)
wC_s8 (1RT)
wC_s9 (2RT)
wB_s2 (1RT)
wB_s3 (2RT)
wC_s1 (3RT)
wA_s3 (1RT)
wB_s1 (2RT)
wB_s10 (2RT)
wB_s2 (2RT)
wB_s3 (2RT)
wB_s4 (3RT)
wB_s5 (2RT)
wB_s6 (2RT)
wB_s7 (2RT)
wB_s8 (2RT)
wB_s9 (2RT)
wC_s1 (1RT)
wC_s10 (1RT)
wC_s2 (2RT)
wC_s3 (2RT)
wC_s4 (2RT)
wC_s5 (3RT)
wC_s6 (3RT)
wC_s7 (4RT)
wC_s8 (1RT)
wC_s9 (6RT)
wA_s1 (3RT)
wA_s3 (3RT)
wB_s3 (2RT)
wB_s5 (3RT)
wC_s3 (1RT)
wA_s1 (4RT)
wA_s10 (4RT)
wA_s2 (4RT)
wA_s3 (5RT)
wA_s4 (4RT)
wA_s5 (4RT)
wA_s6 (4RT)
wA_s7 (4RT)
wA_s8 (4RT)
wA_s9 (4RT)
wB_s1 (3RT)
wB_s10 (3RT)
wB_s2 (4RT)
wB_s3 (3RT)
wB_s4 (3RT)
wB_s5 (3RT)
wB_s6 (3RT)
wB_s7 (3RT)
wB_s8 (3RT)
wB_s9 (4RT)
wC_s5 (3RT)
wC_s7 (1RT)
wA_s1 (7RT)
wA_s2 (4RT)
wB_s1 (5RT)
wC_s1 (4RT)
wA_s1 (4RT)
wA_s10 (4RT)
wA_s2 (7RT)
wA_s3 (5RT)
wA_s4 (6RT)
wA_s5 (5RT)
wA_s6 (6RT)
wA_s7 (5RT)
wA_s8 (6RT)
wA_s9 (7RT)
wB_s1 (2RT)
wB_s2 (1RT)
wB_s3 (3RT)
wB_s4 (1RT)
wB_s7 (5RT)
wB_s8 (1RT)
wC_s1 (9RT)
wC_s10 (7RT)
wC_s2 (6RT)
wC_s3 (6RT)
wC_s4 (8RT)
wC_s5 (5RT)
wC_s6 (5RT)
wC_s7 (8RT)
wC_s8 (8RT)
wC_s9 (10RT)
wC_s1 (1RT)
wA_s10 (1RT)
wB_s5 (1RT)
wC_s6 (1RT)
wC_s9 (1RT)
wA_s1 (2RT)
wB_s1 (1RT)
wB_s2 (1RT)
wA_s1 (2RT)
wA_s10 (4RT)
wA_s2 (2RT)
wA_s3 (2RT)
wA_s4 (2RT)
wA_s5 (2RT)
wA_s6 (2RT)
wA_s7 (2RT)
wA_s8 (2RT)
wA_s9 (2RT)
wB_s1 (4RT)
wB_s10 (1RT)
wB_s2 (3RT)
wB_s3 (1RT)
wB_s4 (1RT)
wB_s5 (1RT)
wB_s6 (2RT)
wB_s7 (1RT)
wB_s8 (1RT)
wB_s9 (3RT)
wC_s2 (1RT)
wC_s4 (1RT)
wC_s5 (1RT)
wC_s8 (1RT)