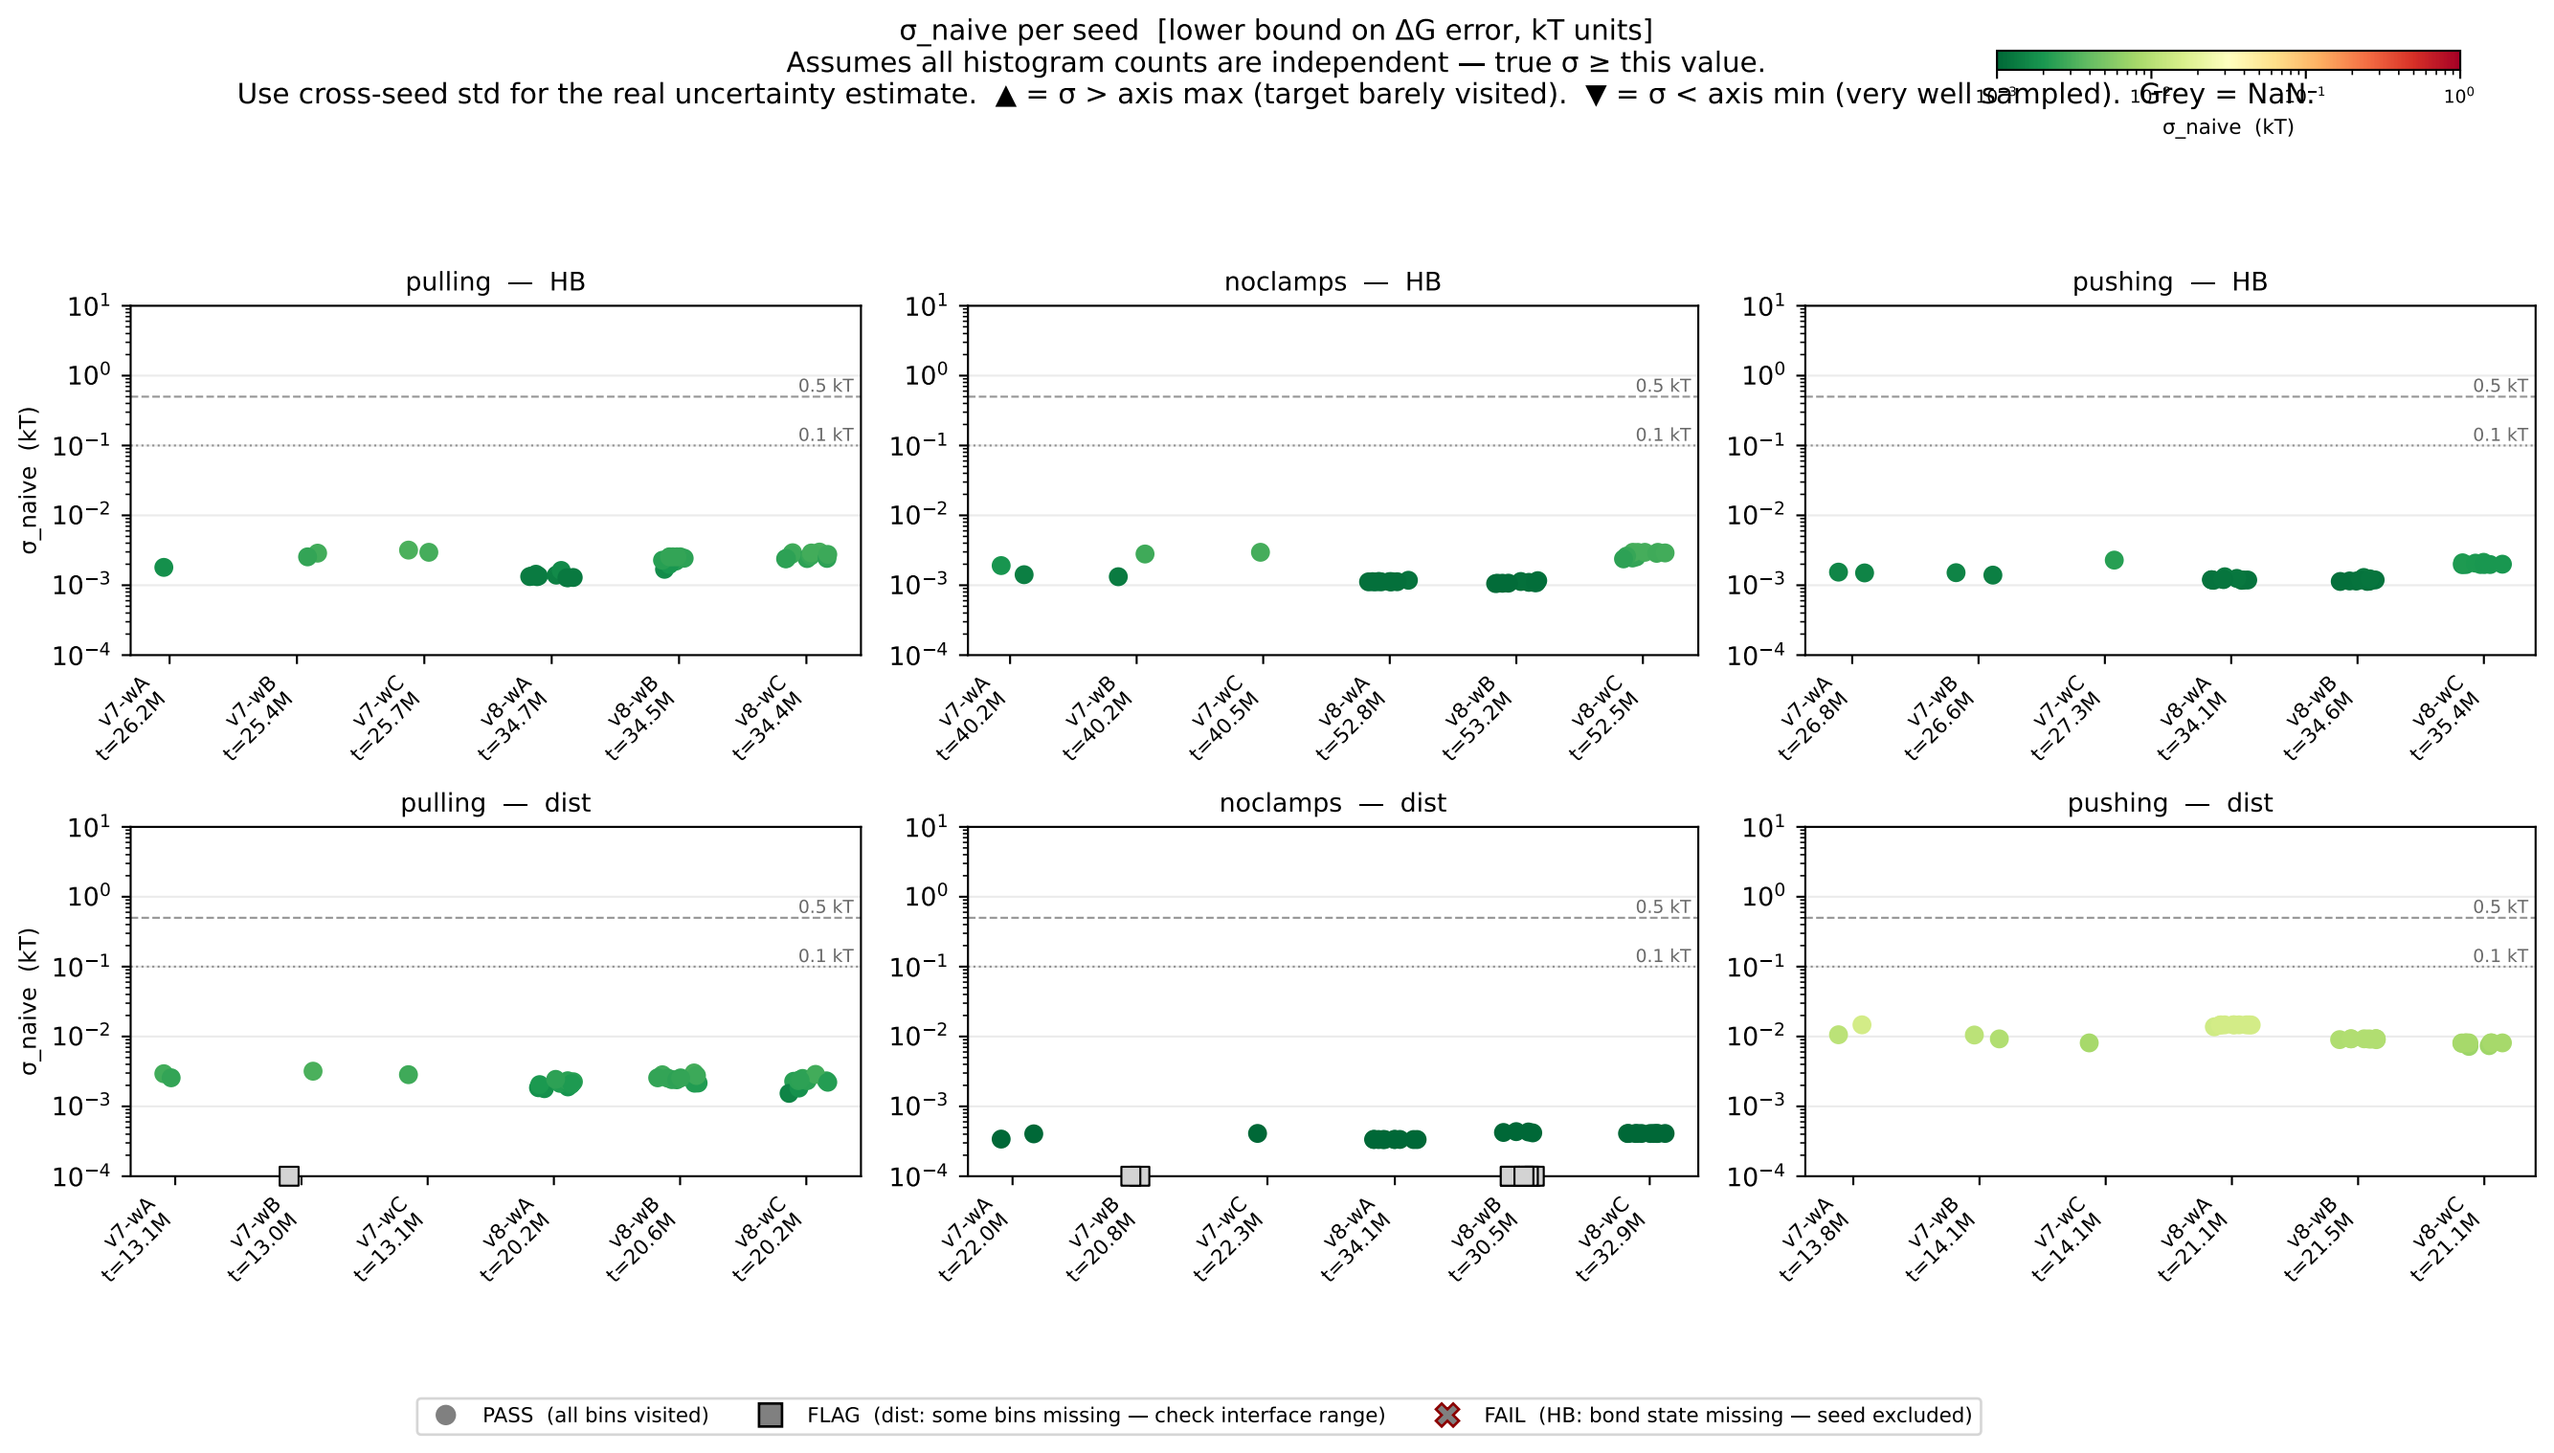

σ_naive per seed [lower bound on ΔG error, kT units]
Assumes all histogram counts are independent — true σ ≥ this value.
Use cross-seed std for the real uncertainty estimate. ▲ = σ > axis max (target barely visited). ▼ = σ < axis min (very well sampled). Grey = NaN.
σ_naive (kT)
pulling — HB
noclamps — HB
pushing — HB
pulling — dist
noclamps — dist
pushing — dist
σ_naive (kT)
0.5 kT
0.1 kT
v7-wA t=26.2M
v7-wB t=25.4M
v7-wC t=25.7M
v8-wA t=34.7M
v8-wB t=34.5M
v8-wC t=34.4M
v7-wA t=40.2M
v7-wB t=40.2M
v7-wC t=40.5M
v8-wA t=52.8M
v8-wB t=53.2M
v8-wC t=52.5M
v7-wA t=26.8M
v7-wB t=26.6M
v7-wC t=27.3M
v8-wA t=34.1M
v8-wB t=34.6M
v8-wC t=35.4M
v7-wA t=13.1M
v7-wB t=13.0M
v7-wC t=13.1M
v8-wA t=20.2M
v8-wB t=20.6M
v8-wC t=20.2M
v7-wA t=22.0M
v7-wB t=20.8M
v7-wC t=22.3M
v8-wA t=34.1M
v8-wB t=30.5M
v8-wC t=32.9M
v7-wA t=13.8M
v7-wB t=14.1M
v7-wC t=14.1M
v8-wA t=21.1M
v8-wB t=21.5M
v8-wC t=21.1M
PASS (all bins visited)
FLAG (dist: some bins missing — check interface range)
FAIL (HB: bond state missing — seed excluded)