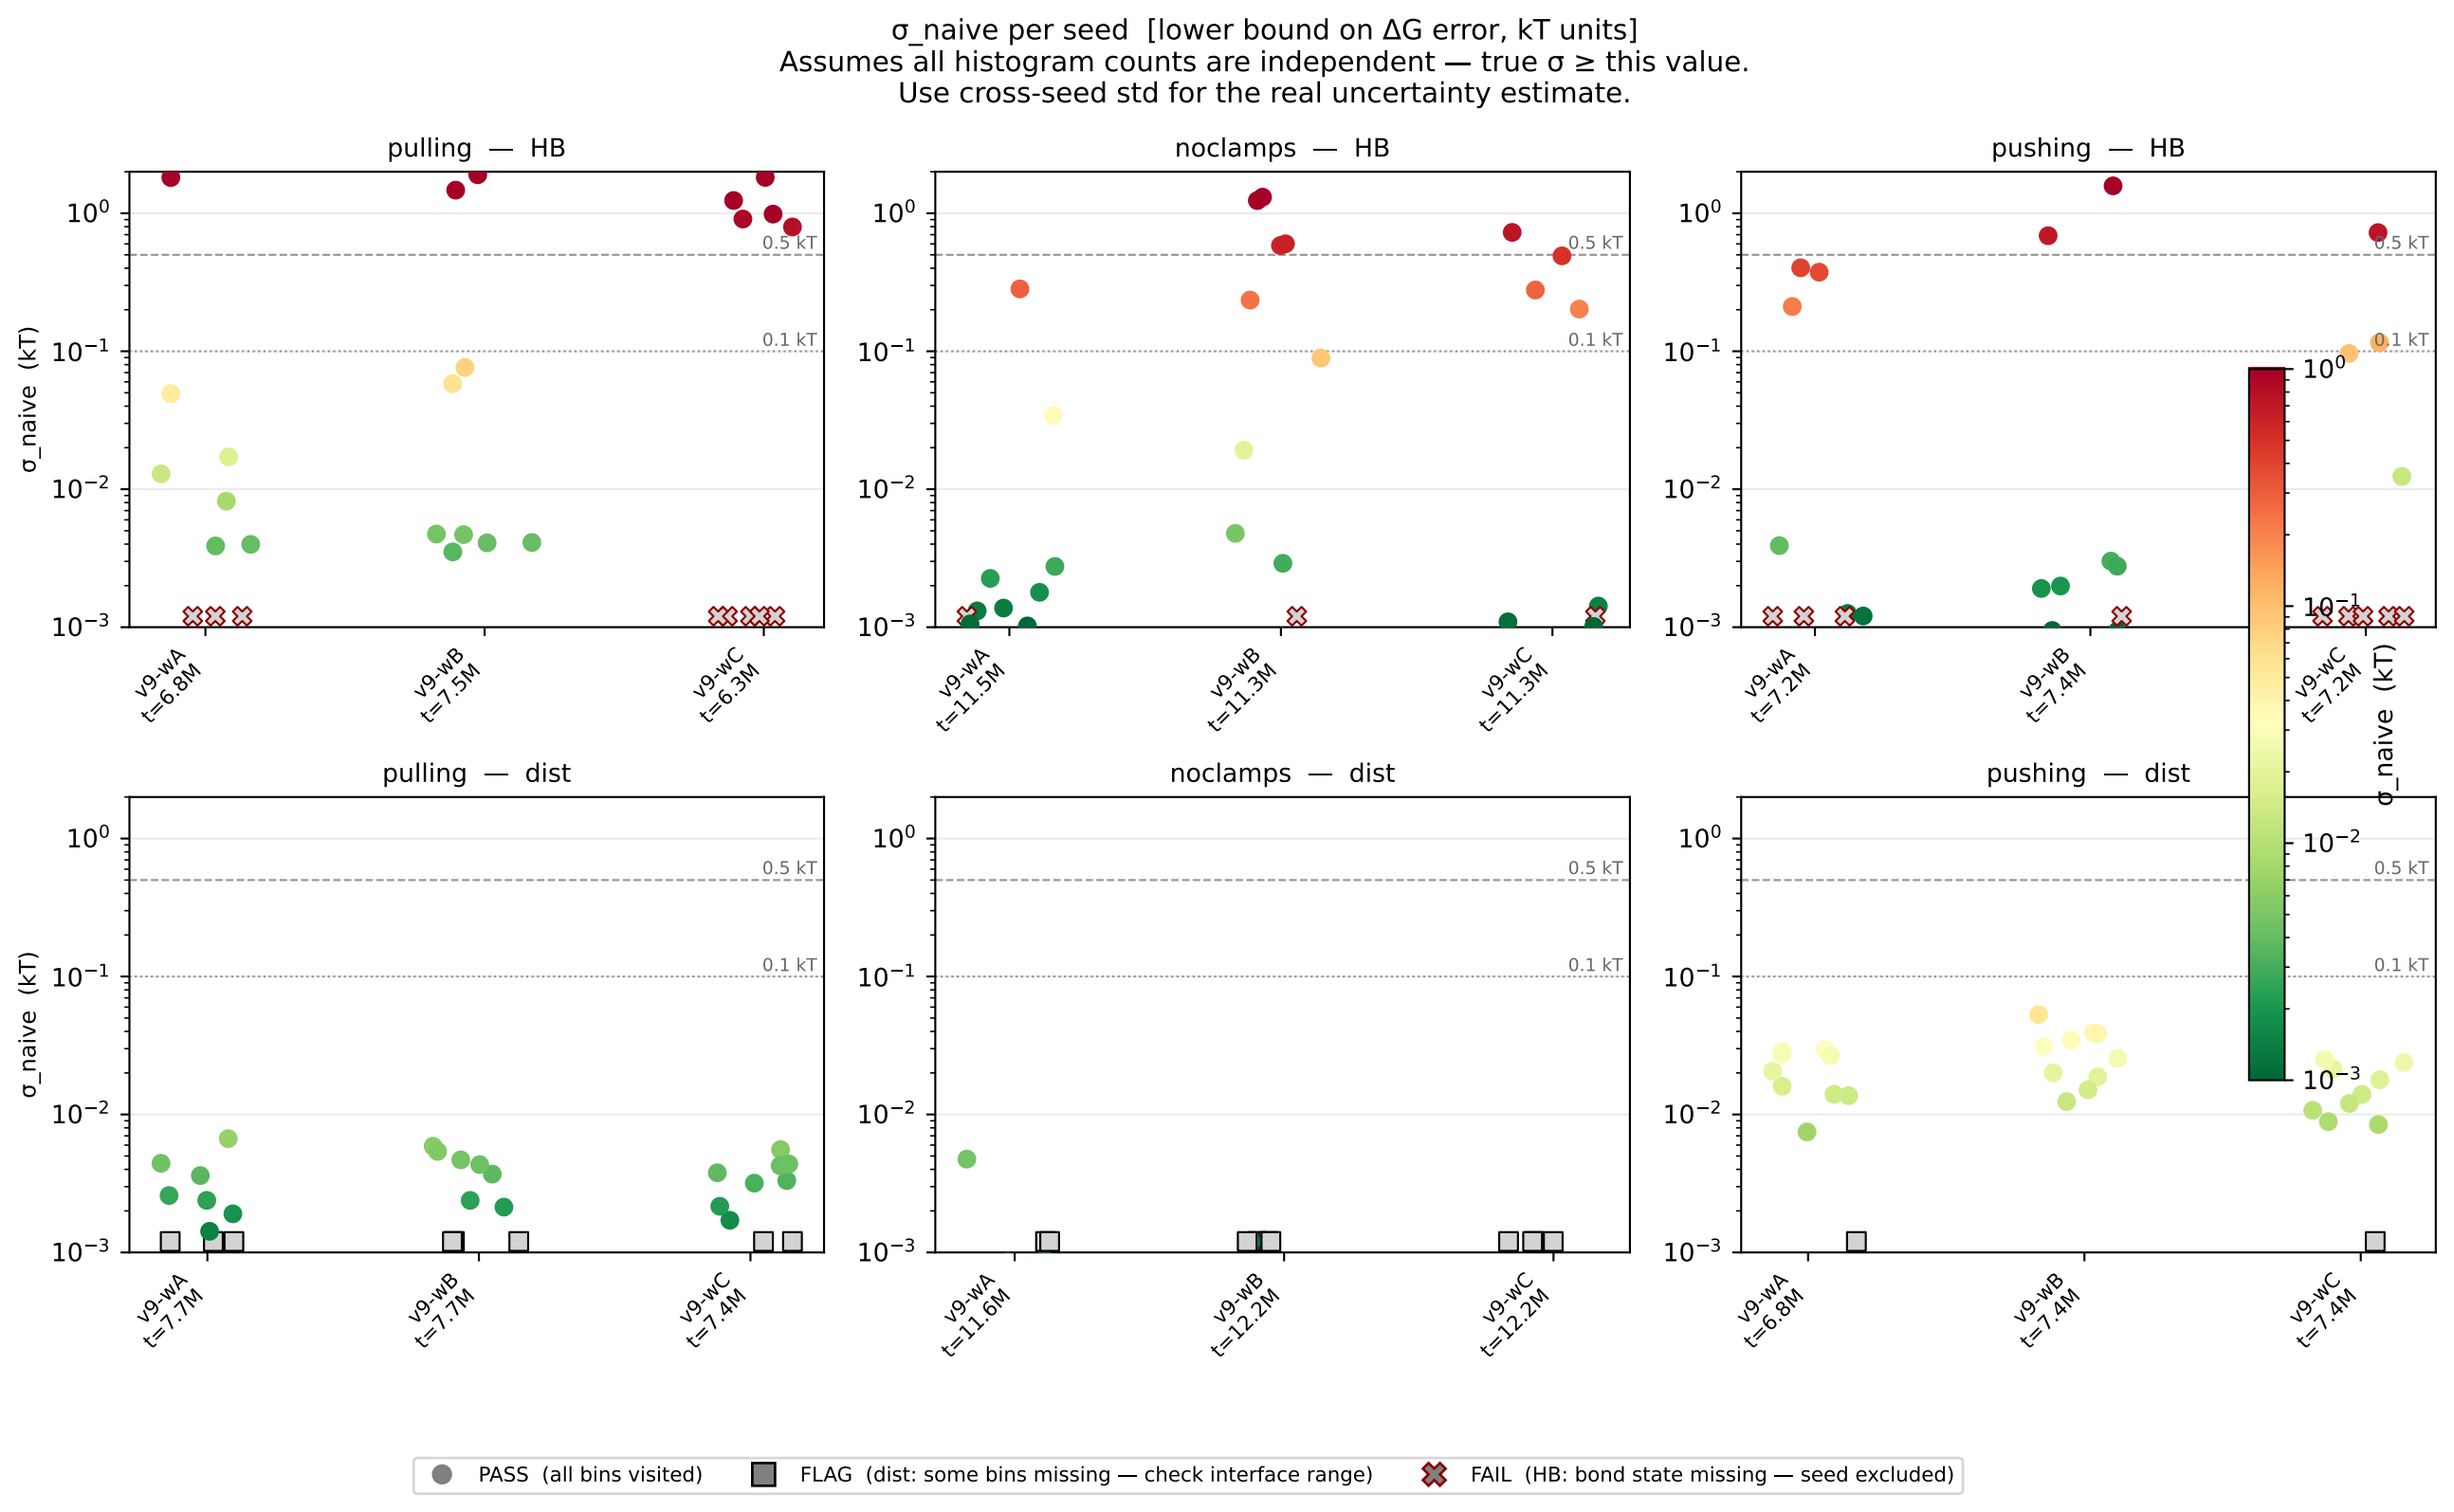

σ_naive per seed [lower bound on ΔG error, kT units]
Assumes all histogram counts are independent — true σ ≥ this value.
Use cross-seed std for the real uncertainty estimate.
pulling — HB
noclamps — HB
pushing — HB
pulling — dist
noclamps — dist
pushing — dist
σ_naive (kT)
0.5 kT
0.1 kT
v9-wA t=6.8M
v9-wB t=7.5M
v9-wC t=6.3M
v9-wA t=11.5M
v9-wB t=11.3M
v9-wC t=11.3M
v9-wA t=7.2M
v9-wB t=7.4M
v9-wC t=7.2M
v9-wA t=7.7M
v9-wB t=7.7M
v9-wC t=7.4M
v9-wA t=11.6M
v9-wB t=12.2M
v9-wC t=12.2M
v9-wA t=6.8M
v9-wB t=7.4M
v9-wC t=7.4M
PASS (all bins visited)
FLAG (dist: some bins missing — check interface range)
FAIL (HB: bond state missing — seed excluded)