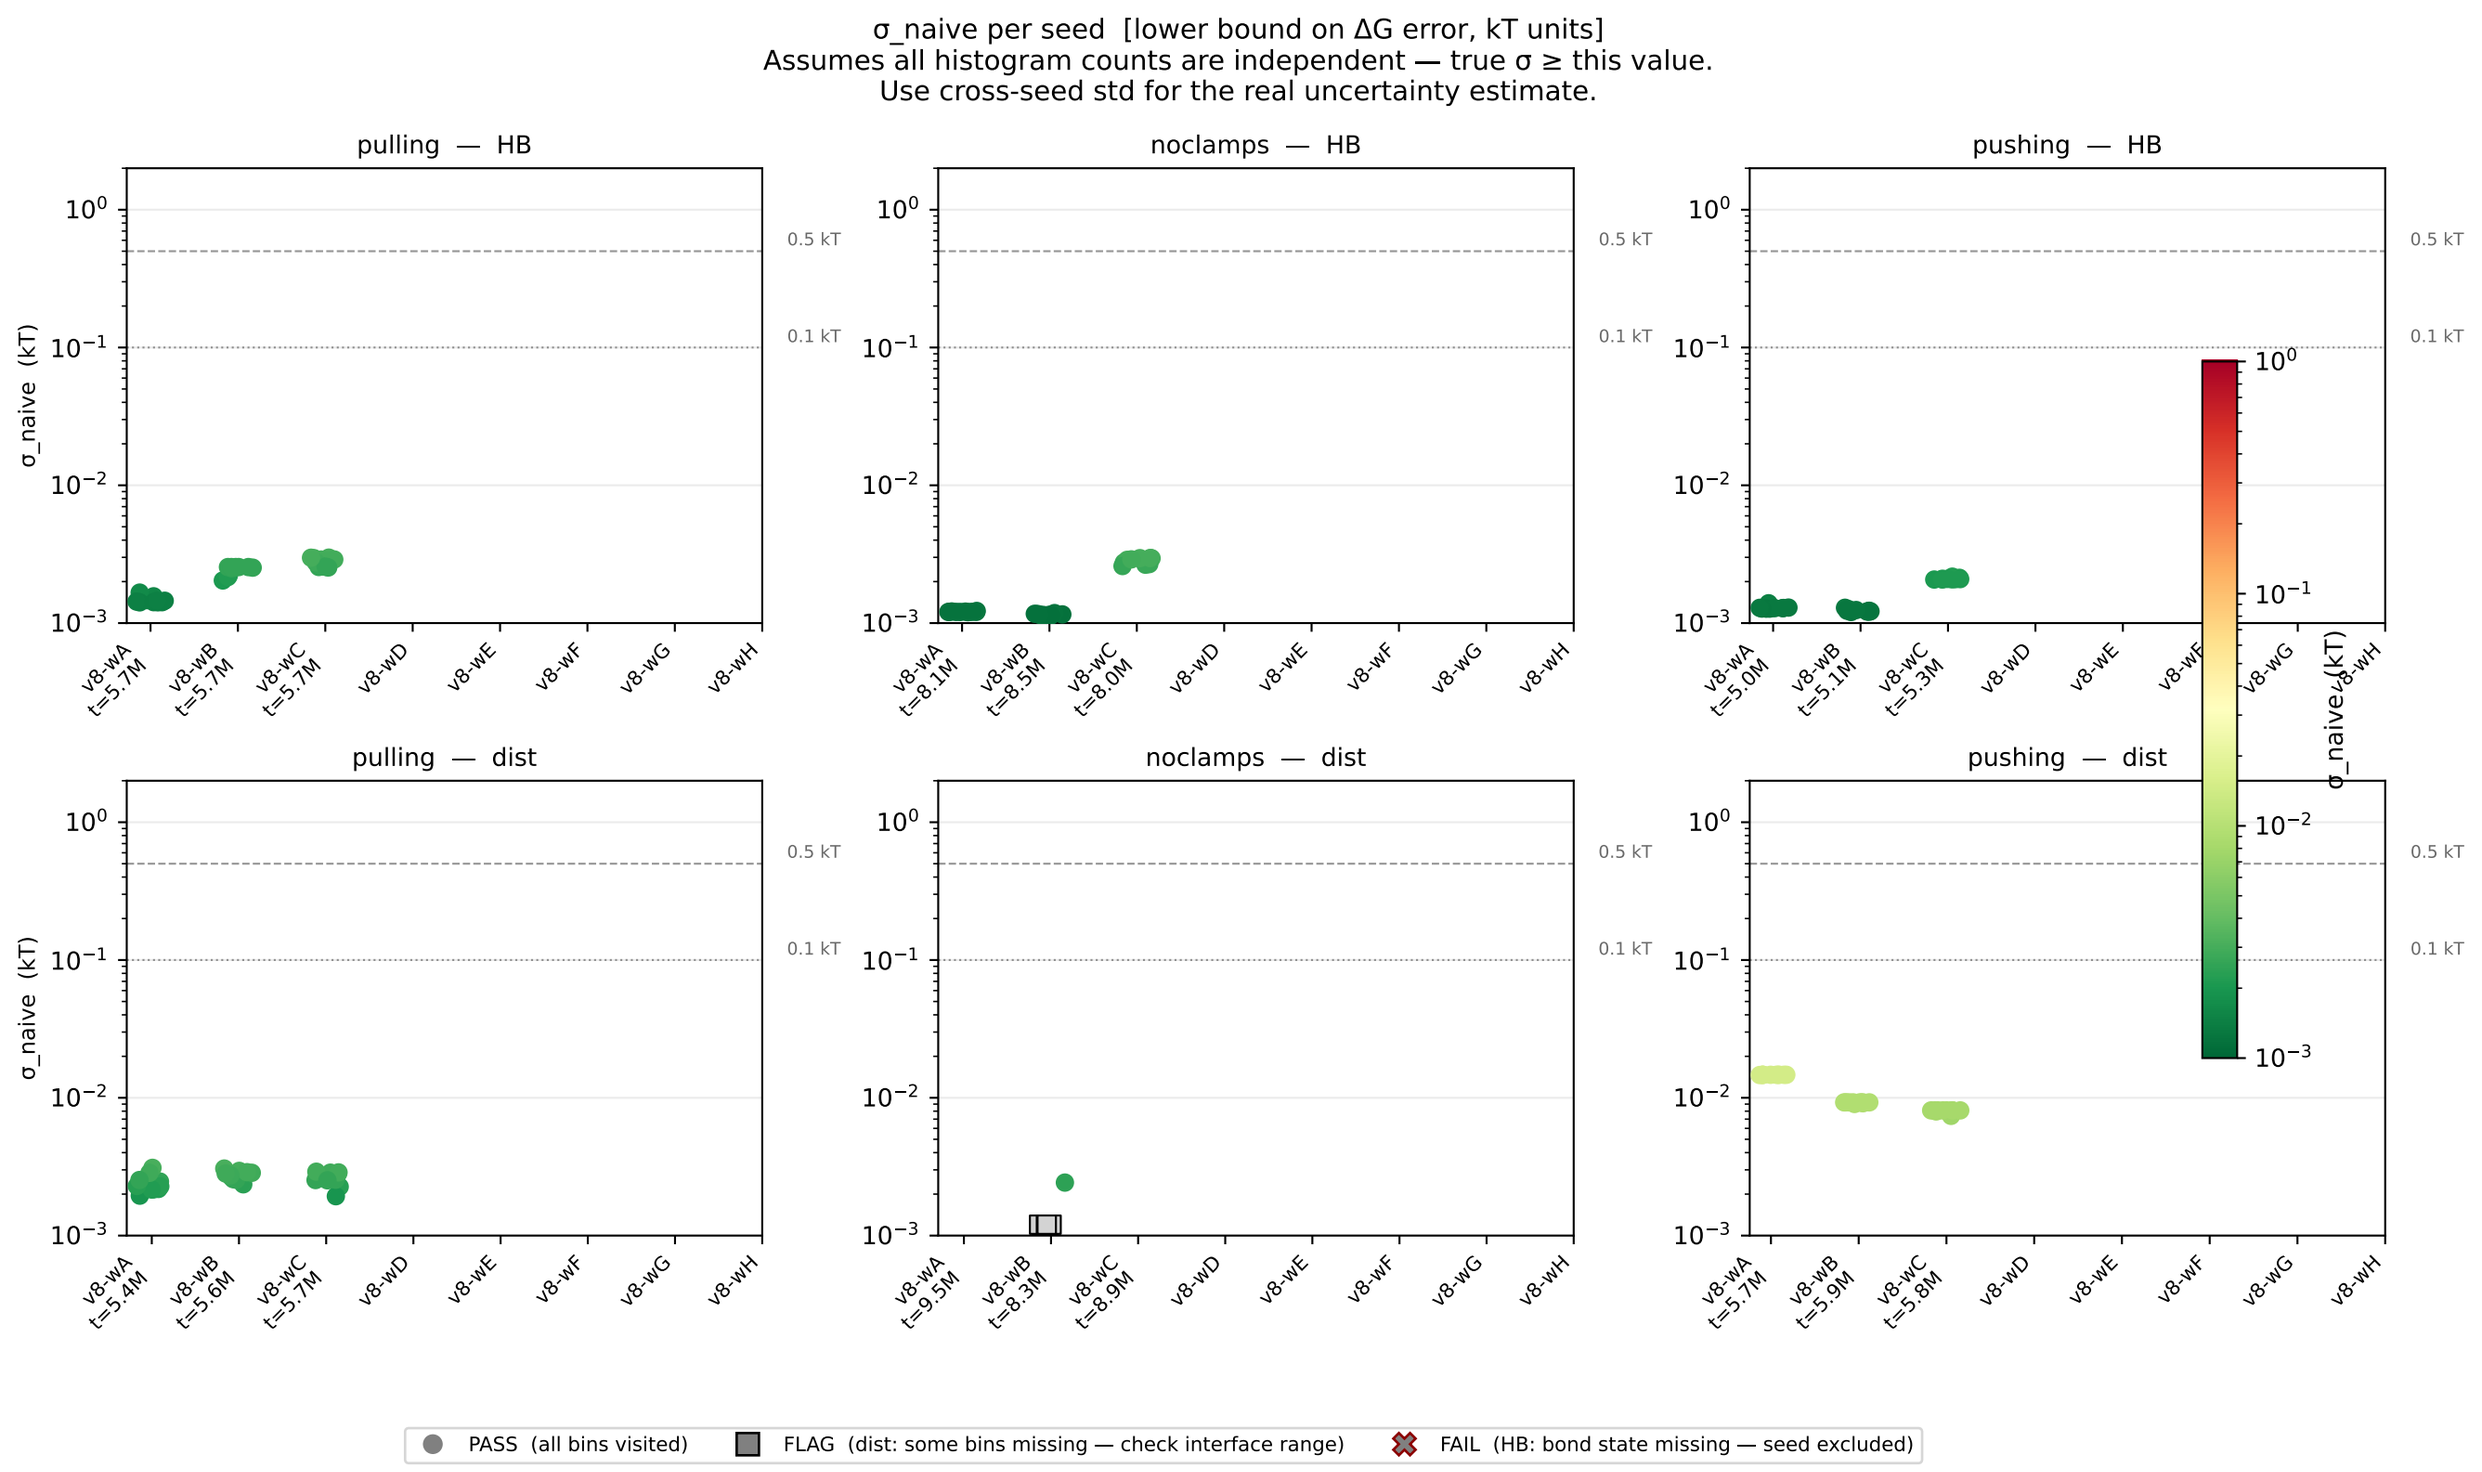

σ_naive per seed [lower bound on ΔG error, kT units]
Assumes all histogram counts are independent — true σ ≥ this value.
Use cross-seed std for the real uncertainty estimate.
pulling — HB
noclamps — HB
pushing — HB
pulling — dist
noclamps — dist
pushing — dist
σ_naive (kT)
0.5 kT
0.1 kT
v8-wA t=5.7M
v8-wB t=5.7M
v8-wC t=5.7M
v8-wA t=8.1M
v8-wB t=8.5M
v8-wC t=8.0M
v8-wA t=5.0M
v8-wB t=5.1M
v8-wC t=5.3M
v8-wA t=5.4M
v8-wB t=5.6M
v8-wC t=5.7M
v8-wA t=9.5M
v8-wB t=8.3M
v8-wC t=8.9M
v8-wA t=5.7M
v8-wB t=5.9M
v8-wC t=5.8M
v8-wD
v8-wE
v8-wF
v8-wG
v8-wH
PASS (all bins visited)
FLAG (dist: some bins missing — check interface range)
FAIL (HB: bond state missing — seed excluded)