

Space

Week 11

AEM 2850 / 5850 : R for Business Analytics

Cornell Dyson
Spring 2023

Acknowledgements: [Andrew Heiss](#), [Claus Wilke](#), [Allison Horst](#)

Announcements

Group project due this Friday, April 14 ([link](#))

No office hours today after class

Office hours by appointment at aem2850.youcanbook.me

Thursday's in-class example = this week's lab

- Goal is to get practice without overloading you given the group project deadline this week

Questions before we get started?

Plan for today

Prologue

Adding data to maps as layers

Geospatial visualizations in R

A quick primer on projections (for reference)

Disclaimer: I am not an expert on working with geospatial data. I just want to give you a sense of the possibilities!

Prologue

Geospatial data can help us...


Visualize business data for internal purposes

Study business activities


- Example: Dyson Profs. Addoum, Ng, and Ortiz-Bobea have studied how extreme temperatures affect business sales, productivity, and earnings




Addoum et al: Temperatures

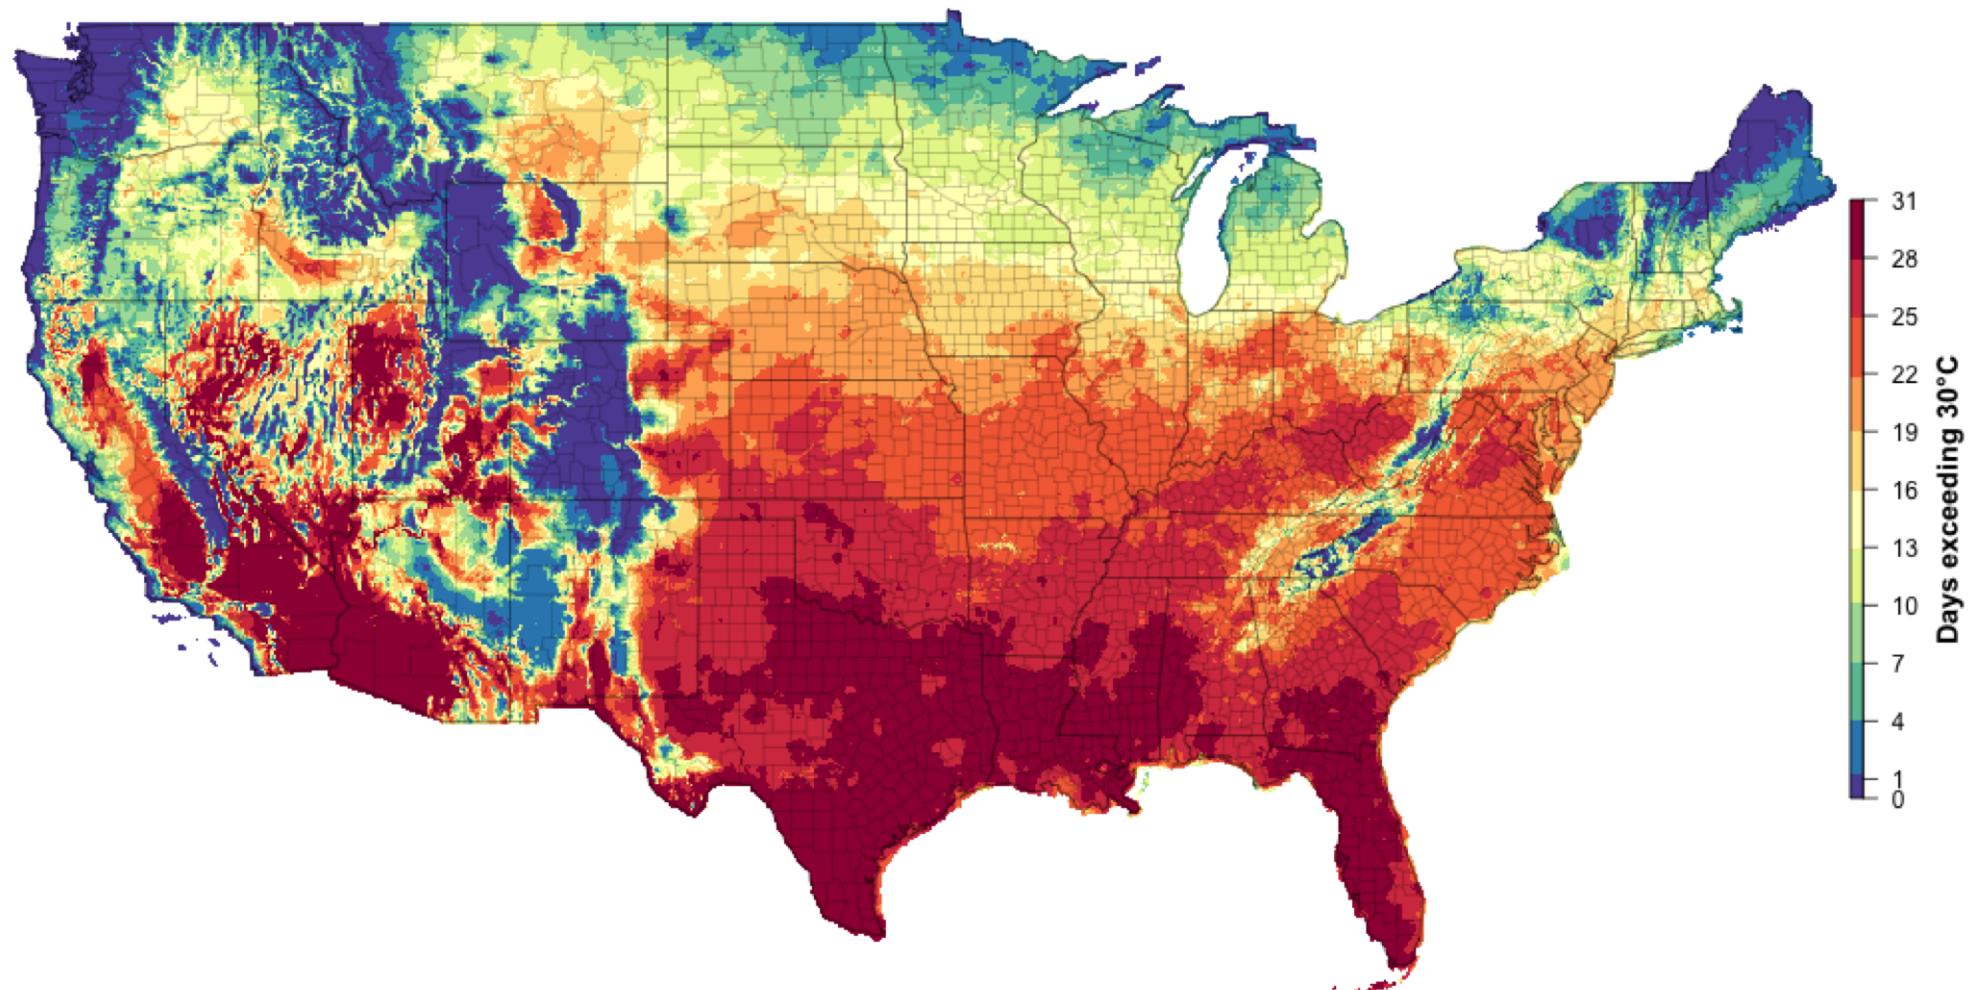


Addoum et al: Temperature Shocks

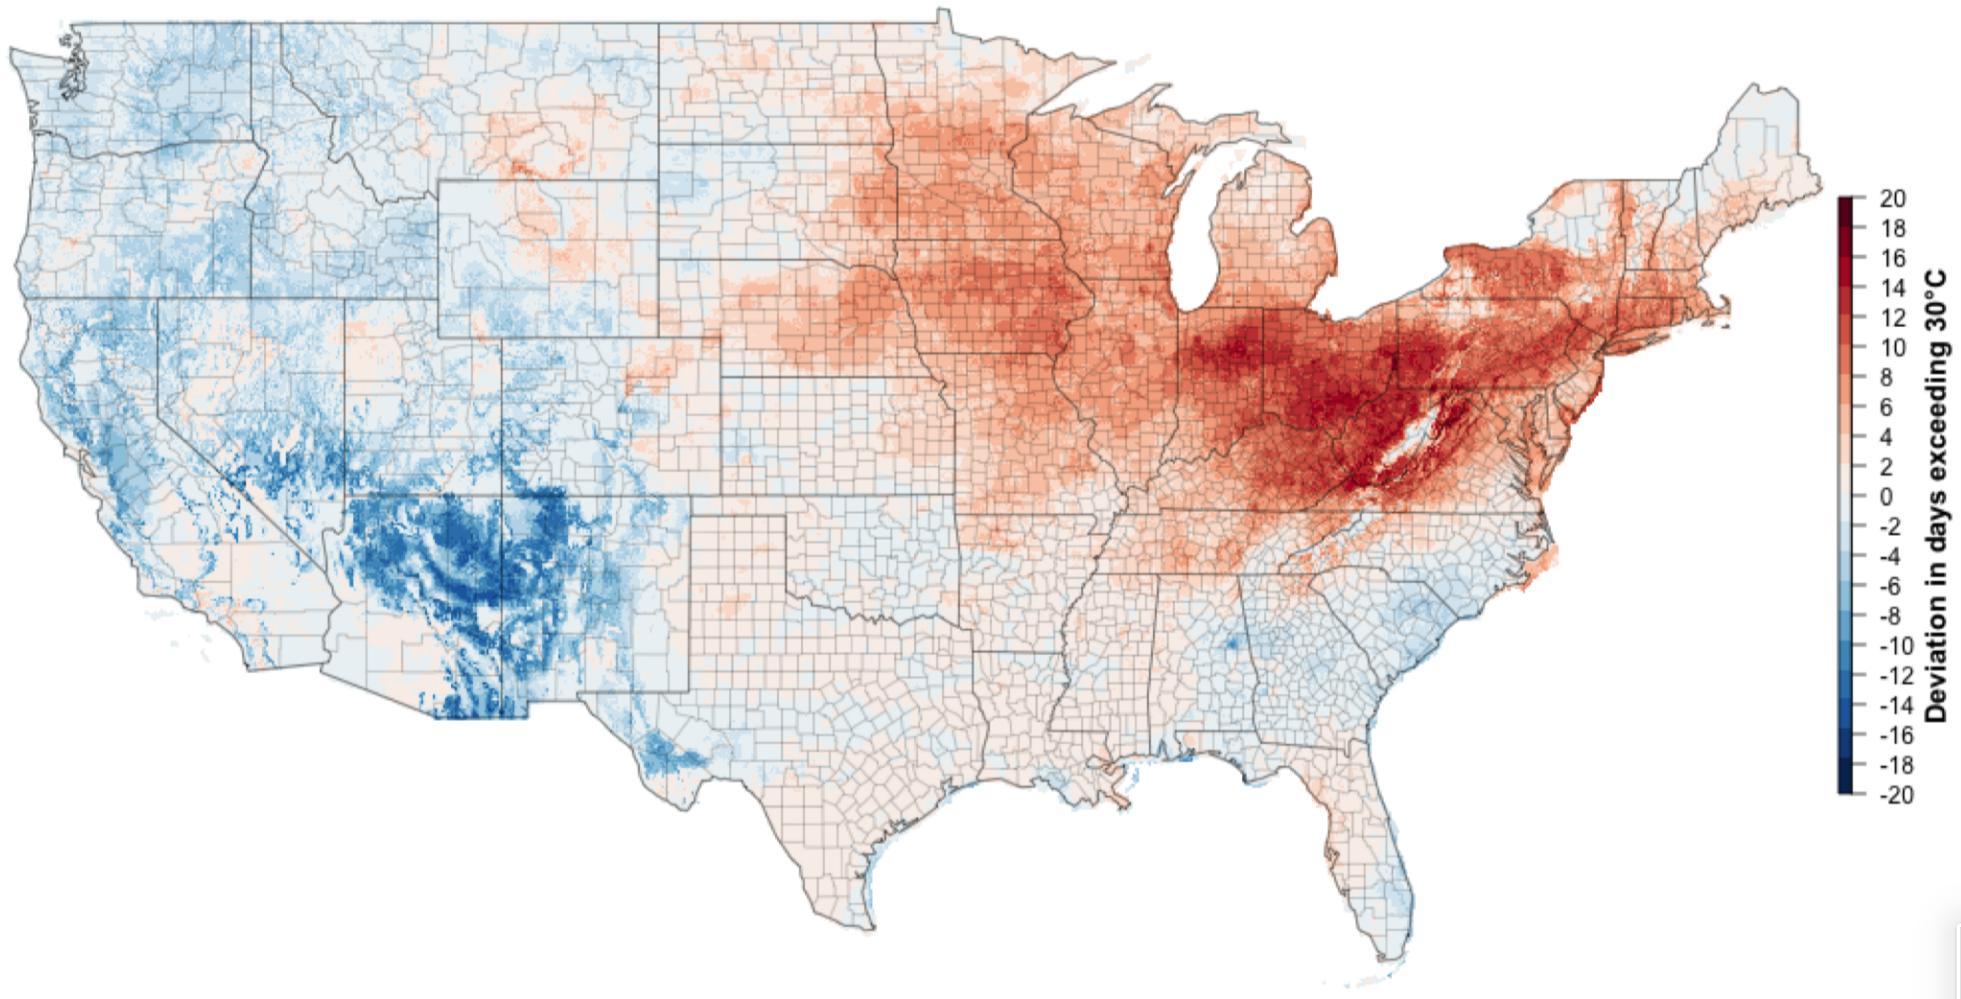

Addoum et al: Establishments

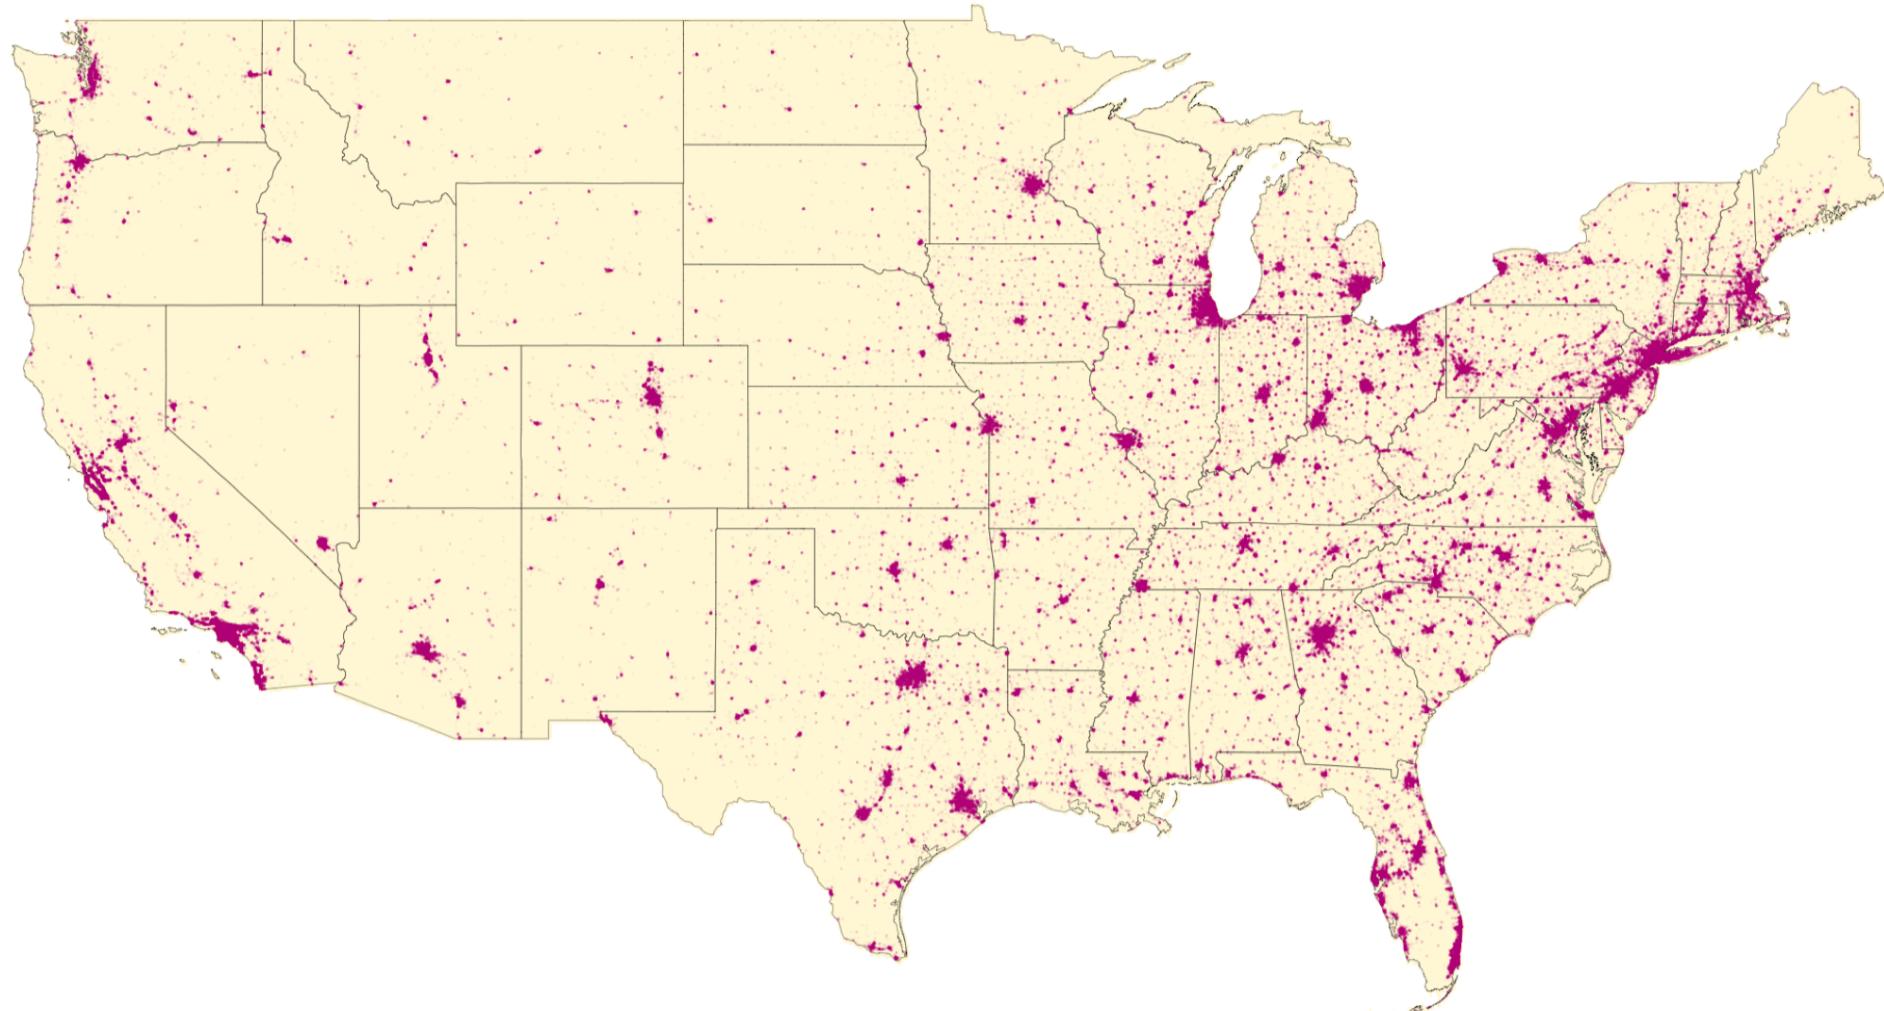

Temperature Shocks and Establishment Sales

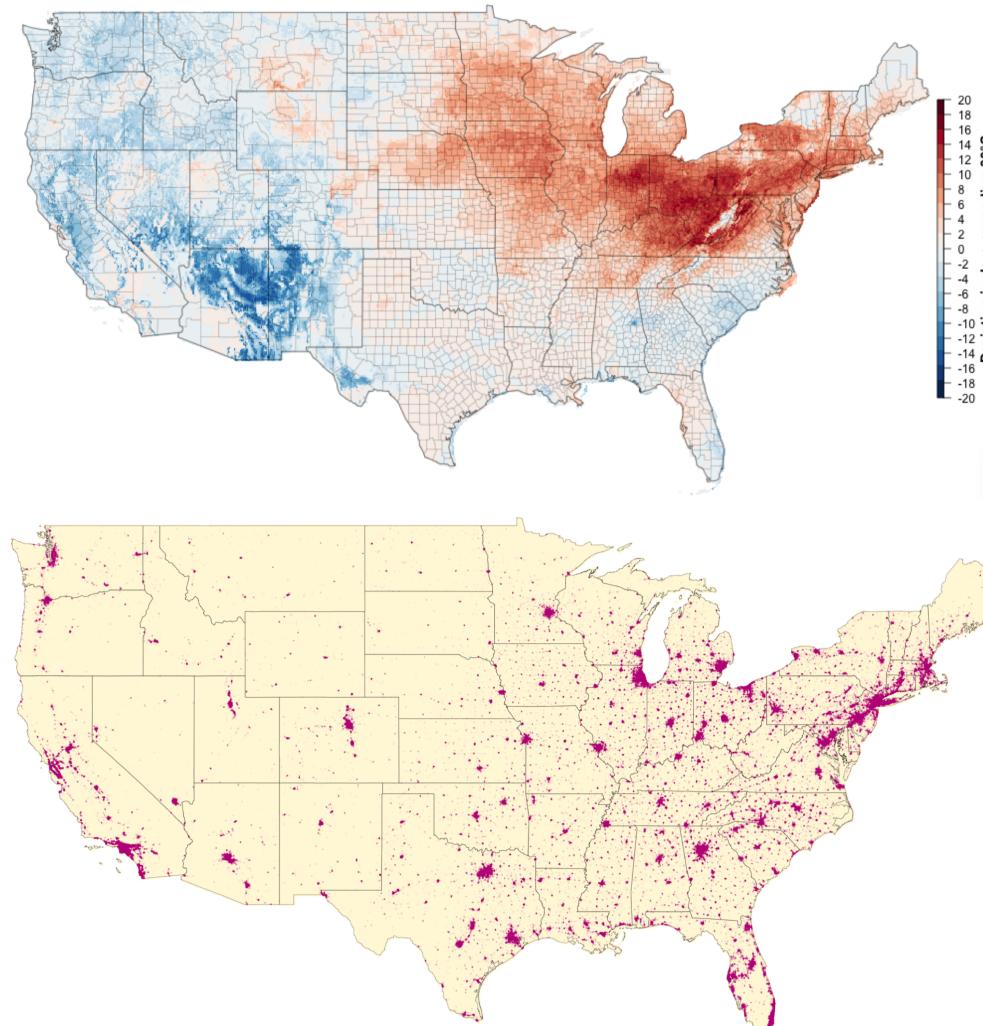


Geospatial data can mislead us...



Trey Yingst ✅
@TreyYingst




Spotted: A map to be hung somewhere in the West Wing

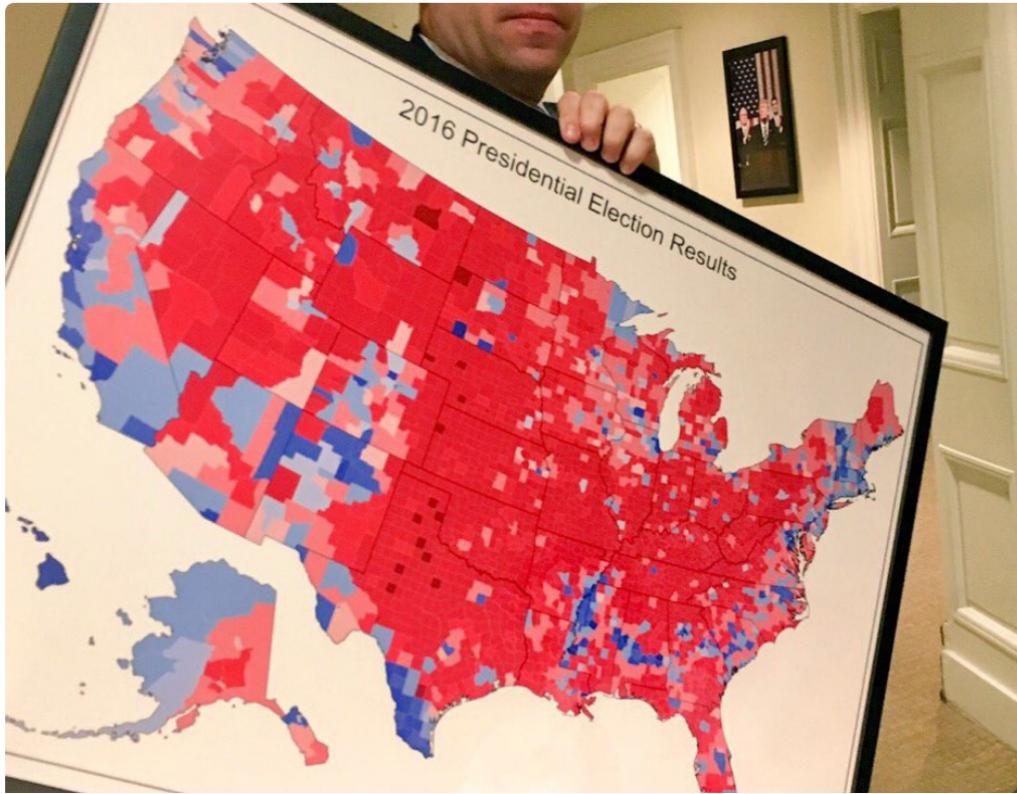


How is this **choropleth map** misleading?

Land doesn't vote

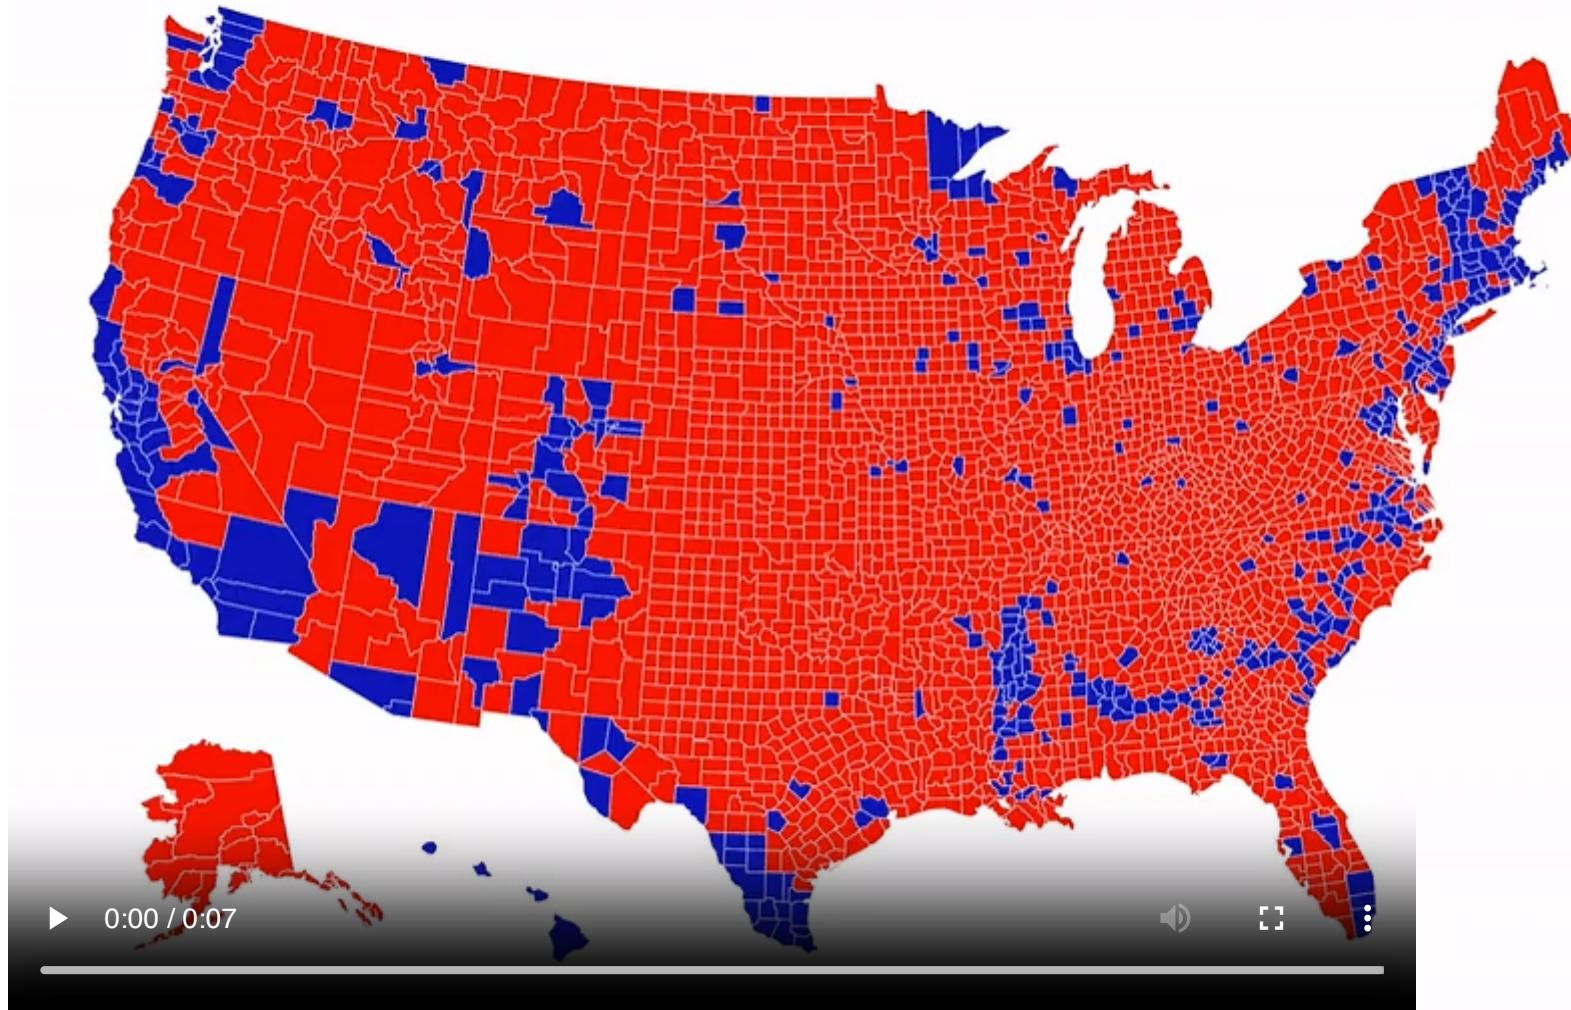


Cartogram heatmaps may be preferable

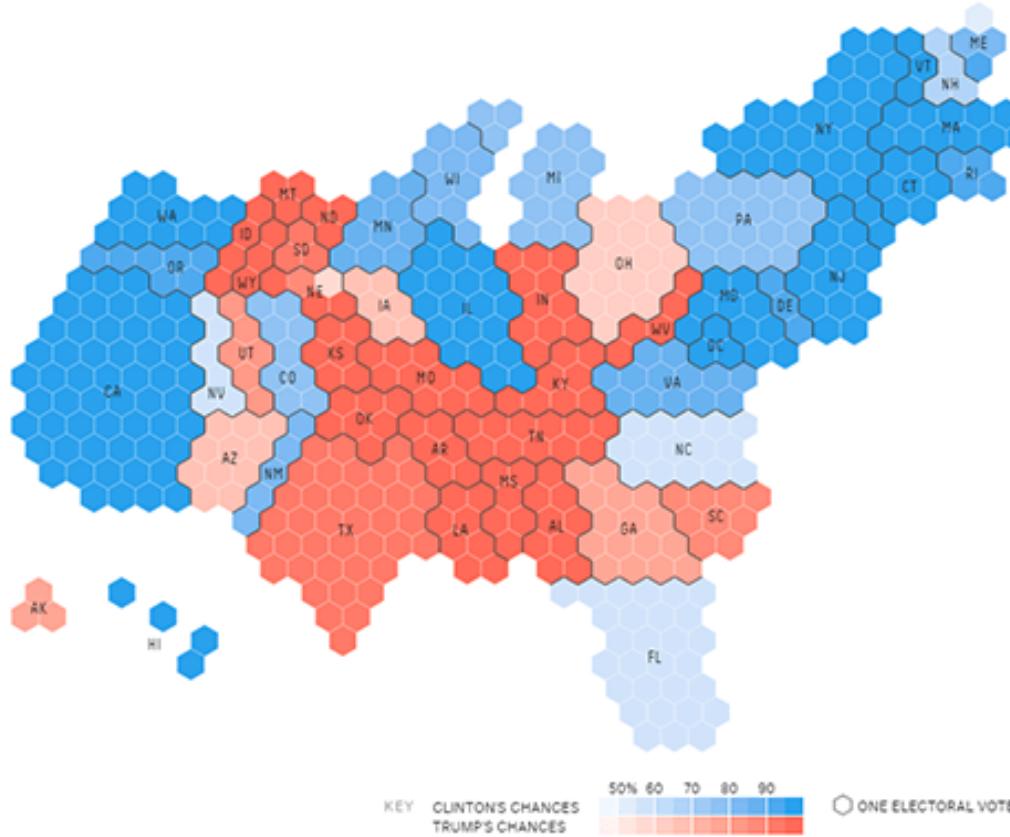


Each hexagon corresponds to one electoral vote

Or: use other layers to represent data

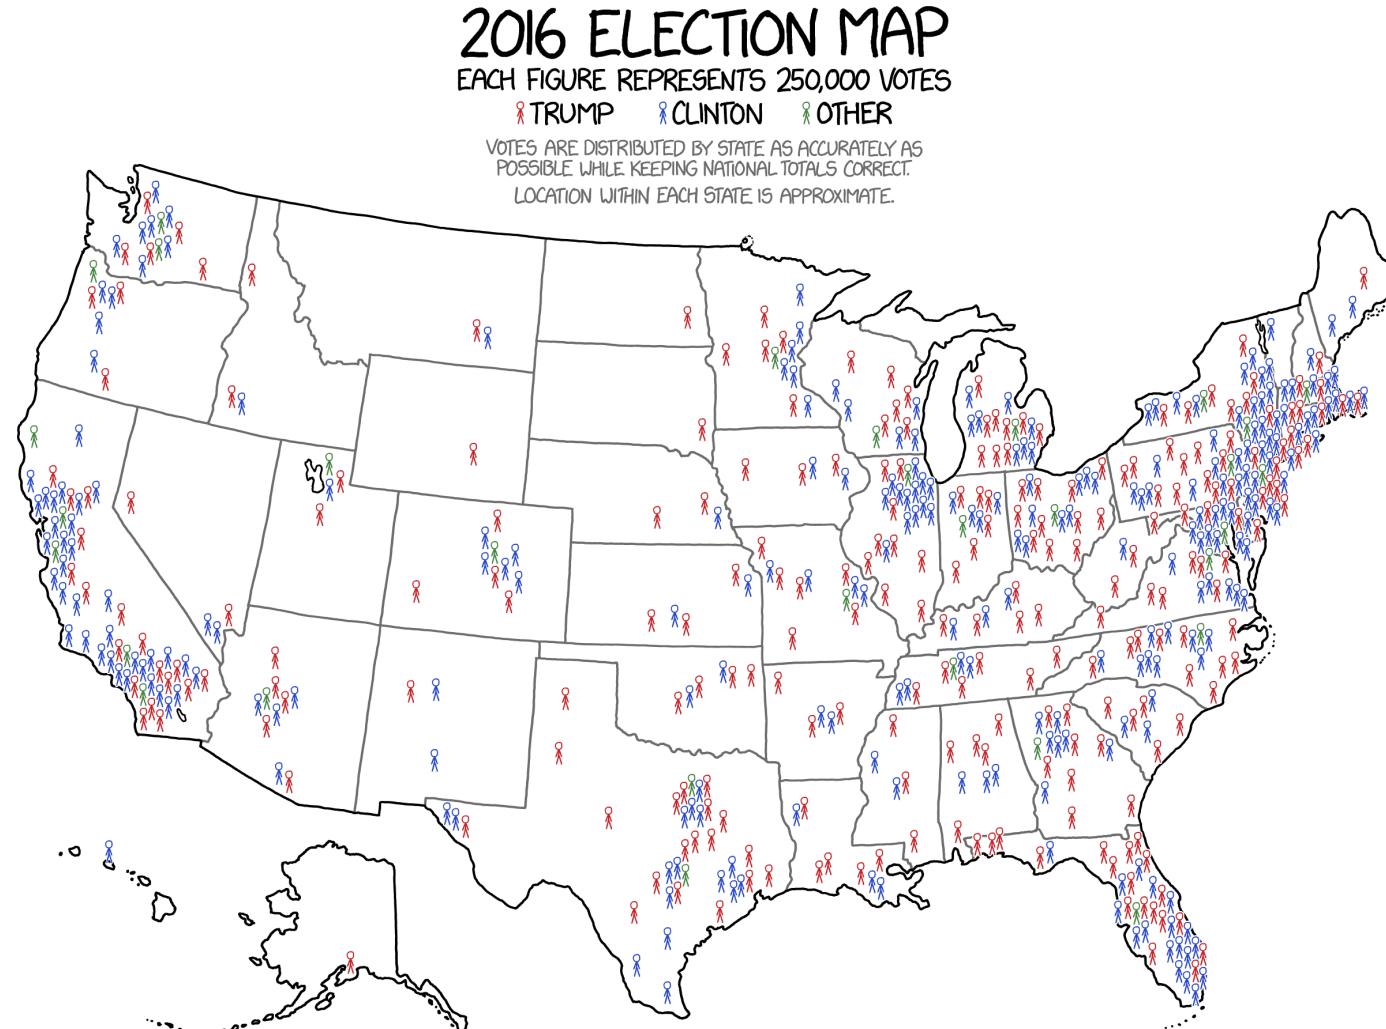


Adding data to maps as layers

Maps show data in a geospatial context

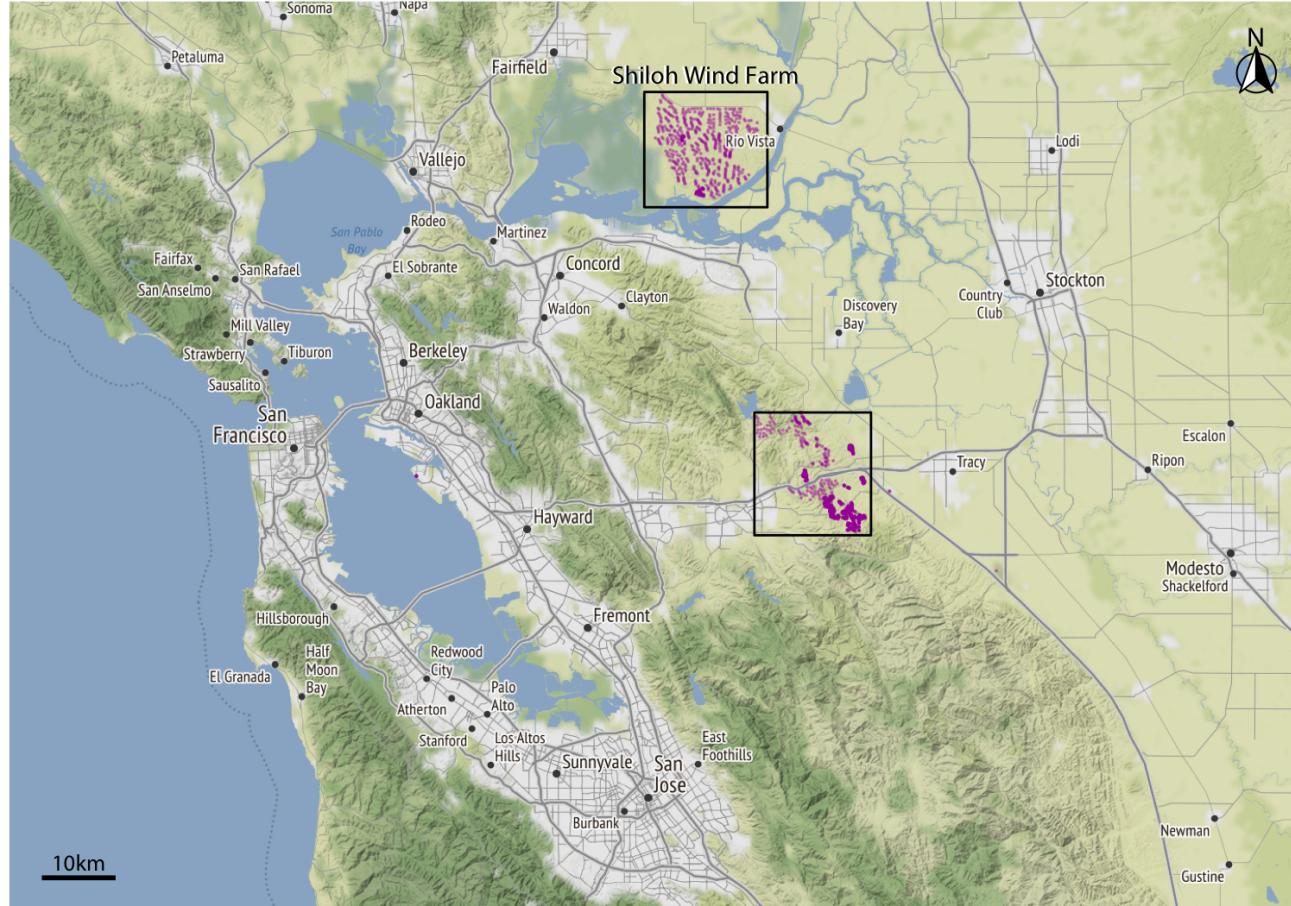

Maps are composed of several distinct layers


terrain

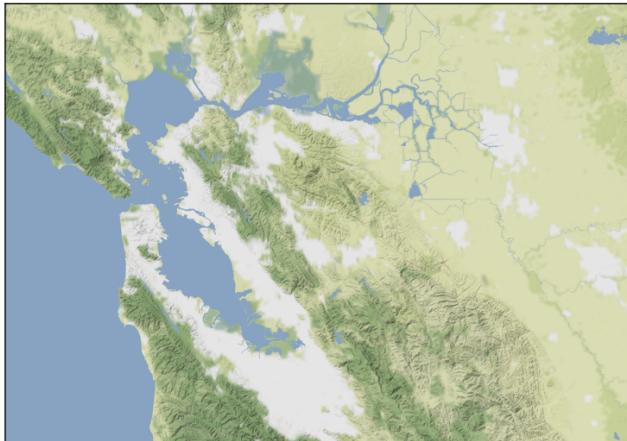


roads




wind turbines

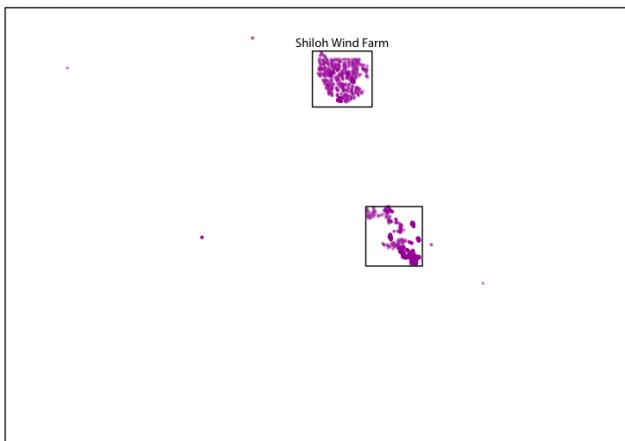


city labels, scale bar

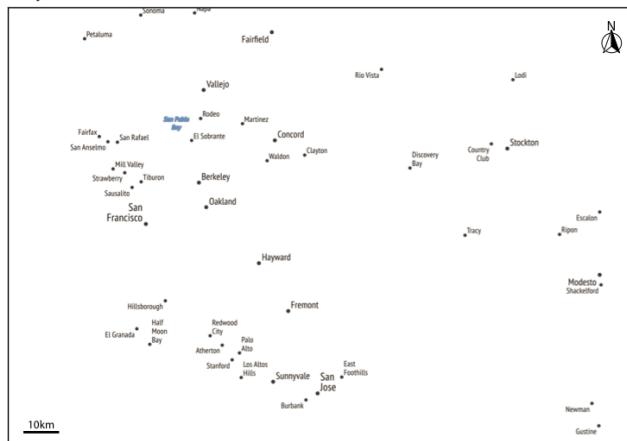

The idea of aesthetic mappings still applies

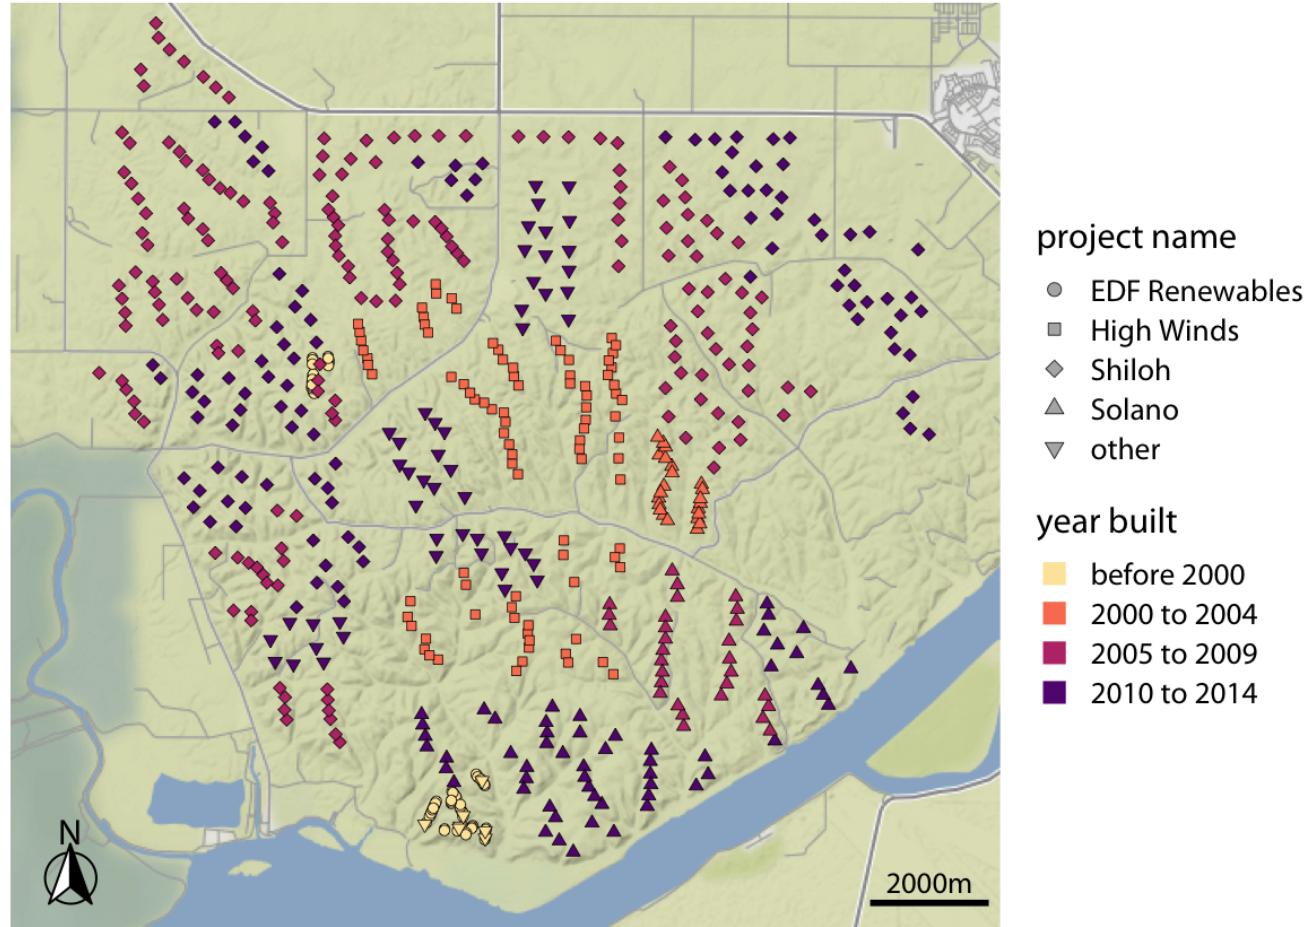


Examples: maps with lines

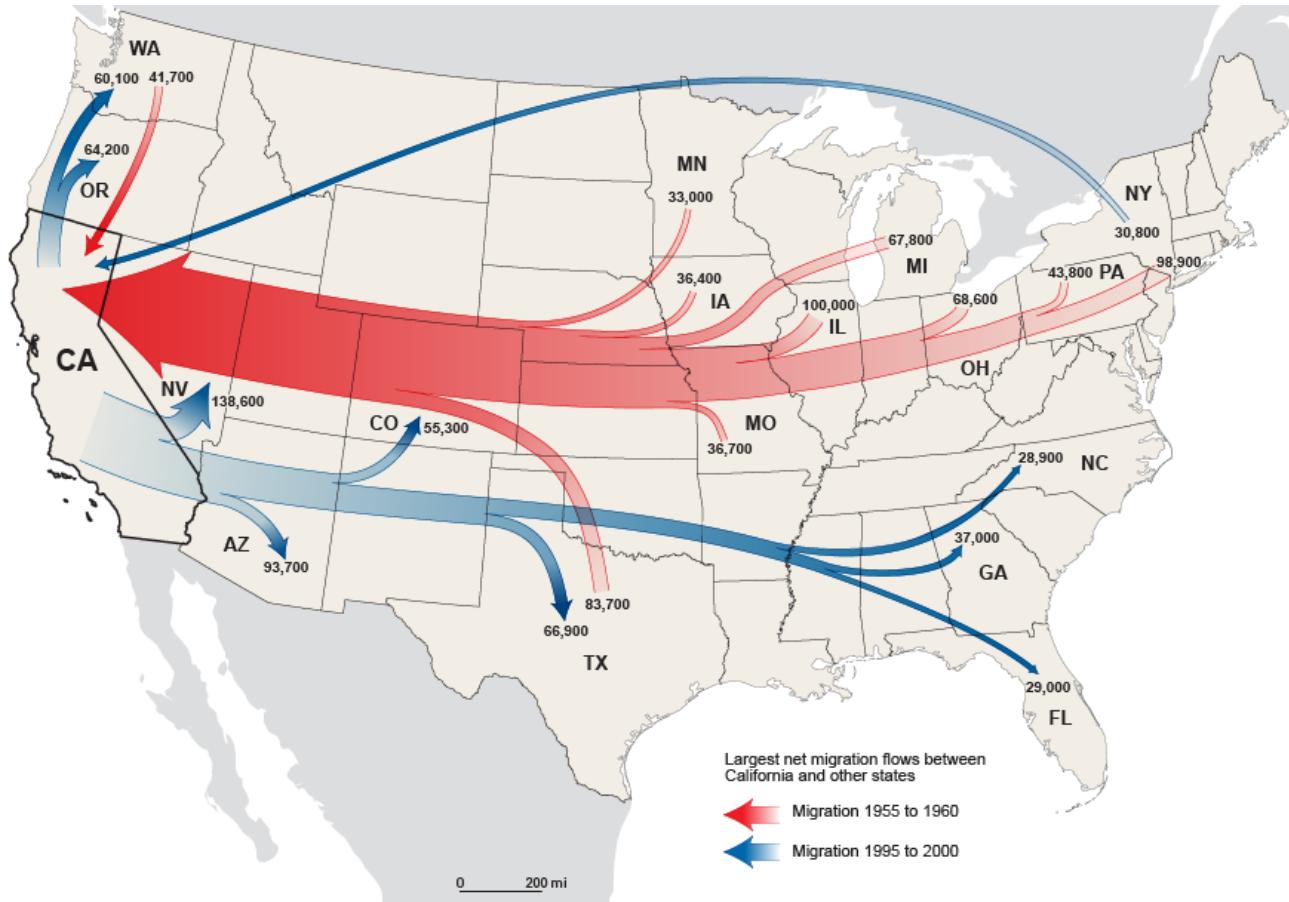


US Census Bureau: Net migration between California and other states

Examples: maps with points

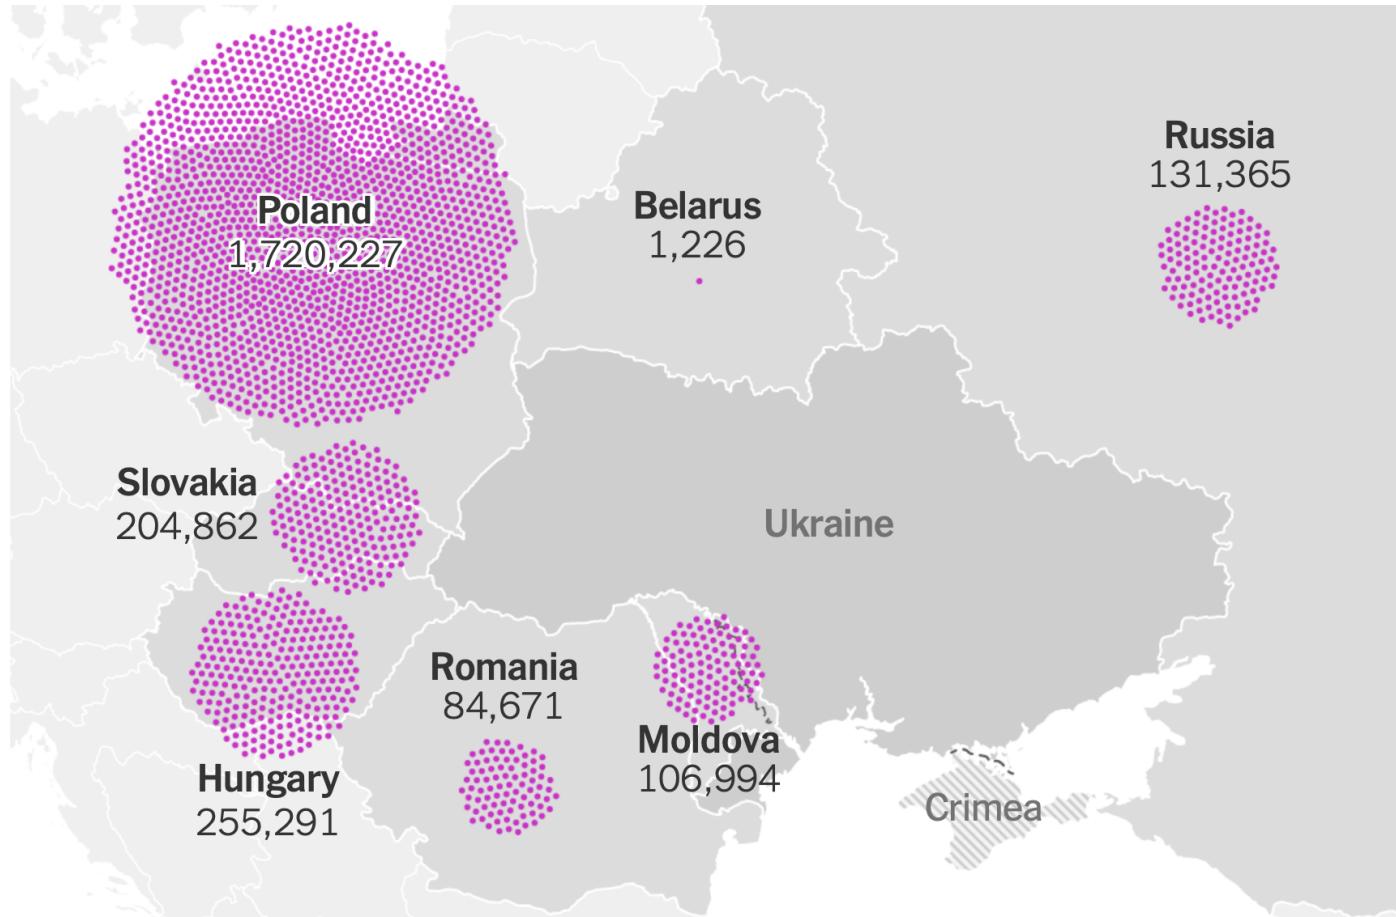

The New York Times, "Refugees from Ukraine, Feb. 24 - Mar. 13, 2022"


Examples: maps with points

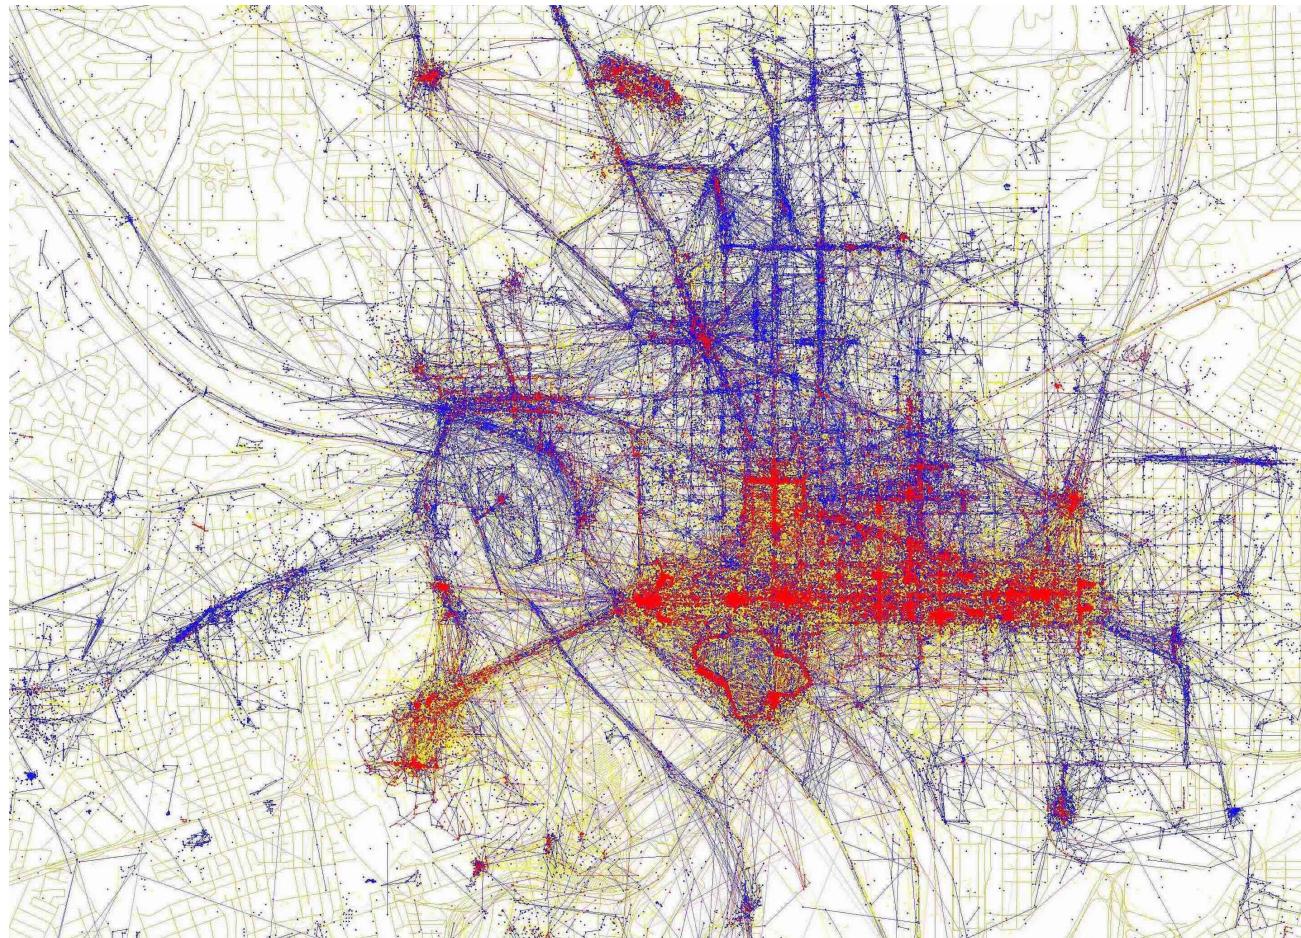

Photos taken in DC: blue = locals; red = tourists; yellow = unknown


Geospatial visualizations in R

Aesthetic mappings meet mapping

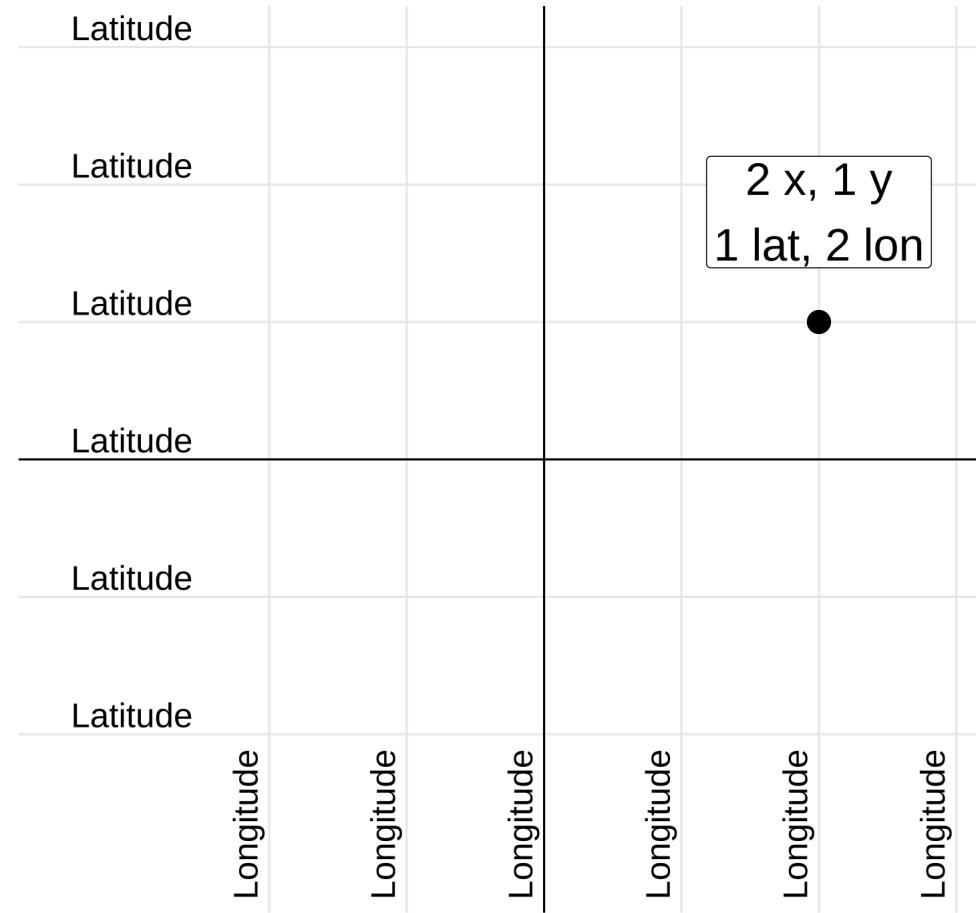

via @sarahbellmaps

The `sf` package: simple features in R

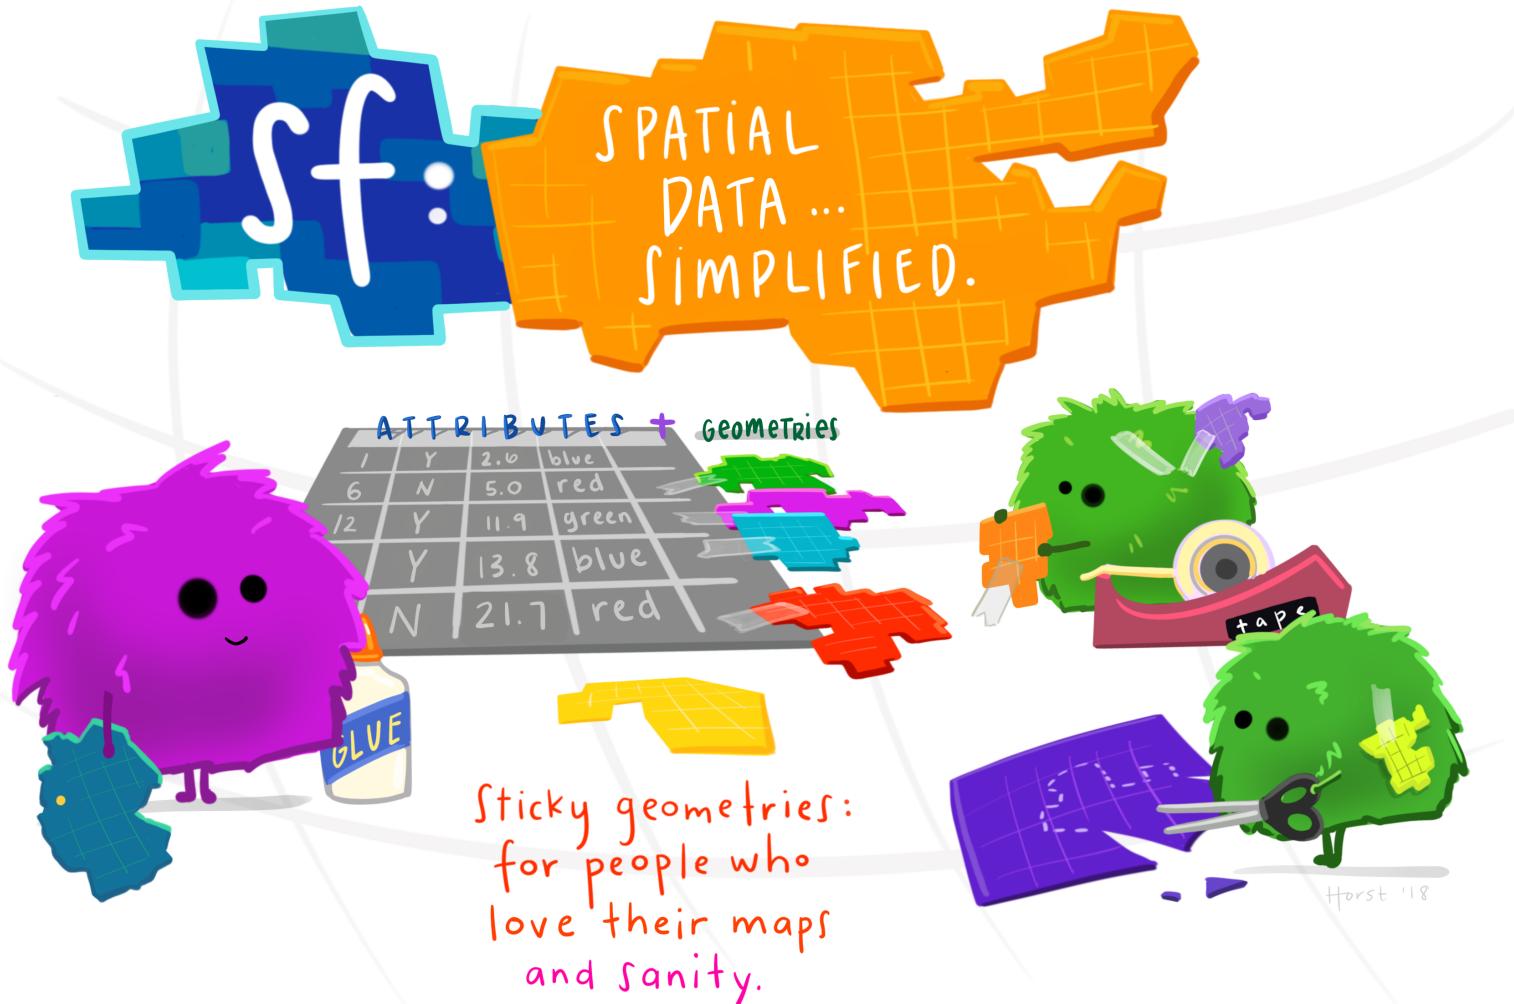

Shapefiles

Geographic information is shared as **shapefiles**

These are *not* like regular single CSV files!

Shapefiles come as zipped files with a bunch of different files inside



sf makes it easy in R

Simple features standardize how spatial objects are represented by computers

The **sf** package represents simple features as native R objects

Goal is to present information about *spatial geometries* according to some *attribute* (e.g., population, sales, etc.)

To make it easy to combine *attributes* with *spatial geometries*, **sf** stores feature geometries in the data frame column **geometry**

Importing sf data frames

```
library(sf) # load sf package  
world_shapes <- read_sf("data/ne_110m_admin_0_countries/ne_110m_admin_0_countries.shp")
```

sf data frames are data frames:

```
class(world_shapes)  
  
## [1] "sf"           "tbl_df"        "tbl"          "data.frame"
```

Inspecting sf data frames


```
world_shapes |>  
  select(TYPE, GEOUNIT, ISO_A3, geometry) |>  
  head(5)
```

```
## Simple feature collection with 5 features and 3 fields  
## Geometry type: MULTIPOLYGON  
## Dimension: XY  
## Bounding box: xmin: -180 ymin: -18 xmax: 180 ymax: 83  
## Geodetic CRS: WGS 84  
## # A tibble: 5 × 4  
##   TYPE      GEOUNIT      ISO_A3                                geometry  
##   <chr>      <chr>       <chr>                                <MULTIPOLYGON [°]>  
## 1 Sovereign country Fiji        FJI      (((180 -16, 180 -17, 179 -17, 179 -17...  
## 2 Sovereign country Tanzania  TZA      (((34 -0.95, 34 -1.1, 38 -3.1, 38 -3....  
## 3 Indeterminate    Western Sahara ESH      ((((-8.7 28, -8.7 28, -8.7 27, -8.7 26...  
## 4 Sovereign country Canada    CAN      ((((-123 49, -123 49, -125 50, -126 50...  
## 5 Country        United States of America USA      ((((-123 49, -120 49, -117 49, -116 49...
```

The magic geometry column

To make a map using `ggplot`, all you need to do is + `geom_sf()`


```
world_shapes |>  
  ggplot() +  
  geom_sf()
```

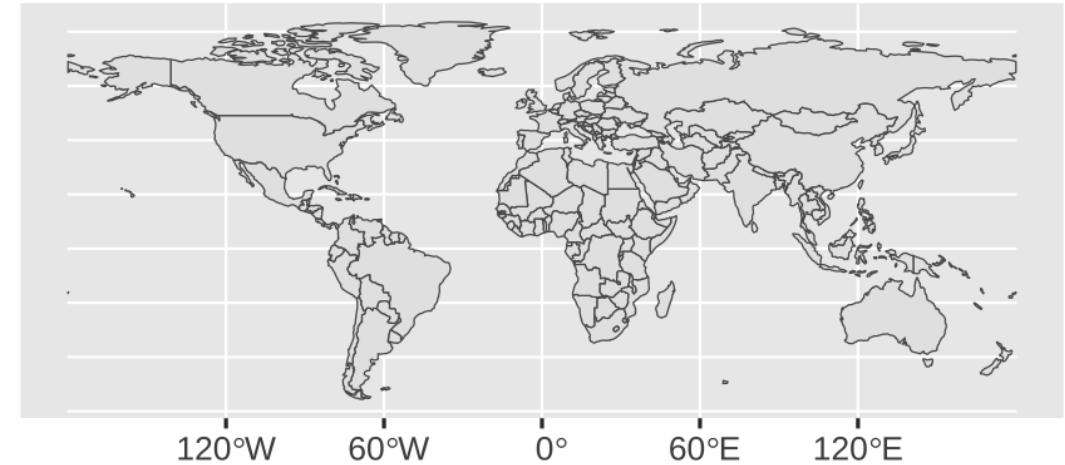

Changing projections

Use `coord_sf()` to change projections (see end for background on projections)


```
world_shapes |>  
  ggplot() +  
  geom_sf() +  
  coord_sf(crs = "+proj=merc")
```

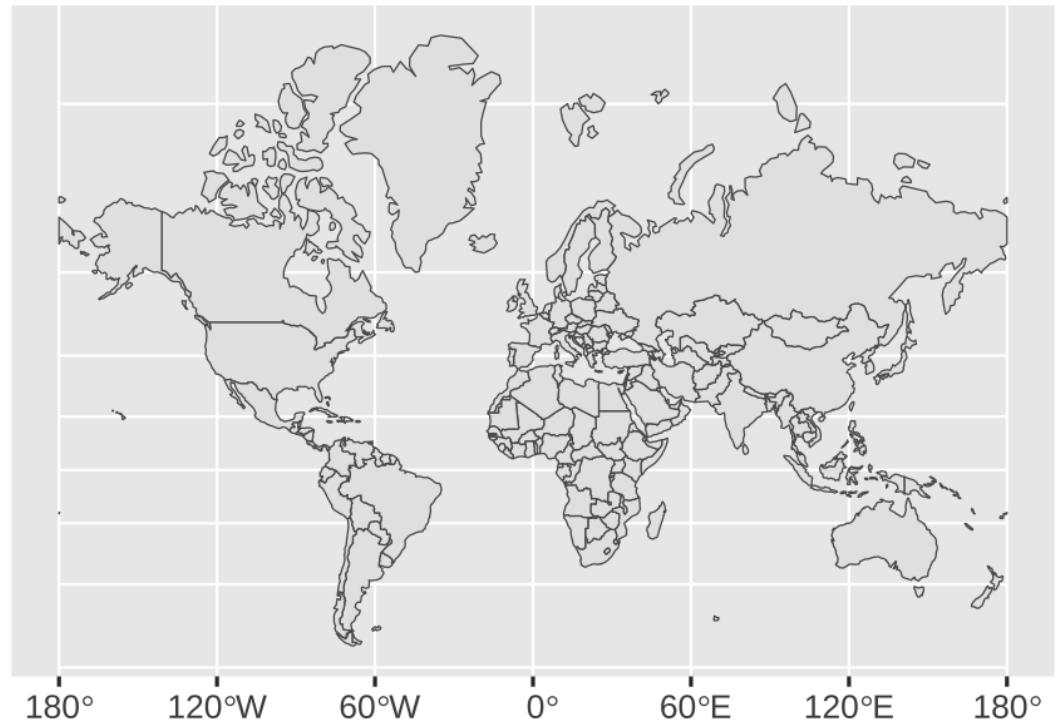

Changing projections

Use `coord_sf()` to change projections (see end for background on projections)

```
world_shapes |>  
  ggplot() +  
  geom_sf() +  
  coord_sf(crs = "+proj=robin")
```

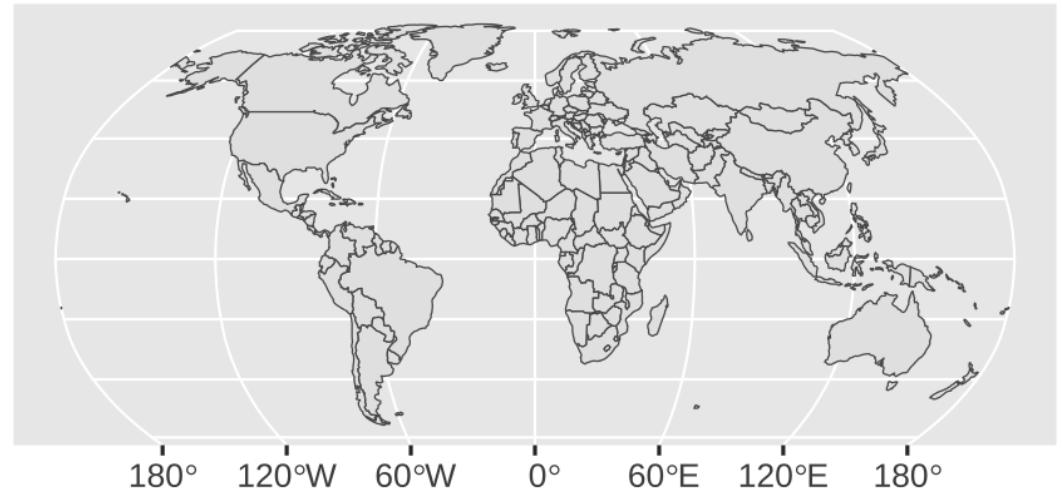


Let's zoom in on New York

```
# counties was created in the background  
head(counties, 5)
```

```
## Simple feature collection with 5 features and 1  
## Geometry type: MULTIPOLYGON  
## Dimension: XY  
## Bounding box: xmin: -79 ymin: 41 ymax: 45  
## Geodetic CRS: WGS 84  
##  
##       county                      geom  
## 1793    albany MULTIPOLYGON (((-74 42, -74...  
## 1794    allegany MULTIPOLYGON (((-78 42, -78...  
## 1795    bronx MULTIPOLYGON (((-74 41, -74...  
## 1796    broome MULTIPOLYGON (((-75 42, -76...  
## 1797 cattaraugus MULTIPOLYGON (((-79 42, -79...
```

```
counties |>  
  ggplot() +  
  geom_sf()
```

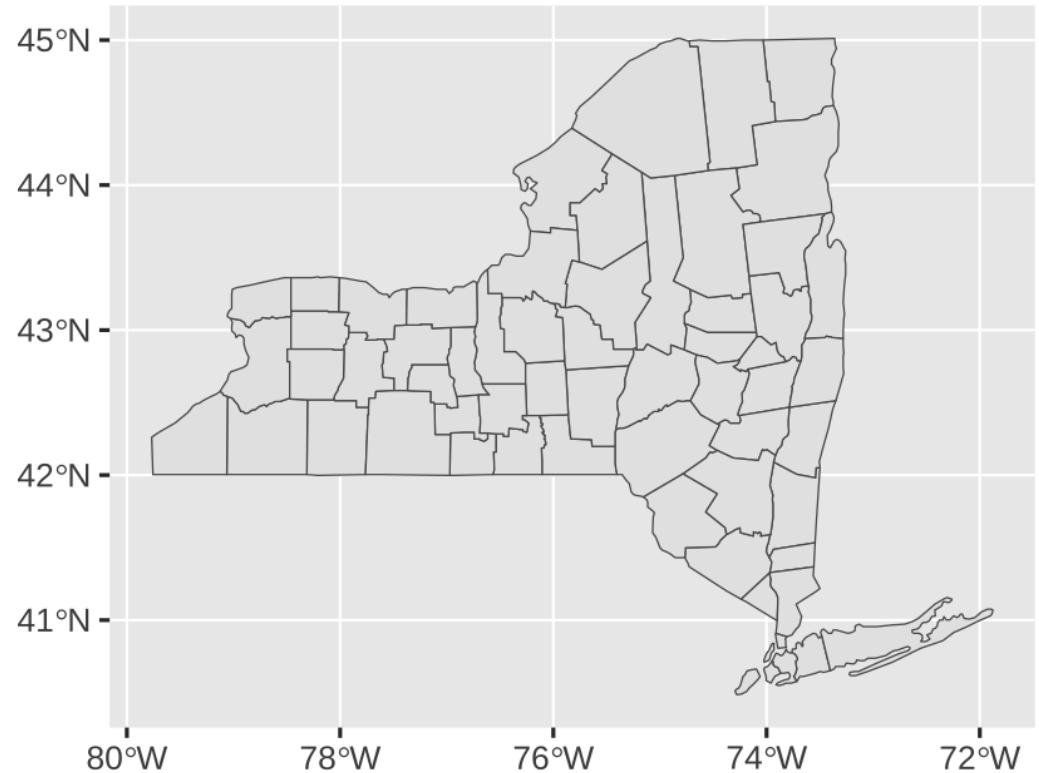


We can filter like normal

All regular data frame operations work on `sf` data frames

```
counties |>  
  filter(county == "tompkins") |>  
  ggplot() +  
  geom_sf()
```

What will this code produce?

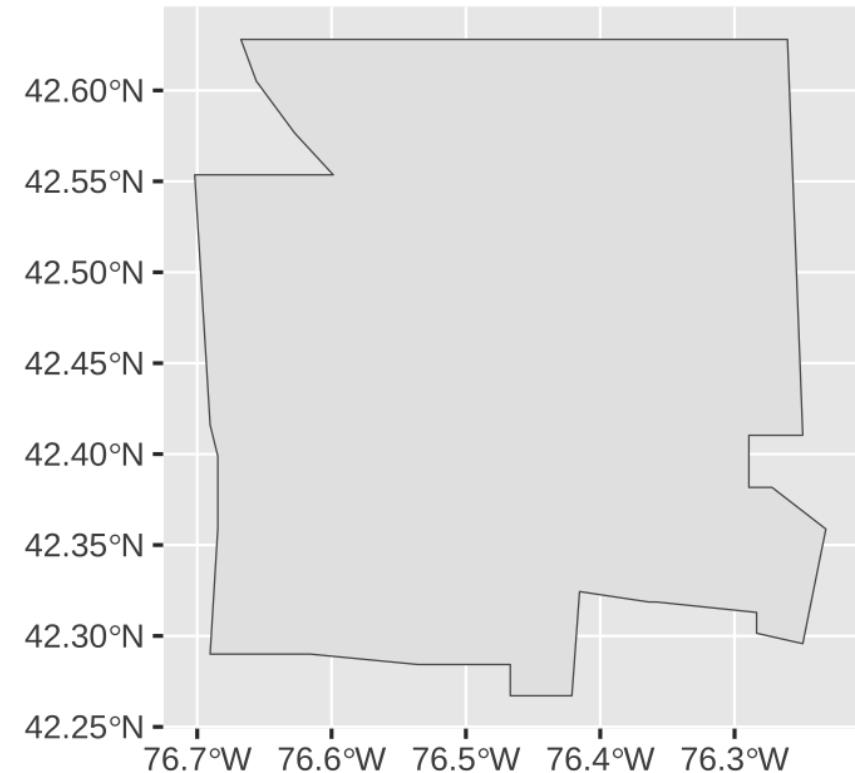

We can mutate like normal

All regular data frame operations work on `sf` data frames

What will this code produce?

```
counties |>  
  mutate(is_albany = (county=="albany")) |>  
  head(5)
```


```
## Simple feature collection with 5 features and 2 fields  
## Geometry type: MULTIPOLYGON  
## Dimension: XY  
## Bounding box: xmin: -79 ymin: 41 xmax: -74 ymax: 43  
## Geodetic CRS: WGS 84  
##          county                      geom is_albany  
## 1793    albany MULTIPOLYGON ((((-74 42, -74...      TRUE  
## 1794    allegany MULTIPOLYGON ((((-78 42, -78...     FALSE  
## 1795    bronx MULTIPOLYGON ((((-74 41, -74...     FALSE  
## 1796    broome MULTIPOLYGON ((((-75 42, -76...     FALSE  
## 1797 cattaraugus MULTIPOLYGON ((((-79 42, -79...
```

We can use aesthetics like normal

All regular ggplot aesthetics work

```
counties |>  
  mutate(is_tompkins = (county=="tompkins")) |>  
  ggplot(aes(fill = is_tompkins)) +  
  geom_sf()
```

What will this code produce?

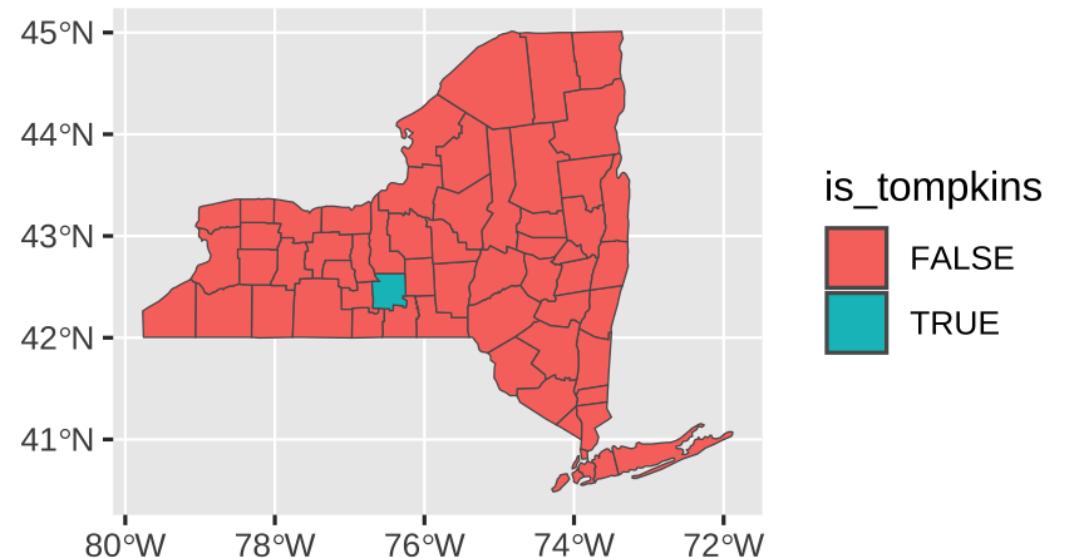


We can add layers like normal

All regular ggplot layers work

```
counties |>  
  mutate(is_tompkins = (county=="tompkins")) |>  
  ggplot(aes(fill = is_tompkins)) +  
  geom_sf() +  
  guides(fill = "none") + # omit legend  
  scale_fill_viridis_d() + # nicer colors  
  theme_minimal()         # cleaner theme
```

What will this code produce?

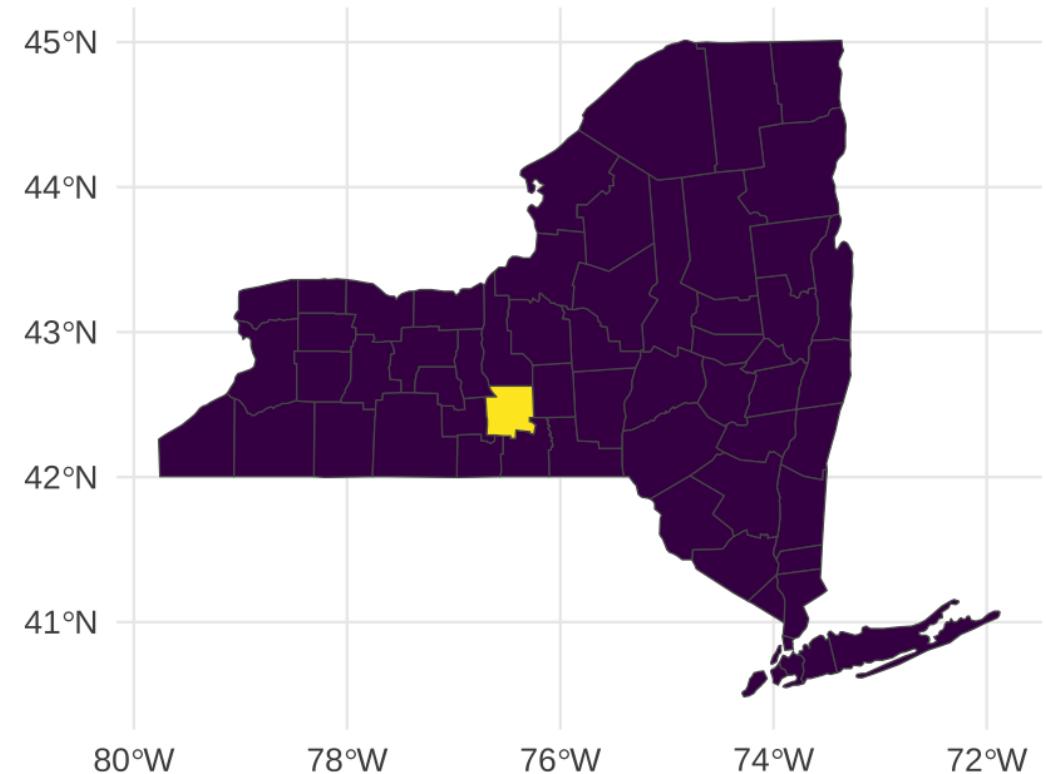

We can do a lot more!

`sf` is for all GIS stuff

Draw maps

Calculate distances between points

Count observations in a given area

Anything else related to geography!

See [here](#) or [here](#) for full textbooks


Example: compute the area of NY counties

```
counties |>  
  mutate(area = st_area(counties)) # sf::st_area() computes areas
```

```
## Simple feature collection with 62 features and 2 fields  
## Geometry type: MULTIPOLYGON  
## Dimension: XY  
## Bounding box: xmin: -80 ymin: 40 xmax: -72 ymax: 45  
## Geodetic CRS: WGS 84  
## First 10 features:  
##   county                 geom      area  
## 1793  albany MULTIPOLYGON (((-74 42, -74... 1.4e+09 [m^2]  
## 1794 allegany MULTIPOLYGON (((-78 42, -78... 2.6e+09 [m^2]  
## 1795  bronx MULTIPOLYGON (((-74 41, -74... 7.3e+07 [m^2]  
## 1796  broome MULTIPOLYGON (((-75 42, -76... 1.8e+09 [m^2]  
## 1797 cattaraugus MULTIPOLYGON (((-79 42, -79... 3.4e+09 [m^2]  
## 1798  cayuga MULTIPOLYGON (((-77 43, -77... 1.9e+09 [m^2]  
## 1799 chautauqua MULTIPOLYGON (((-79 43, -79... 2.8e+09 [m^2]  
## 1800  chemung MULTIPOLYGON (((-77 42, -77... 1.1e+09 [m^2]  
## 1801 chenango MULTIPOLYGON (((-75 43, -75... 2.3e+09 [m^2]  
## 1802  clinton MULTIPOLYGON (((-74 45, -73... 2.9e+09 [m^2]
```

Fill counties by area

```
counties |>  
  mutate(area = as.numeric(st_area(counties)))  
  ggplot(aes(fill = area)) +  
  geom_sf() +  
  scale_fill_viridis_c(alpha = 0.5) +  
  theme_minimal()
```

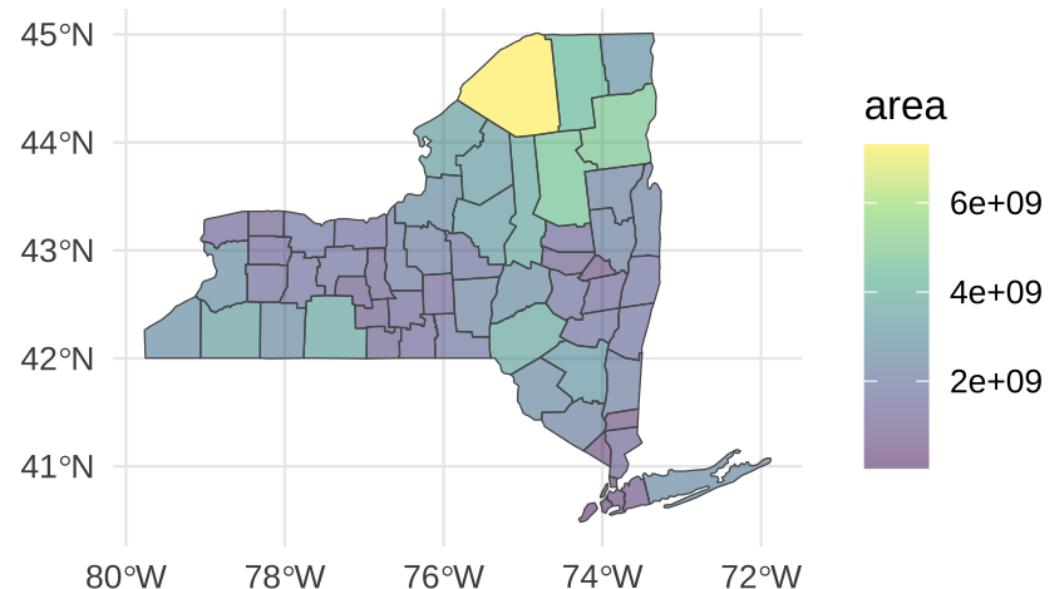

No geometry column?

Make your own with `st_as_sf()`

```
other_data
```

```
## # A tibble: 2 × 3
##   city     long    lat
##   <chr>   <dbl> <dbl>
## 1 Cornell -76.5  42.5
## 2 Cancun  -86.8  21.2
```

```
other_data |>
```

```
  st_as_sf(coords = c("long", "lat"),
            crs = st_crs("EPSG:4326"))
```

```
## Simple feature collection with 2 features and 1 field
## Geometry type: POINT
## Dimension:      XY
## Bounding box:  xmin: -87 ymin: 21 xmax: -76 ymax: 42
## Geodetic CRS:  WGS 84
## # A tibble: 2 × 2
##   city     geometry
##   <chr>   <POINT [°]>
## 1 Cornell (-76 42)
## 2 Cancun (-87 21)
```

Compute the distance from Cornell to Cancun

Compute distances using `st_distance()`

```
other_sf <- other_data |>  
  st_as_sf(coords = c("long", "lat"),  
            crs = st_crs("EPSG:4326"))  
  
other_sf |>  
  st_distance()
```


```
## Units: [m]  
##          [,1]     [,2]  
## [1,]      0 2556310  
## [2,] 2556310      0
```

The distance from Cornell to Cancun is 2556 kilometers, or 1588 miles.

Map the trip from Cornell to Cancun

```
world_shapes |>  
  ggplot() +  
  geom_sf() +  
  geom_sf(data = other_sf,  
          color = "#B31B1B") +  
  coord_sf(crs = "+proj=robin")
```

What will this code produce?

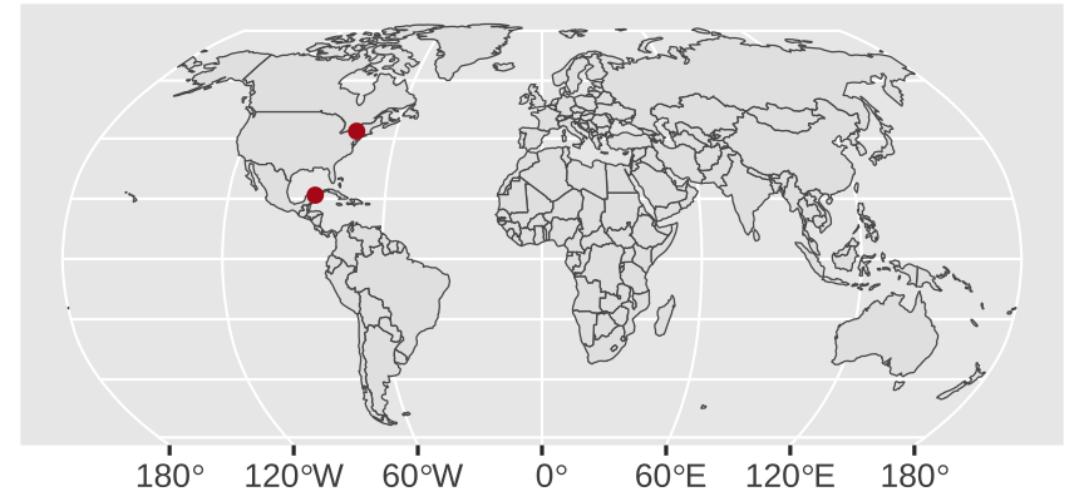

geom_sf() is today's standard

You'll sometimes find older tutorials and StackOverflow answers about using
geom_map() or **ggmap** or other things

Those still work, but they don't use the same magical **sf** system with easy-to-convert projections and other GIS stuff

Stick with **sf** and **geom_sf()** and your life will be easy

Where to find shapefiles

Natural Earth for international maps

US Census Bureau for US maps

For anything else...



Scales



$1:10m = 1:10,000,000$

$1 \text{ cm} = 100 \text{ km}$



$1:50m = 1:50,000,000$

$1\text{cm} = 500 \text{ km}$



$1:110m = 1:110,000,000$

$1 \text{ cm} = 1,100 \text{ km}$

Using too high of a resolution makes your maps slow and huge

A quick primer on projections

A quick primer on projections

All world maps are wrong according to Vox. Why?

Impossible to represent spherical surface as a plane without distortions

Projections "project" 3D surface down to 2D

Some preserve land shape, some preserve size, etc.

Let's look at some examples

World projections

Longitude-latitude



Mercator



Gall-Peters




Robinson




US projections

NAD83

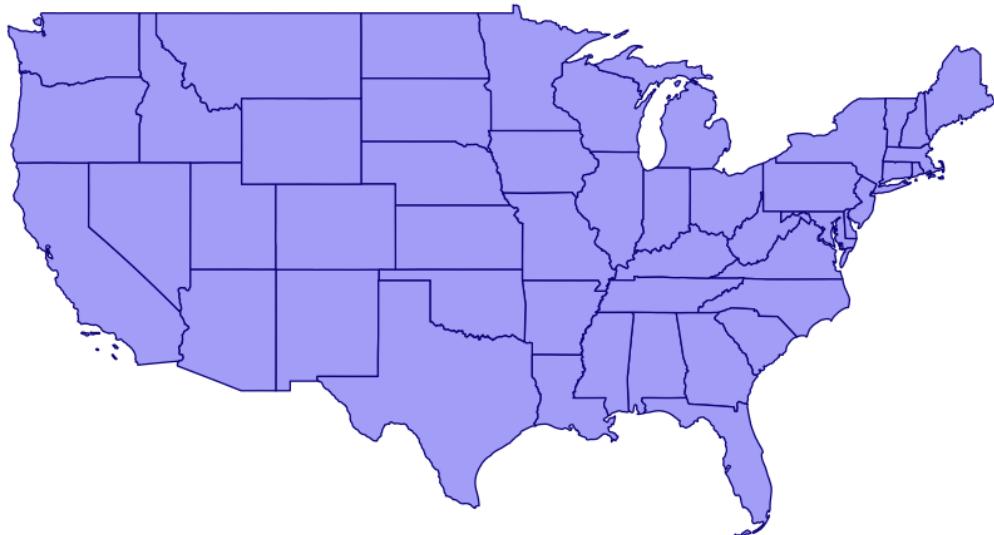

Albers

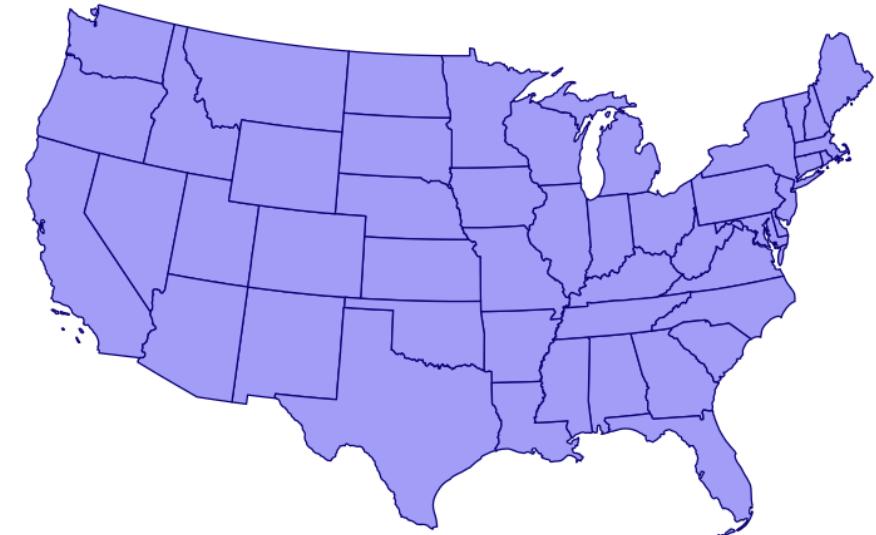

Which projection is best?

None of them

There are no good or bad projections

There are good and bad projections for a particular use case

Reference: Finding projection codes

spatialreference.org

epsg.io

proj.org

This is an excellent overview of how this all works

And this is a really really helpful overview of all these moving parts