

Time

Week 9

AEM 2850 / 5850 : R for Business Analytics

Cornell Dyson
Spring 2024

Acknowledgements: **Andrew Heiss**

Announcements

Reminders:

- **Group project groups due this Friday (March 22) (canvas link)**
 - Form groups of 3
 - All students in each group must be enrolled at the same course level (2850 or 5850)
 - If unable to form a group of 3, please state that in your submission
- **Group project due April 12** (full details to come in the next week)

Questions before we get started?

Plan for this week

Tuesday

- Prologue
- Visualizing time: the basics
 - Visualizing amounts over time
 - Dates and times in R
- Start example-08

Thursday


- Visualizing time: leveling up
 - Visualizing distributions
 - Animating plots
 - Faceting plots
 - Connecting scatter plots
- Finish example-08

Starting, ending, and decomposing time (for reference)

Prologue


Car thefts are rising. Is TikTok to blame?

Milwaukee, WI

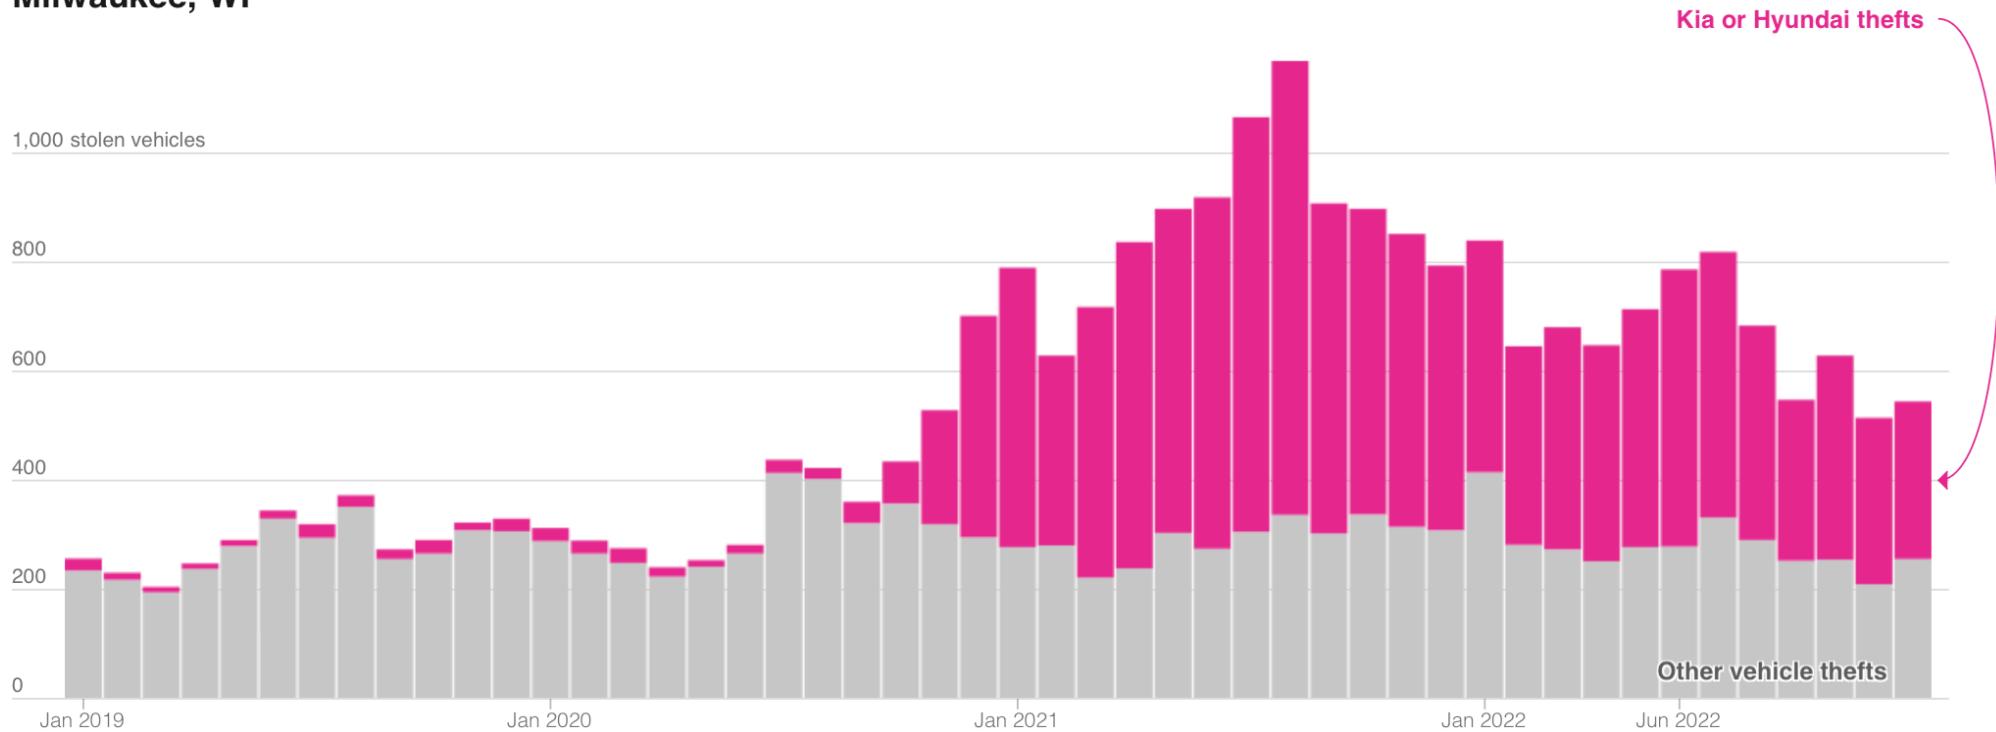


What's good about this graph? What could be better?

What's good? What could be better?

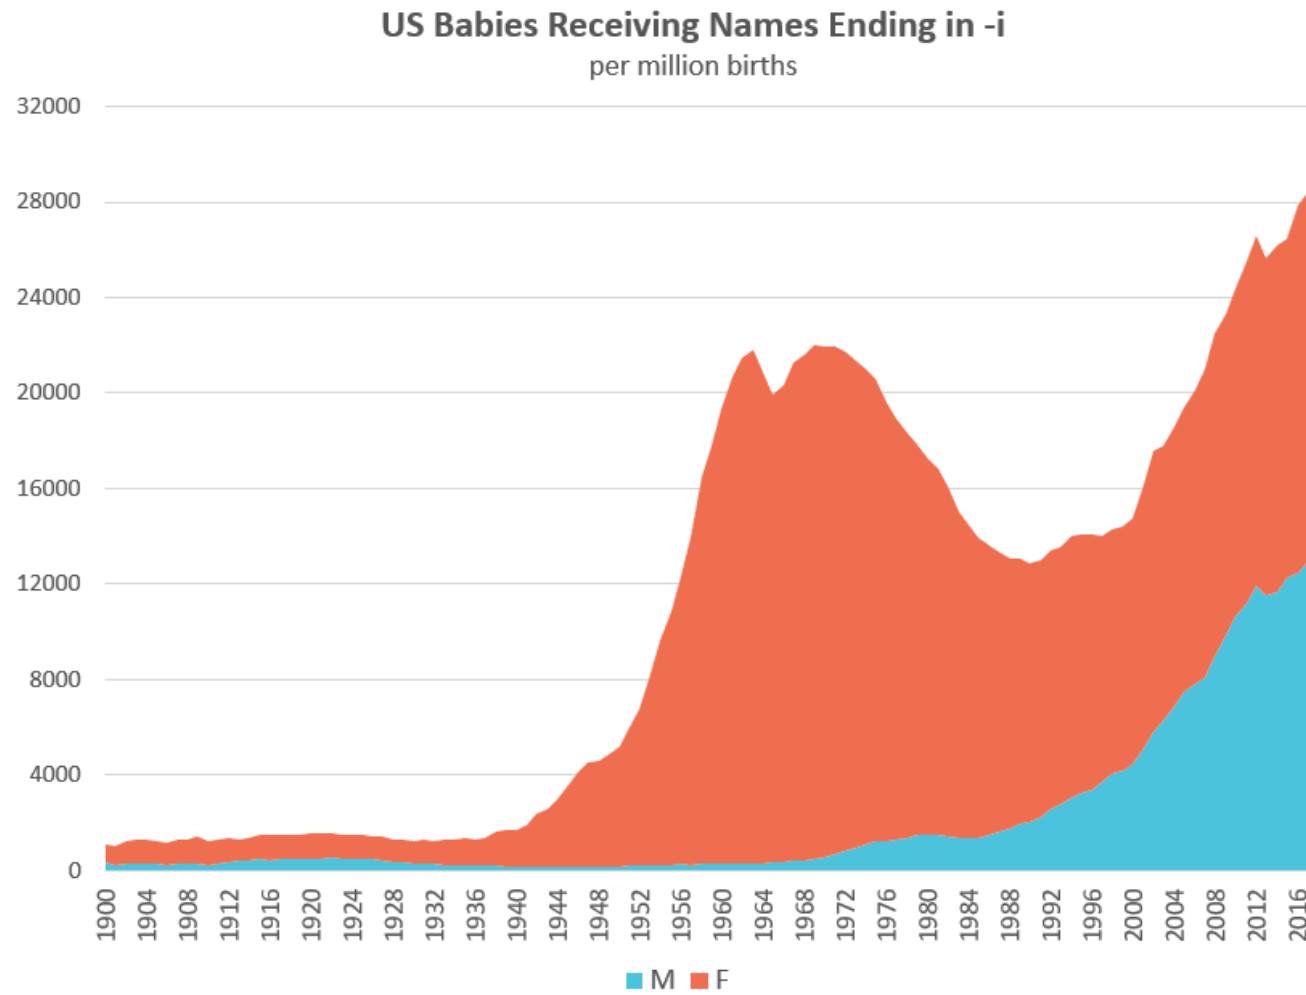


What's good? What could be better?

- Stacked curves makes it hard to see trends for females
- Legend could be bigger and use "Male" and "Female"
- x-axis labeling: use labels every 10 or 20 years (not 4!)
- y-axis labeling:
 - multiples of 4 are not intuitive
 - %s would be easier to interpret

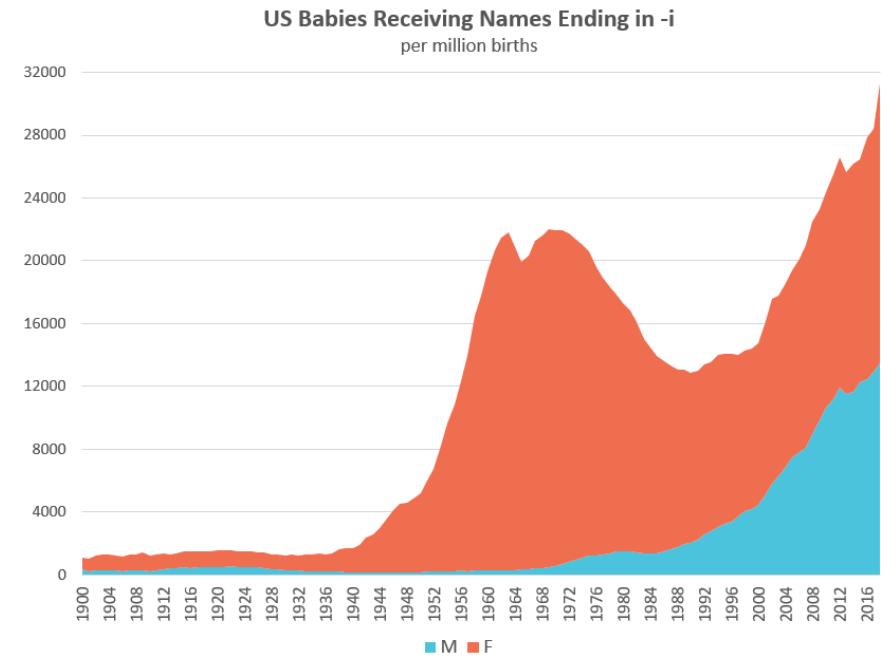

Is truncating the y-axis misleading?

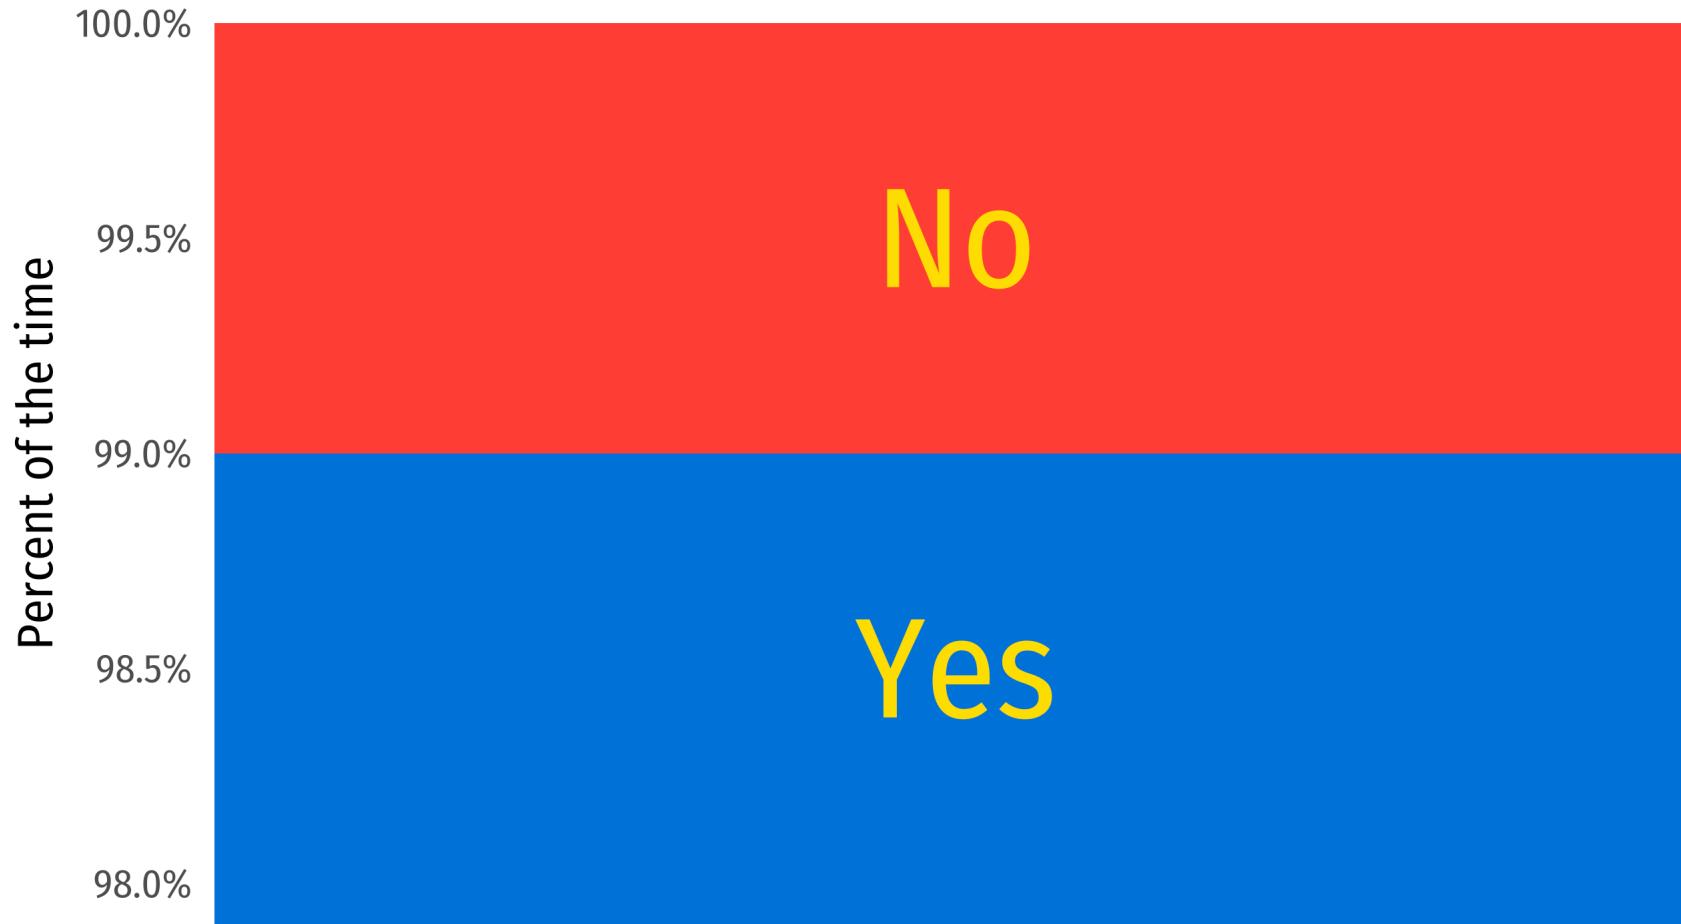

Don't be too extreme!

When discussing amounts, we said to never truncate the y-axis



But it is actually more legal to truncate the y-axis than you might think

When do you think it is okay to truncate?

- When small movements matter
- When the scale itself is distorted
- When zero values are impossible



When is it okay to truncate?

When small movements matter

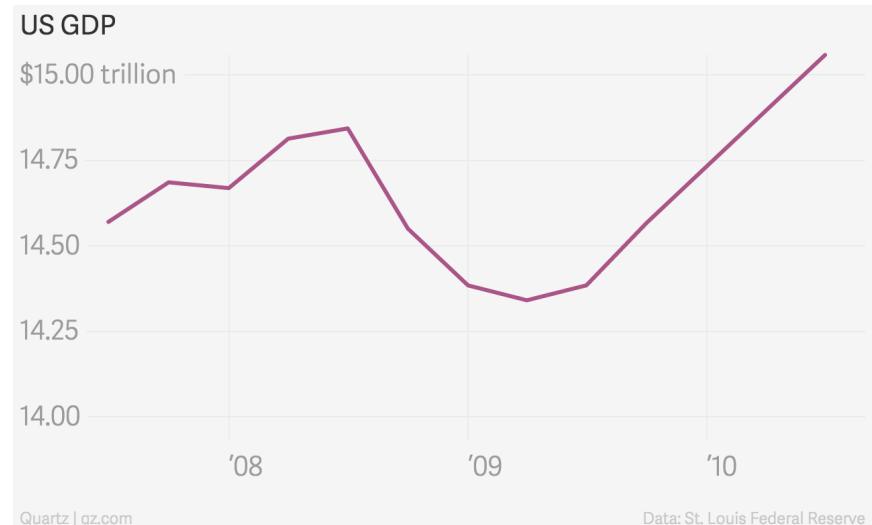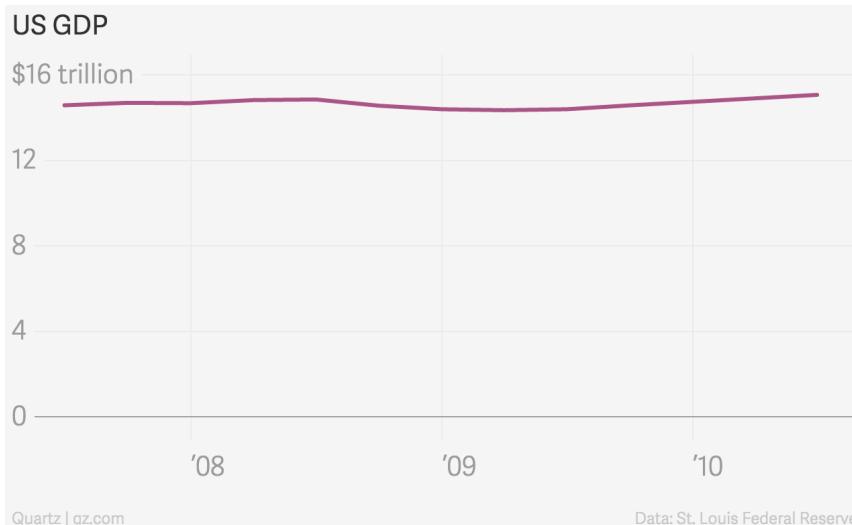



When is it okay to truncate?

When the scale itself is distorted

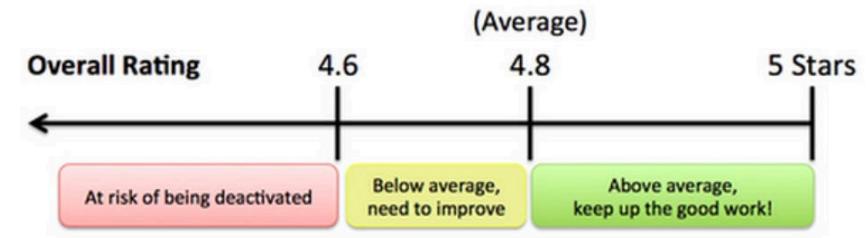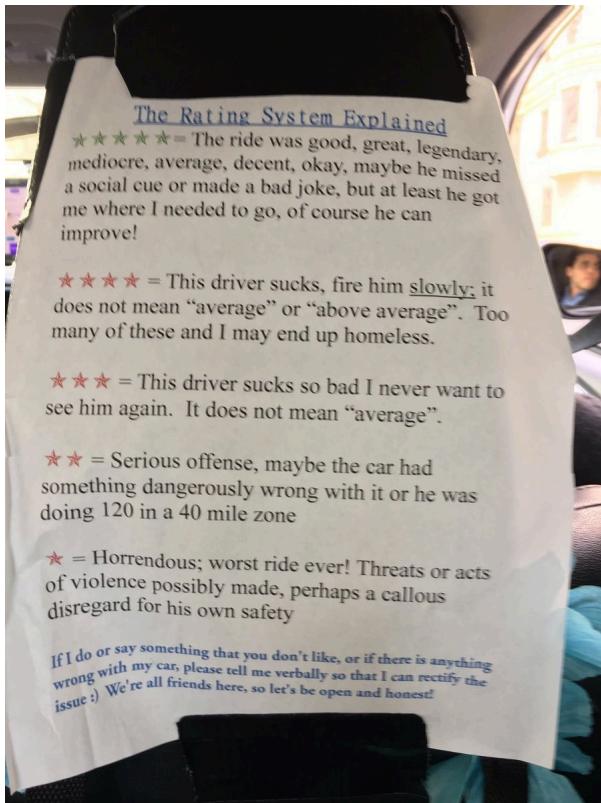


When is it okay to truncate?

When zero values are impossible

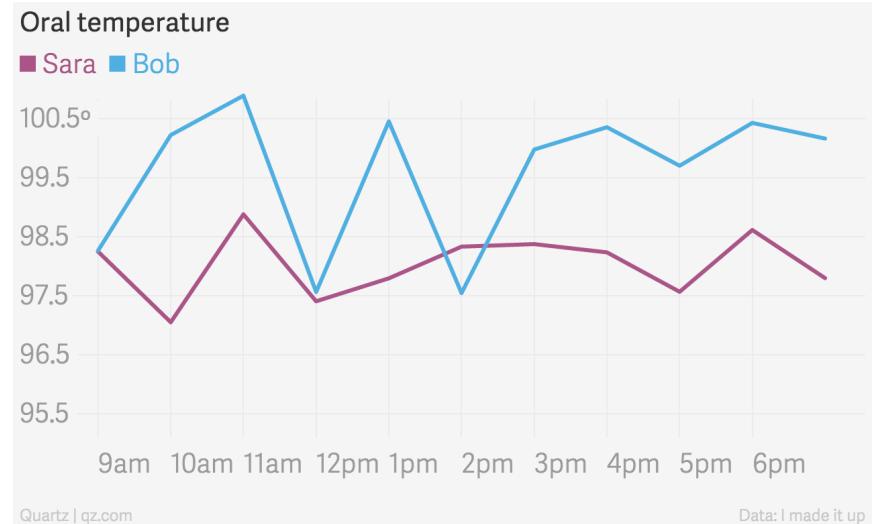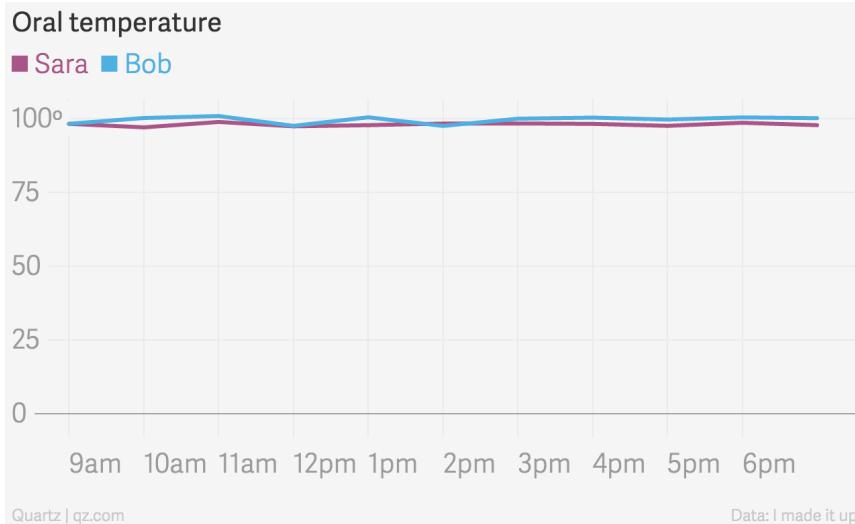



Never on bar charts!

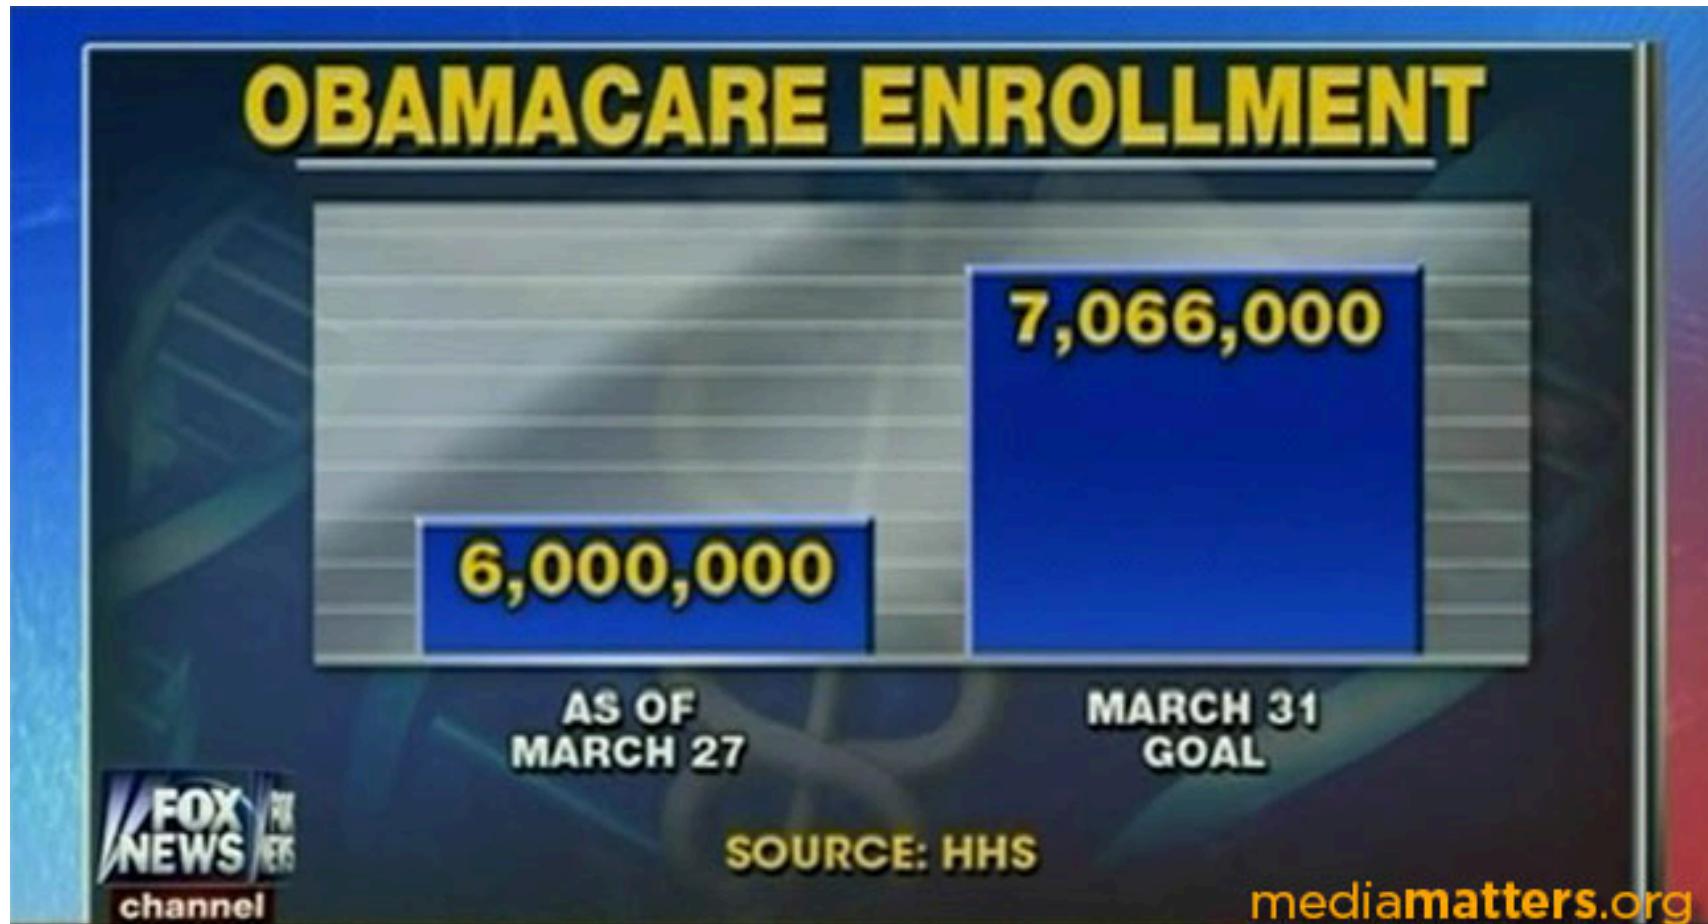


Zero is okay, too

Just because you don't *have to* start at 0 doesn't mean you should *never* start at 0

Andrew Gelman's heuristic: "**If zero is in the neighborhood, invite it in.**"

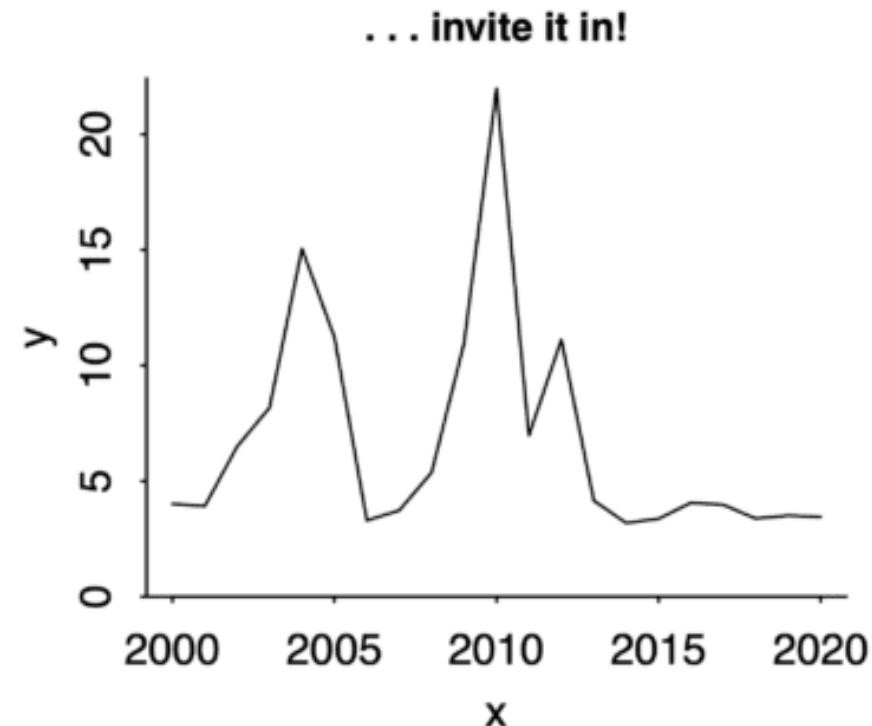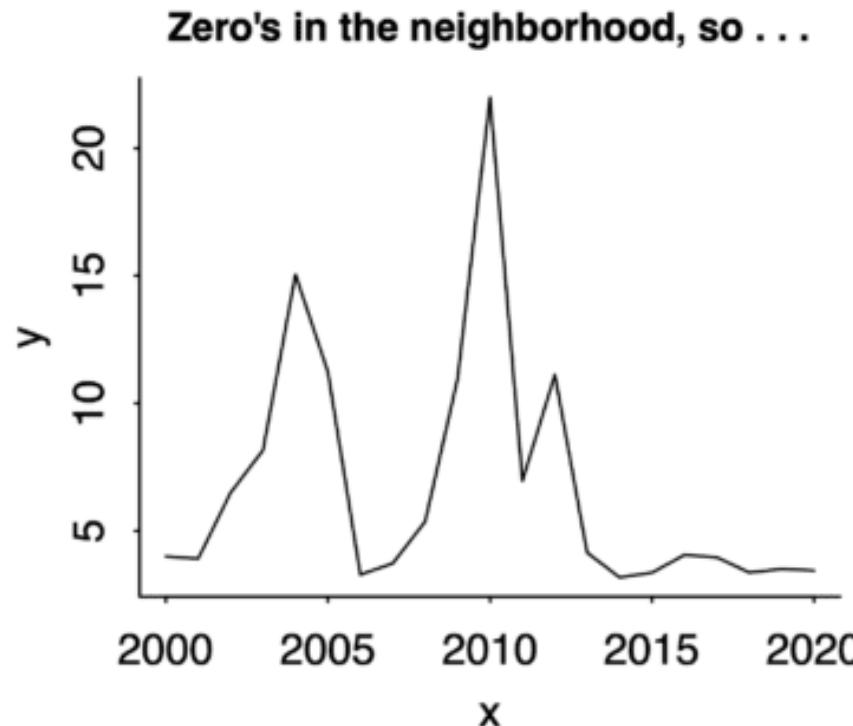


Also: keep scales consistent, flag missing data

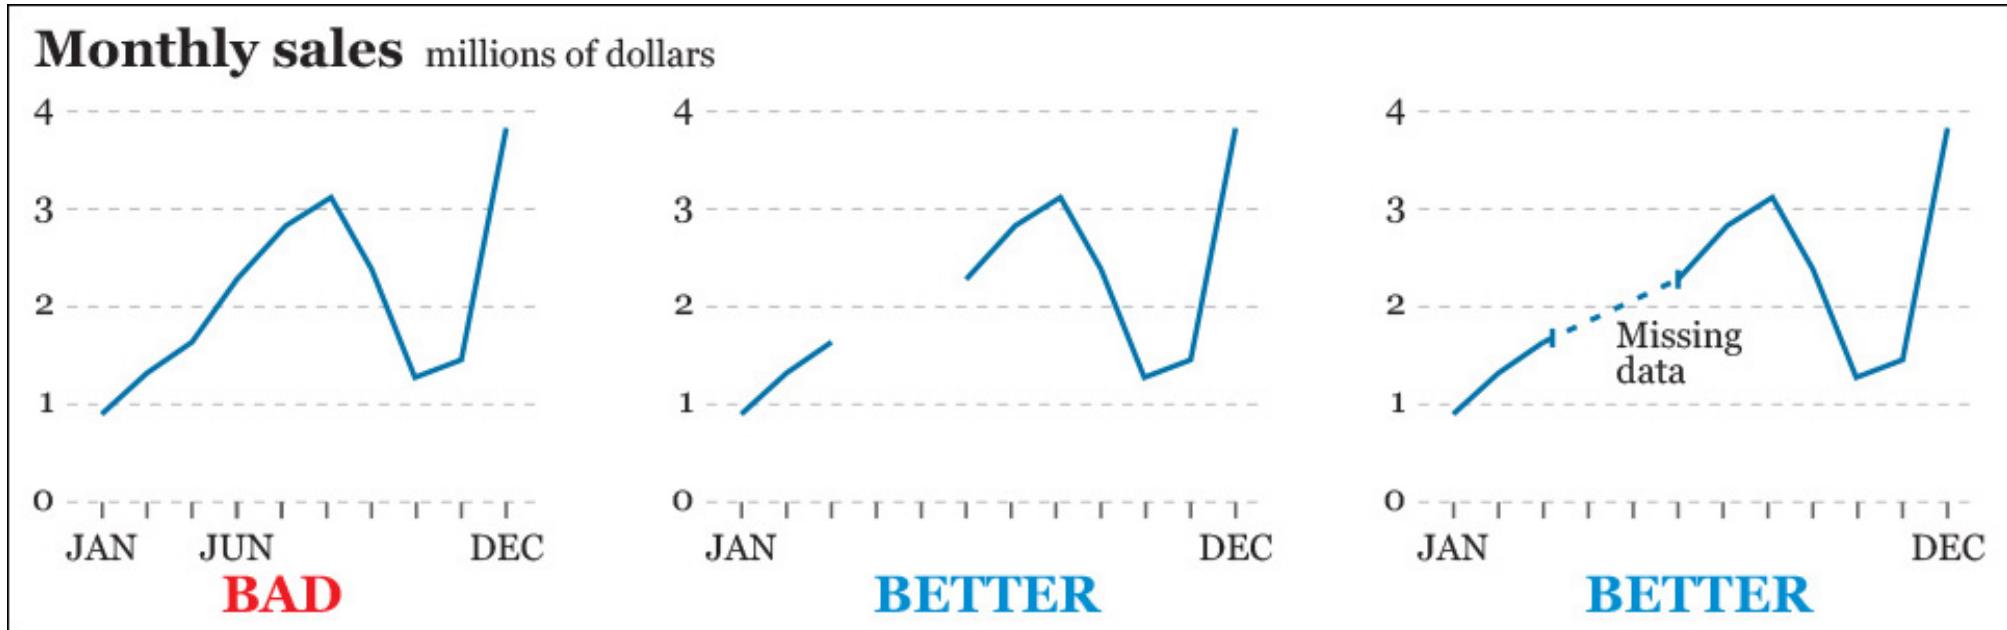


Also: don't impute across categories

This is BAD

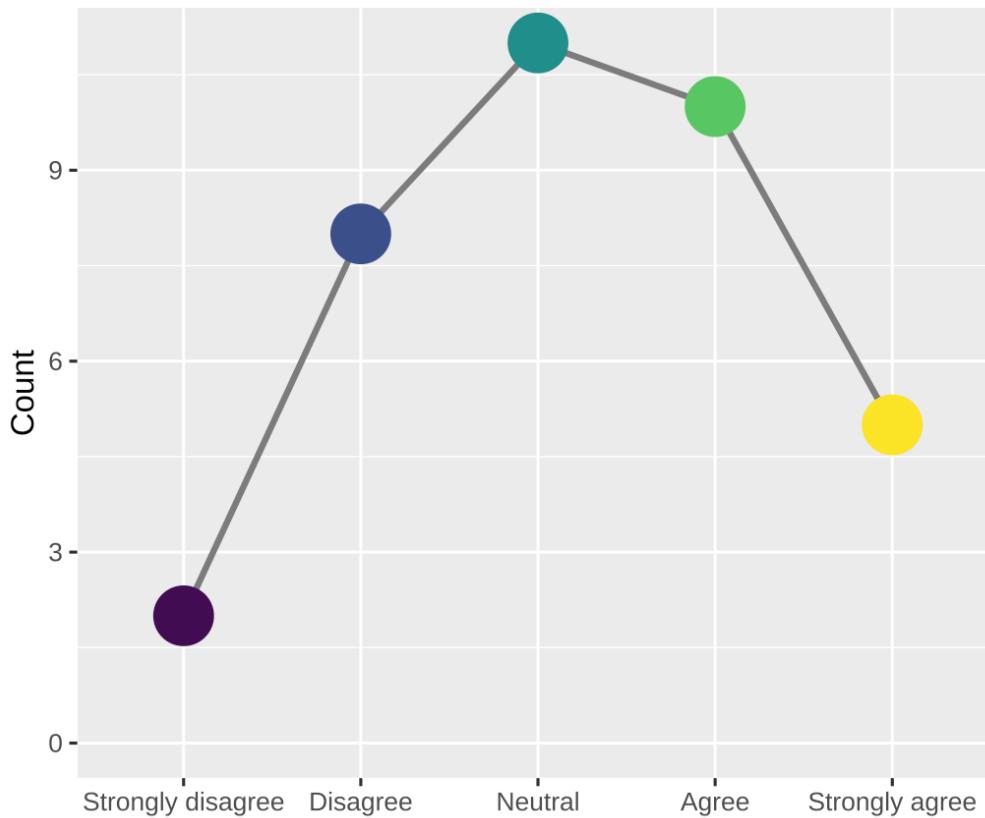

This is BETTER

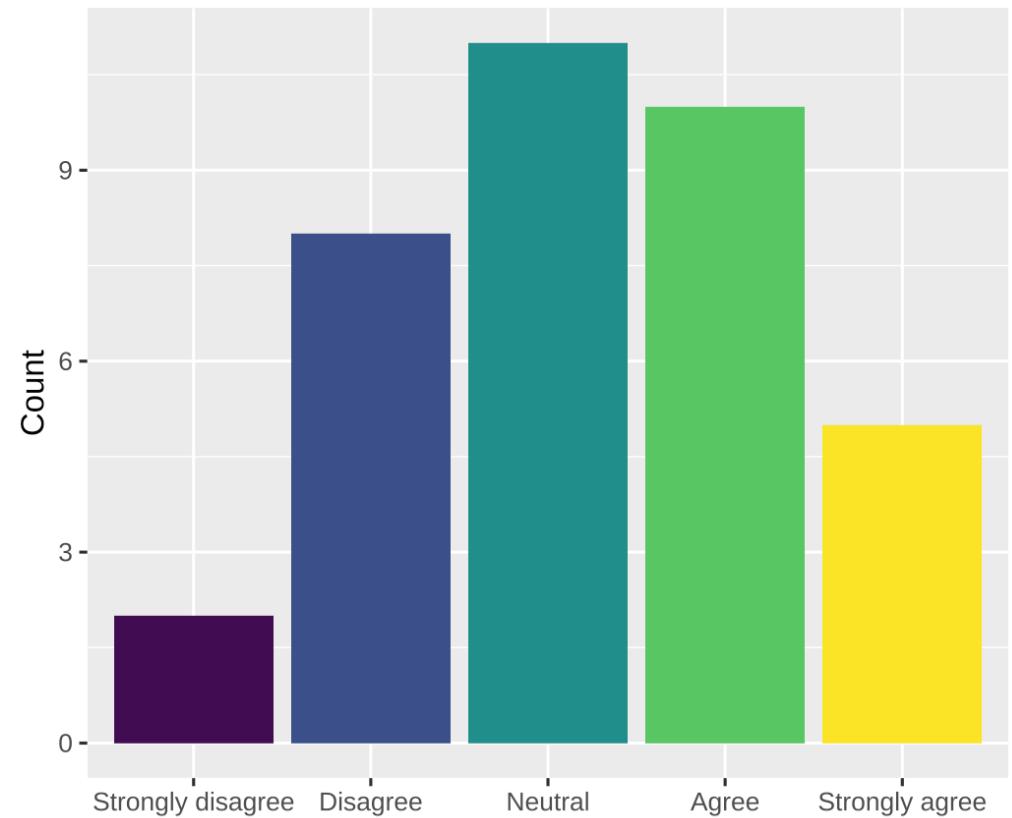

Visualizing time: the basics

Visualizing amounts over time

Time is just a variable that can be mapped to an aesthetic

Can be used as `x`, `y`, `color`, `fill`, `facet`, and even animation

Can use all sorts of `geom`s: lines, columns, points, heatmaps, densities, maps, etc.

In general, follow reading conventions to show time progression:

→ & ↓

Visualizing amounts over time using ggplot

Let's use GameStop share prices to make some plots:

```
gme_prices
```

```
## # A tibble: 5,060 × 8
##   symbol date      open   high    low close volume adjusted
##   <chr>   <date>    <dbl>  <dbl>  <dbl>  <dbl>    <dbl>    <dbl>
## 1 GME    2002-02-13 9.62  10.1   9.52  10.0   19054000  6.77
## 2 GME    2002-02-14 10.2   10.2   9.93  10     2755400   6.73
## 3 GME    2002-02-15 10    10.0   9.85  9.95   2097400   6.70
## 4 GME    2002-02-19 9.9    9.9   9.38  9.55   1852600   6.43
## 5 GME    2002-02-20 9.6    9.88  9.52  9.88   1723200   6.65
## 6 GME    2002-02-21 9.84  9.93  9.75  9.85   1744200   6.63
## 7 GME    2002-02-22 9.93  9.93  9.6   9.68   881400    6.51
## 8 GME    2002-02-25 9.65  9.82  9.54  9.75   863400    6.56
## 9 GME    2002-02-26 9.7   9.85  9.54  9.75   690400    6.56
## 10 GME   2002-02-27 9.68  9.68  9.5   9.57   1022800   6.45
## # i 5,050 more rows
```


How would you use these data to plot **adjusted** prices over time?

Time on x-axis + geom_point()

```
gme_prices |>  
  ggplot(aes(x = date, y = adjusted)) +  
  geom_point() +  
  labs(x = NULL, y = "Share price ($)",  
       title = "GME to the moon")
```

How could you reduce point overlap?

GME to the moon

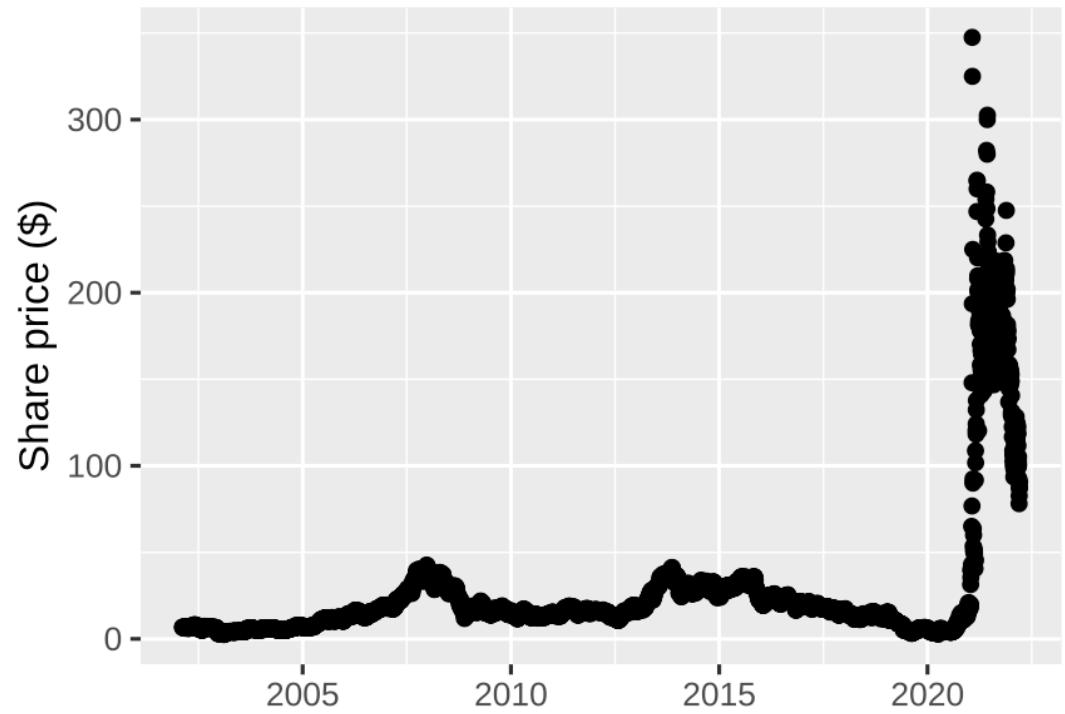


Time on x-axis + geom_point()

```
gme_prices |>  
  ggplot(aes(x = date, y = adjusted)) +  
  geom_point(size = 0.5) +  
  labs(x = NULL, y = "Share price ($)",  
       title = "GME to the moon")
```

How could you add a line to this?

GME to the moon

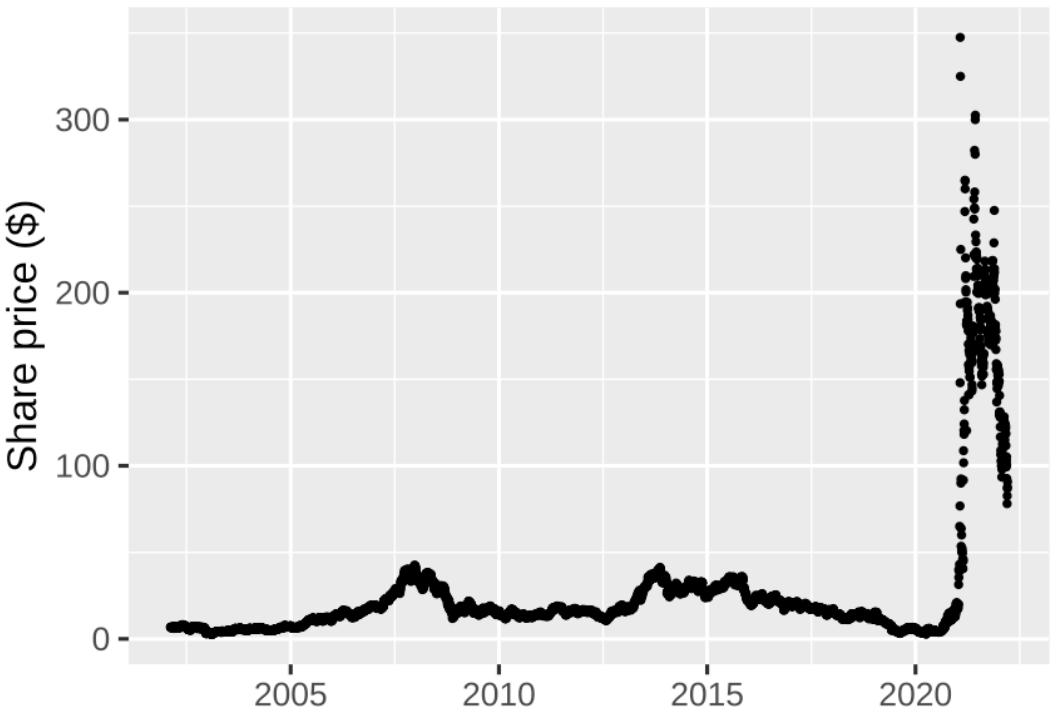


Time on x-axis + geom_point()

```
gme_prices |>  
  ggplot(aes(x = date, y = adjusted)) +  
  geom_point(size = 0.5) +  
  geom_line() +  
  labs(x = NULL, y = "Share price ($)",  
       title = "GME to the moon")
```

Which is better, points or lines?

GME to the moon

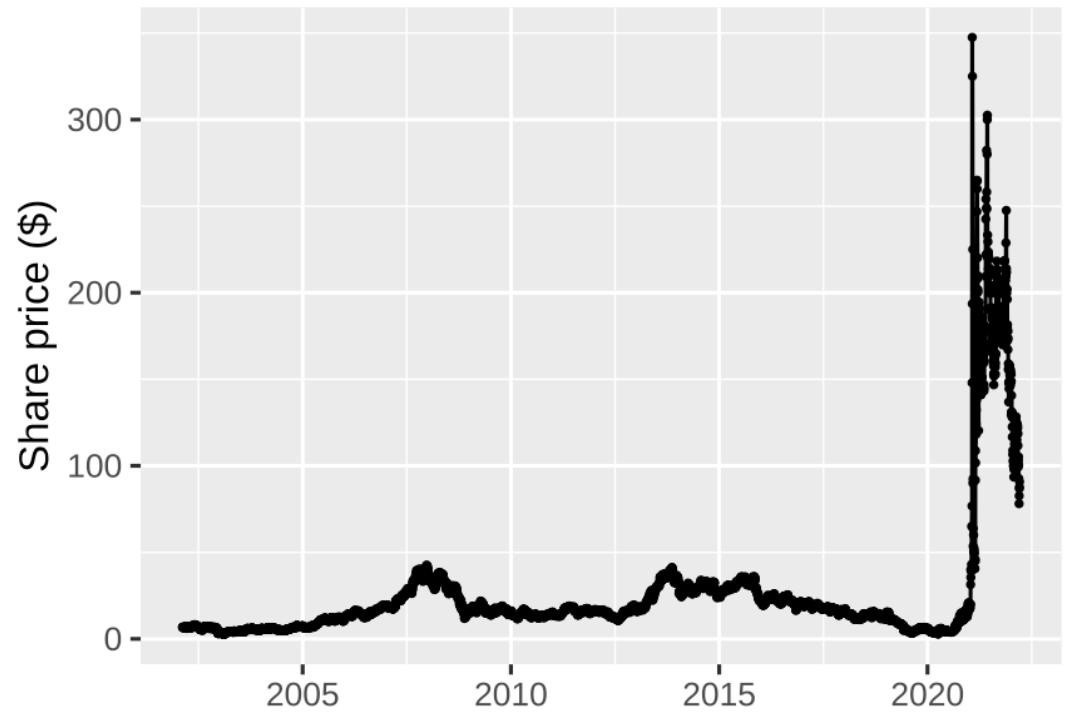

Time on x-axis: points vs lines

It depends!

Points emphasize observations

Lines emphasize trends

Using lines for time series is often fine since data are evenly spaced and usually complete


But lines are effectively made-up data, so be careful how you use them!

Time on x-axis + geom_line/col()

The GameStop share price plot is clearer without points:

```
gme_prices |>  
  ggplot(aes(x = date, y = adjusted)) +  
  geom_line() +  
  labs(x = NULL, y = "Share price ($)",  
       title = "GME to the moon")
```

GME to the moon

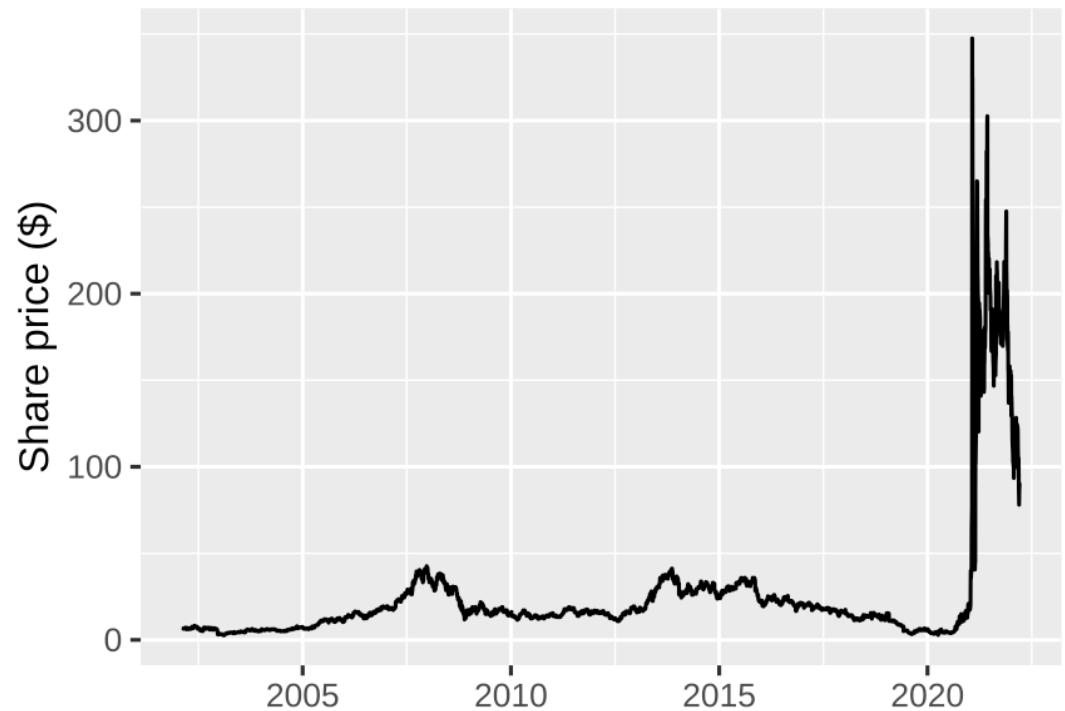


Time on x-axis + geom_line/col()

Can also use a fill for the area under a line, **as long as the y-axis starts at zero**


```
gme_prices |>  
  ggplot(aes(x = date, y = adjusted)) +  
    geom_area(fill = "skyblue", color = "black") +  
    labs(x = NULL, y = "Share price ($)",  
         title = "GME to the moon")
```

GME to the moon

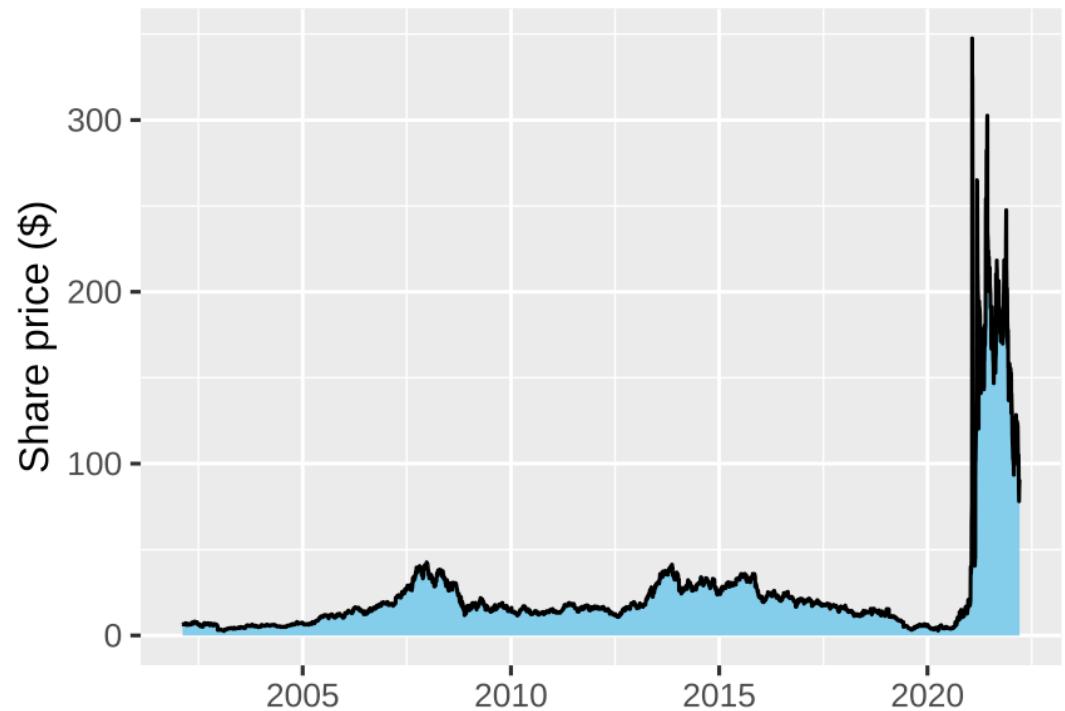

Line plots don't have to be boring

HOLY CRAP

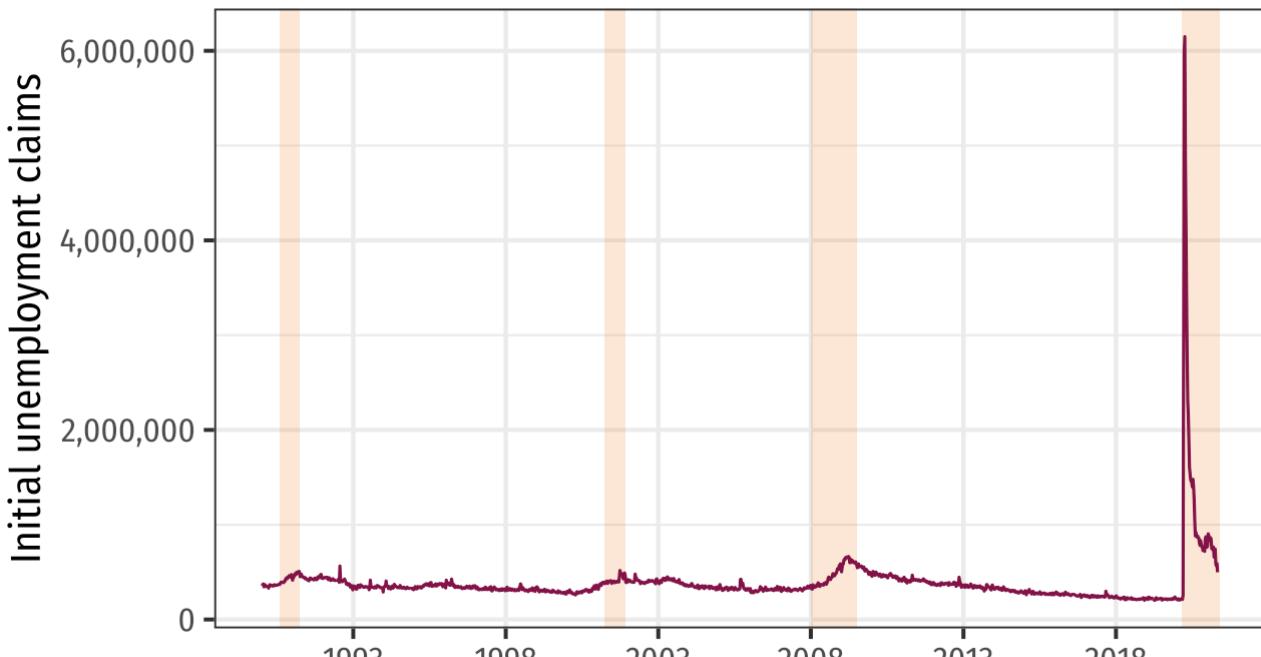

Source: Initial weekly unemployment claims (ICSA); FRED
Recessions highlighted in orange



Dates and times in R

Are dates and times special?

We just made some plots without really thinking about data types

We can map "dates" to x regardless of whether they are `date` or `numeric` objects

When do we need to pay attention to the details?

1. Converting from strings to dates
2. Getting components of date-time data
3. Computing time spans

Dates and times in R

R has "native" classes for storing calendar dates and times

- For background, see [?Dates](#) and [?DateTimeClasses](#)

The [lubridate](#) package offers convenient tools for working with dates and times

- Loaded automatically as part of the core tidyverse since tidyverse 2.0.0
- See [Chapter 17 of R4DS \(2e\)](#)

Converting from strings to dates

Use `lubridate::ymd` to parse dates with **year**, **month**, and **day** components

```
svb_failure <- ymd("2023-03-10")  
svb_failure
```

```
## [1] "2023-03-10"
```

```
class(svb_failure)
```

```
## [1] "Date"
```

```
class("2023-03-10")
```

```
## [1] "character"
```

Converting from strings to dates

`lubridate` offers many other functions for parsing dates

For example, instead of `ymd` we could use `mdy`:

```
signature_failure <- mdy("March 12, 2023")
```

```
signature_failure
```

```
## [1] "2023-03-12"
```

```
class(signature_failure)
```

```
## [1] "Date"
```

Getting components of date-time data

What year did Silicon Valley Bank fail?

```
year(svb_failure)
```

```
## [1] 2023
```

What day of the week was that?

```
wday(svb_failure)
```

```
## [1] 6
```

```
wday(svb_failure, label = TRUE)
```

```
## [1] Fri  
## Levels: Sun < Mon < Tue < Wed < Thu < Fri < Sat
```

What month was that?

```
month(svb_failure)
```

```
## [1] 3
```

```
month(svb_failure, label = TRUE)
```

```
## [1] Mar  
## 12 Levels: Jan < Feb < Mar < Apr < May < Jun < Jul
```

Computing time spans

How many days passed between the failures of SVB and Signature?

```
signature_failure - svb_failure
```

```
## Time difference of 2 days
```

How many days are left until classes end?

```
ymd(20240507) - today()
```

```
## Time difference of 50 days
```

These are **durations**


See Chapter 17 of R4DS (2e) for functions to compute **periods** and **intervals**

example-08: time-practice.R

Visualizing time: leveling up

Visualizing distributions over time


We can also visualize how distributions evolve. How could you make this plot?

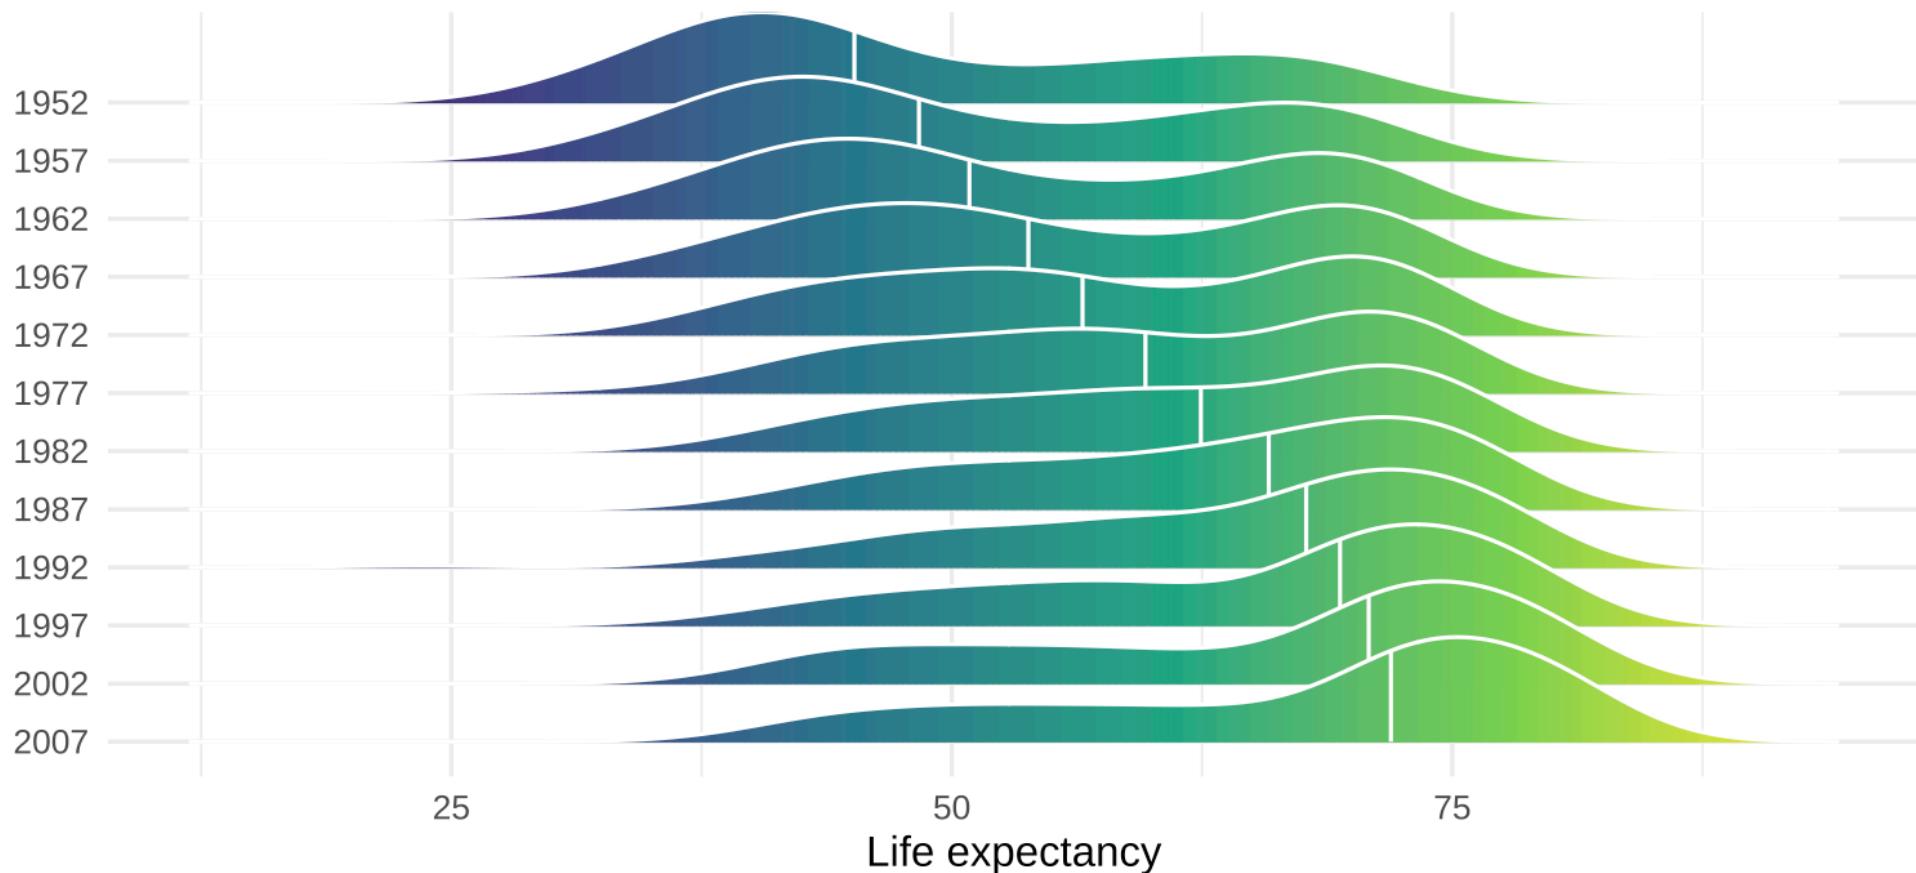

Let's start simple

```
library(ggridges) # for geom_density_ridges()  
  
gapminder |>  
  mutate(year = as_factor(year)) |>  
  ggplot(  
    aes(x = lifeExp,  
        y = year) # map time to y  
  ) +  
  geom_density_ridges() # add geom
```


How could we modify this to follow ↓ convention for time?

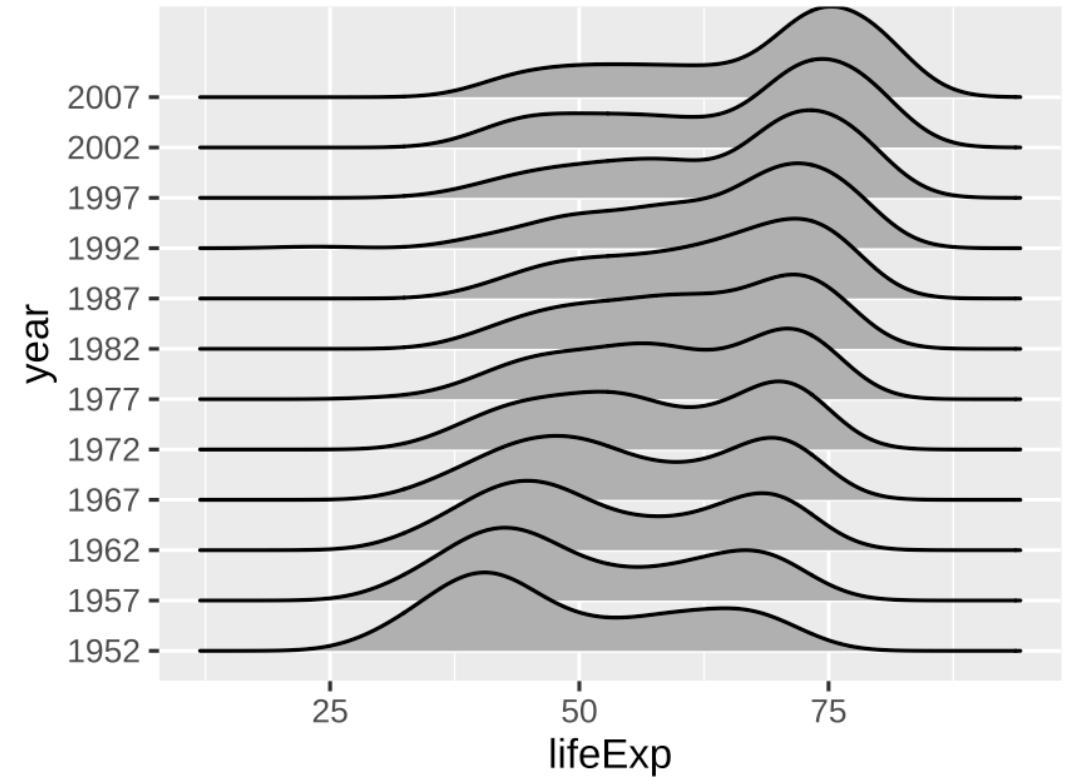

Follow ↓ convention for time

```
gapminder |>  
  mutate(year = as_factor(year)) |>  
  ggplot(  
    aes(x = lifeExp,  
        y = fct_rev(year)) # reverse year  
  ) +  
  geom_density_ridges()
```


How could we make the lines white?

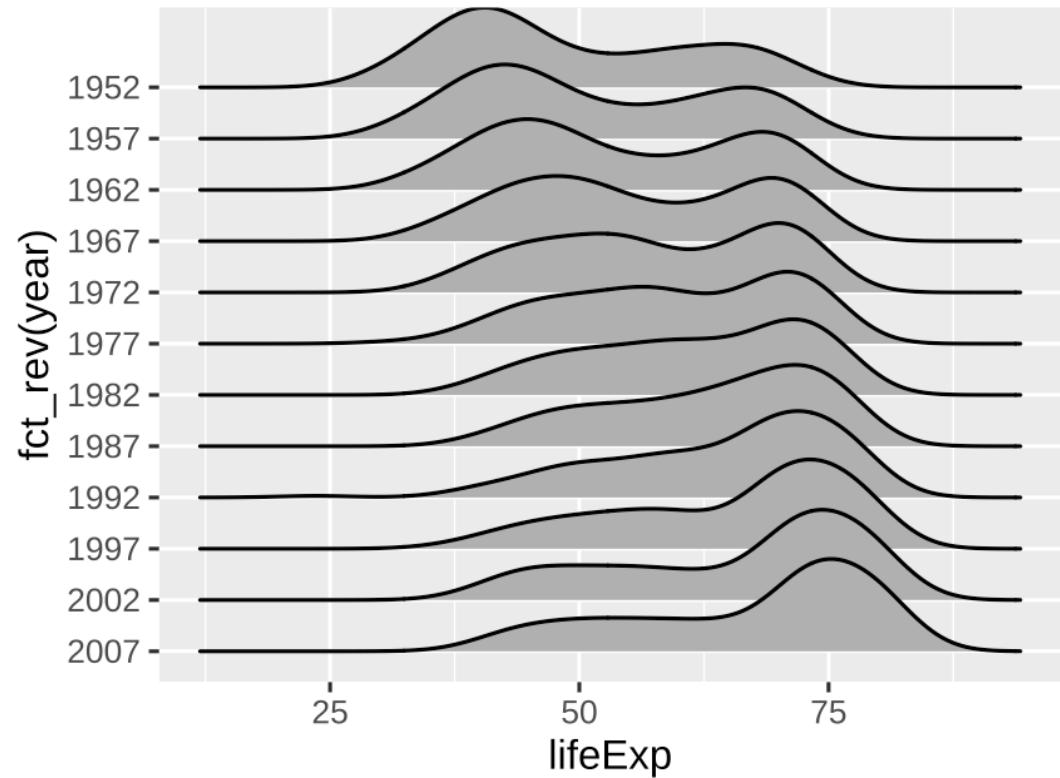

Add color to help visually separate densities

```
gapminder |>  
  mutate(year = as_factor(year)) |>  
  ggplot(  
    aes(x = lifeExp,  
        y = fct_rev(year))  
  ) +  
  geom_density_ridges(  
    color = "white" # separate densities  
  )
```


How could we add a line at the median of each density?

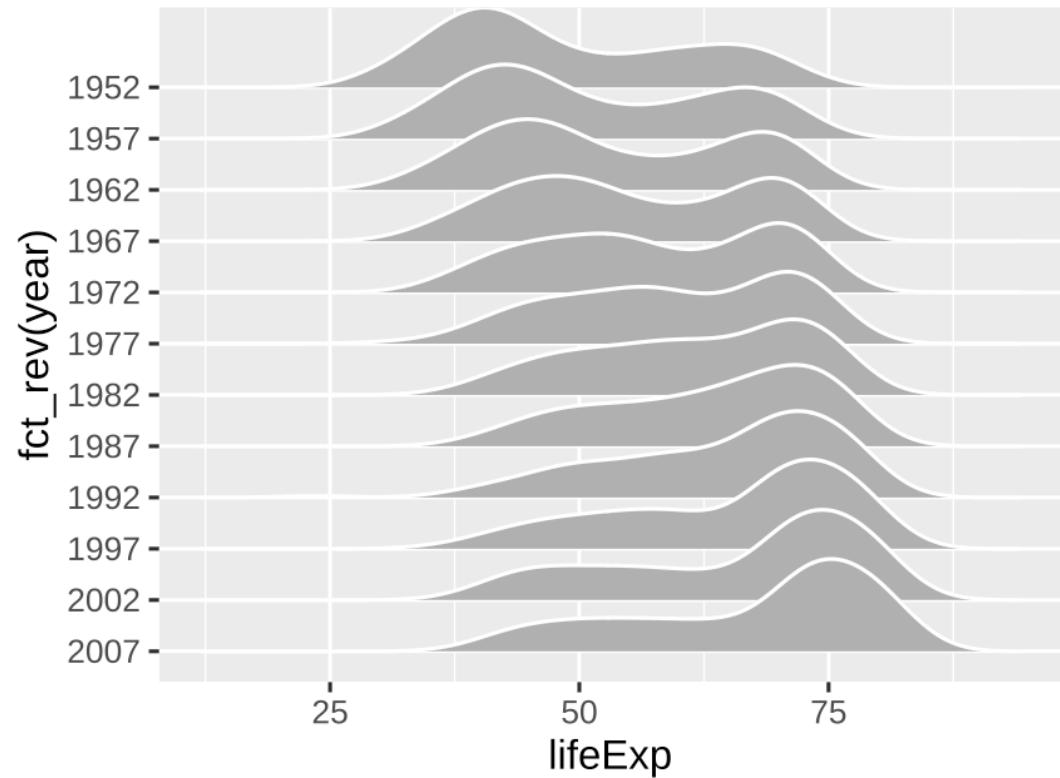

Add a line at the median of each density


```
gapminder |>  
  mutate(year = as_factor(year)) |>  
  ggplot(  
    aes(x = lifeExp,  
        y = fct_rev(year))  
  ) +  
  geom_density_ridges(  
    color = "white",  
    quantile_lines = TRUE, # add lines  
    quantiles = 2           # median  
  )
```

How could we add a color gradient to the densities?

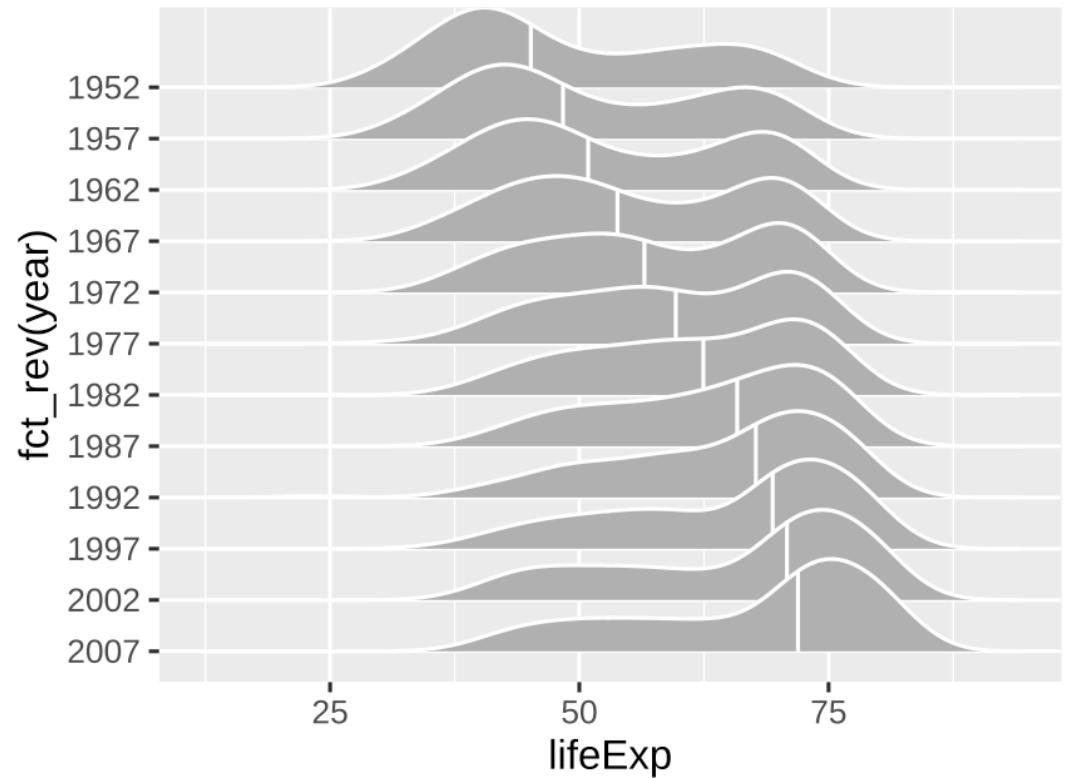

Fill the densities along the x axis


```
gapminder |>  
  mutate(year = as_factor(year)) |>  
  ggplot(  
    aes(x = lifeExp,  
        y = fct_rev(year),  
        fill = after_stat(x) # fill by x  
    ) +  
  geom_density_ridges_gradient(  
    # this is a special geom to fill along x  
    color = "white",  
    quantile_lines = TRUE,  
    quantiles = 2  
  )
```

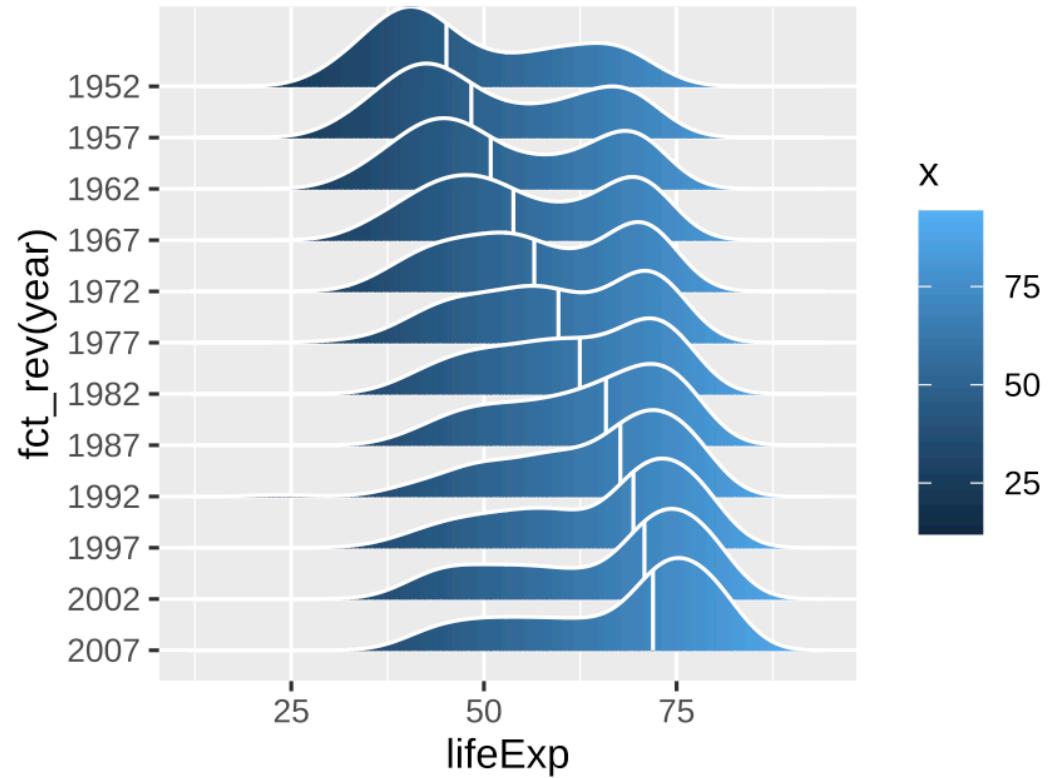

Use `after_stat(x)` to shade the *densities*, not the data itself

Use colors that are better perceived


```
gapminder |>  
  mutate(year = as_factor(year)) |>  
  ggplot(  
    aes(x = lifeExp,  
        y = fct_rev(year),  
        fill = after_stat(x))  
  ) +  
  geom_density_ridges_gradient(  
    color = "white",  
    quantile_lines = TRUE,  
    quantiles = 2  
  ) +  
  scale_fill_viridis_c() # nicer shading
```

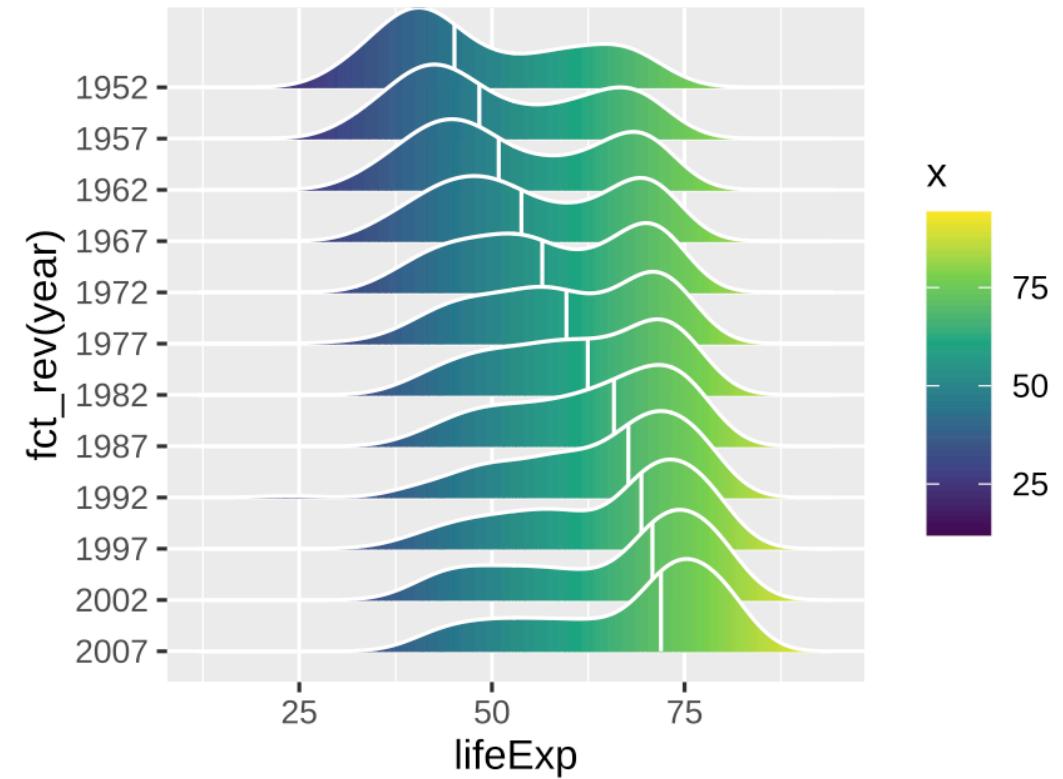


viridis colors are easier to perceive if color blind, and in black-and-white

Finish by cleaning the plot up

```
gapminder |>  
  mutate(year = as_factor(year)) |>  
  ggplot(  
    aes(x = lifeExp,  
        y = fct_rev(year),  
        fill = after_stat(x))  
  ) +  
  geom_density_ridges_gradient(  
    color = "white",  
    quantile_lines = TRUE,  
    quantiles = 2  
  ) +  
  scale_fill_viridis_c() +  
  guides(fill = "none") +      # omit legend  
  labs(x = "Life expectancy", # modify label  
       y = NULL,             # omit labels  
       fill = NULL) +        # omit labels  
  theme_minimal(              # cleaner theme  
    base_size = 14          # larger font  
  )
```

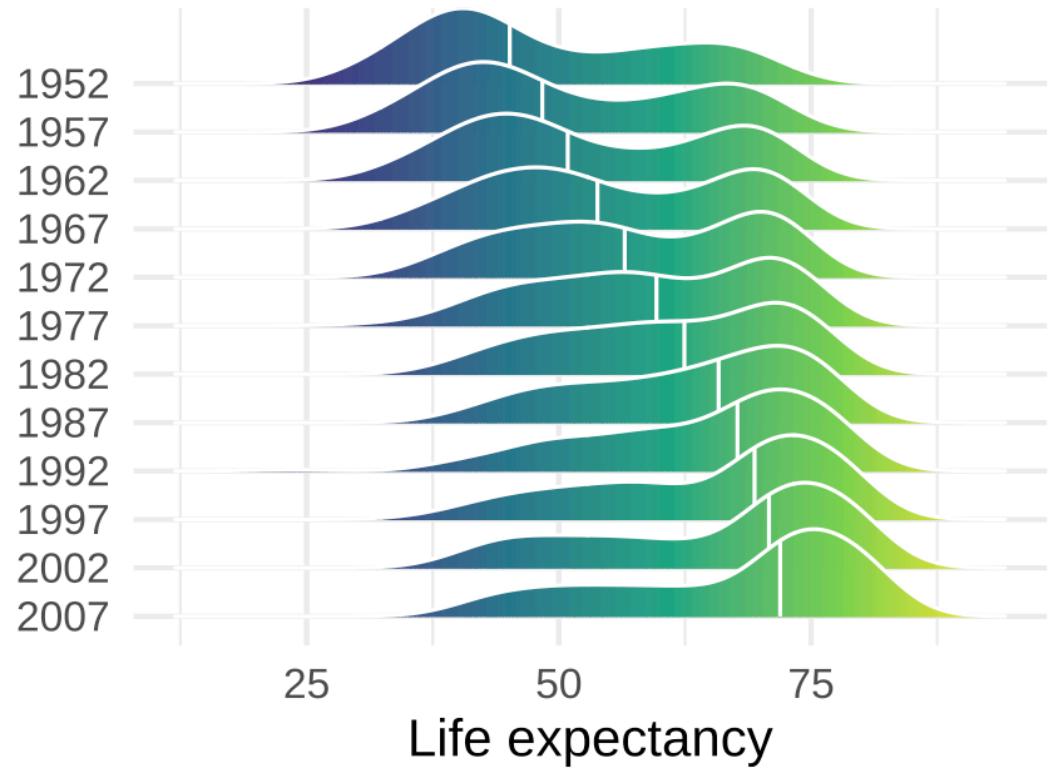

Animating plots over time

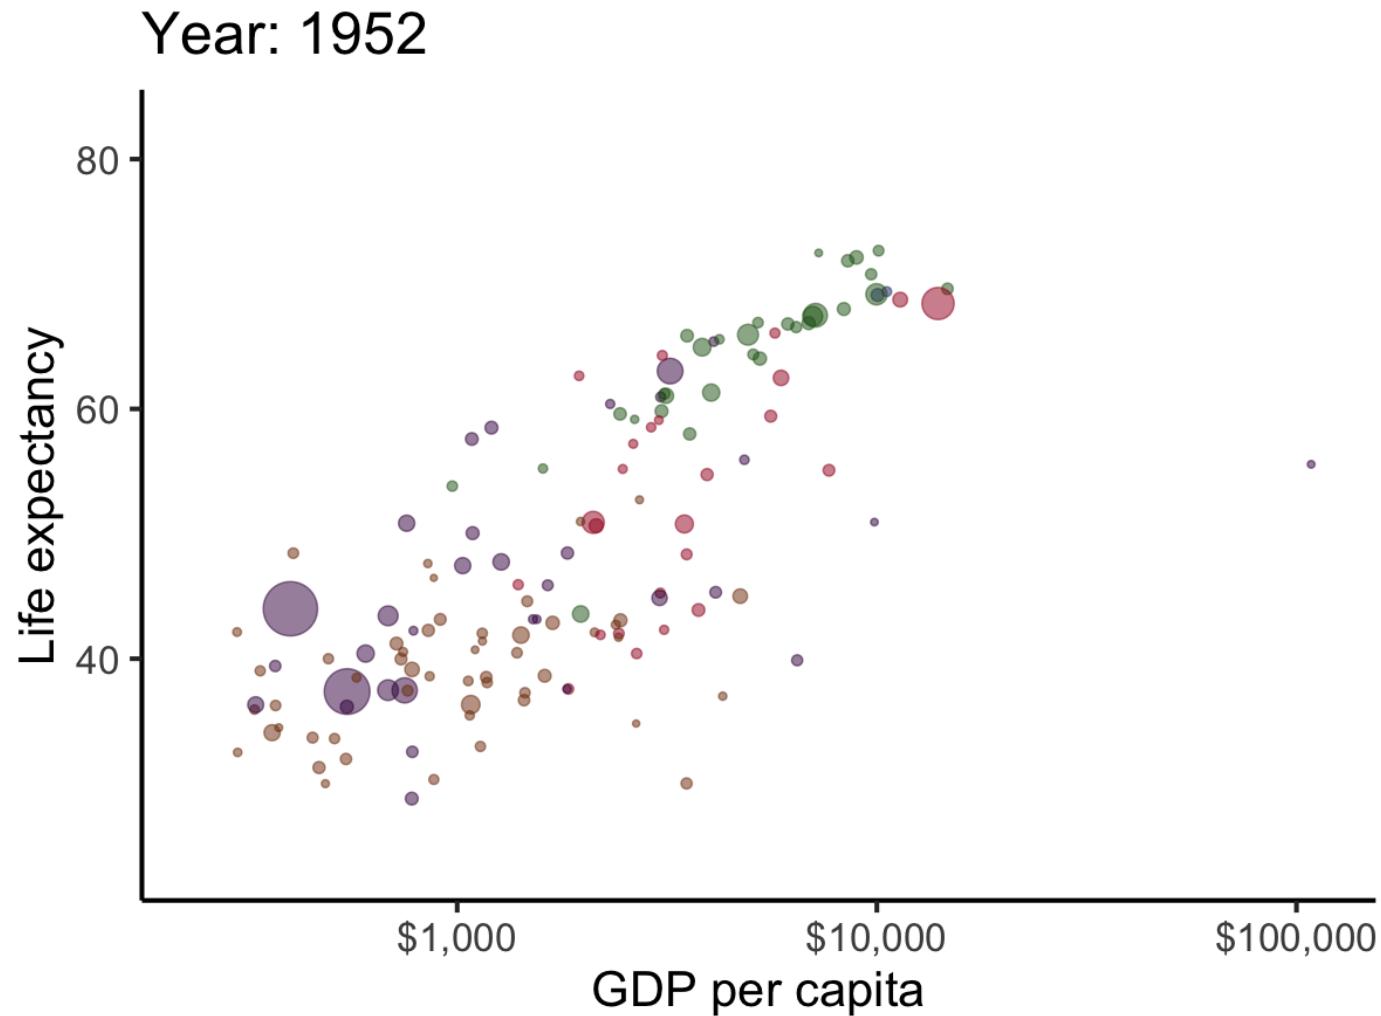


How can we make this animation in R?

First, how would we make a static plot of the data?

```
library(gapminder) # gapminder data

gapminder |>
  ggplot(aes(x = gdpPercap, y = lifeExp,
             size = pop, color = continent)) +
  geom_point(alpha = 0.5, show.legend = FALSE)
  scale_color_manual(
    values = gapminder::continent_colors
  ) +
  scale_size_continuous(range = c(1, 15)) +
  scale_x_log10(labels = label_dollar()) +
  theme_classic(base_size = 20) +
  labs(x = "GDP per capita",
       y = "Life expectancy",
       title = "Year: 1952-2007")
```

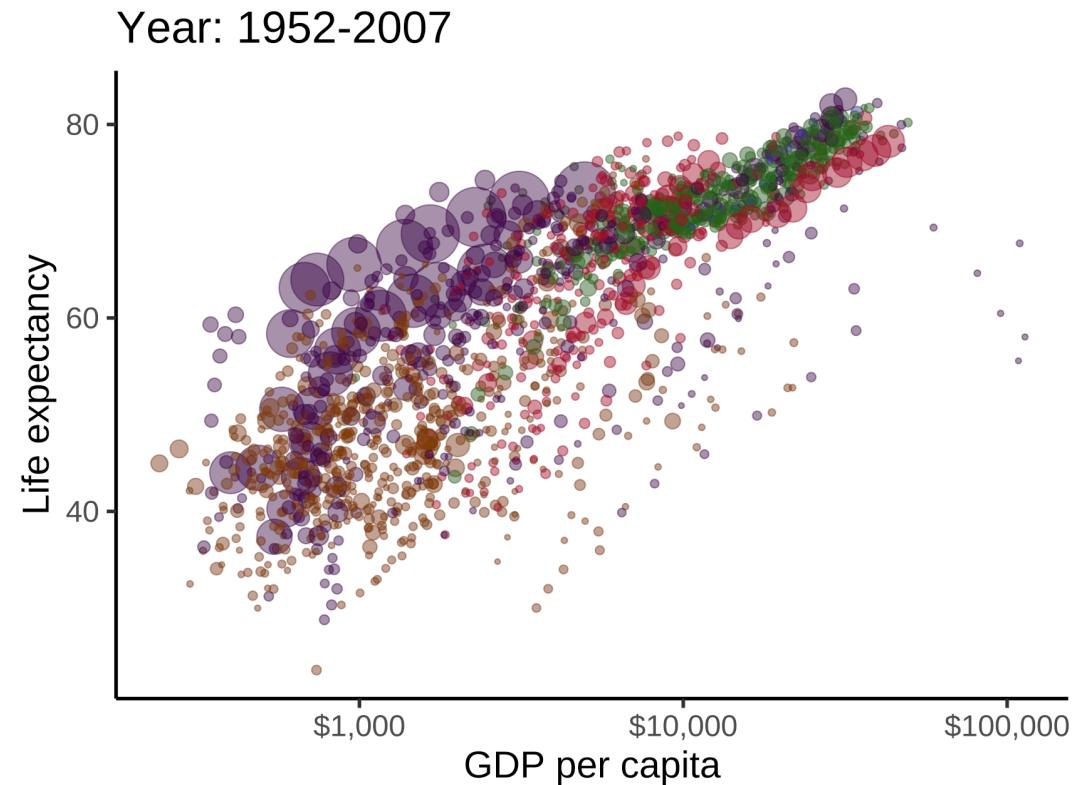


Converting a static plot to an animation

Second, let's use `ganimate` to visualize changes over time

```
library(gganimate) # plot animation package

gapminder |>
  ggplot(aes(x = gdpPercap, y = lifeExp,
             size = pop, color = continent)) +
  geom_point(alpha = 0.5, show.legend = FALSE)
  scale_color_manual(
    values = gapminder::continent_colors
  ) +
  scale_size_continuous(range = c(1, 15)) +
  scale_x_log10(labels = label_dollar()) +
  theme_classic(base_size = 20) +
  labs(x = "GDP per capita",
       y = "Life expectancy",
       title = "Year: {frame_time}") +
  transition_time(year) +
  ease_aes('linear') # default progression
```

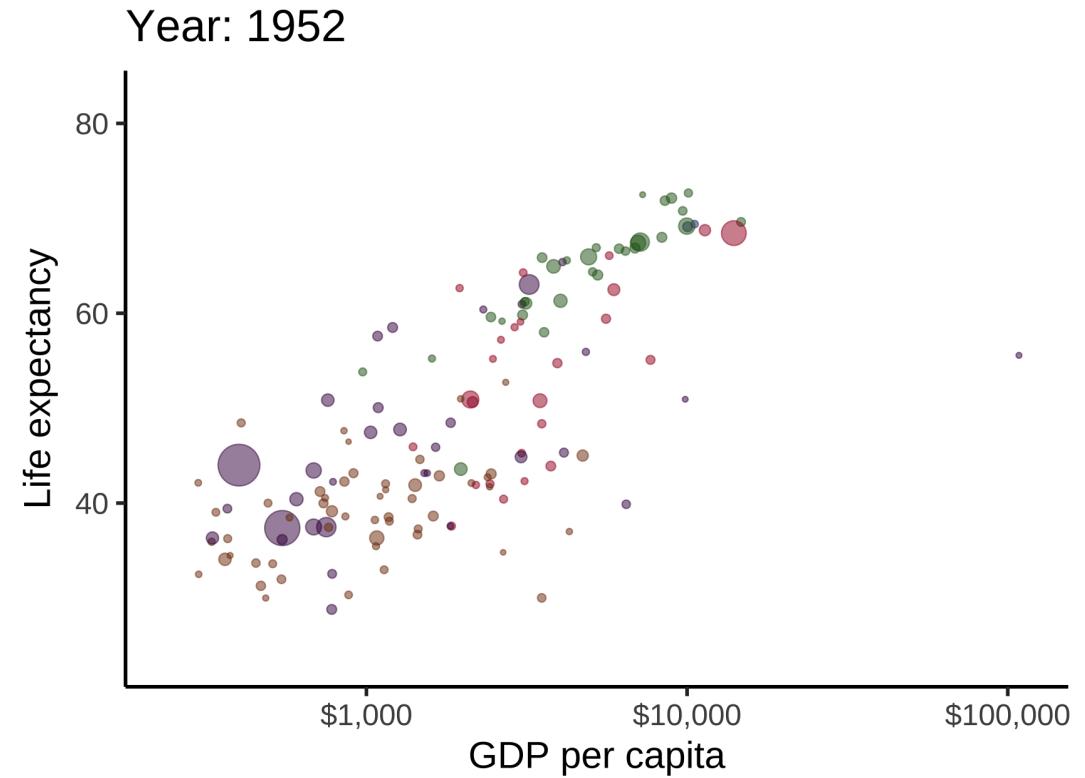

Saving gifs


Third, use `anim_save()` to write a `.gif` that you can text to your mom

```
library(gganimate)
library(gifski)

my_gapminder_animation <- gapminder |>
  ggplot(aes(x = gdpPercap, y = lifeExp, size = pop, color = continent)) +
  geom_point(alpha = 0.5, show.legend = FALSE) +
  scale_color_manual(values = gapminder::continent_colors) +
  scale_size_continuous(range = c(1, 15)) +
  scale_x_log10(labels = label_dollar()) +
  theme_classic(base_size = 20) +
  labs(x = "GDP per capita",
       y = "Life expectancy",
       title = "Year: {frame_time}") +
  transition_time(year) +
  ease_aes('linear')

animate(my_gapminder_animation, renderer = gifski_renderer())
anim_save("content/slides/img/09/my-gapminder-animation.gif")
```

Faceting plots over time

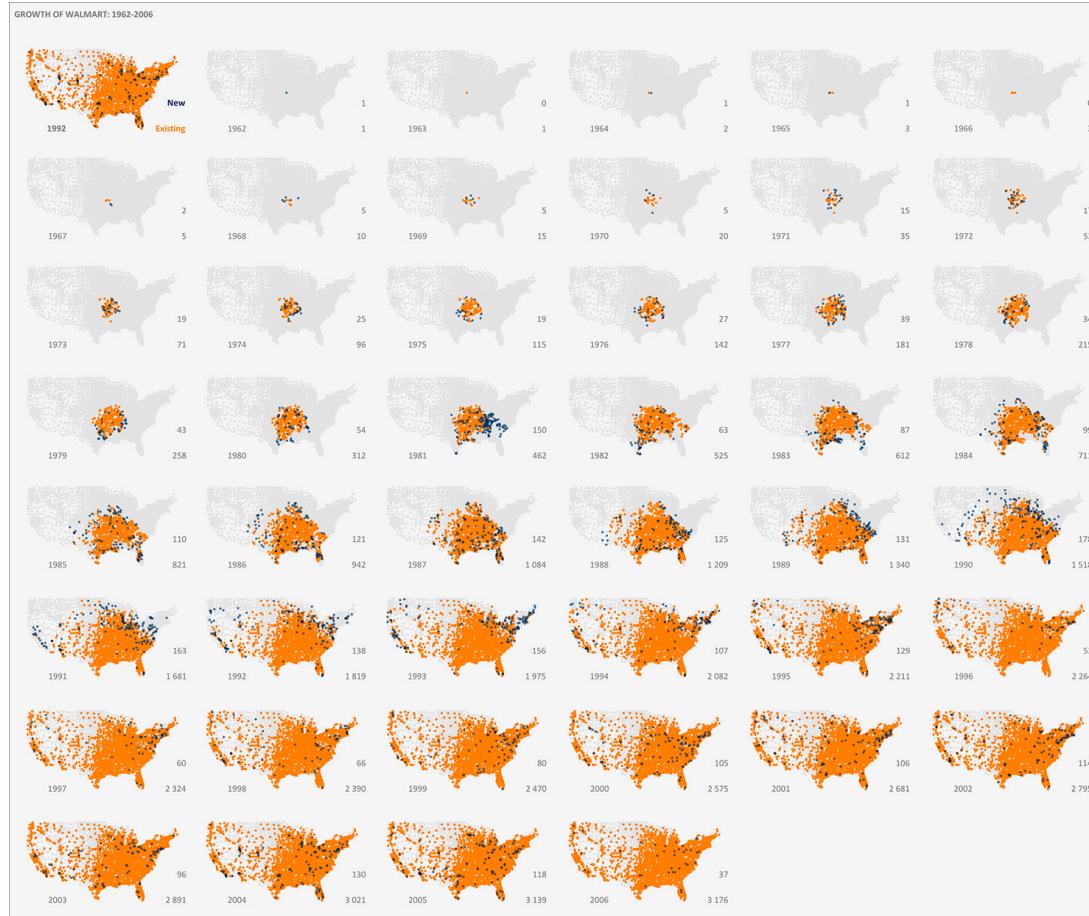


Map of the spread of Walmart by Jorge Camões

Connecting scatter plots over time

Sometimes connected scatter plots of time series data make sense

What is a connected scatter plot?


How would you make one using these data?

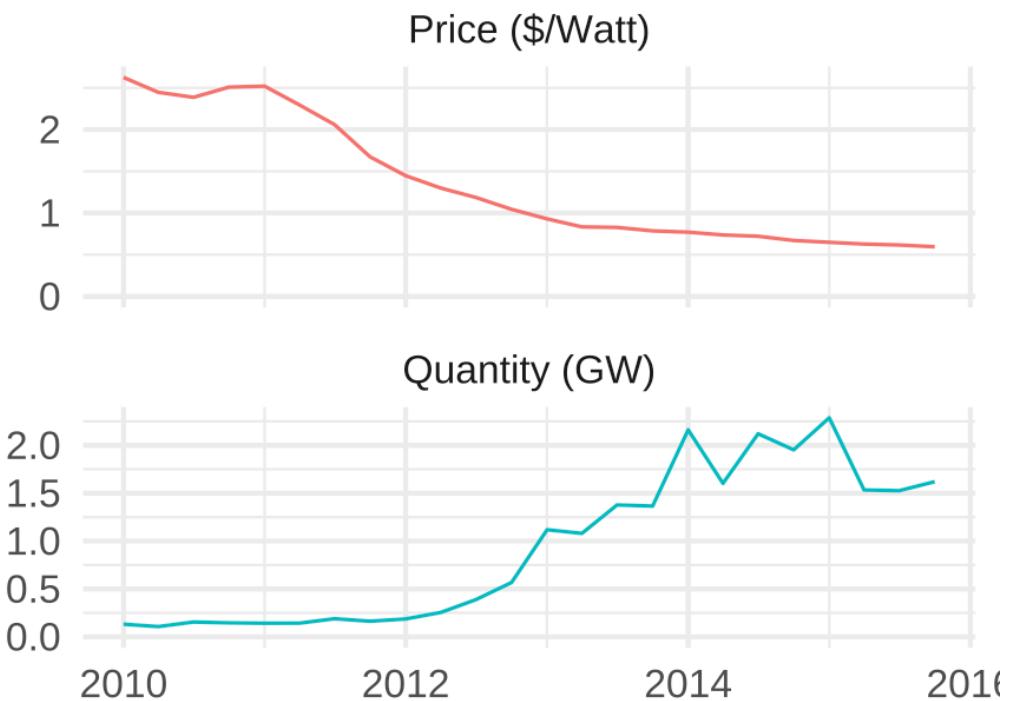


Connected scatter plots

```
solar_data |>  
  ggplot(aes(x = `Quantity (GW)`, # not time  
             y = `Price ($/Watt)`, # not time  
             color = date)) +      # time!  
  geom_point() +  
  geom_path() + # connect by time, not x  
  scale_x_log10() +  
  scale_y_log10() +  
  scale_color_viridis_c() +  
  guides(color = "none") +  
  theme_minimal(base_size = 14)
```

Note the log axes

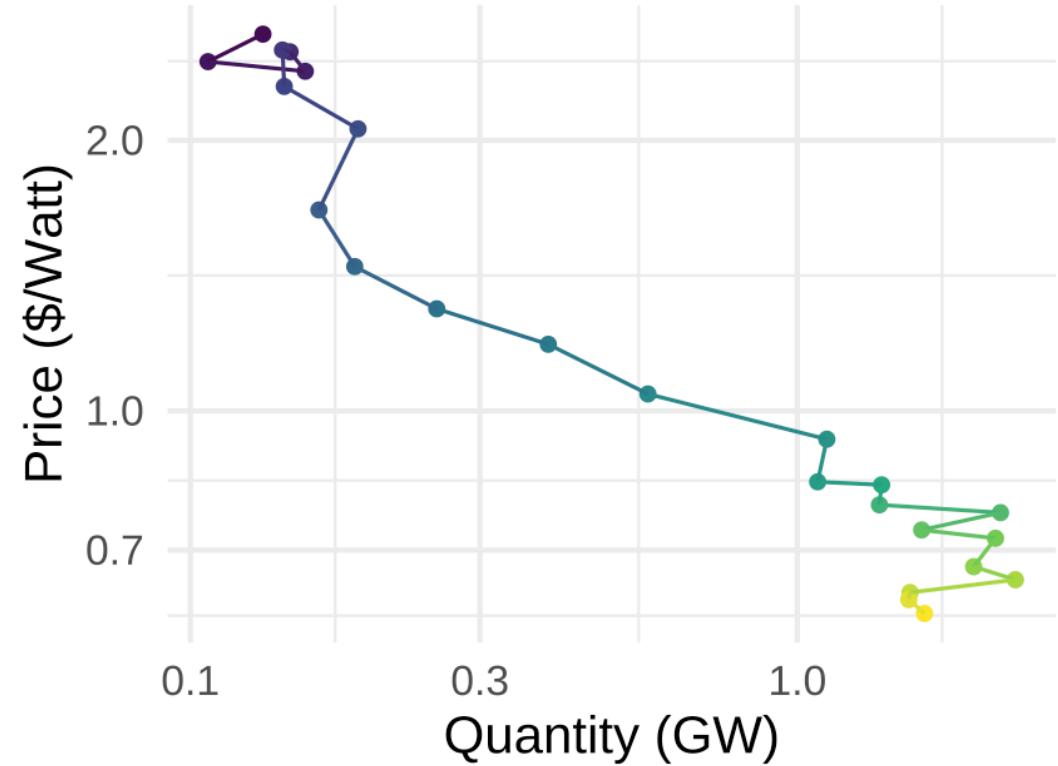

Is this a good use case?

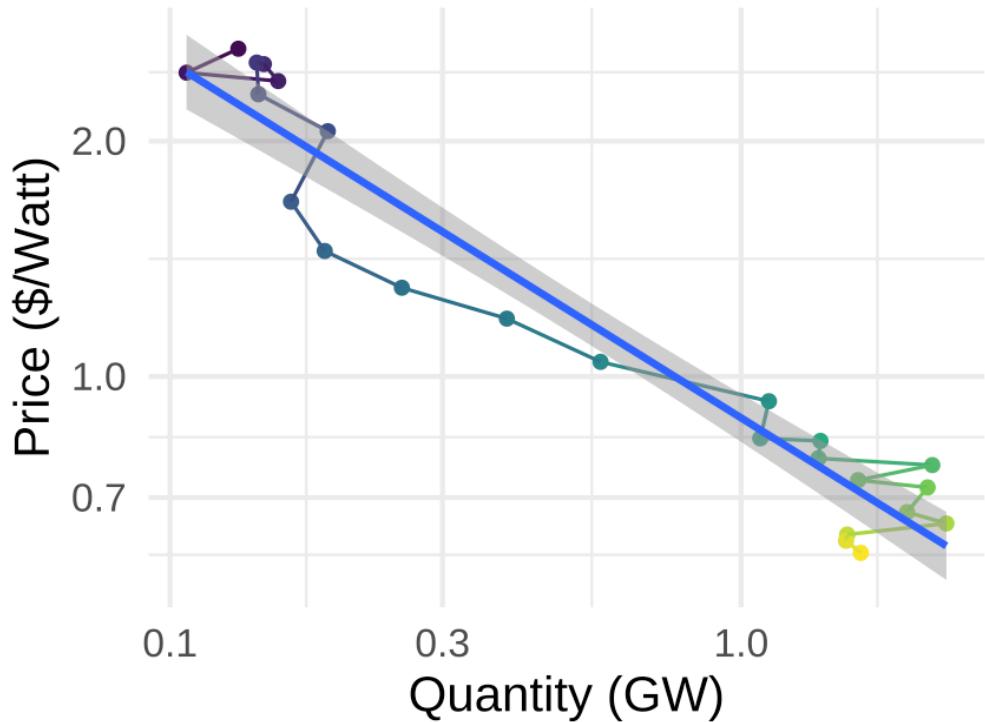

Looks a lot like a demand curve!


$$\log(Q) = \alpha + \beta \log(P) + \varepsilon$$

We could use regression to estimate β

How might we interpret β ?

But even here, a regular (not connected) scatter plot would be better!

Often it's better to use multiple plots

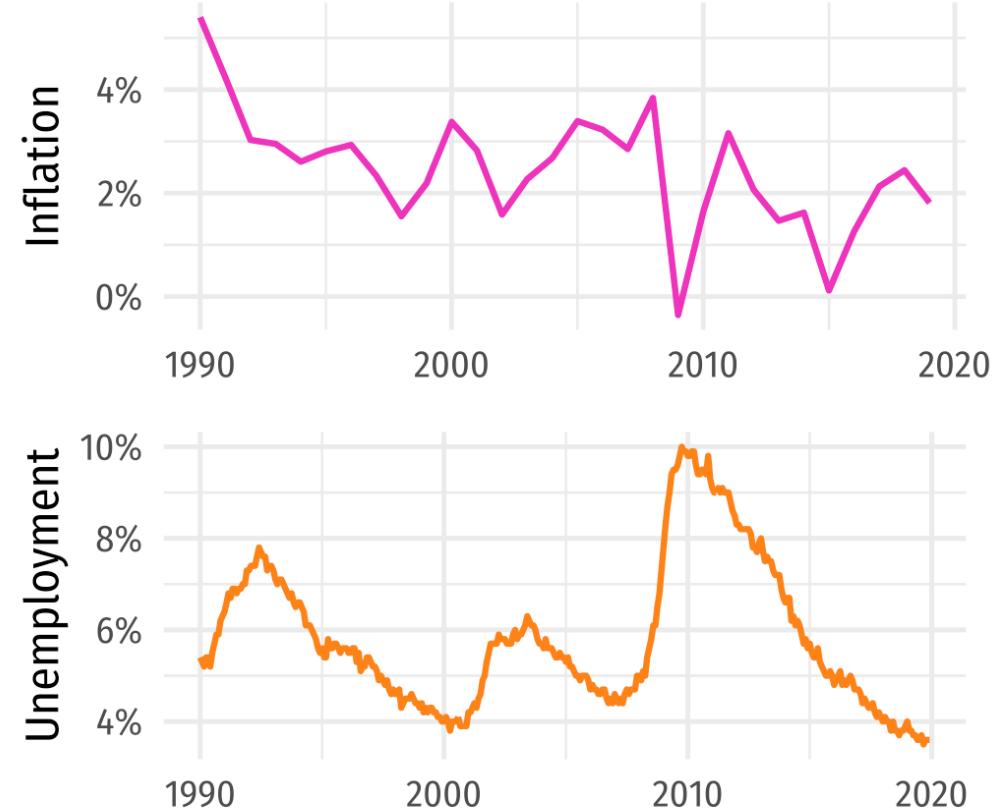


Starting, ending, and decomposing time (for reference)

You have to start (and end) somewhere

You always have to choose start and end points


Start and end at reasonable times that help maintain the context of your story

Measles vaccine was pretty effective

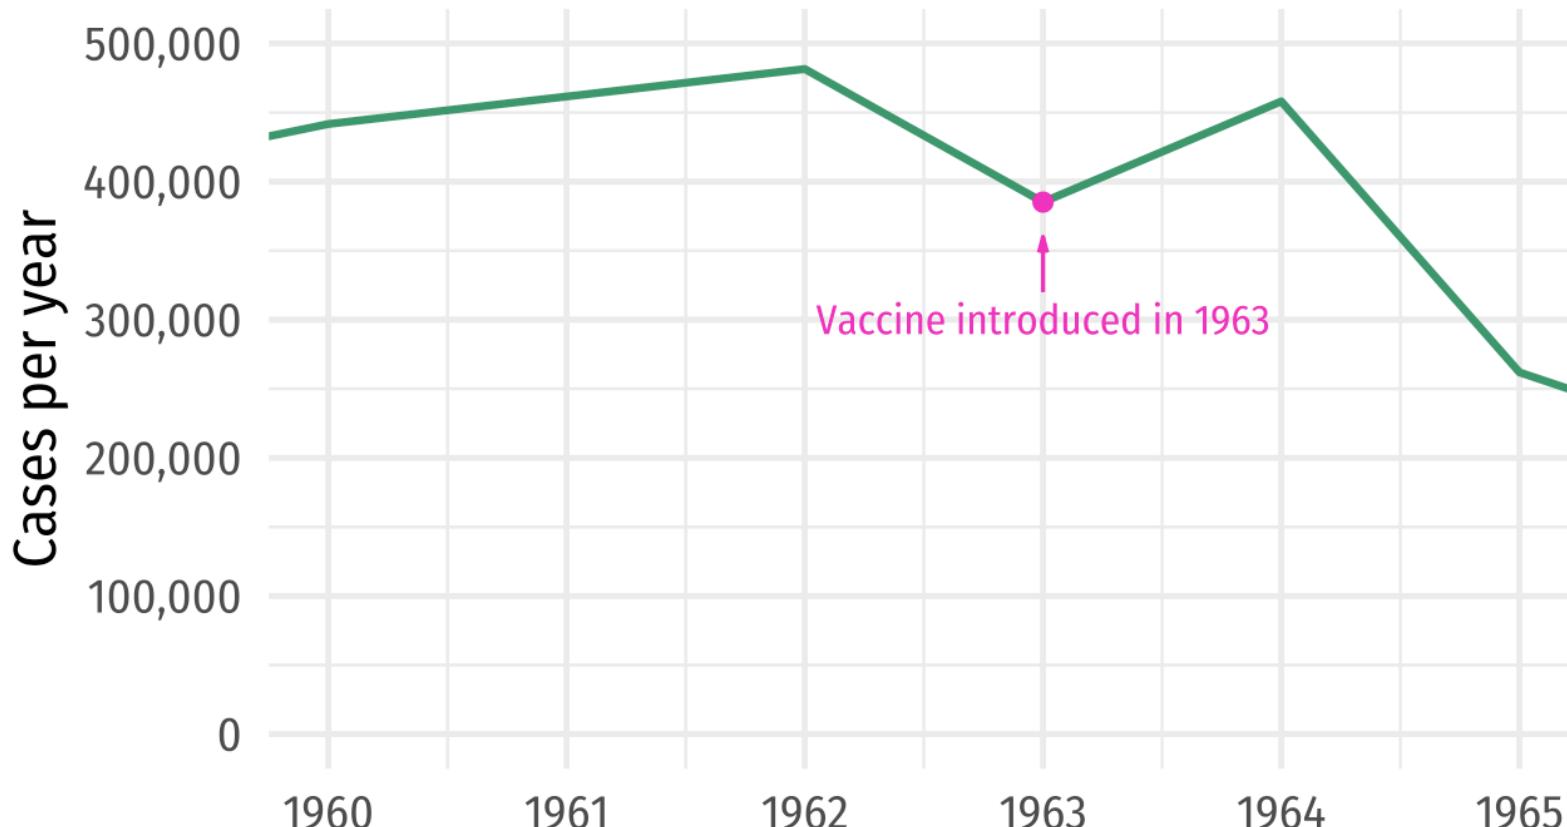

Source: CDC, Epidemiology and Prevention of
Vaccine-Preventable Diseases, 13th Edition



Measles vaccine was *incredible*!

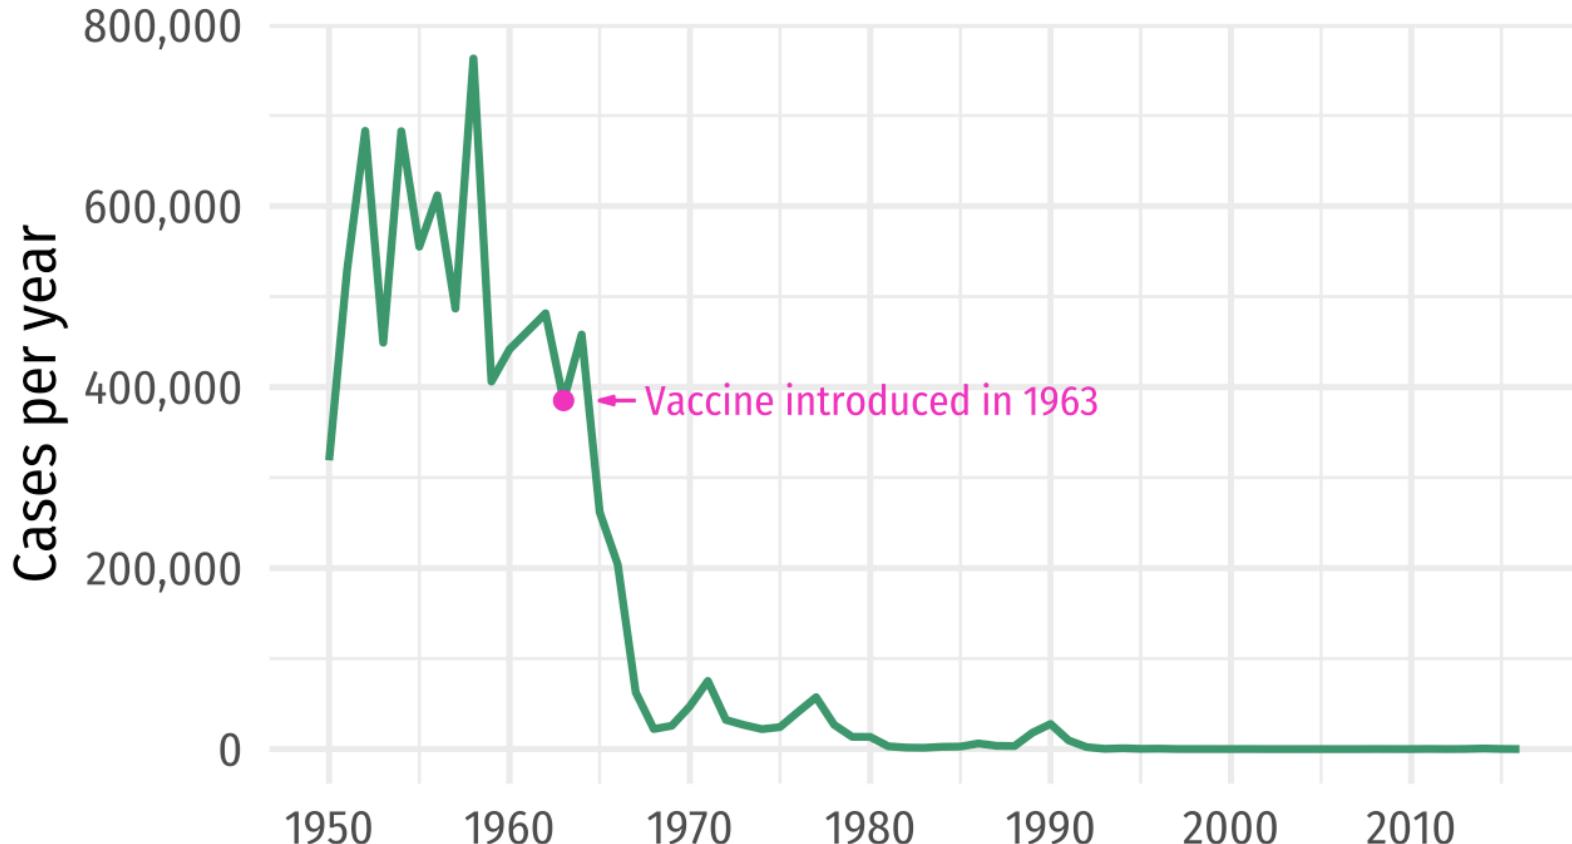


Source: CDC, Epidemiology and Prevention of
Vaccine-Preventable Diseases, 13th Edition

Seasonality

Don't mistake seasonality for actual trends

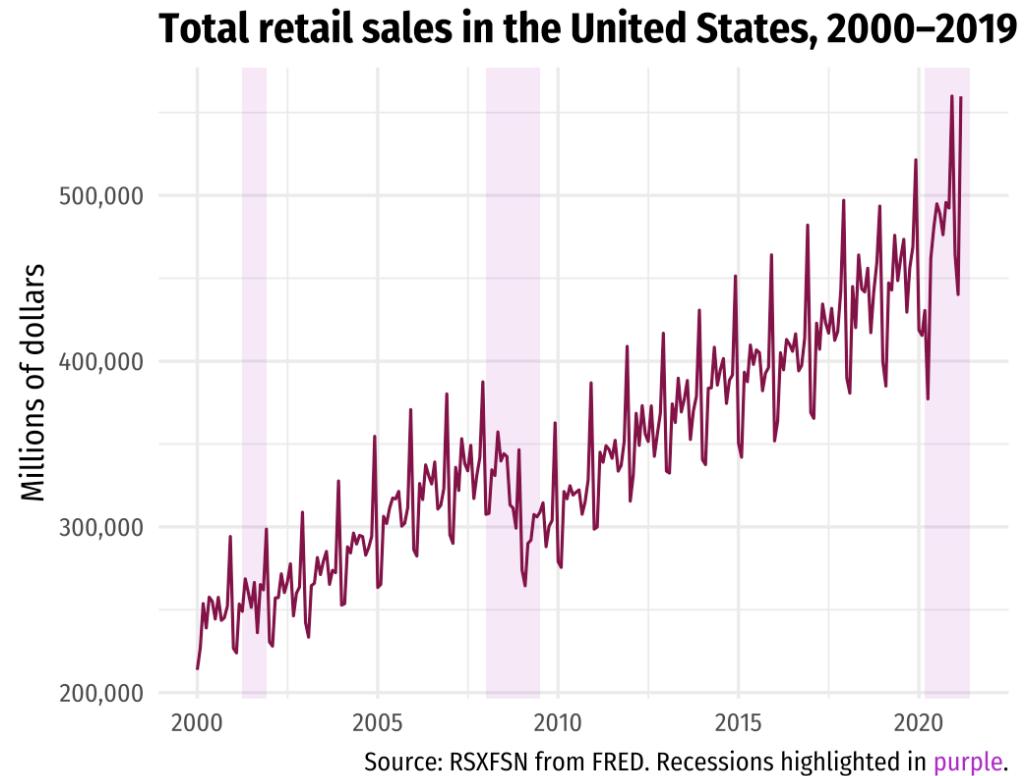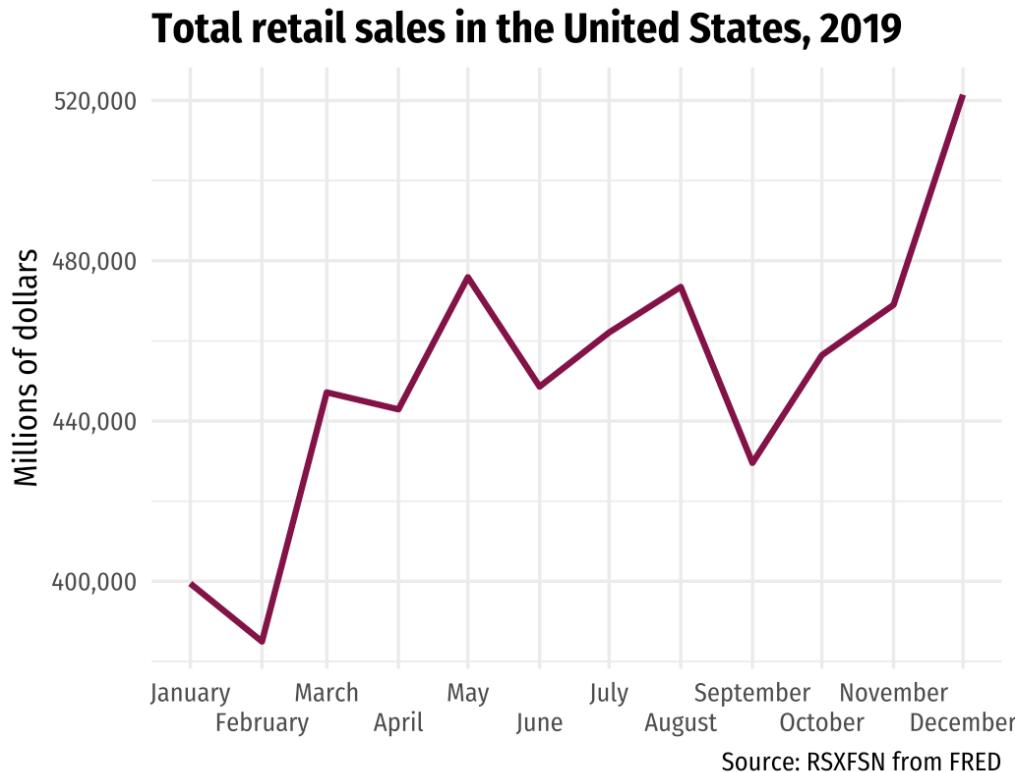

Seasonal adjustment

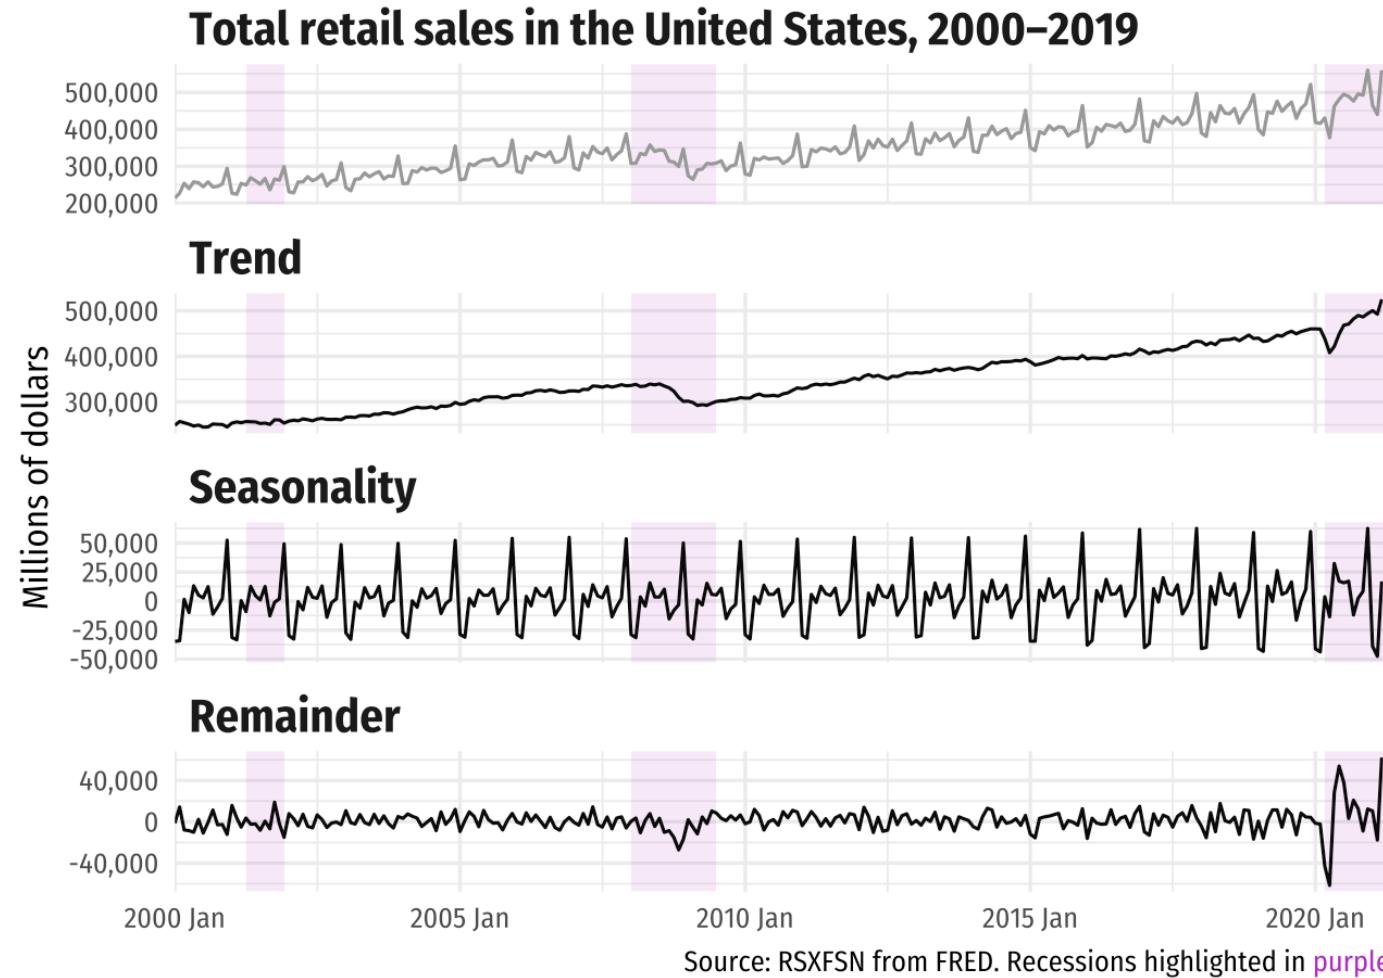

Birthday decomposition

