



A guide to the beamer package kthpq

Isaac Ren

January 15, 2024 — KTH Royal Institute of Technology



General information

Customization and special commands

Long section title to showcase different line wrapping options, and some math showcases



General information

Introduction

- **kthpq** is a beamer template that implements the KTH Brand guidelines published in October 2023.
 - The starting point is the provided PowerPoint template, although some liberties have been taken regarding beamer-specific elements, such as block environments and math formatting.
- The name pays homage to **PQ** (Promenadorquestern och med Baletten Paletten), KTH's student jazz band :)

General description

kthpq is not too special, but there are some things to note:

- Slides either contain line patterns from KTH's Brands, or they can be added with the command `\insertlines`. Some level of customization of the line patterns is possible; see next section.
- The header and footer are rather minimal.
 - The header shows the current section. This can be removed by adding `\def\insertsection{}` in the preamble.
 - The footer can be customized with the commands `\deffootline` and `\setfootline`. There are three arguments, which correspond to the left, middle, and right parts of the footer.
- Title and section slides contain neither the header nor the footer and are created by new commands `\inserttitlepage` and `\insertsectionpage`.

In the background

- All extra files are found in the `kthpq-files` directory.
- `kthpq` requires compiling with **LuaLaTeX** in order to use the required font, **Figtree**.
 - For some reason the package `fontspec` used to load fonts is very verbose in its warnings, so it is called with the `quiet` option.
- Figtree is actually quite limited in scope, so `kthpq` also uses **Fira Math** for sans serif math symbols and **Bera Mono** for monospace fonts. The fonts are located in the `fonts/` directory.
- KTH's visual elements are stored in the `figs/` directory.

How to use

- To use `kthpq`, add the command `\usepackage{kthpq}` in the preamble, probably towards the end.
- The following options are available when loading the theme:
 - `engine=lualatex` or `pdflatex`. The default and recommended engine for compiling with `kthpq` is `lualatex`, which is the only way to get the recommended fonts Figtree and Georgia. The option `pdflatex` should be faster, but uses Helvetica and Bitstream Charter.
 - `mathshape=sf`, `rm`, or `custom`. This determines the shape used for math. The default is `sf`, sans-serif. `rm` corresponds to serif and `custom` means that no new math font is loaded (in case you want to load your own font).
 - `fontdir=<directory>` or `auto`. Provide the (relative or absolute) directory path to the Figtree font files. The path used on Overleaf is provided in `sample.tex`. For local setups, use the option `auto` when `fontspec` can find the font by itself.

License

- The source code of kthpq is distributed under the MIT license. See `LICENSE.txt` for more information, although if you are just using this template for a presentation, you shouldn't need to worry about it :)

What is not included?

The following features are not included:

- Other types of headers or footers that are commonly used, such as `miniframes`, `split`, or `infolines`.
- Frame subtitles and sidebars.
- Article mode.
- Different sized slides: the template is designed for $254 \times 143\text{mm}$ (16:9) slides. The options `[17pt]`, `lualatex` are highly recommended, and the option `[t]` is recommended, following the guidelines.

Reporting issues

- This package is actively maintained by me (Isaac Ren), at least for the next few years (this is written in 2023).
- If you encounter any issues or have any feature requests, please contact me by email. I'm not sure who will see this, so I won't write my email out here: it's `firstlast@kth.se`.



Customization and special commands

New commands

- The title slide is inserted using the command `\inserttitlepage[template]`.
 - The default template option for title slides is center. There is currently one other option, left, which is shown on the next slide.
- The similar commands `\insertsectionpage` and `\insertendpage` insert section pages and end pages, respectively.
- You can also insert lines in any frame environment by adding the command `\insertlines`. See further for more detailed explanations.
- The commands `\deffootline` and `\setfootline` both take three arguments, which correspond to the left, middle, and right parts of the footer.




A left-aligned title

Isaac Ren

January 15, 2024 — KTH Royal Institute of Technology

Lines

- KTH's Brand guidelines allow users to insert certain abstract line patterns on slides.
- kthpq comes with premade selections of lines. These are contained in macros of the form `\linescardinal`, where *cardinal* is one of the following: northwest, northeast, east, southeast (with some variants). These can be found in `kthpq-files/beamerinnerthemekthpq.sty`.
- The command `\insertlines` will insert `\linesnortheast`. This is what you see on this slide.

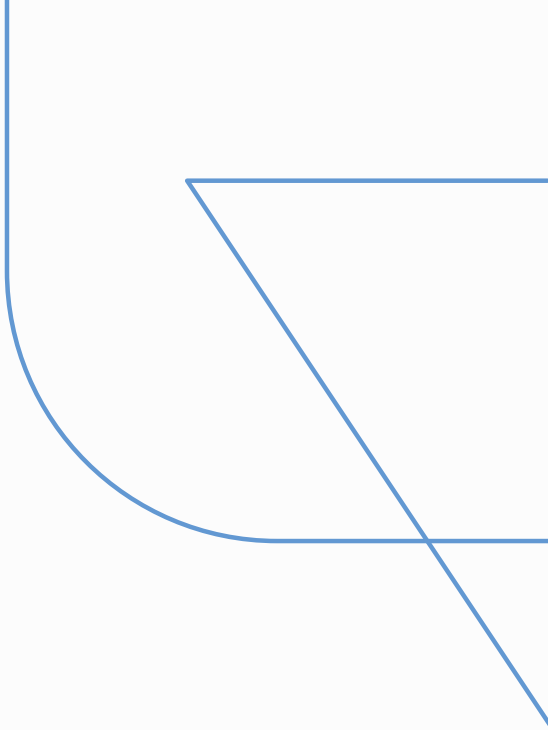

Smaller changes

The following small features are also included and can be customized:

- The `\emph` command has been changed to **bold** instead of *italic*. A new beamer color `emph` has also been added, which is used by the command.
- All of KTH's recommended colors have been introduced and can be used to customize the color theme. See `kthpq-files/beamercolorthemekthpq.sty` for details.



Long section title to showcase different
line wrapping options, and some math
showcases



Long section title to showcase different line wrapping options, and some math showcases

Prime numbers

Theorem

There is no largest prime number.

Proof.

1. Suppose p were the largest prime number.
2. Consider $q := p! + 1$.
3. q is not divisible by any number $\leq p$, so either it is prime or it is divisible by a prime number strictly greater than p .
4. Contradiction, so there is no largest prime number.





Long section title to showcase different line wrapping options, and some math showcases

Examples

The following are **prime numbers**:

2, 3, 5, 7, 11, 13, 17, 19, 23.

Warning

The number 1 is not prime!

A more complicated formula [Rie59]

Defining the **logarithmic integral** and **Riemann's prime-power counting function** respectively as

$$\operatorname{li}(x) := \int_0^x \frac{dt}{\ln t} \quad \text{and} \quad \Pi_0(x) := \frac{1}{2} \left(\sum_{p,n:p^n < x} \frac{1}{n} + \sum_{p,n:p^n \leq x} \frac{1}{n} \right),$$

where p spans prime numbers, we have the equation

$$\Pi_0(x) = \operatorname{li}(x) - \sum_{\rho} \operatorname{li}(x^{\rho}) - \ln 2 + \int_x^{\infty} \frac{dt}{t(t^2 - 1) \ln t},$$

where ρ spans the nontrivial zeros of the Riemann zeta function and $x > 1$.



Long section title to showcase different
line wrapping options, and some math
showcases

References

- [Rie59] G. F. B. Riemann, **Über die Anzahl der Primzahlen unter einer gegebenen Größe**, Monatsberichte der Königlichen Preußischen Akademie der Wissenschaften (Nov. 1859), 671–680.

